

LETO 11SQ2

LETO LED PURE | EFFICIENT | PERENNIAL

SENSO
SPEC SHEET

PENDANT LIGHT



pendant light fixture

SPECIFICATIONS

LED

- consistent colour, uniform beam
- LED lifetime of 50,000h
- infrared and UV free beam
- different CRI, colour T° and lumen output available, please refer to the chart

ELECTRICAL

- standard 120 V driver included, options available:
 - standard dimming driver (using ELV dimmers)
 - 0-10V dimmable driver (down to ~1%)
 - ELDO driver (0-10V dimming, down to ~0.1%)

FINISH

- satin power coat finish

CONSTRUCTION

- aluminium construction


INSTALLATION

- canopy included, fits on standard junction box
- height adjustable aircraft cable suspension system
- aircraft cable and electric wire included: 2.5m [98"]

WEIGHT

3.2 kg [7 lbs]

DIMENSION

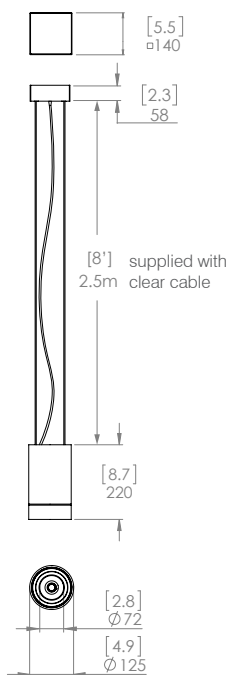

Consult this chart to confirm the availability of the desired combination before specifying below.

| Colour Rendering Index (CRI) | STD/V CRI 83+ | | | | | ARTIST/V/B CRI 98+ | | | |
|------------------------------|---------------|------|------|------|------|--------------------|------|------|------|
| | 700 | 1000 | 1300 | 2000 | 3000 | 700 | 1000 | 1300 | 2000 |
| Luminous Flux (lm) | 700 | 1000 | 1300 | 2000 | 3000 | 700 | 1000 | 1300 | 2000 |
| Consumption (W) | 6.5 | 9.5 | 14 | 23 | 35 | 9 | 13 | 19 | 32 |
| Colour T° 2700 K | ● | ● | ● | ● | ● | ●▲ | ●▲ | ●▲ | ●▲ |
| 3000 K | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 3500 K | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 4000 K | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| ELV dimming DIM | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 0-10 V dimming LCS/ELDO | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| STD | ● | ● | ● | ● | ● | ● | ● | ● | ● |

● = available ▲ = XTM Beauty

Please specify:

- MODEL** ☐ **695SQ2** – LETO 11SQ2
- COLOUR RENDERING INDEX** ☐ **581** – 83+
☐ **781** – 98+
☐ **781B** – Beauty (2700K only)
☐ **881** – vibrant (3000K only)
☐ **981** – vibrant/artist (3000K only)
- BEAM ANGLE** ☐ **610** – 18°
☐ **611** – 30°
☐ **612** – 45°
☐ **613** – 60°
- COLOUR TEMPERATURE** ☐ **90** – 2700K
☐ **70** – 3000K
☐ **60** – 3500K
☐ **40** – 4000K
- FINISH** ☐ **01** – white
☐ **02** – black
☐ **08** – silver
☐ **XX** – custom
- LUMEN** ☐ **07** – 700
☐ **10** – 1000
☐ **13** – 1300
☐ **20** – 2000
☐ **30** – 3000
- DRIVER** ☐ **STD** – non-dimmable
☐ **DIM** – dimmable
☐ **LCS** – 0-10V control
☐ **ELDO-LCS*** – 0-10V control
☐ **ELDO-DALI*** – addressable control
☐ **LUT** – Lutron
- VOLTAGE** ☐ **120** – 120V
☐ **277** – 277V

| | |
|----------|---------|
| QUANTITY | PROJECT |
| NOTE | |



SENSO