SPEC SHEET

LETO 11.5



Consult this chart to confirm the availability of the desired combination before specifying below.

Colour Rendering Index (CRI)	STD/V CRI 83+			ARTIST/V/B CRI 98+			
Luminous Flux (Im)	700	1000	1300	2000	700	1000	1300
Consumption (W)	6.5	9.5	14	23	9	13	19
Colour T° 2700 K	•	•	•	•	• 🛦	• 🛦	• 🛦
3000 K			•			•	
3500 K			•	•	•	•	
4000 K		•	•	•	•	•	•
ELV dimming DIM	•	•	•	•	•	•	•
0-10 V dimming LCS/ELDO	•	•	•	•	•	•	•
STD	•	•	•	•	•	•	•

pendant light fixture

SPECIFICATIONS

- consistent colour, uniform beam
- LED lifetime of 50,000h
- infrared and UV free beam
- different CRI, colour T° and lumen output available, please refer to the chart

ELECTRICAL

- standard 120 V driver included, options available:
- standard dimming driver (using ELV dimmers)
- 0-10V dimmable driver (down to \sim 1%)
- ELDO driver (remote driver only, 0-10V dimming, down to ~0.1%)

· satin power coat finish


CONSTRUCTION

· aluminium construction

INSTALLATION


- · canopy included, fits on standard junction box
- electric wire included: 2m [78"]

DIMENSION

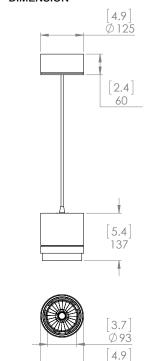

Please specify:

MODEL	697 – LETO 11.5
COLOUR RENDERING INDEX	581 – 83+ 781 – 98+ 781B – Beauty (2700K only) 881 – vibrant (3000K only) 981 – vibrant/artist (3000K only)
REFLECTOR	611 – 28° 612 – 44°
COLOUR TEMPERATURE	90 – 2700K 70 – 3000K 60 – 3500K 40 – 4000K
FINISH	01 – white 02 – black 08 – silver XX – custom
LUMEN	07 – 700 10 – 1000 13 – 1300 20 – 2000 30 – 3000
DRIVER	STD – non-dimmable DIM – dimmable LCS – 0-10V control ELDO* – >0.1% dimming (remote driver only) LUT – Lutron
VOLTAGE	120 – 120V 277 – 277V







*Driver canopy needed for ELDO/LUT drivers or remoted driver only

