

LETO 11LBHP

LETO LED PURE | EFFICIENT | PERENNIAL

SENSO
SPEC SHEET

PENDANT LIGHT



supplied with clear cable

Consult this chart to confirm the availability of the desired combination before specifying below.

Colour Rendering Index (CRI)	STD/V CRI 83+	
Luminous Flux (lm)	4000	5000
Consumption (W)	46	55
Colour T°		
2700 K	●	●
3000 K	●	●
3500 K	●	●
4000 K	●	●
ELV dimming DIM		
0-10 V dimming LCS/ELDO	●	●
STD	●	●

● = available

pendant light fixture

SPECIFICATIONS

LETO 11LBHP

LED

- consistent colour, uniform beam
- LED lifetime of 50,000h
- infrared and UV free beam
- different CRI, colour T° and lumen output available, please refer to the chart

SHADE

- acrylic construction
- efficiency: 95.8% (clear version)
- available in clear, white or metalized

ELECTRICAL

- standard 120 V driver included, options available:
 - 0-10V dimmable driver (down to ~1%)
 - ELDO driver (0-10V dimming, down to ~0.1%)

FINISH

- satin power coat finish

CONSTRUCTION

- aluminium construction


INSTALLATION

- canopy included, fits on standard junction box
- height adjustable aircraft cable suspension system
- aircraft cable and electric wire included: 2m [78"]

WEIGHT

3.2 kg [7 lbs]

DIMENSION

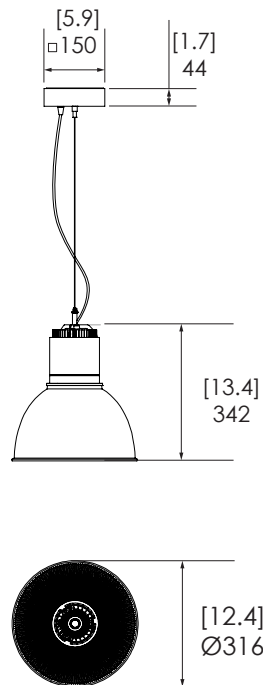

Please specify:

MODEL	<input type="checkbox"/>	798 – LETO 11LBHP
COLOUR	<input type="checkbox"/>	581 – 83+
RENDERING INDEX	<input type="checkbox"/>	881 – vibrant (3000K only)
BEAM ANGLE	<input type="checkbox"/>	610 – 18°
	<input type="checkbox"/>	611 – 30°
	<input type="checkbox"/>	612 – 45°
	<input type="checkbox"/>	613 – 60°
SHADE	<input type="checkbox"/>	601 – white (Standard)
	<input type="checkbox"/>	600 – clear (Custom order)
	<input type="checkbox"/>	608 – metalized (Custom order)
COLOUR	<input type="checkbox"/>	90 – 2700K
TEMPERATURE	<input type="checkbox"/>	70 – 3000K
	<input type="checkbox"/>	60 – 3500K
	<input type="checkbox"/>	40 – 4000K
FINISH	<input type="checkbox"/>	01 – white
	<input type="checkbox"/>	02 – black
	<input type="checkbox"/>	08 – silver
	<input type="checkbox"/>	XX – custom
LUMEN	<input type="checkbox"/>	40 – 4000
	<input type="checkbox"/>	50 – 5000
DRIVER	<input type="checkbox"/>	STD – non-dimmable
	<input type="checkbox"/>	DIM – dimmable
	<input type="checkbox"/>	LCS – 0-10V control
	<input type="checkbox"/>	ELDO-LCS* – 0-10V control
	<input type="checkbox"/>	ELDO-DALI* – addressable control
	<input type="checkbox"/>	LUT – Lutron
VOLTAGE	<input type="checkbox"/>	120 – 120V
	<input type="checkbox"/>	277 – 277V

QUANTITY	PROJECT
NOTE	



SENSO