

LETO 11.5S

LETO LED PURE | EFFICIENT | PERENNIAL

SENSO
SPEC SHEET

SURFACE MOUNT



Consult this chart to confirm the availability of the desired combination before specifying below.

Colour Rendering Index (CRI)	STD / V CRI 83+			ARTIST/V/B CRI 98+	
	700	1000	1300	700	1000
Luminous Flux (lm)	6.5	9.5	14	9	13
Consumption (W)					
Colour T°					
2700K	●	●	●	●▲	●▲
3000K	●	●	●	●	●
3500K	●	●	●	●	●
4000K	●	●	●	●	●
ELV dimming					
DIM	●	●	●	●	●
0-10 V dimming					
LCS	●	●	●	●	●
STD	●	●	●	●	●

● = available ▲ = XTM Beauty

surface mount downlight fixture

SPECIFICATIONS

LETO 11.5S

LED

- consistent colour, uniform beam
- LED lifetime of 50,000h
- infrared and UV free beam
- different CRI, colour T° and lumen output available, please refer to the chart

ELECTRICAL

- standard 120 V driver included, options available:
 - standard dimming driver
 - 0-10V dimmable driver (down to ~1%)

FINISH

- satin power coat finish


CONSTRUCTION

- aluminium construction

INSTALLATION

- canopy included, fits on standard junction box
- electric wire included: 2m [78"]

DIMENSION

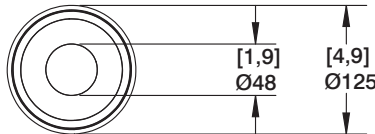

Please specify:

- MODEL** ☐ **698** – Leto 11.5S
- COLOUR RENDERING INDEX** ☐ **581** – 83+
☐ **781** – 98+
☐ **781B** – Beauty (2700K only)
☐ **881** – vibrant (3000K only)
☐ **981** – vibrant/artist (3000K only)
- GLASS OPTIC** ☐ **621** – 28° domed glass
☐ **622** – 48° domed glass
- COLOUR TEMPERATURE** ☐ **27** – 2700K
☐ **30** – 3000K
☐ **35** – 3500K
☐ **40** – 4000K
- FINISH** ☐ **01** – white
☐ **02** – black
☐ **08** – silver
- LUMEN** ☐ **07** – 700
☐ **10** – 1000
☐ **13** – 1300
- DRIVER** ☐ **STD** – non-dimmable
☐ **DIM** – dimmable (277V excluded)
☐ **LCS** – 0-10V control
- VOLTAGE** ☐ **120** – 120V
☐ **277** – 277V

QUANTITY	PROJECT
NOTE	



SENSO