

# LETO 16

LETO LED PURE | EFFICIENT | PERENNIAL

SENSO  
SPEC SHEET

SURFACE MOUNT



Consult this chart to confirm the availability of the desired combination before specifying below.

Colour Rendering Index (CRI)	STD/V CRI 83+					ARTIST/V/B CRI 98+			
Luminous Flux (lm)	700	1000	1300	2000	3000	700	1000	1300	2000
Consumption (W)	6.5	9.5	14	23	35	9	13	19	32
Colour T°	2700 K	•	•	•	•	•▲	•▲	•▲	•▲
3000 K	•	•	•	•	•	•	•	•	•
3500 K	•	•	•	•	•	•	•	•	•
4000 K	•	•	•	•	•	•	•	•	•
ELV dimming DIM	•	•	•	•	•	•	•	•	•
0-10 V dimming LCS/ELDO	•	•	•	•	•	•	•	•	•
STD	•	•	•	•	•	•	•	•	•

• = available ▲ = XTM Beauty

## spot light monpoint

### SPECIFICATIONS

LETO 16

#### GENERAL

- fully adjustable beam direction

#### LED

- consistent colour, uniform beam
- LED lifetime of 50,000h
- infrared and UV free beam
- different CRI, colour T° and lumen output available, please refer to the chart

#### ELECTRICAL

- standard 120 V driver included, options available:
  - standard dimming driver (using ELV dimmers)
- 277V available upon request, consult Senso for details

#### FINISH

- satin power coat finish

#### CONSTRUCTION

- aluminium construction

#### INSTALLATION

- fits on standard junction box
- canopy included

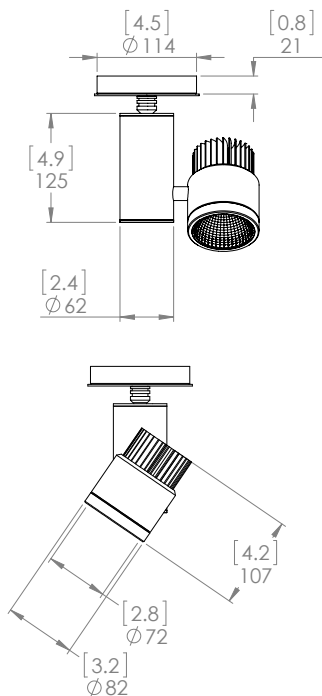
#### OPTIONS / ACCESSORIES

- consult next page
- louver (includes mounting ring)
  - barndoor (includes mounting ring)

#### WEIGHT

0.9 kg [2 lbs]

#### DIMENSION



#### Please specify:

- MODEL** ☐ **620** – canopy version
- COLOUR RENDERING INDEX** ☐ **581** – 83+  
☐ **781** – 98+  
☐ **781B** – Beauty (2700K only)  
☐ **881** – vibrant (3000K only)  
☐ **981** – vibrant/artist (3000K only)
- BEAM ANGLE** ☐ **610** – 18°  
☐ **611** – 30°  
☐ **612** – 45°  
☐ **613** – 60°
- COLOUR TEMPERATURE** ☐ **90** – 2700K  
☐ **70** – 3000K  
☐ **60** – 3500K  
☐ **40** – 4000K
- FINISH** ☐ **01** – white  
☐ **02** – black  
☐ **08** – silver  
☐ **XX** – custom
- LUMEN** ☐ **07** – 700  
☐ **10** – 1000  
☐ **13** – 1300  
☐ **20** – 2000  
☐ **30** – 3000
- DRIVER** ☐ **STD** – not dimmable  
☐ **DIM** – dimmable  
☐ **LCS** – 0-10V control

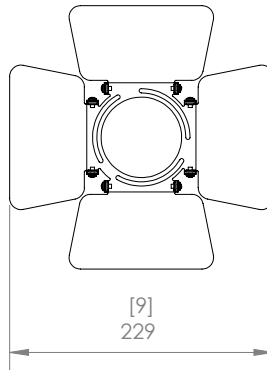
QUANTITY	PROJECT
NOTE	



SENSO

## ACCESSORIES

**Barndoor 66-**


**DIMENSION**


- Limits the glare and allows you to control the direction of the light beam
- fixed to the front ring (included) by bending tabs
- flaps can be adjusted and lock in place

**CONSTRUCTION**

- steel construction
- satin powder coat finish

PART NO: **66-01-16** white  
**66-02-16** black  
**66-08-16** silver

**Louver 67-**


- 95% open area
- 45° cut-off

**CONSTRUCTION**

- made from cold-rolled steel
- standard finish: black polymer coating with an eggshell finish

PART NO: **67-02** black