

LETO 5

LETO LED PURE | EFFICIENT | PERENNIAL

SENSO
SPEC SHEET

SURFACE MOUNT



Consult this chart to confirm the availability of the desired combination before specifying below.

Colour Rendering Index (CRI)	STD/V CRI 83+				ARTIST/V/B CRI 98+		
Luminous Flux (lm)	700	1000	1300	2000	700	1000	1300
Consumption (W)	6.5	9.5	14	23	9	13	19
Colour T°	2700 K	●	●	●	●	▲	●
	3000 K	●	●	●	●	●	●
	3500 K	●	●	●	●	●	●
	4000 K	●	●	●	●	●	●
ELV dimming DIM	●	●	●	●	●	●	●
0-10 V dimming LCS/ELDO	●	●	●	●	●	●	●
STD	●	●	●	●	●	●	●

● = available ▲ = XTM Beauty

spot light, monopoint

SPECIFICATIONS

LETO 5

GENERAL

- fully adjustable beam direction

LED

- consistent colour, uniform beam
- LED lifetime of 50,000h
- infrared and UV free beam
- different CRI, colour T° and lumen output available, please refer to the chart

ELECTRICAL

- standard 120 V driver included, options available:
 - standard dimming driver (using ELV dimmers)
- 277V available upon request, consult Senso for details

FINISH

- satin power coat finish

CONSTRUCTION

- aluminium construction

INSTALLATION

- fits on standard junction box
- canopy included

OPTIONS / ACCESSORIES


consult next page

- shade
- lense (includes mounting ring)
- louver (includes mounting ring)
- barndoor (includes mounting ring)

WEIGHT

1.4 kg [3 lbs]

DIMENSION

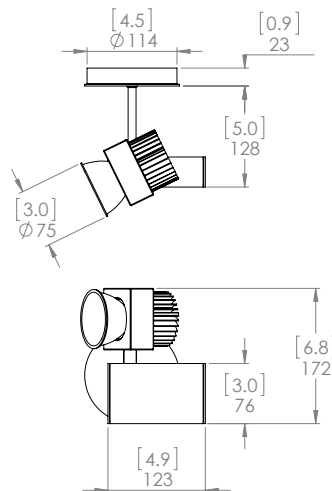

Please specify:

- MODEL** ☐ **610** – canopy version
- COLOUR RENDERING INDEX** ☐ **581** – 83+
☐ **781** – 98+
☐ **781B** – Beauty (2700K only)
☐ **881** – vibrant (3000K only)
☐ **981** – vibrant/artist (3000K only)
- BEAM ANGLE** ☐ **610** – 18°
☐ **611** – 30°
☐ **612** – 45°
☐ **613** – 60°
- COLOUR TEMPERATURE** ☐ **90** – 2700K
☐ **70** – 3000K
☐ **60** – 3500K
☐ **40** – 4000K
- FINISH** ☐ **01** – white
☐ **02** – black
☐ **08** – silver
☐ **XX** – custom
- LUMEN** ☐ **07** – 700
☐ **10** – 1000
☐ **13** – 1300
☐ **20** – 2000
- DRIVER** ☐ **STD** – not dimmable
☐ **DIM** – dimmable
☐ **LCS** – 0-10V control

QUANTITY	PROJECT
NOTE	




SENSO

ACCESSORIES

Barndoor 66-



DIMENSION

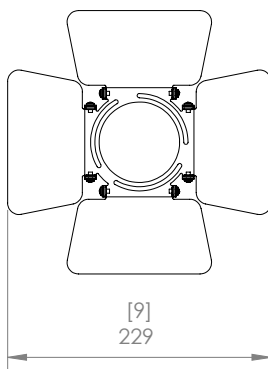


- Limits the glare and allows you to control the direction of the light beam
- fixed to the front ring (included) by bending tabs
- flaps can be adjusted and lock in place

CONSTRUCTION

- steel construction
- satin powder coat finish

PART NO: **66-01-05** white
66-02-05 black
66-08-05 silver

Louver 67-



- 95% open area
- 45° cut-off

CONSTRUCTION

- made from cold-rolled steel
- standard finish: black polymer coating with an eggshell finish

PART NO: **67-02** black



- for a diffused light (no reflector included)
- holds in place via 3 set screws

CONSTRUCTION

- chromed mounting ring, acrylic shade

PART NO: **67-03**