

LETO 5

LETO LED PURE | EFFICIENT | PERENNIAL

SENSE
SPEC SHEET

TRACK LIGHTING



Consult this chart to confirm the availability of the desired combination before specifying below.

Colour Rendering Index (CRI)	STD/V CRI 83+					ARTIST/V/B CRI 98+			
Luminous Flux (lm)	700	1000	1300	2000	3000	700	1000	1300	2000
Consumption (W)	6.5	9.5	14	23	35	9	13	19	32
Colour T°	2700 K	•	•	•	•	•▲	•▲	•▲	•▲
3000 K	•	•	•	•	•	•	•	•	•
3500 K	•	•	•	•	•	•	•	•	•
4000 K	•	•	•	•	•	•	•	•	•
ELV dimming DIM	•	•	•	•	•	•	•	•	•
0-10 V dimming LCS/ELDO	•	•	•	•	•	•	•	•	•
STD	•	•	•	•	•	•	•	•	•

• = available

▲ = XTM Beauty

spot light, track mounted

SPECIFICATIONS

LETO 5

GENERAL

- fully adjustable beam direction

LED

- consistent colour, uniform beam
- LED lifetime of 50,000h
- infrared and UV free beam
- different CRI, colour T° and lumen output available, please refer to the chart

ELECTRICAL

- standard 120 V driver included, options available:
 - standard dimming driver (using ELV dimmers)
- 277V available upon request, consult Senso for details

FINISH

- satin powder coat finish

CONSTRUCTION

- aluminium construction

INSTALLATION

- includes track adapter (available in 1 or 2 circuits)
- contact us for track compatibility

OPTIONS / ACCESSORIES

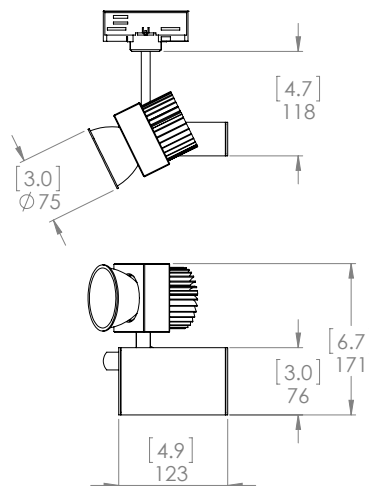
consult next page

- shade
- lense (includes mounting ring)
- louver (includes mounting ring)
- barndoor (includes mounting ring)

WEIGHT

1.4 kg [3 lbs]

DIMENSION



Please specify:

MODEL	<input type="checkbox"/>	650 – single phase
	<input type="checkbox"/>	651 – two phase
COLOUR RENDERING INDEX	<input type="checkbox"/>	581 – 83+
	<input type="checkbox"/>	781 – 98+
	<input type="checkbox"/>	781B – Beauty (2700K only)
	<input type="checkbox"/>	881 – vibrant (3000K only)
	<input type="checkbox"/>	981 – vibrant/artist (3000K only)
REFLECTOR	<input type="checkbox"/>	610 – 18°
	<input type="checkbox"/>	611 – 30°
	<input type="checkbox"/>	612 – 45°
	<input type="checkbox"/>	613 – 60°
COLOUR TEMPERATURE	<input type="checkbox"/>	90 – 2700K
	<input type="checkbox"/>	70 – 3000K
	<input type="checkbox"/>	60 – 3500K
	<input type="checkbox"/>	40 – 4000K
FINISH	<input type="checkbox"/>	01 – white
	<input type="checkbox"/>	02 – black
	<input type="checkbox"/>	08 – silver
LUMEN	<input type="checkbox"/>	07 – 700
	<input type="checkbox"/>	10 – 1000
	<input type="checkbox"/>	13 – 1300
	<input type="checkbox"/>	20 – 2000
DRIVER	<input type="checkbox"/>	STD – not dimmable
	<input type="checkbox"/>	DIM – dimmable
	<input type="checkbox"/>	LCS – 0-10V control

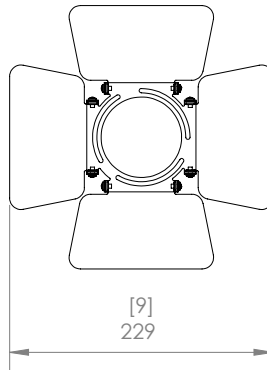
QUANTITY	PROJECT
NOTE	



SENSE

ACCESSORIES

Barndoor 66-


DIMENSION


- Limits the glare and allows you to control the direction of the light beam
- fixed to the front ring (included) by bending tabs
- flaps can be adjusted and lock in place

CONSTRUCTION

- steel construction
- satin powder coat finish

PART NO: **66-01-05** white
66-02-05 black
66-08-05 silver

Louver 67-


- 95% open area
- 45° cut-off

CONSTRUCTION

- made from cold-rolled steel
- standard finish: black polymer coating with an eggshell finish

PART NO: **67-02** black



- for a diffused light (no reflector included)
- holds in place via 3 set screws

CONSTRUCTION

- chromed mounting ring, acrylic shade

PART NO: **67-03**