

LETO 16

LETO LED PURE | EFFICIENT | PERENNIAL

SENSE
SPEC SHEET

TRACK LIGHTING



Consult this chart to confirm the availability of the desired combination before specifying below.

Colour Rendering Index (CRI)	STD/V CRI 83+					ARTIST/V/B CRI 98+			
Luminous Flux (lm)	700	1000	1300	2000	3000	700	1000	1300	2000
Consumption (W)	6.5	9.5	14	23	35	9	13	19	32
Colour T°	2700 K	•	•	•	•	•	•	•	•
	3000 K	•	•	•	•	•	•	•	•
	3500 K	•	•	•	•	•	•	•	•
	4000 K	•	•	•	•	•	•	•	•
ELV dimming DIM	•	•	•	•	•	•	•	•	•
0-10 V dimming LCS/ELDO	•	•	•	•	•	•	•	•	•
STD	•	•	•	•	•	•	•	•	•

• = available

▲ = XTM Beauty

spot light, track mounted

SPECIFICATIONS

LETO 16

GENERAL

- fully adjustable beam direction

LED

- consistent colour, uniform beam
- LED lifetime of 50,000h
- infrared and UV free beam
- different CRI, colour T° and lumen output available, please refer to the chart

ELECTRICAL

- standard 120 V driver included, options available:
 - standard dimming driver (using ELV dimmers)
- 277V available upon request, consult Senso for details

FINISH

- satin powder coat finish

CONSTRUCTION

- aluminium construction

INSTALLATION

- includes track adapter (available in 1 or 2 circuits)
- contact us for track compatibility



OPTIONS / ACCESSORIES

- consult next page
- louver (includes mounting ring)
- barndoor (includes mounting ring)

WEIGHT

0.9 kg [2 lbs]

DIMENSION

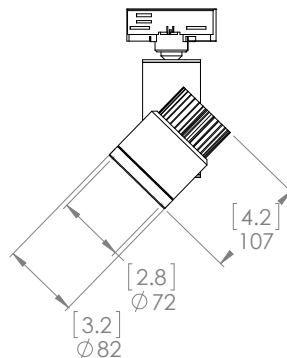

Please specify:

- MODEL** ☐ 655 – single phase
☐ 656 – dual phase
- COLOUR RENDERING INDEX** ☐ 581 – 83+
☐ 781 – 98+
☐ 781B – Beauty (2700K only)
☐ 881 – vibrant (3000K only)
☐ 981 – vibrant/artist (3000K only)
- REFLECTOR** ☐ 610 – 18°
☐ 611 – 30°
☐ 612 – 45°
☐ 613 – 60°
- COLOUR TEMPERATURE** ☐ 90 – 2700K
☐ 70 – 3000K
☐ 60 – 3500K
☐ 40 – 4000K
- FINISH** ☐ 01 – white
☐ 02 – black
☐ 08 – silver
☐ XX – custom
- LUMEN** ☐ 07 – 700
☐ 10 – 1000
☐ 13 – 1300
☐ 20 – 2000
☐ 30 – 3000
- DRIVER** ☐ STD – not dimmable
☐ DIM – dimmable
☐ LCS – 0-10V control


QUANTITY	PROJECT
NOTE	



SENSE

ACCESSORIES

Barndoor 66-

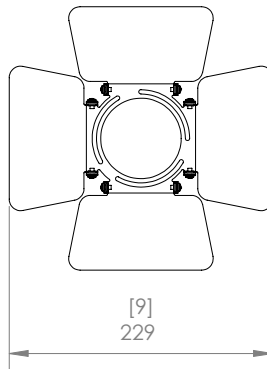
DIMENSION


- Limits the glare and allows you to control the direction of the light beam
- fixed to the front ring (included) by bending tabs
- flaps can be adjusted and lock in place

CONSTRUCTION

- steel construction
- satin powder coat finish

PART NO: **66-01-16** white
66-02-16 black
66-08-16 silver

Louver 67-


- 95% open area
- 45° cut-off

CONSTRUCTION

- made from cold-rolled steel
- standard finish: black polymer coating with an eggshell finish

PART NO: **67-02** black