



# TWO PHASE RECESSED TRACK

SEN  
SPEC SHEET

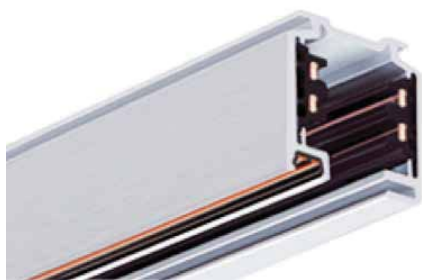

standard 120 V with optional data bus system (0-10V dimming)

## SPECIFICATIONS

## TWO PHASE

### GENERAL

The 5 conductors (2 live/ 2 neutral/ 1 ground) EUTRAC surface track consists of an extruded aluminum profile which also functions as ground and 2 inserted plastic profiles carrying 4 embedded 12 gauge copper conductors. Any given profile can be easily cut to length on site. It is not necessary to cut back or bend back the conductors. The track has pre-punched holes for mounting every 8" on center.

### FINISH

white (RAL 9010) or black (RAL 9005) powder coated and silver anodized.


### Track

#### Standard

4'	8'	12'
○ 230-101	230-201	230-301
● 230-102	230-202	230-302
● 230-103	230-203	230-303

#### Data bus (0-10V dimming)


4'	8'	12'
○ 233-101	233-201	233-301
● 233-102	233-202	233-302
● 233-103	233-203	233-303



### Components


#### T-bar recessed profile

surface track housing 230- with visible flange  
198-50-0012-01




#### End cap

For T-bar profile  
198-00-0035-01




#### Suspension clip

For tension grip (6 pcs)  
99-259-00




#### Suspension bracket

For T-bar and spackle flange profile  
198-00-0037-00




#### Mechanical straight coupler

For T-bar and spackle flange profile  
198-00-0033-00



#### Feed in cap

For T-bar and spackle flange profile  
198-00-0034-00



SEN

www.sensolighting.com


# TWO PHASE RECESSED TRACK

## System components

### Multiple feed canopy cover


Used to cover an outlet box when using multiple feeds.

- 198-60-0006-01
- 198-60-0006-02
- 198-60-0006-03



### Mid feed canopy cover

- 198-60-0026-01
- 198-60-0026-02
- 198-60-0026-03




### L-coupler feed

Used to join two sections of track together at a 90° angle. May be used as a feed point.

ground inside

- | Standard   | Data bus |
|------------|----------|
| ○ 99-808-1 | 99-809-1 |
| ● 99-808-2 | 99-809-2 |
| ● 99-808-3 | 99-809-3 |



### T-coupler feed

Used to join three sections of track in a "T" configuration. May be used as a feed point.

#### Standard

- | ground left | ground right |
|-------------|--------------|
| ○ 99-811-1  | 99-812-1     |
| ● 99-811-2  | 99-812-2     |
| ● 99-811-3  | 99-812-3     |

#### Data bus

- | ground left | ground right |
|-------------|--------------|
| ○ 99-813-1  | 99-814-1     |
| ● 99-813-2  | 99-814-2     |
| ● 99-813-3  | 99-814-3     |

### X-coupler coupler feed


Used to join four sections of track together in an "X" configuration. May be used as a feed point.

#### Standard

- 99-815-1
- 99-815-2
- 99-815-3

#### Data bus

- 99-816-1
- 99-816-2
- 99-816-3



### Live end feed

Used when energizing track from an outlet box or conduit feed.

#### Standard

ground right

- 99-800-1
- 99-800-2
- 99-800-3

ground left

- 99-801-1
- 99-801-2
- 99-801-3


#### Data bus

ground right

- 99-802-1
- 99-802-2
- 99-802-3

ground left

- 99-803-1
- 99-803-2
- 99-803-3




### Floating mid-feed

#### Standard

- 99-804-1
- 99-804-2
- 99-804-3

#### Data bus

- 99-818-1
- 99-818-2
- 99-818-3



### I-coupler feed


Used to join two sections of track together in a straight line. May be used as a feed point.

#### Standard

- 99-805-1
- 99-805-2
- 99-805-3

#### Data bus


- 99-806-1
- 99-806-2
- 99-806-3



### Flex-coupler feed

Used to join two sections of track together to create angles from 0° to 180°. Can be flexed on horizontal or vertical planes.

- 99-817-1
- 99-817-2



### Coupler

Straight


Used to join two sections of track together in a straight line.

#### Standard

- 99-889-1
- 99-889-2
- 99-889-3

#### Data bus


- 99-874-1
- 99-874-2
- 99-874-3



### End caps

Used to end any open configuration of track

- 99-900-1
- 99-900-2
- 99-900-3




### Current limiter, end feed (Left)

#### Standard

- 198-00-1102-1
- 198-00-1102-2
- 198-00-1102-3

#### Data bus

- 198-00-2102-1
- 198-00-2102-2
- 198-00-2102-3



### Current limiter, end feed (Right)

#### Standard

- 198-00-1101-1
- 198-00-1101-2
- 198-00-1101-3

#### Data bus

- 198-00-2101-1
- 198-00-2101-2
- 198-00-2101-3

