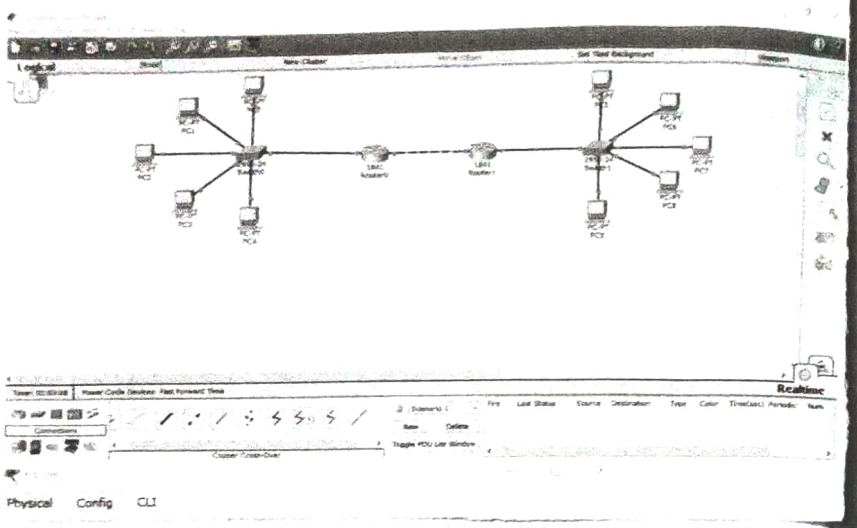



IOS Command Line Interface

```
exit
Router#
%SYS-6-CONFIG_I: Configured from console by console
configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface FastEthernet0/1
Router(config-if)#ip address 192.168.1.1 255.255.255.224
% 192.168.1.0 overlaps with FastEthernet0/0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 192.168.1.65 255.255.255.224
% 192.168.1.64 overlaps with FastEthernet0/1
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#do show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol

FastEthernet0/0        192.168.1.1     YES manual up                    down

FastEthernet0/1        192.168.1.65    YES manual up                    up

Vlan1                  unassigned      YES unset  administratively down down
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to
up
```

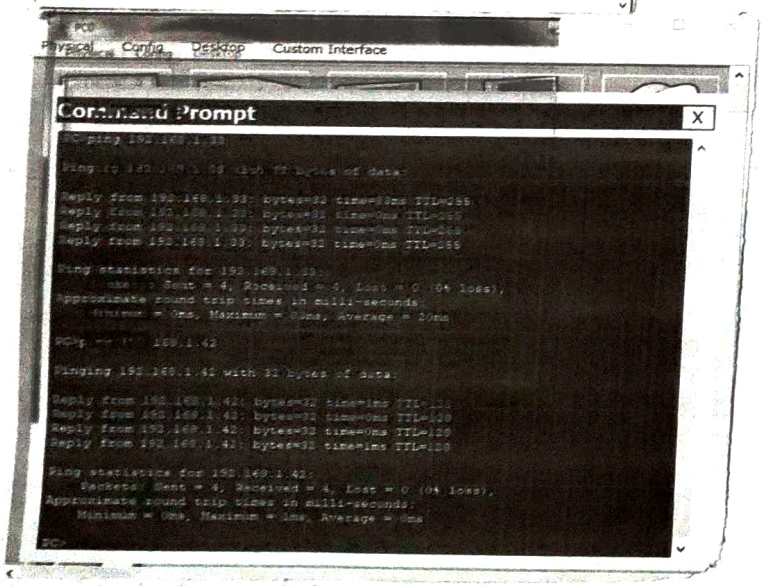

Exp - 9.
Date : 11/9/26

Implementation of Subnetting in cisco packet Tracer.

Aim : to design multiple subnet with suitable host assign static IP address connect the subnets through a router and simulate packet transmission with and without a router

Algorithm / Procedure :

1. Open cisco packet tracer.
2. Place PCs switches and one router in the workspace.
3. Divide the network into two or more subnets based on the required number of hosts
4. Assign each subnet a unique network address and subnet mask.
5. Use the simulation mode or the ping command to test communication blw pcs in different subnets
6. compare the results in both cases

Result :

Multiple subnets were designed and configure successfully packet transmission blw different subnets was success when the router was configured correctly