


ARP Packet flow

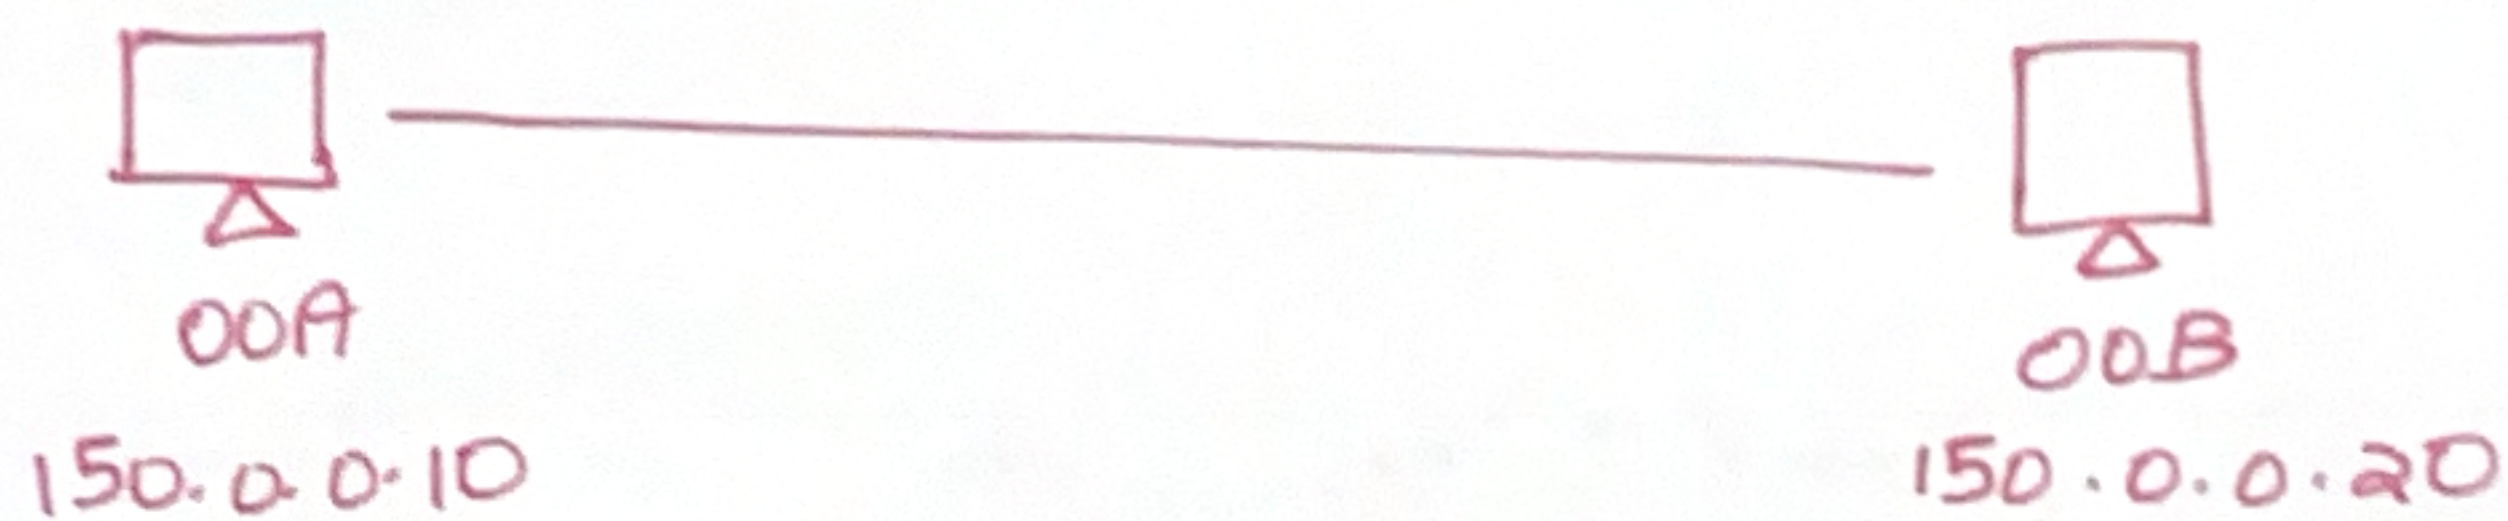

Ping 150.0.0.20

write a packet flow of 150.0.0.10 to 150.0.0.20

ARP REQ

Sender ip 150.0.0.10
Sender mac 00A
Target ip 150.0.0.20
Target mac 00:00:00:00:00:00

SMAC 00A
DMAC FF:FF:FF:FF:FF:FF

ARP REQ

Sender ip 150.0.0.20
Sender mac 00B
Target ip 150.0.0.10
Target mac 00A

SMAC 00B
DMAC 00A

ECHO	SIP	150.0.0.10	SMAC	00A
	DIP	150.0.0.20	DMAC	00B

ECHO	SIP	150.0.0.20	SMAC	00B
	DIP	150.0.0.10	DMAC	00A