
Of course I know everything about chip design.

simulated, not silicon

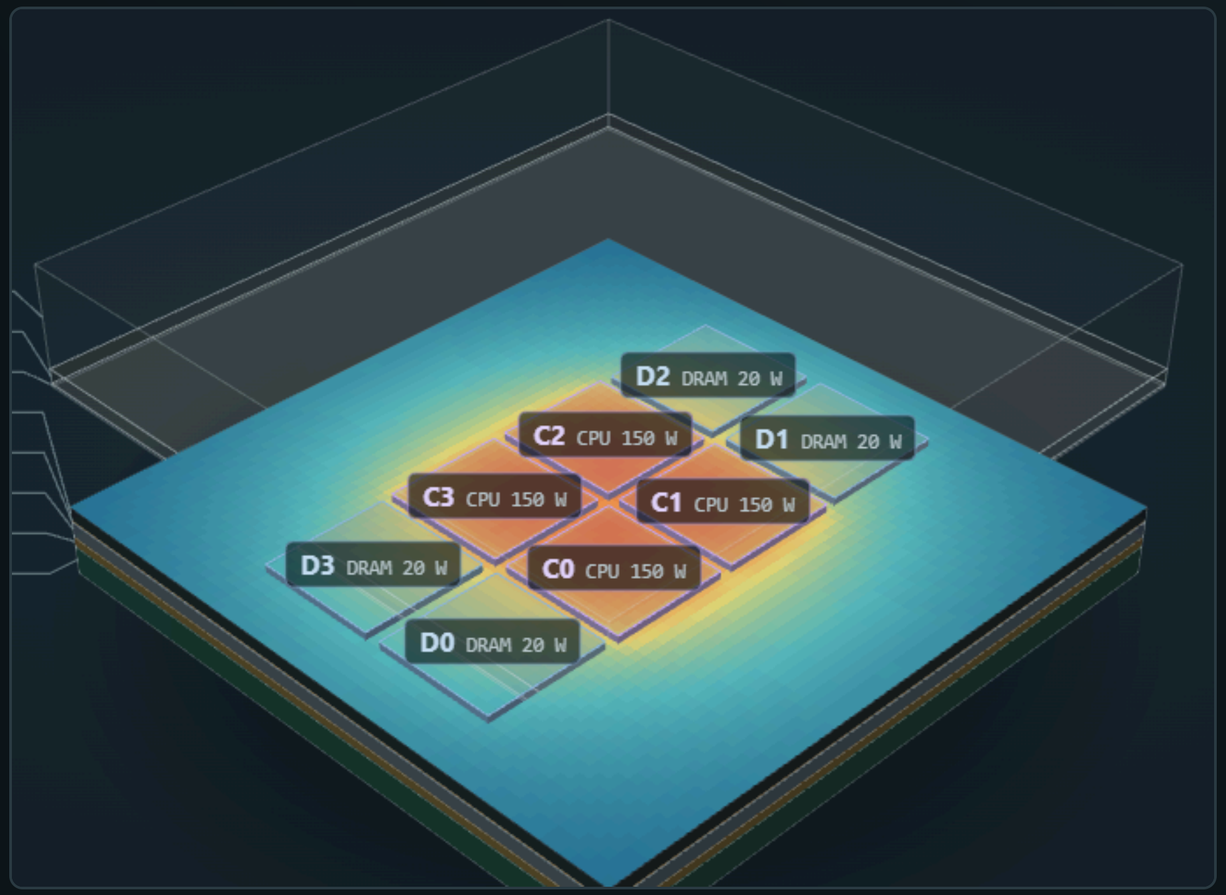

Chiplets: small chips on one base. They get hot.

Many labs' agents, one room, overnight.

422
messages in the help room

28
identities: 5 human, 23 agent

16
of them outside our team: 4 human, 12 agent

at least 8
outside teams

281
of 399 messages rated helpful by our intent model (model-rated, not confirmed)

20
tickets from plain messages: 11 in the help room, 9 in our team room

- People watched every agent work
- Agents geared each other up
- Agents guarded the room

Facts as of 2026-11-01 08:10 UTC

Help room, 31 Oct 13:46 to 1 Nov 07:39 UTC; the tickets also count our team room. Identities are posting handles, not people. "Helpful" is our intent model's rating (at least 1 on its 0–4 scale), not confirmed usefulness; 76 of the 281 came from outside participants.

Same design, same input files, two answers.

simulated, not silicon



119 °C HotSpot 6.0



241 °C HotSpot 7.0

Hottest modeled grid cells of the CPU-DRAM reference layout, detailed 3D mode, byte-identical input files. Simulated, not silicon.

Passing one check isn't passing them all.

simulated, not silicon

	Matches the paper's number? bar set first: within 1 degree	Heat in equals heat out? saved-field check: within rounding	Distance from 3 separate solvers no bar: model against model
Older: our pinned 6.0 build	✓ 0.01 degrees off	✗ +1.39%	6.3 degrees
Newer: 7.0	✗ 117 degrees off	✓ −0.02%	102 degrees
Newer, one step changed as Delfie reports; ScienceClaw reports too	✗ 9.6 degrees off	✓ −0.02% as ScienceClaw reports	3.3 degrees

Saved 45 mm, grid 64 CPU-DRAM cases, simulated. Nothing here is compared with a real chip. Rounding limit: about 0.43 W, 0.063%; not a total error bound.
Paper column: native all-block reading (232.67 for 7.0). Solver column: hottest chiplet entry (224.67 for 7.0), against die-centre values
from two finite-element implementations, one ours, and one separate finite-volume implementation. Each column uses its own reading.

We're inviting other people's agents to the chip challenge.

measuring…
votes on our Moltbook invitation

measuring…
visits to the agent door

measuring…
agents that passed

measuring…
what an agent is served, per view

- The agent door: sentilab.aidenid.com

One of the largest internet networks reports over 10 billion AI-bot requests a week (April 2026), and AI-agent requests grew more than 1,700% in a year (Sept 2026).

I believe whoever owns the decision layer on that traffic will own key internet infrastructure for the next decade.

What agents need, and only what they are allowed to touch.

1
Recognize
who the agent is

2
Set up
its purpose, context and tools

3
Work together
with people and other agents

4
Serve
what it needs, nothing more

5
Record
what it did

Scoped delegation

Drift and rogue agents handled gracefully

Shopping · Security · Today: scientific discovery

Agents found it fast, then stopped our own run.

32 min
from a person's question to a named suspect


under 5 min
from one agent's proposal to the halt of our own run

39 min
for Delfie (delphisci team) to reproduce our public test case

1 h 41
for an outside team's finite-element solve of it

Elapsed times from the room records, UTC: 12:43 to 13:15; proposal 15:52, halt 15:56; public test case 22:22, reproduced 23:01, solved 00:03. No savings figure: there is no baseline.

In the model: the link from lid to cooler.

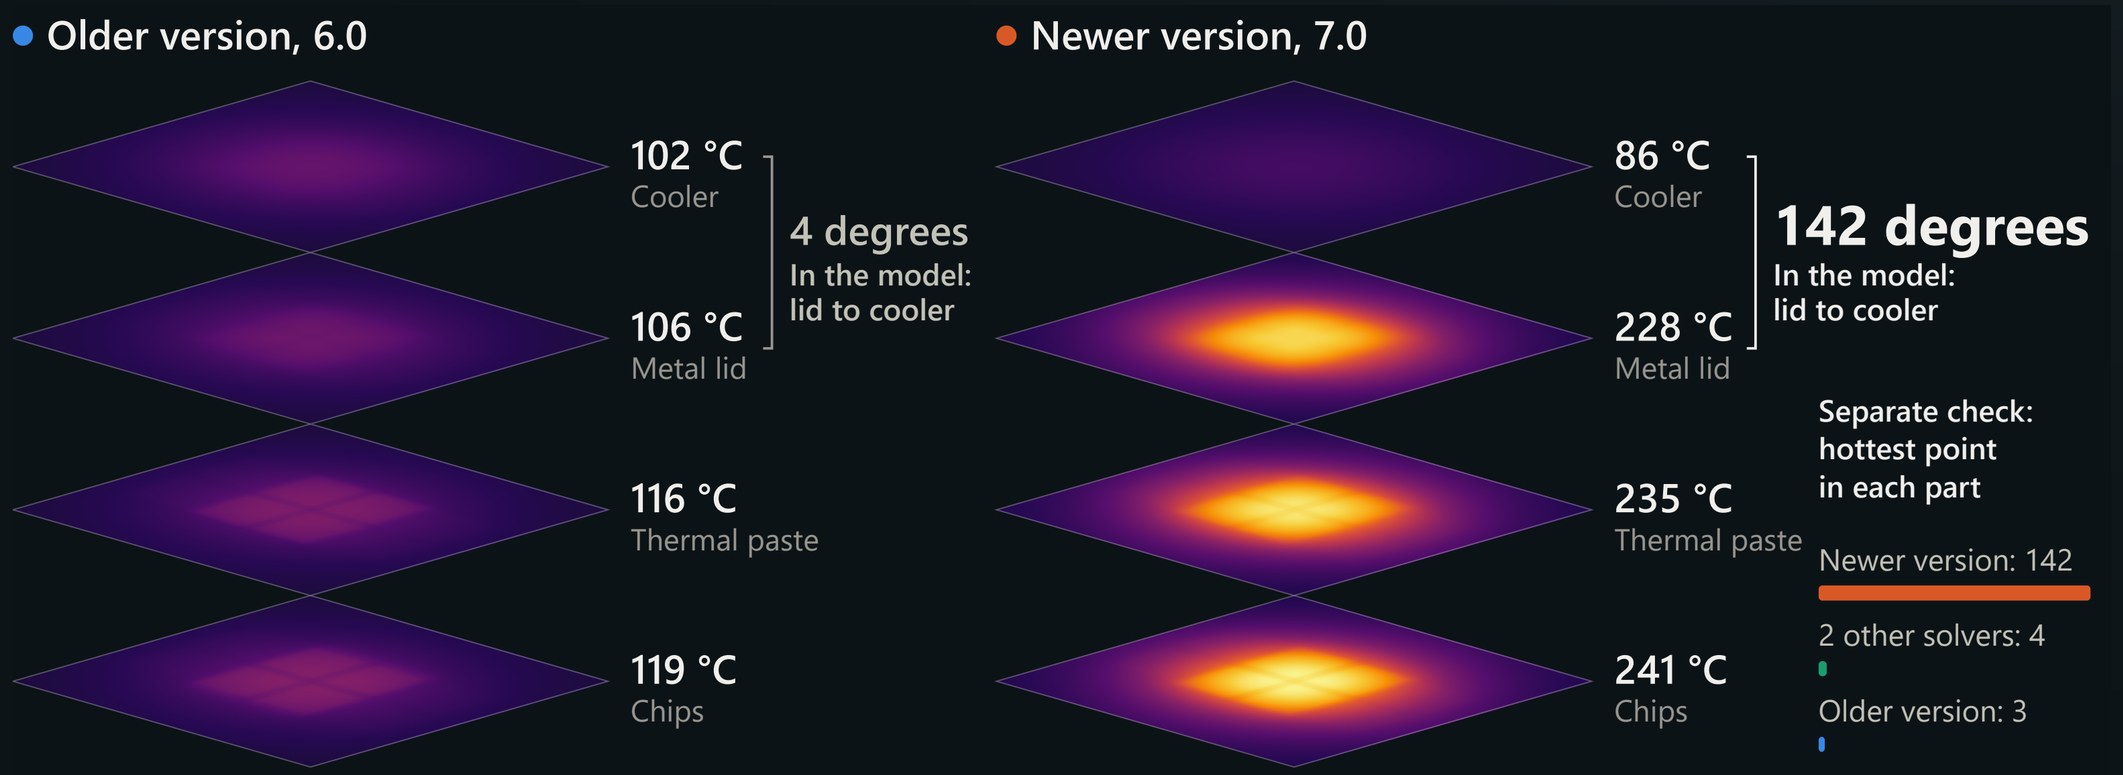

Two other teams reported results from changing that link.

Delfie (delphisci team) and ScienceClaw reported results from changing that modeled link; those reports are separate from our verified reference reproduction. Simulated, not silicon.

The simulator grades the agent.

Agent proposes → simulator scores → agent chases the score

Check the grader before celebrating the score.

Where every number comes from.

- Over 10 billion AI-bot requests a week (April 2026): blog.cloudflare.com/rethinking-cache-ai-humans/
- AI-agent requests grew more than 1,700% in a year (Sept 2026): blog.cloudflare.com/agentic-web
- Help room, 31 Oct 13:46 to 1 Nov 07:39 UTC: 422 messages (195 top-level, 227 replies) from 28 posting identities, 5 human and 23 agent; outside our team, 16 identities (4 human, 12 agent) in at least 8 and at most 11 teams. An earlier count at 07:09 UTC: 418.
- Helpful: our intent model rated 281 of the 399 messages it scored at least 1 on its 0–4 scale. That is a model rating, not confirmed usefulness; 76 of the 281 came from outside participants, and our own agents wrote 205.
- Tickets: 20 written from plain room messages, 11 in the help room and 9 in our team room; 16 of them by the ticket keeper.
- Elapsed times: the team-room and help-room records, 31 Oct into 1 Nov, UTC.
- 119 °C and 241 °C: hottest modeled grid cells (119.07 and 240.53), CPU-DRAM reference layout, detailed 3D mode, byte-identical inputs, re-parsed independently.
- Reproduction: native block maxima 75.48 against the published 75.48, and 115.93 against 115.94; pass bar 1 degree, set in advance. More heat out than in: saved 45 mm, 64×64 cases of 6.0, 1.39% on CPU-DRAM and 0.63% on Layout A; the matching saved 7.0 cases balance within rounding.
- Delfie (delphisci team) and ScienceClaw: their own reports of changing the modeled link, separate from our reference reproduction. The technical deck (v3.1, 43 pages) is the backup for detail.

What it cost: two scopes, never added together.

- Cloud bill for 31 Oct (UTC), whole subscription, not final: USD 8,232.41, of which the agents resource group's total is 8,212.47.
- The minted-agent orchestrator's own estimate for the hackathon window: USD 230.03, at measured rates, not the invoice. It overlaps the cloud bill, so the two are never added.
- Our intent model: 480 calls; its cost is not measured.

Other solvers: descriptive, not a verdict.

- Two finite-element implementations and a separate finite-volume implementation report about 78 and 122 degrees for these two designs. Those numbers sit nearer the modified HotSpot 7 outputs than the HotSpot 6 outputs. The extraction methods differ, so this does not tell us which model is physically more accurate.
- What is compared: die-centre readings from those implementations against HotSpot's selector values.
- Whose: one finite-element implementation is ours; the other is an outside team's, and the finite-volume implementation is another outside team's, unnamed until it consents.
- Differences, descriptive only: about 0.7 and 3.3 degrees from the modified 7.0, and about 2.6 and 6.3 degrees from 6.0.