

RC400T event controller

Ref. RC400T



ANALOG WAY®

Event controller for the Aquilon the Alta 4K and the Midra™ 4K multi-screen live presentation systems




TAA Compliance: This product is manufactured in France, a TAA-designated country, and is fully compliant with the Trade Agreements Act (17 U.S.C. & 2501-2581).



Presentation

The RC400T event controller has been designed to greatly increase the level of operational efficiency and to give instant access to the crucial functionalities of the Aquilon, the Alta 4K and the Midra™ 4K image processor such as screens, layers, sources, and memories. Up to five processors can be controlled in parallel (switch on the fly). The RC400T comes with a small footprint design and rugged housing, and offers 56 user programmable buttons, a high-resolution T-bar and a three-axis joystick for easy and fast PIP sizing and programming. This makes it the perfect solution for most control environments from large-scale live events (music shows, product launches, industry conferences...) to multi-purpose event auditoriums. With the Aquilon series, the customization of the RC400T is further enhanced allowing you to create custom rows with various button types.

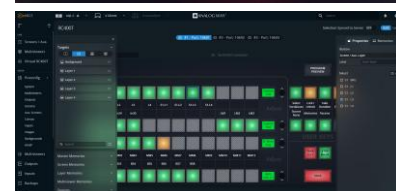

Technical Specifications

Dimensions

- ▶ W 22.44" x H 4.82" x D 15.04"
- ▶ L 570 mm x H 122.5 mm x P 382 mm

Weight without accessories

- ▶ 8 kg / 17.63 lbs

Operating conditions

- ▶ Temperature: 0 to 40°C (32 to 104°F)
- ▶ Humidity: 10% to 80%, non-condensing

Noise (@ 1,6m height @25°C)

- ▶ Front: 35 DBa@1m
- ▶ Rear: 35 DBa@1m

Thermal dissipation

- ▶ 85 BTU/hr

Warranty

3-year warranty on parts and labor back to factory

Power supply

- ▶ 100-240 VAC 50/60Hz 2.2A
- ▶ Fuse cartridge T2,5A 250VAC 5x20mm
- ▶ Max consumption: 25 W

EMC & Environnemental Compliance

- ▶ EN55032, EN55024, EN61000, FCC part15, ICES

Safety Compliance

- ▶ IEC/UL/EN 62368-1
- ▶ CSA22.2#62368-1
- ▶ UL Listed (E359143)

Supplied with

- ▶ 1 x Power supply cord
- ▶ 1 x Quick start guide including safety instructions

Key Features

Heavy-duty, compact design

Designed for fault-free operation

Instant access to crucial functionalities

56 user-programmable buttons

Customizable via Web RCS (on Aquilon series only)

High-resolution T-bar

Three-axis joystick for easy and fast PIP sizing and programming

Controls up to 5 devices in parallel (on-the-fly switching from the menu)

1 USB (front panel) and 1 USB (rear panel)

1 Ethernet network interface

Can be deployed both on a desk or recessed in the console surface

4-pin XLR connector XLR for LED lamp

Specifications subject to change without prior notice

RC400T_EN-07/08/2025