




(a) Solid block




occupancy: 64 / 64

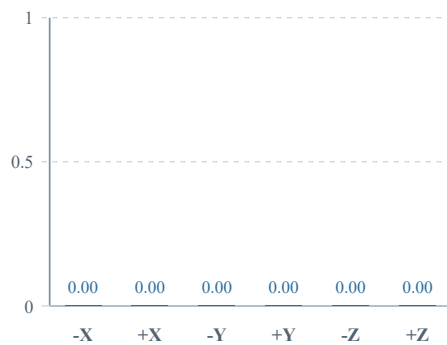


(b) Flat slab




occupancy: 16 / 64

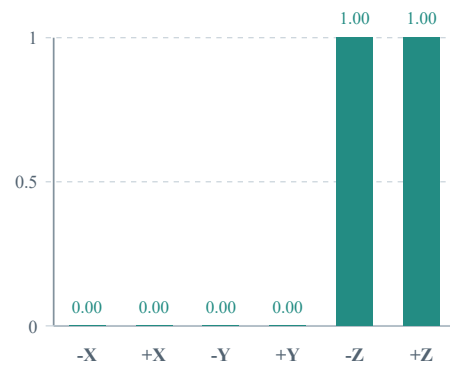


(c) Staircase




occupancy: 40 / 64

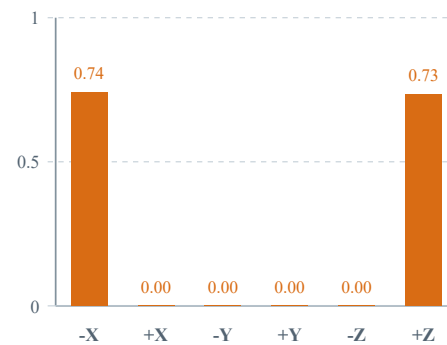

(d) Porous node



occupancy: 32 / 64

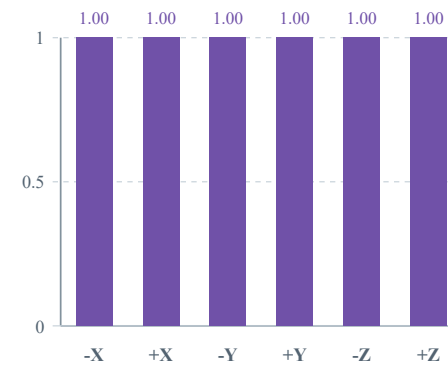

$r_d = \text{clamp}((A_d - B_d) / 4^2, 0, 1)$ Bars show decoded 5/5/5/5/4/4-bit node-local values.