

# A Pharo Thing Tutorial

Alex Oliveira

September 21, 2018

Copyright 2017 by Alex Oliveira.

The contents of this book are protected under the Creative Commons Attribution-ShareAlike 3.0 Unported license.

You are **free**:

- to **Share**: to copy, distribute and transmit the work,
- to **Remix**: to adapt the work,

Under the following conditions:

**Attribution.** You must attribute the work in the manner specified by the author or licensor (but not in any way that suggests that they endorse you or your use of the work).

**Share Alike.** If you alter, transform, or build upon this work, you may distribute the resulting work only under the same, similar or a compatible license.

For any reuse or distribution, you must make clear to others the license terms of this work. The best way to do this is with a link to this web page:

<http://creativecommons.org/licenses/by-sa/3.0/>

Any of the above conditions can be waived if you get permission from the copyright holder. Nothing in this license impairs or restricts the author's moral rights.



Your fair dealing and other rights are in no way affected by the above. This is a human-readable summary of the Legal Code (the full license):

<http://creativecommons.org/licenses/by-sa/3.0/legalcode>

# Contents

<b>Illustrations</b>	<b>ii</b>
<b>1 Installations</b>	<b>3</b>
1.1 Installing Os on RASPBERRY (RASPBIAN)	3
1.2 Copying Raspbian files on MAC OSX	4
1.3 Copying Raspbian files on Linux	4
1.4 Copying Raspbian files on Windows	4
1.5 Installing the Raspbian in Raspberry Pi	4
1.6 Installing PharoThings on Raspberry Pi	5
1.7 Execute PharoThings on Raspberry	8
1.8 Connecting Pharo client on remote Pharo	9
<b>2 Lesson 1 – Turning on/off LED</b>	<b>11</b>
2.1 What we need?	11
2.2 Experimental theory	12
2.3 Experimental procedure	13
2.4 Experimental code	13
2.5 What did we learn?	15
2.6 In the next lesson...	15

# Illustrations

1-1	Preparing SD Card. . . . .	4
1-2	Copying NOOBS. . . . .	4
1-3	Installing Raspbian. . . . .	5
1-4	Installing PharoLauncher. . . . .	5
1-5	Download Pharo 61. . . . .	6
1-6	Open your Pharo image. . . . .	6
1-7	Loading PharoThings. . . . .	6
1-8	Copying PharoARM. . . . .	7
1-9	Copying the folder on your Raspberry. . . . .	8
1-10	Server up and running. . . . .	8
2-1	Physical connection LED. . . . .	14
2-2	Remote Board Inspector. . . . .	15

In this booklet we will show you how to develop a little application that collect weather information. We will start to show how we can play with leds and others.





# Installations

The first step you need to get started with PharoThings is to install an Operating System in your Raspberry Pi. When you buy a Raspberry Pi, the OS is not factory installed.

## 1.1 Installing Os on RASPBERRY (RASPBIAN)

In this tutorial, we will download and install NOOBS (New Out Of the Box Software). NOOBS is an easy operating system installer which contains Raspbian (<https://www.raspberrypi.org/downloads/raspbian/>) and LibreELEC (<https://libreelec.tv>).

Raspbian is the Foundation's official supported operating system, a Linux OS based on Debian Stretch to run in ARM processors.


### Download

You can download an official image from the Raspberry Pi website Noobs downloads page (<https://www.raspberrypi.org/downloads/noobs/>). You will download a zip file and extract the files to your SD card.


### Copying

You will need a computer with an SD card reader to install the image. This process basically extracts the files from the zip file downloaded into an SD card formatted and start the Raspberry Pi with this SD card.

You can go directly to your operating system by clicking on the links below:

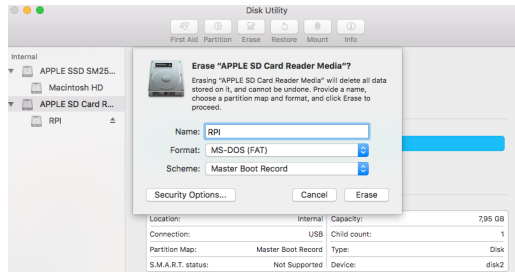

**Figure 1-1** Preparing SD Card.

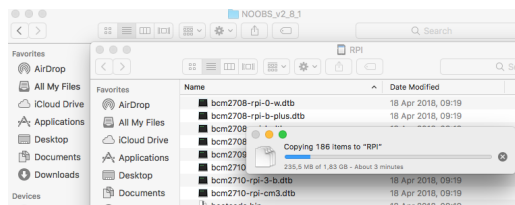

**Figure 1-2** Copying NOOBS.

## 1.2 Copying Raspbian files on MAC OSX

- Open “disk utility”, select the SD Card and Erase (Format MS-DOS FAT) as shown in Figure 1-1.
- Copy the files from folder NOOBS\_XXX to SD Card as shown in Figure 1-2.

## 1.3 Copying Raspbian files on Linux

## 1.4 Copying Raspbian files on Windows


## 1.5 Installing the Raspbian in Raspberry Pi

Plug the SD Card on Raspberry and turn it on. Select “Raspbian” and “Yes” as shown by Figure 1-3.


In a few minutes, you will have your Raspberry Pi running Raspbian OS. Now you can install PharoThings and control devices remotely.



## 1.6 Installing PharoThings on Raspberry Pi

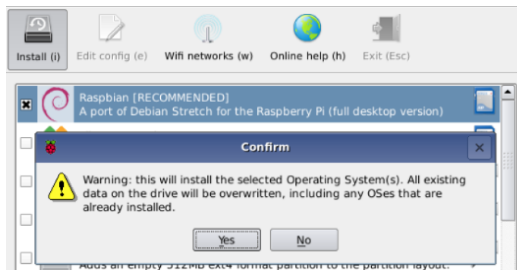

**Figure 1-3** Installing Raspbian.

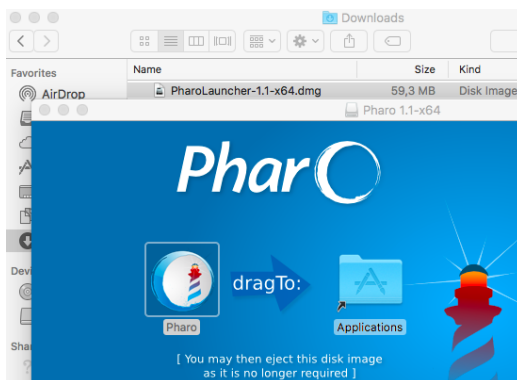

**Figure 1-4** Installing PharoLauncher.

## 1.6 Installing PharoThings on Raspberry Pi


Install PharoThings requires to get Pharo, PharoThings and an ARM virtual machine.

### Download PharoLauncher


Use the PharoLauncher (an application to help you running multiple versions and images of Pharo) and install Pharo 6.1. You can get the launcher from <http://pharo.org/download>. You can also directly install a version of Pharo from the same place.

### Download Pharo 61


Run the Pharo Launcher. Double click the distribution you want to create a image and give a name to image (see Figure 1-5). A short name and without spaces is recommended, because we will type this name and path in command line on Linux.

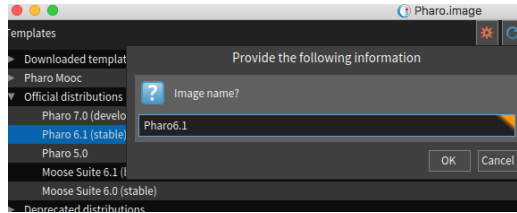

**Figure 1-5** Download Pharo 61.

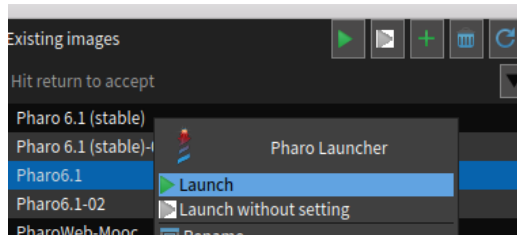

**Figure 1-6** Open your Pharo image.



**Figure 1-7** Loading PharoThings.

## Execute your Pharo image

Launch the image as shown in Figure 1-6. A folder with the image name will be created inside the folder Pharo: `/Users/your_user_name/Documents/Pharo/`

In this example the folder is `/Users/my_user_name/Documents/Pharo/Pharo6.1`


## Load PharoThings

Open Playground and execute this command to install the server part of PharoThings (as shown in Figure 1-7):

```
Metacello new
  baseline: 'PharoThings';
  repository: 'github://pharo-iot/PharoThings/src';
  load: #(RemoteDevServer Raspberry).
```

Then configure image to disable slow browser plugins (instead remote browser

## 1.6 Installing PharoThings on Raspberry Pi

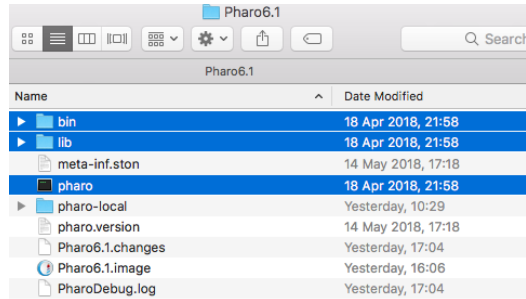

**Figure 1-8** Copying PharoARM.

will be much slower):

```
[ClySystemEnvironmentPlugin disableSlowPlugins.
```

### Snapshot your Image

In Pharo, click and “Save and Quit”. This way all your code and configurations are saved and ready to be reused.

### Download the VM


- Download ArmVM from <http://files.pharo.org/vm/pharo-spur32/linux/armv6/latest.zip>.
- Unzip it
- Copy the files shown in Figure 1-8 to Pharo folder `/Users/your_user_name/Documents/Pharo/pharo_image_folder`

### Copying Sources


Copy the file sources from the folder `/Applications/Pharo.app/Contents/MacOS` to folder `/Users/your_user_name/Documents/Pharo/images/pharo_image_folder/lib/pharo/5.0-201804182009/`

### Copy to the Raspberry

Copy this folder to your Raspberry Pi (via flashdrive, network etc). The folder must have the structure shown in Figure 1-9.

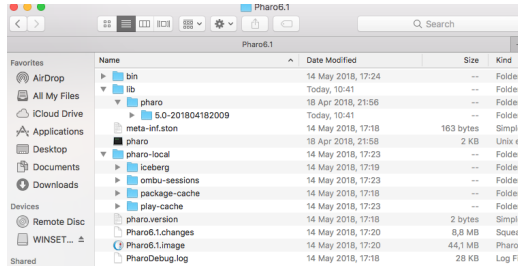

**Figure 1-9** Copying the folder on your Raspberry.

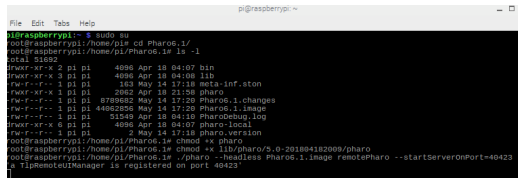

**Figure 1-10** Server up and running.

## 1.7 Execute PharoThings on Raspberry

### Turn on your Raspberry and connect it to the network.

In this example, the folder Pharo6.1 was copied to folder /home/pi/.

Is necessary apply execute permissions on the Pharo files, using the command `chmod +x`

```
chmod +x /home/pi/Pharo6.1/pharo
```

```
chmod +x /home/pi/Pharo6.1/lib/pharo/5.0-201804182009/pharo
```

### Start Server

Start the Pharo typing the following command in the Terminal on your Raspberry:

```
[ pharo --headless Server.image remotePharo --startServerOnPort=40423
```

If all is right, you will see the answer:

```
[ 'a TlpRemoteUIManager is registered on port 40423'
```

So now we have the Raspberry running the TelePharo on TCP port 40423 (as shown in Figure 1-10) and we can connect into it from another computer.

## 1.8 **Connecting Pharo client on remote Pharo**

more to come.





## Lesson 1 – Turning on/off LED

One of the classic analogies in electronics to “Hello World” is turn on a led or lamp. In this first lesson, we will learn how to connect correctly an LED in your Raspberry Pi and how to use PharoThings to control this led by turning it on and off.

Coding in Pharo is very simple, but it is very powerful and you can control all the GPIOs of your Raspberry Pi remotely.

If you didn't see how to install the PharoThings on your Raspberry Pi and how to control it remotely, you can find the instructions on Chapter 1.

### 2.1 What we need?

In this lesson we will use a very simple setup.

#### Components

- 1 Raspberry Pi (any model) connected to your network (wired or wireless)
- 1 Breadboard
- 1 LED
- 1 Resistor (330ohms)
- Jumper wires

## 2.2 Experimental theory

Before constructing any circuit, you must know the parameters of the components in the circuit, such as their operating voltage, operating current, etc.

### The LED

To turn on the LED, we need to send the correct voltage and current to it. The voltage and current can't be high, otherwise, the led will burn, or in some cases, damage the Raspberry.

Typically, the forward voltage of an LED is between 1.8 and 3.3 volts. It varies by the color of the LED. A red LED typically drops 1.8 volts, but voltage drop normally rises as the light frequency increases, so a blue LED may drop from 3 to 3.3 volts[1].

Most 3mm and 5mm LEDs will operate close to their peak brightness at a drive current of 20 mA. This is a conservative current: it doesn't exceed most ratings (your specs may vary, or you may not have any specs—in this case, 20 mA is a good default guess [2])

In this experiment, the operating voltage of the LED is between 1.5V and 2.0V and the operating current is between 10mA and 20mA.

### The Resistor

We must always use resistors to connect LEDs up to the GPIO pins of the Raspberry Pi to limit the voltage and current between the LED and the Raspberry to a safe value.

A small change in voltage can produce a huge change in current (see more: LED Current vs. Voltage [2])

In this experiment, we will use a 330ohm resistor. To identify the correct resistor, follow one of the following color sequences, depending on the number of bands [3]:

- If there are four colour bands, they will be Orange, Orange, Brown, and then Gold;
- If there are five bands, then the colours will be Orange, Orange, Black, Black, Brown.

To know how calculate and choose the correct resistor, see this article: Which resistor to use with LED?

It does not matter which way round you connect the resistors (in this experiment). Current flows in both ways through them. This means that you can connect the resistor at the positive pole or the negative pole of the LED, as well as starting with the first or last color.



But the LEDs will only work if the power is supplied correctly (if the polarity is correct). You will not burn the LEDs if they connect the wrong way – they just will not turn on.

## 2.3 Experimental procedure

Now we will build the circuit. This circuit consists of an LED that lights up when power is applied, a resistor to limit current and a power supply (the Rasp)[3].

- Connect the Ground PIN from Raspberry in the breadboard blue rail (-). Raspeberry Pi models with 40 pins has 8 GPIO ground pins. You can connect with anyone. In this experiment we will use the PIN6 (Ground);
- Then connect the resistor from the same row on the breadboard to a column on the breadboard, as shown below;
- Now push the LED legs into the breadboard, with the long leg (with the kink) on the right;
- And insert a jumper wire connecting the righth column and the PIN7 (GPIO7).

The figure below shows how the electric connection is made:

## 2.4 Experimental code

Now, we can write some code in Pharo to control the GPIOs using PharoThings and turn the LED on. We have 2 options to do this:


- Write the code locally on the Raspberry;
- Use TelePharo to connect from your computer into the Raspberry and do all the work remotely.

In this experiment, we will use the second option: connect and do all the work remotely.

If you didn't see how to install the PharoThings on your Raspberry Pi and how to control it remotely, take a look in this tutorial: [Installing PharoThings on your Raspberry Pi](#)

In your inspect window (Inspector on a PotRemoteBoard) you can see a scheme of pins similar to Raspberry Pi docs. But here it is a live tool which represents the current pins state[4].

Digital pins are shown with green/red icons which represent high/low (1/0) values. In case of output pins you are able to click on the icon to toggle the value.

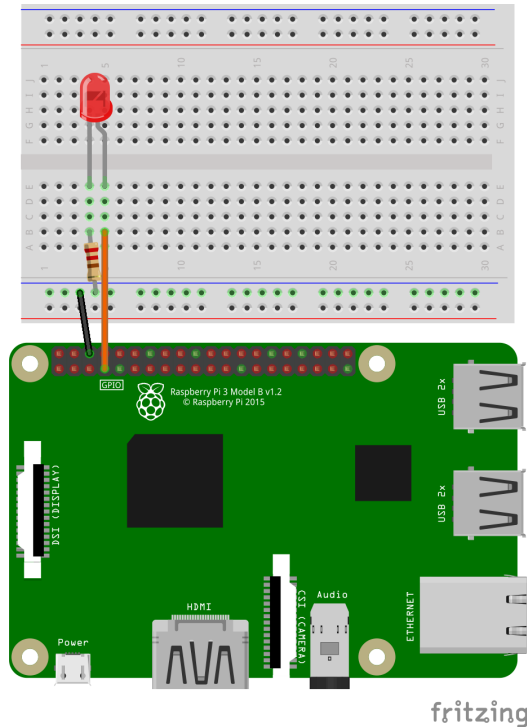

**Figure 2-1** Physical connection LED.

For control the led we first introduced named variable `#led` which we assigned to GPIO7 pin instance:

```
[ led := gpio7.
```

Then we configured the pin to be in digital output mode and set the value:

```
[ led beDigitalOutput.  
[ led value: 1.
```

It turned the led on.

You can notice that gpio variables are not just numbers/ids. PharoThings models boards with first class pins. They are real objects with behaviour. For example you can ask pin to toggle a value:

```
[ led toggleDigitalValue.
```

Or ask a pin for current value if you want to check it:

```
[ led value.
```

## 2.5 What did we learn?

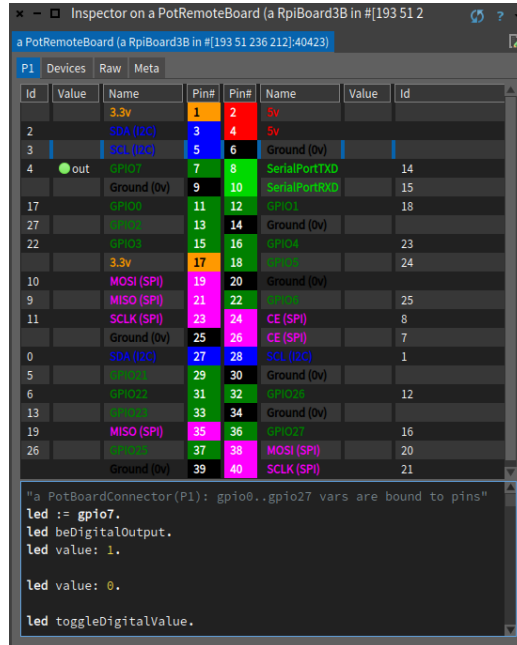


Figure 2-2 Remote Board Inspector.

## 2.5 What did we learn?

With PharoThings you can remotely control all the GPIOs in your running board!

You can:

- Interact remotely with pins and boards;
- See the current pins state in real time;
- Run the code dynamically.
- Easy, powerful.

## 2.6 In the next lesson...

Let's use what we learned in this lesson and write a simple code to blink the LED.

