



**WE
DELIVER
TOP FLOOR
SERVICE!**

PHONE: (800) 598-2444

FAX: (708) 371-2477

Elevator and Escalator Equipment

14639 Short St. Posen, Illinois 60469



- I** Introduction
- T** Terms and Conditions
- D** Dover
- G** G.A.L.
- H** Haughton
- M** Montgomery
- O** Otis
- W** Westinghouse
- C** Other Companies
- A** Miscellaneous
- P** Part Number Index

MISSION

The customer is the foundation of our enterprise.

**We commit to all our customers,
that we will conduct ourselves with fairness,
integrity, and respect for every individual.**

**We encourage innovation and creativity so
as to serve every customer better than any
competitor with products and services of
superior value.**

**We will earn a fair profit which is the source
of reward for our employees and our customers.**

**We recognize the need for continuous
improvement in our daily endeavors
“for what we accomplish today determines the
strength and security of our company tomorrow”.**



I Introduction

PRICING

For pricing information on any item or for items that do not appear in this catalog, please call us at 1-800-598-2444 or 708-371-2444.

Price quotes are valid for 30 days. Occasionally we can only get a best estimate rather than a firm quote. This is particularly the case with parts that are not frequently used. In this case, we cannot hold the price firm until the part has been procured.

RETURN POLICY

If for any reason you wish to return a product that you have ordered, please call us so we can give you a return goods authorization number. Please be sure to include your return authorization number with your returned merchandise.

All custom orders are nonrefundable. All returns subject to a 25% restocking fee. Returns must be made within 45 days or receipt of material.

Material is to be shipped prepaid via UPS or truck ground shipment to:

Parts Specialists, Inc.
14639 Short Street
Posen, IL 60469

ORDERING PROCEDURES

Our office hours are Monday-Friday 8:00 a.m. to 4:30 p.m. (Central Time).

- To place an order via telephone please call:
1-800-598-2444 or 708-371-2444.
- To place an order via fax, phone;
708-371-2477.
- If you wish to mail in your purchase order,
mail it to:

Parts Specialists, Inc.
14639 Short Street
Posen, IL 60469

If you send a confirming order, please make sure it is clearly marked to avoid duplicating your phone order.

We accept VISA and MASTERCARD for payment. If you take advantage of these credit card services, a service charge of 8% (of total order) will be added to your invoice. This is a charge that the credit card companies add to use their services.

Parts Specialists, Inc. has a standard charge for wire transfers. We will add a 50 dollar charge to your invoice.

CREDIT

Parts Specialists, Inc. requires new customers to provide credit worthiness. First orders require advance payment, or will be shipped COD.

SHIPMENTS

Our Shipping Department will ship your order by the most efficient method, based on your delivery requirements. Charges for freight, overnight delivery will be added to your invoice.

SHIPPING CODES

UPS, Next Day Air; Orders arrive next day.

UPS, Second Day Air; Orders arrive second day.

UPS, Three Day Select; Orders arrive third day.

UPS, Ground Trac; Freight orders under 70 lbs.

Common Carrier; Freight orders over 70 lbs.

Optional Freight Carriers Available:
Federal Express, Airborne Express and Burlington
Air Freight.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

Terms & Conditions



DAMAGE & LOSS

Parts Specialists, Inc. warrants to customer at the time of delivery the goods will be free from defects in material and manufacture. All shipments should be inspected upon receipt at the destination for visible or concealed damage. Customers remedy under this warranty are limited to the repair or replacement, at PSI's election of Goods or parts thereof returned to PSI which are shown to PSI's reasonable satisfaction to have been defective; provided that written notice of the defect shall have been given by Customer to PSI within forty five (45) days after delivery of such goods to PSI and their reshipment to Customer and the risk of loss thereof will be borne by PSI only if returned in accordance with written shipping instructions from PSI.

TITLE

Parts Specialists, Inc. warrants to Customer that it will convey good title to the goods sold hereunder. PSI's liability and Customer's remedy under this warranty are limited to the removal of any title defect or, at the election of PSI to the replacement of the goods or parts thereof which are defective in title; provided, however, that the rights and remedies of the parties with respect to patent infringement shall be limited to the provisions of subparagraphs below.

EXCLUSIVE WARRANTIES & REMEDIES

The foregoing warranties are exclusive and are given and accepted in lieu of any and all other warranties, express or implied, including without limitation the implied warranties of merchantability and fitness for a particular purpose: and any obligation, liability, right, claim or remedy in contract or tort, whether or not arising from negligence, actual or imputed.

The remedies of the Customer shall be limited to those provided herein to the exclusion of any and all other remedies including without limitation, incidental or consequential damages. No agreement varying or extending the foregoing warranties, remedies, or this limitation will be binding upon PSI unless in writing, signed by a duly authorized officer of PSI.

EXCUSABLE DELAYS

Parts Specialists, Inc. shall not be charged with any liability for delay or nondelivery when due to delays of suppliers, acts of the public enemy, compliance in good faith with any applicable foreign or domestic governmental regulation or order whether or not it proves to be invalid, fires, riots, labor disputes, unusually severe weather, or any other cause beyond the reasonable control of PSI. To the part of PSI, the time for the performance shall be extended for as many days beyond the date thereof as is required to obtain removal of such causes. This provision shall not, however, relieve PSI from using its best efforts to avoid or remove such causes and continue performance with a reasonable dispatch whenever such causes are removed.

LIABILITY LIMITATION

The price allocable in this order to any product or service alleged to be the cause of any loss or damage to the Customer shall be the ceiling limit on PSI's liability, whether founded in contract or tort (including negligence), arising out of, or resulting from, this order or the performance or breach thereof the design, manufacture, delivery, sale, repair, replacement, or the use of any such product or the furnishing or any such service. In no event shall PSI have any liability for any incidental or consequential damages.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

T



Decimal & Millimeter Equivalents

FRACTIONS OF INCH	DECIMALS	MILLIMETERS	FRACTIONS OF INCH	DECIMALS	MILLIMETERS
1/64	.015625	0.397	33/64	.515625	13.097
1/32	.031250	0.794	17/32	.531250	13.494
3/64	.046875	1.191	35/64	.546875	13.891
1/16	.062500	1.588	9/16	.562500	14.288
5/64	.078125	1.984	37/64	.578125	14.684
3/32	.093750	2.381	19/32	.593750	15.081
7/64	.109375	2.778	39/64	.609375	15.478
1/8	.125000	3.175	5/8	.625000	15.875
9/64	.140625	3.572	41/64	.640625	16.272
5/32	.156250	3.969	31/32	.656250	16.669
11/64	.171875	4.366	43/64	.671875	17.066
3/16	.187500	4.763	11/16	.687500	17.463
13/64	.203125	5.159	45/64	.703125	17.859
7/32	.218750	5.556	23/32	.718750	18.256
15/64	.234375	5.953	47/64	.734375	18.653
1/4	.250000	6.350	3/4	.750000	19.050
17/64	.265625	6.747	49/64	.765625	19.447
9/32	.281250	7.144	25/32	.781250	19.844
19/64	.296875	7.541	51/64	.796875	20.241
5/16	.312500	7.938	13/16	.812500	20.638
21/64	.328125	8.334	53/64	.828125	21.034
11/32	.343750	8.731	27/32	.843750	21.431
23/64	.359375	9.128	55/64	.859375	21.828
3/8	.375000	9.525	7/8	.875000	22.225
25/64	.390625	9.922	57/64	.890625	22.622
13/32	.406250	10.319	29/32	.906250	23.019
27/64	.421875	10.716	59/64	.921875	23.416
7/16	.437500	11.113	15/16	.937500	23.813
29/64	.453125	11.509	61/64	.953125	24.209
15/32	.468750	11.906	31/32	.968750	24.606
31/64	.484375	12.303	63/64	.984375	25.003
1/2	.500000	12.700	1	1.00000	25.400

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

Coils/Capacitors 24-25

Door/Hatch Equipment

Door Operator, Clutch 37-38

Interlocks 34-35

Safety Edges 36

Switches, Shoes 39-40

Relay Parts 26-31

Rectifiers/Transformers 32

Rollers 33

Selector Parts 41-44

Signal Fixtures

Bells/Buzzers 22-23

Hall Lanterns 15-17

Key Switches 1-8

Position Indicators 12-14

Push Buttons 9-11, 18-21

Valve Parts 45

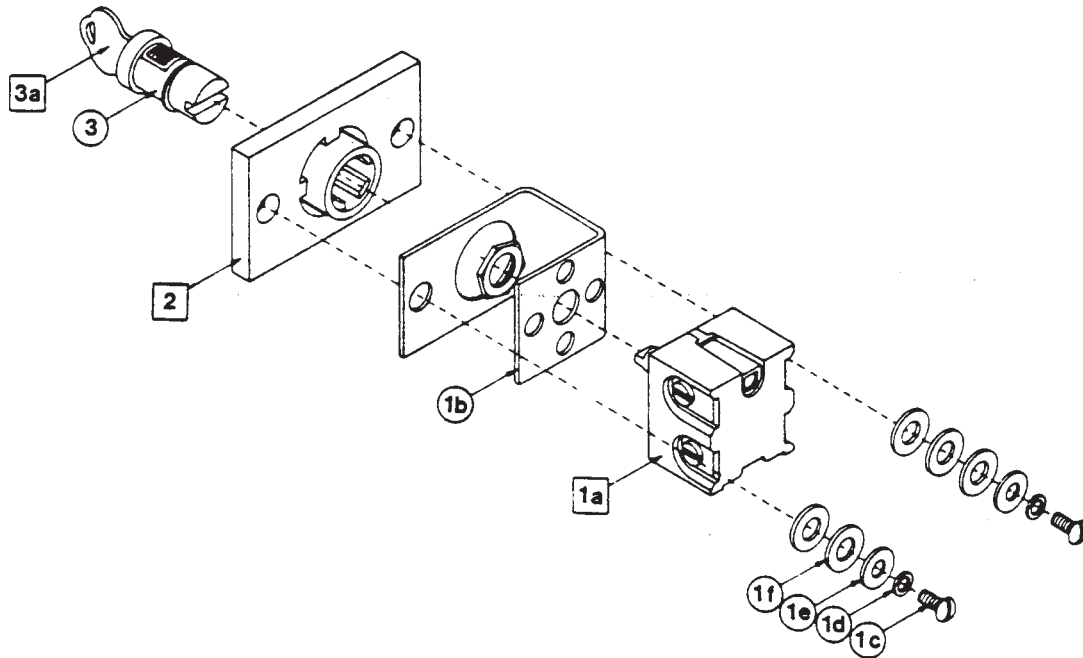


FIGURE NO.	DESCRIPTION	PRINT NO.	
1	Key Cylinder Mounting Material (3 Position)	32704	9703019
	Key Cylinder Mounting Material (2 Position)	32705	9703020
	Key Cylinder Mounting Material (4 Position)	32706	9703032
1a	Rotary Switch (3 Position)	77286	9772868
	Rotary Switch (2 Position)	77287	9772870
	Rotary Switch (4 Position)	77797	9777970
1b	Bracket	32609	9826099
1c	#6 32x 3/8" Round Head Machine Screw	701773	
1d	#6 Lock Washer	700415	
1e	#6 Flat Washer	700391	
1f	1/4" Flat Washer Type A	700394	
2	Key Core		
3	Standard Key Cylinder with 2 (H-2395) keys	32618	9726184
	Restricted Key Cylinder with 2 (H-2389) keys	32619	9826191
	Special Key Cylinder with 2 (H-2304) keys	35953	9859536
	Special Key Cylinder with 2 (H-2454) keys	35954	9759542
	Special Key Cylinder with 2 (H-2567) keys	35955	9759554
	Special Key Cylinder with 2 (H-2573) keys	35956	9759566
3a	H-2395 key only		9703135
	H-2389 key only		9703196
	H-2304 key only		9703202
	H-2454 key only		9703214

V-7 SWITCH PARTS

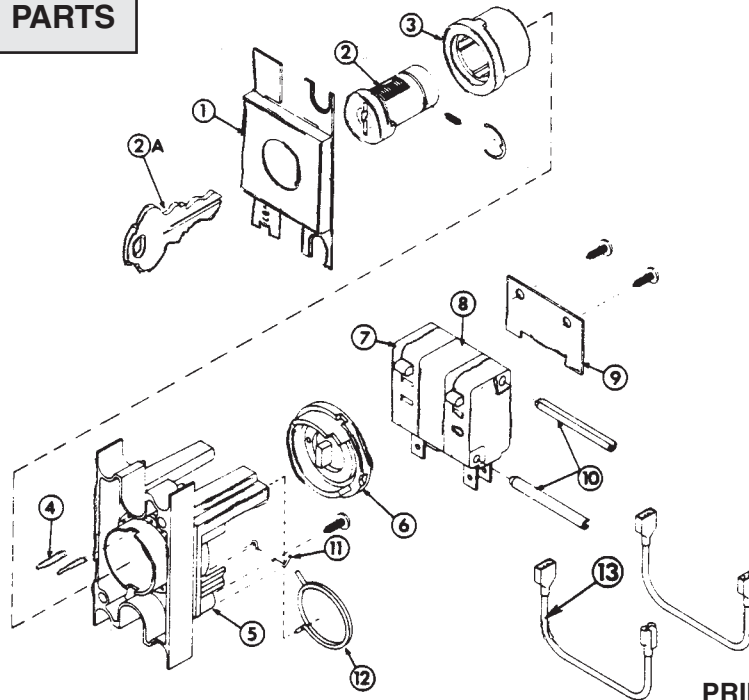


FIGURE NO.

DESCRIPTION

PRINT NO.

1	Bezel, Keyswitch	(See Page 3)	
2	Plug, key, 1 groove (Uses H2389 Key)	660AC1	
	Plug, key, 1 groove (Uses H2395)	660AC2	
	Plug, key, 2 grooves (Uses H1846 Key)	660AD1	
	Plug, key, 2 grooves (Uses H1848 Key)	660AD2	
2a	Key, H2389, 1 groove	103107	9703196
	Key, H2395, 1 groove	103105	9703135
	Key, H1846, 2 groove	103106	9731064
	Key, H1848, 2 groove	148008	9703391
3	Lock, barrel	562AA	
4	Pin, keyswitch, stop	638AC	
5	Bracket, Keyswitch mounting	129AY	
6	Cam, keyswitch (Red)	228AA1	
	Cam, keyswitch (White)	228AA2	
	Cam, keyswitch (Blue)	228AA3	
	Cam, keyswitch (Black)	228AA4	
7	Switch	171AP1	9818431
8	Spacer, Switch (Dummy)	131AF	
9	Retainer, Switch	711AA	
10	Pin, keyswitch connector	638AA	
11	Spring, detent	780AB	
12	Spring, Return	780AC	
13	Jumper	900AB14	


14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

SQUARE

DESCRIPTION

PRINT NO.

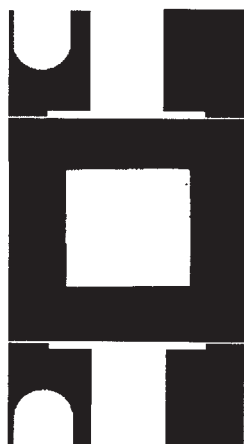

Blank (Black)	128AC1
Blank (Red)	128AC2
Fire Bypass (Red), (Hall)	128AC3
Fire Hold (Red)	128AC4
Inspection (Black)	128AC5
Independent Service (Black)	128AC6
Emergency Service (Black)	128AC7
Hoistway Access, Up-Down (Black) (Hall)	128AC8
Hoistway Access, Down (Black) (Hall)	128AC9
Emergency Power (Black) (Hall)	128AC10
Off-On (Black)	128AC11
Off-On (Black) (Hall)	128AC12
Light (Black)	128AC13
Light-Fan (Black)	128AC14
Hi-Low Fan (Black)	128AC15
Lobby Park (Black) (Hall)	128AC16
Photo Eye (Black)	128AC17
Up-Down (Black) (Hall)	128AC18
Off-Hold (Black)	128AC19
Off-Manual (Black) (Hall)	138289
Off-Auto (Black)	138287

9822628

9822630

9822641

9822653

9822665

9822677

9822689

V7 ROUND



Blank (Black)	128AD1
Blank (Red)	128AD2
Hall Fire Service	128AD3
Car Fire Service	128AD4
Inspection	128AD5
Independent Service	128AD6
Emergency Service	128AD7
Hoistway Access (U.S.) (Hall)	128AD8
Hoistway Access (Canada)	128AD9
Emergency Power	128AD10
Car Call Cutout	128AD11
Hall Car Cutout	128AD12
Light	128AD13
Light with fan	128AD14
Light with 2 speed fan	128AD15
Lobby Park	128AD16
Photo Eye Cutout	128AD17
Hall Call Reg, Int.	128AD18
Door Hold	128AD19
In-Car Stop	128AD20
In-Car Access	128AD21
Hoistway Access (U.S.) (Car)	128AD22
Hall Fire Service (Car)	128AD25

9834540

9834552

9834503

9834515


9834527

9834539

9834564

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444




9746110

DESCRIPTION

PRINT NO.

Kit, Key Switch, Converts Micro Switch To V7, "Hall Registration" Terminal	32936	9746110
Kit, Key Switch, Converts Micro Switch To V7, "Hall Call Lockout" Non Spring Retainer	32938	9746134
Kit, Key Switch, Converts Micro Switch To V7, "Hall Fire Service", Call Lockout	32941	9746160
Key Switch, H-1846 Key, DMC-1, T2 USA, Horizontal Mounting, Found in Kit 9746171, "Hoistway Access", 24V	171AR23	9746213
Kit, Key Switch, Converts Micro Switch to V7, "Emergency Power"	32940	9746158
Kit, Key Switch, Converts Micro Switch to V7, "Hall Registration Intermediate"	32937	9746122
Kit, Key Switch, Converts Micro Switch to V7, "Lobby Park"	32939	9746146

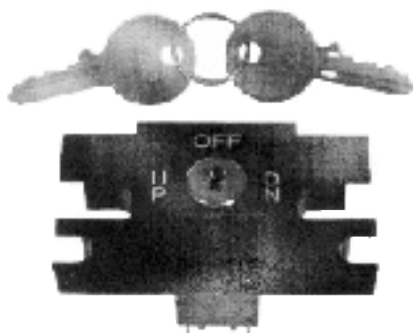


9859597

DESCRIPTION

PRINT NO.

Key Switch, Micro Switch, 5154 Key, Call Registration, Key Removable Off, "Off Dn Up"	171AB17	9859597
Key Switch, Micro Switch, 5140 Key, Key Removable On and Park, Replace with 9746146 V7, "Lobby Park"	171AB14	9859792
Key Switch, Micro Switch, 5027 Key, Key Removable Off and On, Replace with 9746160 V7, "Lobby Park"	171AB4	9859731
Key Switch, Micro Switch, 5027 Key, Key Removable Off and Power, Replace with 9746158 V7, "Emergency Power"	171AB8	9859779

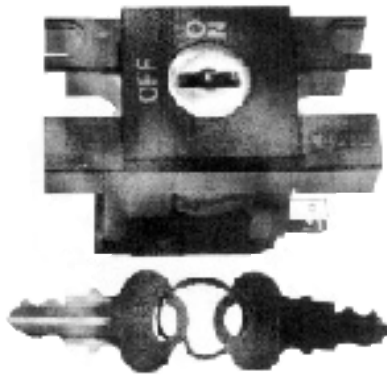


9746092

DESCRIPTION

PRINT NO.

Kit, Key Switch, Converts Micro Switch to V7, "Car Call Lockout", Key Removable in 2 Pos.	32934	9746092
Kit, Key Switch, Converts Micro Switch to V7, "Car Call Registration:	32935	9746109
Key Switch, V7, "In Car Access"	171AR22	9746201
Kit, Key Switch, Converts Micro Switch to V7, "Light and Fan"	32926	9746018
Kit, Key Switch, Converts Micro Switch to V7, "Emergency Service"	32932	9746079
Kit, Key Switch, Converts Micro Switch to V7, "Car Fire Service"	32928	9746031
Kit, Key Switch, with 4 fastons, 2 speed fan	32997	9746225
Kit, Key Switch, Converts Micro Switch to V7, "Photo-Eye"	32931	9746067
Kit, Key Switch, Converts Micro Switch to V7, "Door Hold Open"	32933	9746080
Kit, Key Switch, Converts Micro Switch to V7, "Light"	32925	9746006
Kit, Key Switch, Converts Micro Switch to V7, "Independent Service"	32930	9746055
Kit, Key switch, Converts Micro Switch to V7, "Inspection"	32929	9746043
Kit, Key Switch, Converts Micro Switch to V7, Vertical "Hall Fire Service"	32943	9746183

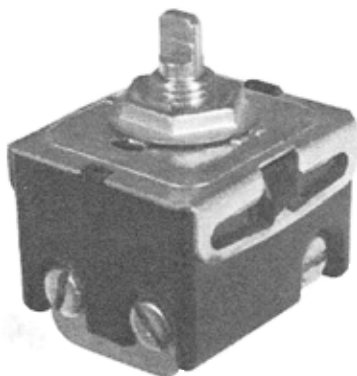

9753175


DESCRIPTION

PRINT NO.

Rotary Switch, Hall Fire Service	102761	9737613
Kit, Rotary Switch, Old Style, Contains 2 Position Switch, Bracket and Screws	32705	9703020
Kit, Rotary Switch, Old Style, Contains 4 Position Switch, Bracket and Screws	32706	9703032
Kit, Rotary Switch, Old Style, Contains 3 Position Switch, Bracket and Screws	32704	9703019

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



9719726



DESCRIPTION


Key Switch, Micro Switch, 1848 Key,
"Hall Call Lockout"

PRINT
NO.

138523 **9719726**

Key Switch, Micro Switch, 1848 Key,
"Car Call Lockout"

138519 **9719763**

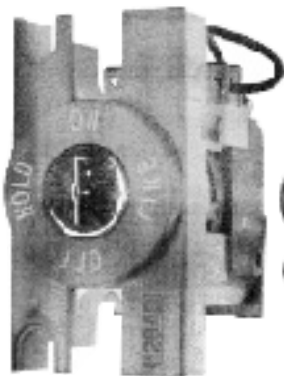

9715990



DESCRIPTION


Key Switch, Impluse V7, Micro Switch, 2389
Key, 3-Position, "Car Fire Service," Vertical.
"Off" "Hold" "On" "Fire"

PRINT
NO.

138513 **9715990**

Key Switch, Impluse V7, H2389 Key, 3-Position,
"Hall Fire Service," Horizontal "Fire" "Bypass"
"Off" "On"

138526 **9715976**

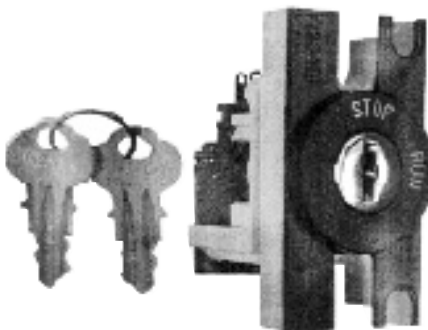

DESCRIPTION

Key Switch, Micro Switch, 1846 Key,
"In Car Stop"

PRINT
NO.

138530 **9715952**



9721745

Cylinder, Lock, 2174-1, Electrical Lock,
Removable in 1 Position

9721745

Cylinder, Lock, 2174-2, Electrical Lock,
Removable in 2 Positions

9721757



977167

DESCRIPTION

PRINT
NO.

Cylinder, H315 Key, First Dover to Replace
Midwest Fixture, Toggle


37165

9771657

Cylinder, H312 Key, First Dover to Replace
Midwest Fixture, Toggle

37167

9771670



9726287

DESCRIPTION

PRINT
NO.

Double Pole Double Throw, 3 Position, Center
Open, ON-OFF-ON

35916

9759165

Toggle, Double Pole Double Throw, Spring
Return, Used On Midwest Fixtures,
ON-OFF-ON

37173

9771736

Single Pole Double Throw, 2 Position, "ON-ON"

32628

9726287

Kit, Toggle Switch Key Cylinder, Old Style
Contains Cam, Bracket Switch And Screws,
2 Position Removable Off

32622

9826221

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



9703093

DESCRIPTION

Key, used on cylinder number 35949, H1642

Key, used on 35915 cylinder, H1665

Key, used on cylinder 660AD1, V7 impluse,
H1846

Key, used on cylinder 660AD2, V7 impluse,
H1848

PRINT NO.

9703093

9703147

103106 **9731064**

148008 **9703391**



9703123

DESCRIPTION

Key, H312, Illinois

Key H315, Illinois

Key,H323, Illinois

PRINT NO.

9703123

32465 **9703159**

32467 **9703238**



9710280

DESCRIPTION

Key, Impulse, 5009

Key, Impulse, 5074

Key, Impulse, 5154

Key, Impulse, 5027

Key, Impulse, 5140

9710280

9710279

9710255


9710267

9710334

NOTE: PSI supplies all Dover keys

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

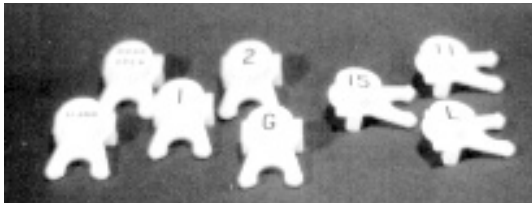

White Lexan buttons come with black symbols and clear lens caps, Dover 106734-series pushbuttons. Caps are supplied loose to make installation easier. Order replacement caps below. Characters available: Floor stops 1 thru 20; Arrow, Alarm, Down, Up, Door Close, Door Open, Blank, B,G, L, LL, M, P.

WHITE HORIZONTAL PUSH BUTTON

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
"2"	106734	9893027
Jewel Button, "RETURN"	106734	9893520
Jewel Button, "IN USE"	106734	9893507
"5"	106734	9893052
"1"	106734	9893015
"SB"	106734	9893179
"6"	106734	9893064
"UL"	106734	9893430
"9"	106734	9893090
Jewel Button, "FIRE SERVICE"	106734	9893519
"4"	106734	9893040
"15"	106734	9893155
"7"	106734	9893076
"3"	106734	9893039
"8"	106734	9893088
"R"	106734	9893180
"14"	106734	9893143
"LOBBY"	106734	9893167
"L"	106734	9893337
Down Arrow	106734	9809995
"13"	106734	9893131
"B"	106734	9893350
"G"	106734	9893398
"Door Close"	106734	9893349
"P"	106734	9893192
"M"	106734	9893416
"Door Open"	106734	9893362
"D"	106734	9893428

WHITE HORIZONTAL PUSH BUTTON

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
"LL"	106734	9893404
Up Arrow	106734	9809892
"ALARM"	106734	9893386
"12"	106734	9893120
"Call"	106734	9893441
"SEND"	106734	9893374
"11"	106734	9893118
"10"	106734	9893106

WHITE VERTICAL PUSH BUTTON

<u>DESCRIPTION</u>	<u>PRINT NO.</u>		<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
"G"	106734	9883393	Button "RETURN"	106734	9883721
"6"	106734	9883060	"2"	106734	9883022
"D"	106734	9833423	"11"	106734	9883113
"5"	106734	9883058	"8"	106734	9883083
"12"	106734	9883125	"15"	106734	9883150
"SB"	106734	9883162	"14"	106734	9883149
"P"	106734	9883186	"13"	106734	9883137
Down Arrow	106734	9883460	"3"	106734	9883034
"UL"	106734	9883435	"4"	106734	9883046
"LL"	106734	9883400	"R"	106734	9883174
Blank	106734	9706744	"B"	106734	9883356
"Door Close"	106734	9883344	"FIRE SERVICE"	106734	9883710
"ALARM"	106734	9883381	"10"	106734	9883101
"DOOR OPEN"	106734	9883368	"7"	106734	9883071
"CALL"	106734	9883447	"9"	106734	9883095
"UP ARROW"	106734	9883459	"1"	106734	9883010
"L"	106734	9883332			



**DESCRIP-
TION**

**PRINT
NO.**

Marked "7"	108307	9822872
Marked "9"	108309	9822902
Marked "3"	108303	9822823
Marked "G"	108339	9822963
Marked "6"	108306	9822859
Marked "1"	108301	9822800
Marked "2"	108302	9822811
Marked "L"	108333	9822940
Marked "8"	108308	9822884
Marked "10"	108310	9822914
Marked "4"	108304	9822835
Marked "5"	108305	9822847
Marked "B"	108335	9822938




9852268
9852256
9852220

(Black caps) Tough, durable ABS plastic 7/8" dia. x 1-5/32"L. Available in standard black cap with white characters, black cap that glows green when illuminated (arrow only), and black cap that glows red when illuminated (arrow only).

Available characters: Floor stops 1-20, Arrow, Alarm, B, Blank, DOWN, Door Close, Door Open, G, L, M, P, UP.

(SPECIFY MARKING)

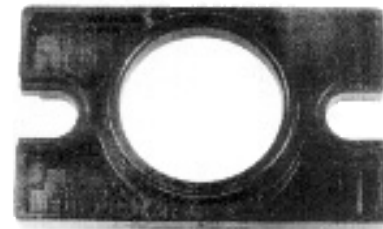

9806349

Push button halo, Old Style, Black, Print Number 106349

9884063



Contact Base Assembly, Blocking Leaf Assembly, Jewel Assembly.

PRINT NO.

108077 **9780774**

Contact Base Assembly, Signal Fixtures, 1 normally open 1 normally closed contact arrangement.

107406 **9884063**



9724590

Hall halo assembly, 1-3/4" O.D. (formerly 32459)



9818443

Push button cap, Impluse, Clear. Print Number 171AG1




9826038

Push button lamp socket assembly for round push button. Print number 32603

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

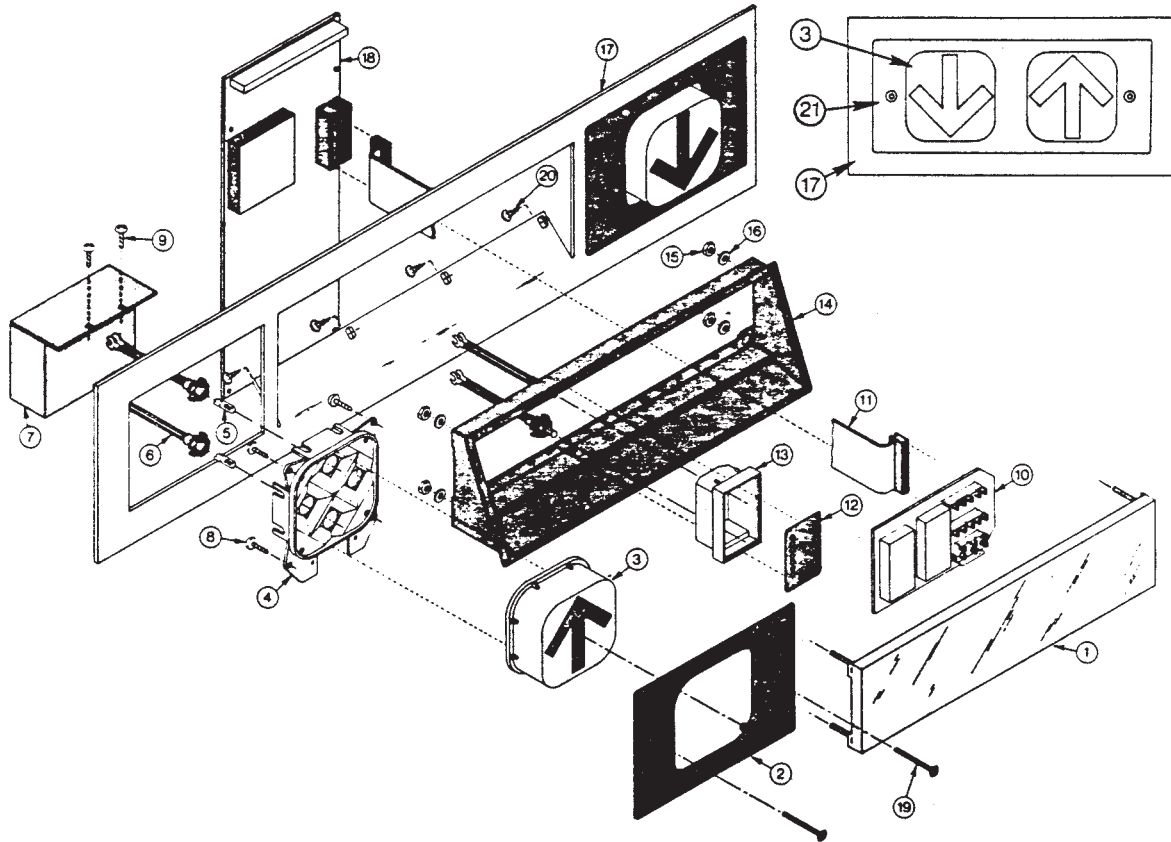

HALL LANTERN AND P.I. (TYPICAL ASSEMBLY)


FIG. NO.	DESCRIPTION	PRINT NO.	FIG. NO.	DESCRIPTION	PRINT NO.
1	Lens, P.I., (RED)	130AC2	12	Film, Discrete Symbol	# varies based on symbol
2	Faceplate (Plastic)	141AA1	13	Reflector, Discrete	134AA1
3	Lens, Lantern	130AD2	14	Housing, Inclined	138AG1 9832336
4	Reflector	134AD1	15	Nut, #6	700570
5	Lamp 28 Volt	175AA1	16	Washer, Flat, #6	700391
6	Housing, Lamp	138AD1	17	Faceplate	# varies based on size
7	Chime, Audible	177AA1	18a	Board, Power Log, 24 V	178AD2 9713232
8	Screw, Thread Rolling, #6 x .375 L	139690	18b	Board, Power Log, 48V	178AD1 9713244
9	Screw, SPBAB, #8 x .625L	117571	19	Screw, CSBHS, E. 190 x 1.50 (Black)	139687
10	Display, Dot Matrix	178AC1	20	Screw, Self Tapping, #8 x .500 L	140549
11	Cable, Ribbon, 20 in. L	130471	21	Faceplate (Plastic)	141AA2 9741318

POSITION INDICATOR INSERTS OLD STYLE



<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
"16"	32586	9725866
"1"	32571	9825710
"8"	32578	9825782
"5"	32575	9825757
"11"	32581	9825812
"6"	32576	9825769
"3"	32573	9825733
"B"	32561	9825617
"12"	32582	9825824
"Blank"	76354	9763545
"SB"	32563	9825630
"7"	32577	9825770
"2"	32572	9825721
"9"	32579	9825794
"Arrow Down"	32629	9826294
"L"	32562	9825629
"G"	32564	9825642
"20"	32590	9825903
"RC"	32597	9825976
"LL"	32565	9825654
"18"	32588	9825885
"ML"	32567	9825678
"M"	32566	9825666
"17"	32587	9825873
"SS"	32596	9825964
"P"	32568	9825680
"Up Arrow"	32630	9826300
"4"	32574	9825745

DISCRETE DOT MATRIX POSITION INDICATOR LENSES



<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
Red Dot, Film, "5"	130AG5	9772212
Red Dot, Film, "4"	130AG4	9772182
Red Dot, Film, "2"	130AG2	9772169
Up or Down Arrow	130AG11	9772236
Red Dot Film, "3"	130AG3	9772170
Red Dot Film, "G"	130AG16	9772261

POSITION INDICATOR LENS




<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
Digital, Beckman, Red 1.50 x 6.0	130595	9830595
Digital, Amber	114284	9844284
Dialite, Digital	108003	9880239
Guard, Digital, Clear 6.53 x 1.59	126461	9726457
Reflector, Digital, Beckman Clear	114205	9714212
Diffuser, Reflector, Digital, Beckman, White	114204	9714200
Filter, Green, Hall Lantern, Arrow	37195	9771955

14639 Short St. • Posen, Illinois 60469 U.S.A.


Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

MIDWEST POSITION INDICATOR INSERTS




<u>DESCRIP- TION</u>	<u>PRINT NO.</u>	
"4"	32444	9724448
"1"	32441	9724412
"M"	32469	9724813
"Blank"	32512	9725120
"14"	32529	9725295
"12"	32527	9725271
"B"	32453	9724539
"13"	32528	9725283
"G"	32480	9724801
"10"	76450	9724503
"L"	32470	9724825
"9"	32449	9724497
"7"	32447	9724473
"8"	32448	9724485
"LL"	32508	9725088
"Down Arrow"	32452	9724527
"3"	32443	9724436
"5"	32445	9724382

POSITION INDICATOR LENS

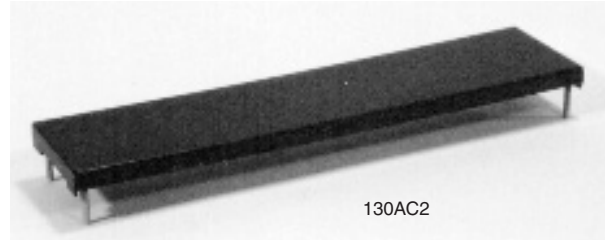

130AC2

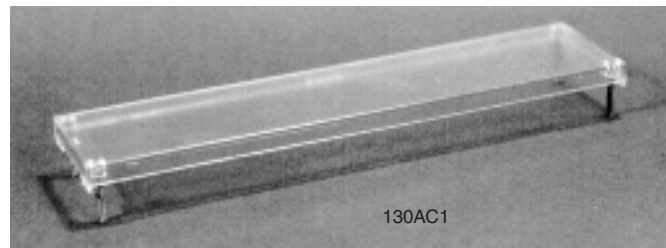

130AC1

DESCRIPTION

PRINT NO.

Impulse, 9.50 x 2.00 Red
Clear

130AC2 **9730618**
130AC1

DISCRETE FILM KIT




Digital position indicator, contains material to add one landing to position indicator. Print number; 33054.

9733050

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

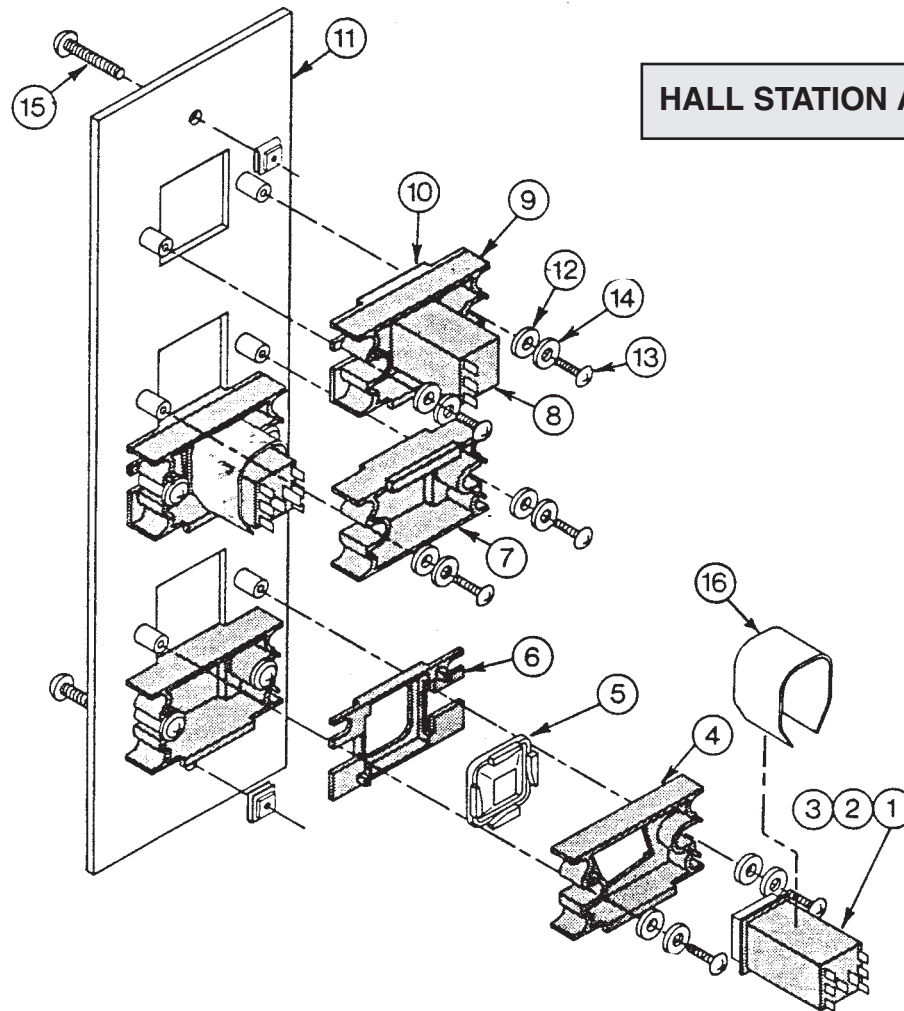


HALL STATION ASSEMBLY

FIG. NO.	DESCRIPTION	PRINT NO.	FIG. NO.	DESCRIPTION	PRINT NO.
1	Pushbutton, Switch (2Pol.)	171AE1	10	Bezel, Keyswitch	
2	Lamp, 28 Volt	175AA1	11	Faceplate	
3	Cap, Clear	171AG1	12	Washer, Flat (#8)	701151
4	Bracket, Mounting	129AB1	13	Screw, .138 (#6) x .250	700505
5	Lens, Target	130AA1	14	Washer, Locking (#6)	700415
6	Bezel (Black)	128AB1	15a	Kit, Faceplate Fastening, Stn. Stl.	200AA1
7	Spacer		15b	Kit, Faceplate Fastening, Muntz	200AA2
8	Keyswitch		16	Clip, Spring	140809
9	Bracket, Mounting	129AC1			
		9891717			
		9721769			
		9818443			
		9851288			
		9893209			
		9822690			
		9851276			

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

9831447

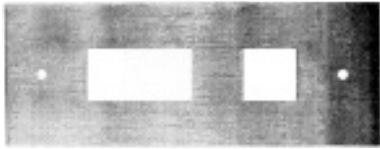

Hall Station Faceplate, terminal, impulse,
3.50 x 9.00, #4 stainless steel. Print number;
141AF3

9741318




Faceplate, black plastic, impulse, hall lantern,
intermediate. Print number; 141AA2

9741215



Black plastic, impulse, hall lantern terminal.
Print number; 141AA1

9767356

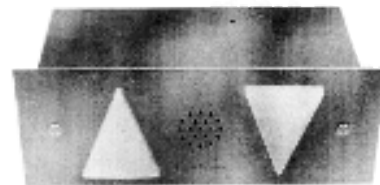


Hall Lantern, Old Style, triangle arrow inserts,
faceplate has speaker pattern, box, intermedi-
ate, 48 volt horizontal. Print number; 107354

9771943



Arrow, hall lantern insert. Print number;
37194


9863552



Old Style, hall lantern insert. Used prior to
mid-1980. Print number; 76355


D

9734144



Reflector, hall lantern, impulse, white. Print number; 134AD1

9730266




Hall Lantern, impulse, 3.00 x 2.50, black, "Arrow:". Print number; 130AD2

9768117



Telephone box assembly door frame, impulse, black plastic, 12.376 x 10.562. Print number; 168AA2.

9832336

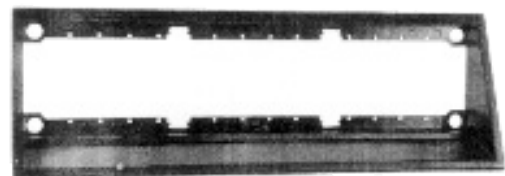

Impulse, inclined housing. Print number; 138AG1.

9766212



Magnetic telephone door latch, impusle. Print number; 166AA2



Jewel Assembly, incandescent bulb, key call pilot, 24 volts. Print number; 178AL3


9719570

Jewel Assembly, red led bulb, key call pilot, 24 volts. Print number; 178AL11

9719581

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

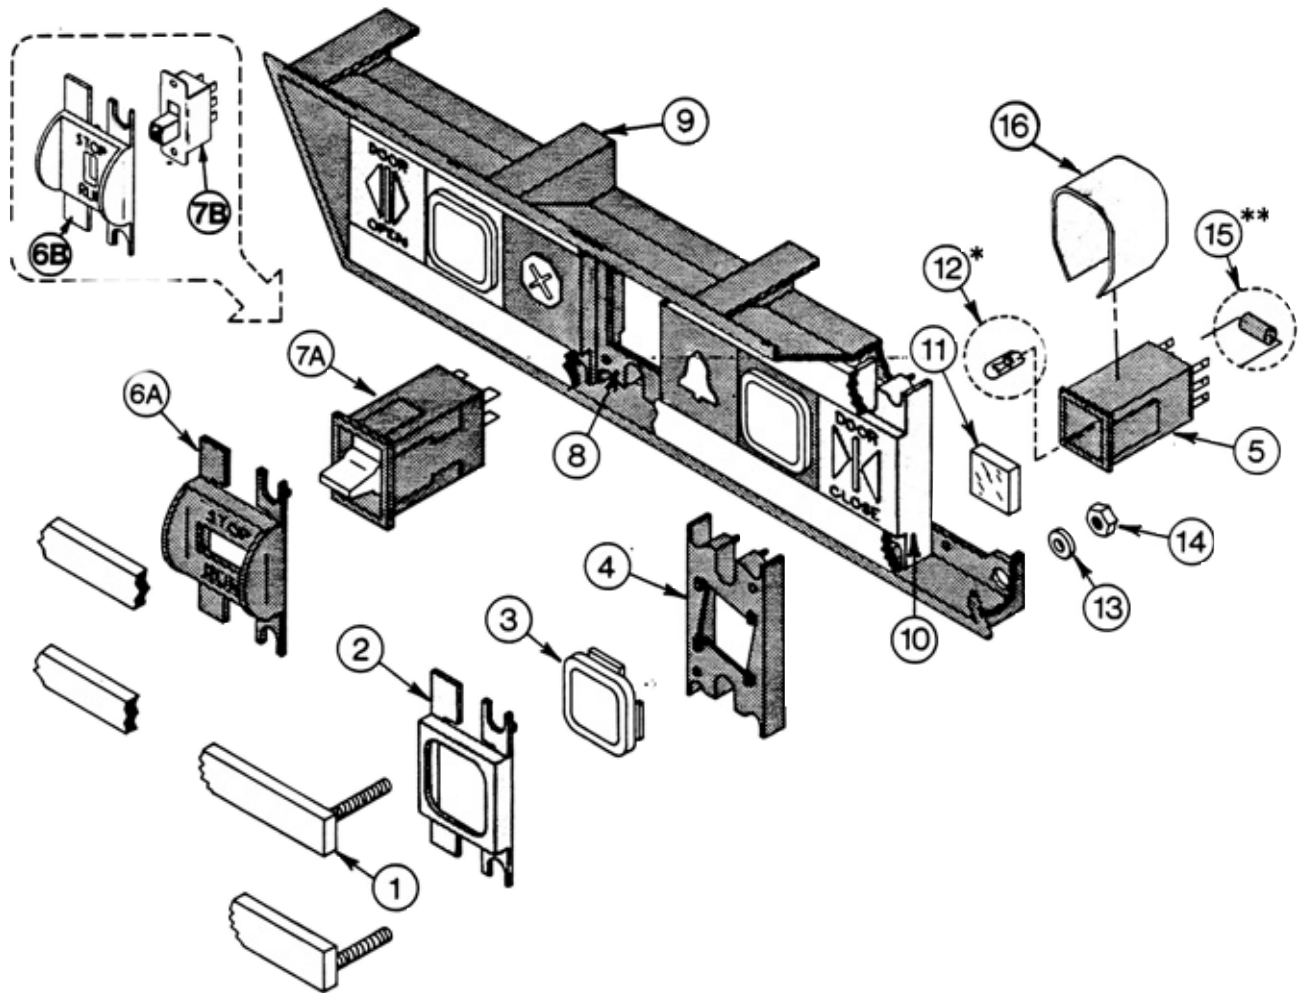


RUN-STOP SWITCH, PUSHBUTTON & SPACER

FIG. NO.	DESCRIPTION	PRINT NO.	FIG. NO.	DESCRIPTION	PRINT NO.
1A	Strip, hold down, Stn. Stil.	129AF1	8	Bracket, Mounting	129AA1
1B	Strip, hold down, muntz	129AF2	9	Housing, Inclined	138AG1
2	Bezel, pushbutton		10	Spacer, 1.25 inch	(see pg.21)
3	Lens, Target	130AA1	11	Cap, Clear	171AG1
4	Bracket, pushbutton	129AB1	12	Lamp, 28 Volt	175AA1
5	Pushbutton, switch (2 Pol.)	171AE1	13	Washer, Flat (#6)	700391
6A	Bezel, Run-Stop (Paddle)	128AA2	14	Nut (#6)	700570
6B	Bezel, Run-Stop (Slide)	128AA4	15	Resistor, (48 Volt Appl.)	142081
7A	Switch, Paddle (2PST)	171AC2	16	Clip, Spring	140809
7B	Switch, Slide	171AT1			

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

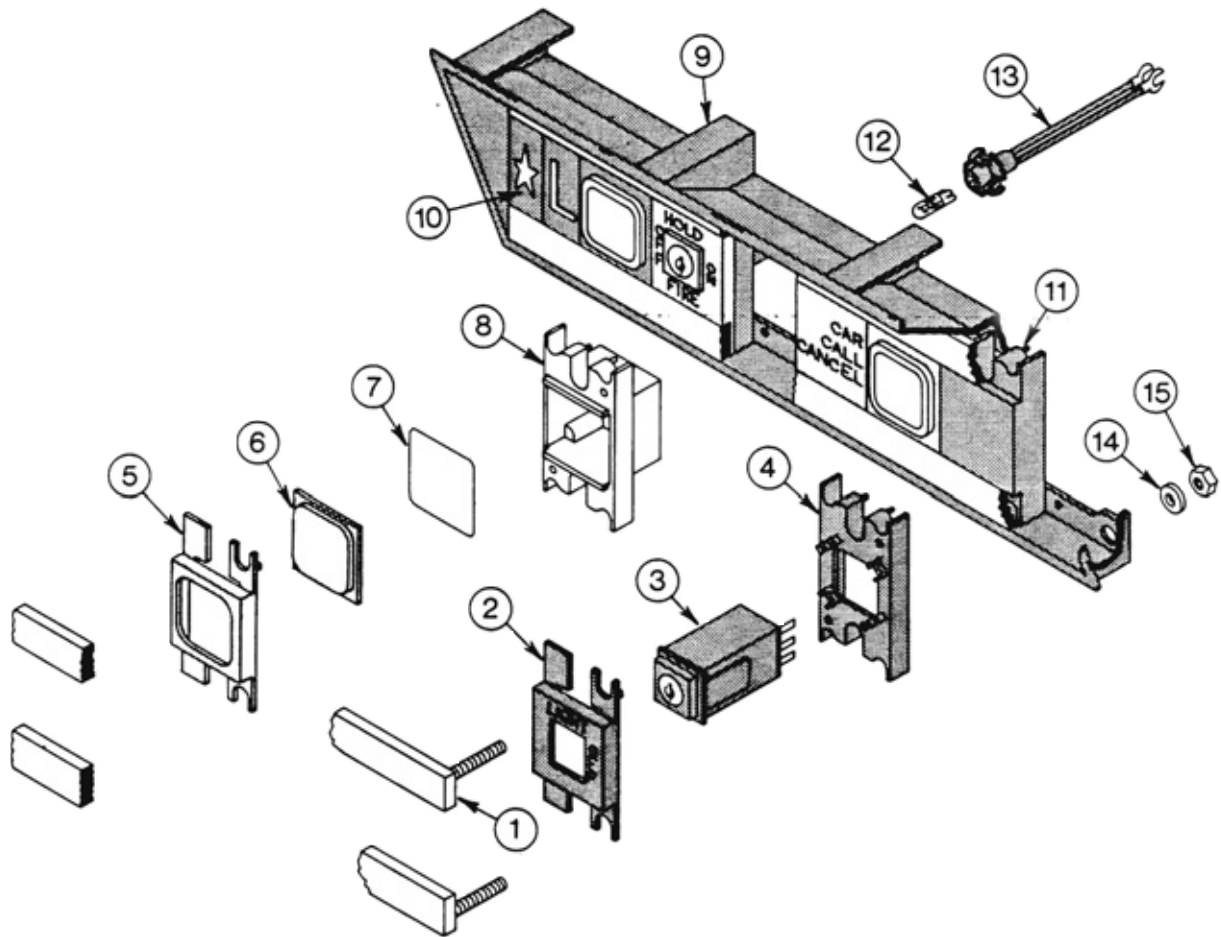


SPACER, FIRE JEWEL & KEY SWITCH

FIG. NO.	DESCRIPTION	PRINT NO.	FIG. NO.	DESCRIPTION	PRINT NO.
1A	Strip, hold down, Stn. Stl.	129AF1		Lens, Int'l. Fire Service	130AF2
1B	Strip, hold down, muntz	129AF2	8	Reflector	134AB1
2	Bezel, Pushbutton		9	Housing, Inclined	138AA1 9832336
3	Switch, Key		10	Spacer .625 inch	(see pg.21)
4	Bracket, Key Switch	129AC1 9851276	11	Spacer, 1.25 inch	(see pg.21)
5	Bezel, Fire Service (Red)	128AB3 9822719	12	Lamp, 28 volt	175AA1 9721769
	Bezel, Key Call Pilot (Blk)	128AB1 9822690	13	Housing, Lamp	138AD1 9727152
6	Lens	130AB1	14	Washer, Flat (#6)	700391
7	Lens, Fire Service	130AF1	15	Nut (#6)	700570
	Lens, Key Call Pilot	130AH1			

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444


NON-ILLUMINATED V7 PUSH BUTTON ASSEMBLY



Black bezel, one switch, print number; **9817190**
171AV1.

Black Bezel, two switches, print **9817219**
number; 171AV4

BLANK V7 PUSH BUTTON BEZELS

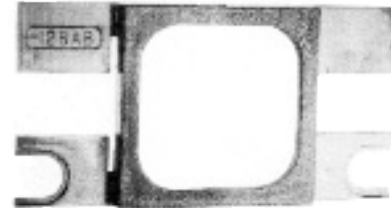

Black, print number; 128AB1

9822690

Blue, print number; 128AB2

9822707



9893209


Lens Target, Old Style, White. Print number;
130AA1.



9818431

V7 push button microswitch, single pole, double
throw. Print number; 171AP1.

RUN STOP SWITCH

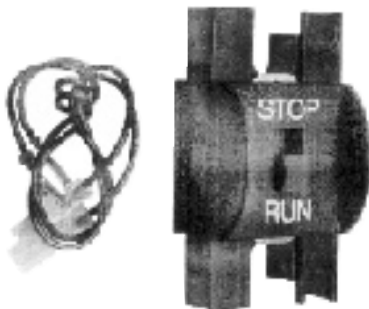

9810158

Impulse, original 171AD2 with 5" lead, available
in plant, 10" lead. Print number; 171AD2.

STOP/INSPECTION SWITCH



Horizontal, pull stop push run. Print
number; 131430.

9811436

Contact base assembly only, signal
fixtures, 2 normally open, Print num-
ber; 107407


9884075

Inspection, "Push Insp. Pull Auto".
Print muber; 109888.


9810985




9893891




9893933



9893817



9893799

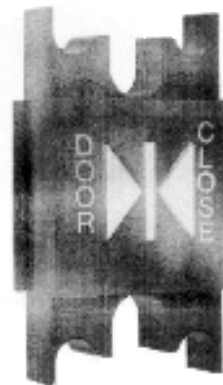

9893830



893684

<u>DESCRIPTION</u>	<u>PRINT NO.</u>		<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
.625, Blank	131AD53	9893787	.625, Prefix, "2"	131AD31	9893696
Impluse Swing Panel,			.625, "B"	131AD40	9893738
1.25, Blank	131AE6	9893817	.625, "G"	131AD44	9893740
Impulse Hall Station,			.625, "P"	131AD48	9893775
1.25, Arrow	138200	9719398	.625, Star	131AD52	9716798
2.5, "GROUND"	131AC15	9893891	.625, "M"	131AD47	9893763
2.5, Blank	131AC1	9893842	.625, "L"	131AD46	9893751
2.5, "BASEMENT"	131AC16	9893908	.625 Prefix, "3"	131AD32	9893702
2.5, "PENTHOUSE"	131AC17	9893910	.625 Prefix, "5"	131AD34	9893726
2.5, "LOBBY"	131AC2	9893854	.625, "R"	131AD49	9813135
2.5, "MAIN"	131AC12	9893880	1.25, "ARROW"	131AE5	9893933
2.5, "MEZZAINE"	131AC18	9893921	1.25, Alarm	131AE16	9893799
.625 Prefix, "1"	131AD30	9893684	1.25, "DOOR CLOSE"	131AE19	9893830
.625, Blank	131AD53	9893787	1.25, "DOOR OPEN"	131AE35	9893829
.625, Prefix, "4"	131AD33	9893714	1.25, "EMERGENCY STOP"	131AE17	9893805

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



9882777

Audible Buzzer, impulse, fire service, 24 volts.
Print number; 177AC1.



Non-Impulse Buzzer, 48 volts. Print number; 68275. **9882753**

Non-Impulse Buzzer, 24 volts. Print number; 68276. **9882765**



9727413

Single stroke gong assembly with brackets,
Used in hall lanterns, brass, 24 volts. Print number; 127417.



9871937

Hall lantern gong assembly with brackets, brass,
24 volts. Print number; 107193.



9830169

Continuous tone sonalert, sound level 60-75
DB, 48 volts DC. Print number; 130162



9726603

Buzzer, 120 volts. Print number; 32660

SINGLE STROKE GONG ASSEMBLIES



Used in hall lanter, continuous duty coil in series with GE 161 lamp, brass, 48 VDC. Print number; 107190

Steel, 24 Volts DC. Print number; 111828

Hall lantern, continuouse duty coil in series with GE 161 lamp, brass, 24 volts. Print number; 107191.

115 Volts DC. Print number; 32439.

Steel, 48 volts DC. Print number; 111827.

9737170

9711818

9737194

9724394

9711820

SINGLE STROKE HALL LANTERN GONG ASSEMBLIES




Includes bracket and hardware, brass, 48 volts. Print number; 107924.

Includes brakets, brass 48 volts. Print number; 127418.

9871925

9727425

9775717



Audible chime, impulse hall lanterns and position indicators, 24/48 volts. Print number; 177AA1.

9760593



Bell alarm, 6.00 diameter x 2.625 deep, 120 volts AC. Print number; 76059.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



9856250



9886667

DESCRIPTION

Capacitor with mounting ring,
5500 MFD 25 volts DC

50 Volts 250 MFD

50 Volts 100 MFD

.1 MDF 600 Volts


PRINT NO.

77933 9779334

65625 9856250

65629 9756383

68666 9886667



9741392



9840473

DESCRIPTION

Door Operator, 350 volts 610 MFD

450 volts 2800 MFD

25 Volts 2700 MFD

DMC, 50 volts 1300 MFD

100 volts 5800 MFD

50 volts 1500 MFD

150 volts 500 MFD

450 volts 140 MFD

With mounting bracket, 250 volts
780 MFD

300 volts 500 MFD

PRINT NO.

141392 9741392

238AL1 9716865

76832 9768439

141377 9741379

140477 9840473

76418 9764185


76330 9763302

149820 9727759

77804 9778044

75760 9757600

D

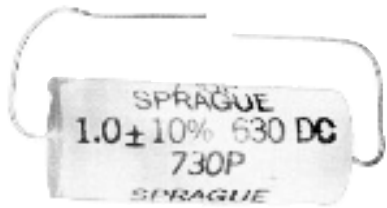

9747059

9859640



9757752

DESCRIPTION

350 volts 40 MFD

50 volts 680 MFD

250 volts 100 MFD

1200 volts .047 MFD

1200 volts .011 MFD

1000 volts 1 MFD

50 volts 1000 MFD

50 volts 150 MFD

630 volts 1 MFD

PRINT NO.

75775

238AK1

137316

241AM1

241AN1

241AL1

65964

65624

147052

9757752

9715046

9715265

9719040

9719076


9719039

9859640

9756164

9747059

DC CONTACTOR COILS

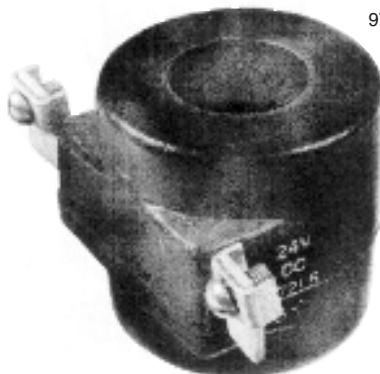

9768981

9742116



DESCRIPTION

Normally open, 24 volts DC

10500T27

23000T31

8000T29

9944T29, C15, 115 volts

CR6053 C 7, 230 volts

14000T30, 160 volts

20000T32

5400T27

10000T29

5010T31

8500T28

2850T28

170T16

3300T29

660T22

14400T35

270T18

7200T32

PRINT NO.

62987

26444-4

72196

26444

26987

27012

27107

DC-2-K

DC-2-K

DC-2K

DC-242-D

DC-2-K

DC-242-D

DC-242-D

DC-242-D

DC-242-D

DC-242-D

DC-242-D

DC-242-D

9768981

9742554

9721964

9742542

9769870

9770124

9701072

9742116

9742049

9742104

9742323

9742062

9742281

9742190

9742300

9742244

9742360

9742207

9742347

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

ICE CUBE RELAYS




DESCRIPTION

PRINT NO.

Relay, 24VDC, DPDT	128646	9728648
Relay, 110VDC, DPDT	132426	9832427
Relay, 12VDC, DPDT	132908	9783295
Relay, 24 VDC, DPDT	132909	9783398
Relay, 120VAC, DPDT	140479	9715629
Relay, 48VDC, DPDT	171AH1	9719970
Relay, 24 VDC, 4PDT	141061	9791061
Relay, 110VDC, 4PDT	141062	9811060
Relay, 120VAC, DPDT	147170	9953048
Relay, 12VDC, 4PDT	147171	
Relay, 110VDC, DPDT	147176	9951854
Relay, 12VDC, DPDT	148402	
Relay, 48VDC, DPDT	148403	
Relay, 24VDC, DPDT	148404	
Relay, 24VDC, SPDT	148562	
Relay, 120VDC, 4PDT	148563	
Relay, 24VDC, 4PDT	148564	
Relay, 120VAC, 3PD	690AB1	9853522
Relay, 24VDC, 3PDT	690AC1	9853534
Relay, 6VDC, 3PDT	690AD1	9853546
Relay, 110VDC, 3PDT	690AE1	9853558
Base, KU/RR, 3 Pole, Screw Terminals	770AC1	9853560

IBM RELAYS



DESCRIPTION

PRINT NO.


Relay, 4PDT, 32VDC	120171	9791012
Relay, 4PDT, 48VDC	102998	9710292
Relay, 4PDT, 48VDC with Diode Arc Suppressor	108968	9708960

(Component parts are not available except
as noted below.)

Diode Assembly		9856286
65628		9791619
Varistor Assembly	109161	9802988
Contact Wire	102988	


14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

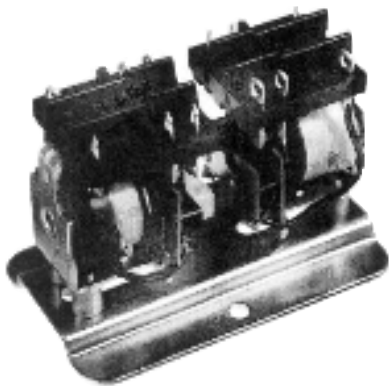

LATCHING RELAYS

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
Relay, KB-1136, 115VAC, (2) 3PDT	72705	9713025
Relay, KB-1225, 230VAC, (2) DPDT	32414	9724140
Relay, KB-1230, 115VAC, (2) DPDT	32415	9724151
Relay, KB-1228, 115VAC, (2) DPDT	75304	9753047
Relay, SK-60069-A, 110VAC, (2) 3PDT	31381	9813809
Relay, KB-4495, 240VAC, (2) DPDT		9860095
Relay, KB-4496, 120VAC, (2) DPDT		9860496
Relay, KB-4494, 120VAC, (2) DPDT		9860794
Relay, RH2LB, 120VAC, (2) DPDT		9951982
Relay, KUB-1087, 24VDC, DPDT	139798	9839793
Relay, KUB-11D1548, 48DC, DPDT	139799	
Relay, R-30, 24VDC, DPDT	132594	
Relay, RY2KS-C-CSA-24VDC, DPDT	148407	
Base, SY4S-05	148408	9953784

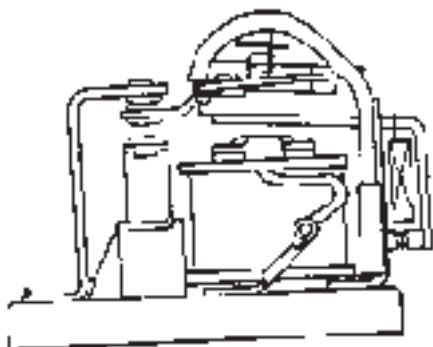

PR SERIES - BACK CONNECTED RELAYS

DOUBLE POLE DOUBLE THROW

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
120 AC	72760	9741082
240 AC	72761	9741100
110 DC	72762	9741124
12 AC	75202	9752020
48 DC	76783	9767836

DOUBLE POLE DOUBLE THROW

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
Relay, 120 AC	71922	9713207
Relay, 240 AC	71923	9713219
Relay, 110 DC	72015	9713360
Relay, 12 AC	75200	9752006
Relay, 24 DC	76826	9768269
Relay, 48 DC	76899	9768993

DOUBLE POLE DOUBLE THROW WITH MAGNETIC BLOWOUTS

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
Relay, 12 DC	112635	9776357

DOUBLE POLE NORMALLY CLOSED WITH MAGNETIC BLOWOUTS

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
Relay, 48 DC	76900	9769043

DOUBLE POLE DOUBLE THROW WITH COMPRESSION SPRING

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
Relay, 48 DC	100554	9713270
Relay, 24 DC	100555	9705533
Relay, 24 DC	142920	9742920
Relay, 12 DC	147053	9742918

DOUBLE POLE NORMALLY OPEN

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
120 AC	72763	9741112
240 AC	72764	9741136
110 DC	72765	9741150
48 DC	76782	9767824
48 DC	77269	9772698
120 AC	77270	9772704
24 DC	101480	9814802

DOUBLE POLE DOUBLE NORMALLY OPEN WITH MAGNETIC BLOWOUTS

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
120 AC	72766	9741148
240 AC	72767	9741161
110 DC	72768	9741185
6 DC	75308	9753084
48 DC	76781	9767812

PR SERIES - FRONT CONNECTED RELAYS



DOUBLE POLE NORMALLY OPEN

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
Relay, 120 AC	71979	9713256
Relay, 240 AC	72102	9713268
Relay, 120 AC	72173	9721733
Relay, 24 DC	76825	9768257
Relay, 48 DC	76902	9769020
Relay, 48 DC	77268	9772686

DOUBLE POLE NORMALLY OPEN WITH MAGNETIC BLOWOUTS

<u>DESCRIPTION</u>	<u>PRINT NO.</u>	
Relay, 120 AC	71924	9741008
Relay, 240 AC	71944	9741021
Relay, 110 DC	72014	9741045
Relay, 6 DC	75340	9753400
Relay, 48 DC	76901	9769018
Relay, 12 DC	112634	9776345
Relay, 12 DC	126673	9836676
Relay, 48 DC	126745	
Relay, 24 DC	147054	9847054



Contact, copper, DC contactor, (DC-9-G), 1.125 x 1.125 x 1.00 replaces 24019 (WI-423-B); used with 9828217 contact. **9820565**

Contact, copper, DC contactor, (DC-243-K), .75 c .75 x .625 **9820851**

Contact, copper, DC contactor, (DC-57-D), .875 C 1.00 x .75 (34058) **9740582**



Contact, carbon, controllers, 1.50 x 1.50 x 1.50, use with #62809. Print number; 27118. **9771189**

Contact, carbon, DC contactors, (DC-319-A), 1.00 x 1.125 x 1.1875. **9740867**

Contact, carbon, controller, (AC-149-D), .875 x 1.00 x .75. **9740200**

Contact, carbon, controllers, 1.00 x 1.00 x 1.375, used with 9828217 contact. Print number; 27080. **9770800**



Contact, stationary, limit switch. Print number; 66133. **9861336**

Contact, copper, silver tip, Shepard Warner #DC-242-M, .5 x 1.9375 x .1875 Thk. (Same as 9820-840 w/ silver contacts). Print number; 60114 **9821284**

Contact, copper, (DC-2-J) .625 x 2.25 x .1875 **9820541**

Contact, copper, .625 W x 3.25 L with 1 x 1 x .25 contact, used with 9820565. Print number; 62821. **9828217**



Contact, carbon, Watson Controller, (TA-4627, TA-4327), 466T, large, 1.00 x 1.50. **9903811**

Contact, carbon, Watson Controller, (TA-4626), 1.00 x .625 (276T) **9903781**

14 & 15 CONTACTORS


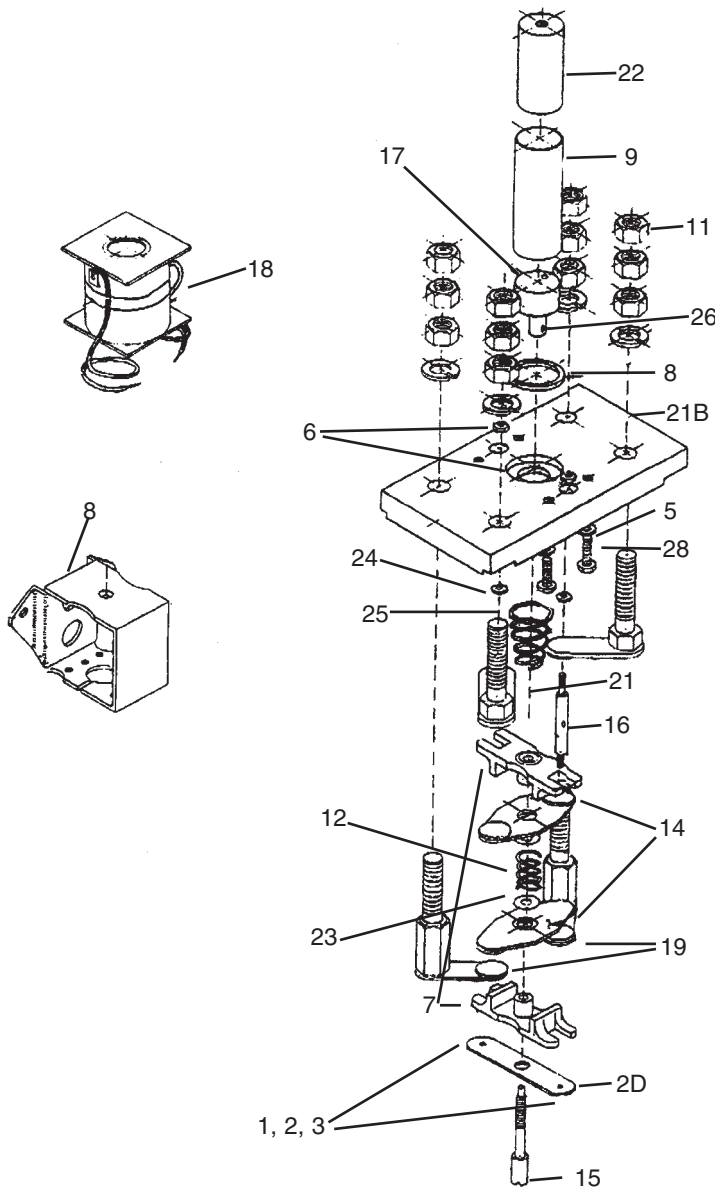


FIGURE NO.

DESCRIPTION

1	Nut, #6-32 x 1/4 Hex	434
2	Washer, #6 Flat	922
3	Washer, #6 Lock Brz.	997
4	Washer, 3/8 Lock	3197
5	Lock Washer	7097
6	Nut, #10-32 x 5/16 Hex	7371
7	Cradle Block	10074
8	Washer	10149
9	Core Tube	10150
10	Core Tube Bushing	10152
11	Nut, 3/8-24 x 5/8 Hex	10283
12	Comp, Spring	25249
13	Washer, #10 shake proof	31735
14	Moving Contact assembly	35890
15	Retaining Screw	35891
16	Guide Stud	35892
17	Moving Guide	35893
18	48VDC Coil	35894
19	Contact Post Assmby,	35900
20	Moving Core Guide	35902
21	Contact Post Assmby.	35909
21b	Base	35895
22	Fixed Core	36926
23	Washer to isolate moving contact	41111
24	Belleville Spring Washer	44778
25	Comp, Spring	45221
26	Screw, #6-32 x 1/8 cup point	45555
27	Screw, #10-32, F.H.S.	1367-3/8
28	Screw, #10-32 Phillips R.H.S.	46603-1/2
	14 Contactor Complete	9871196
	15 Contactor Complete	9871184

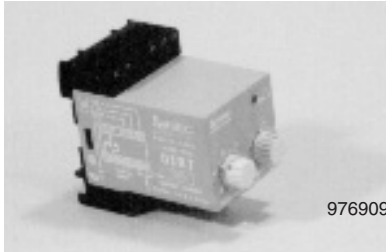

9769092

Relay, current sensing, single pole double throw, .5 to 10 AMP, 110 volts AC. Print number; 690AG1. **9769092**


Relay, reverse-phase assembly, hardware included, 440 volts, replace with 9952548, mounting is somewhat different. Print number; 690AK6. **9741884**

Relay, reverse-phase and phase loss monitor, 230 volts, replace with 9952536. Print number; 141863. **9741963**

Relay, reverse-phase, T2, single pole double throw, 110 volts. Print number; 147143. **9747140**

Relay, reverse-phase, 220 volts AC. Print number; 111973. **9781870**

Relay, reverse-phase, T1, 115 volts. **9764951**

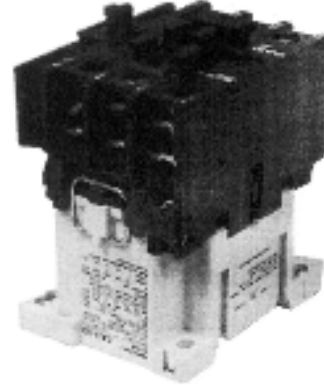


Contactor with overload relay, 3 pole 480 volts AC 20HP 25 Amp. Print number; 298AH2. **9718205**

Contactor with overload relay, 3 pole 480 volts AC15HP 35 Amp. Print number; 298AH1. **9718187**

Contractor with overload relay, T3, 4 pole normally open, 120 volts AC 24 Amps. **9853110**

Contactor, reversing, 60 Hz 220 volt, print number; 137247SP. **9837346**

Contactor, reversing, 60Hz 120 volts. Print number; 137247. **9837243**

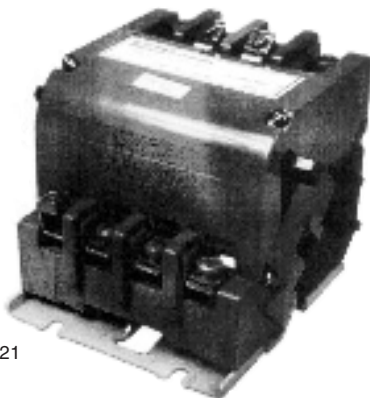

9747321

Contactor, 3 pole, 110 volt coil, size 1. Print number; 147288. **9747321**

Contactor, 3 pole, max Amp 45, 110 volt coil, size 2. Print number; 147283. **9713384**

Contactor, 3 pole, Max Amp 70, 110 volt coil, size 3. Print number; 298AD1. **9839446**


Contactor, AC model P, 3 pol, max Amp 90, 110 Volt coil, size 3. Print number 147284. **9713396**

Contactor, AC model F, 2 pole, max AMP 90, 110 volt coil, size 3. Print number 121345. **9713451**

Contactor, AC model F, 2 pole, max AMP 115, 110 volt coil, size 3.5. Print number; 121346. **9713463**

Contactor, AC model F, 2 pole, max AMP 27, 110 volt coil, size 1. Print number 147282. **9718618**

RECTIFIER MODULE

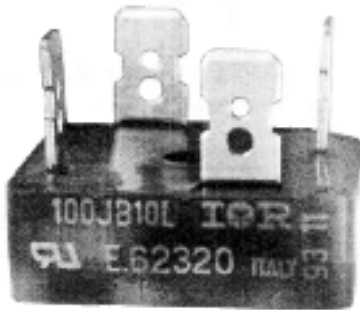

DMC, power unit relay card, 1P. Print number; 141059. **9844107**


Magnetek drive, 600 volt Magnetek-05P000509-0258. **9854897**

FULL WAVE RECTIFIER



T3, 35 Amp. Print number; 689AA1. **9853510**

FULL WAVE BRIDGE RECTIFIER

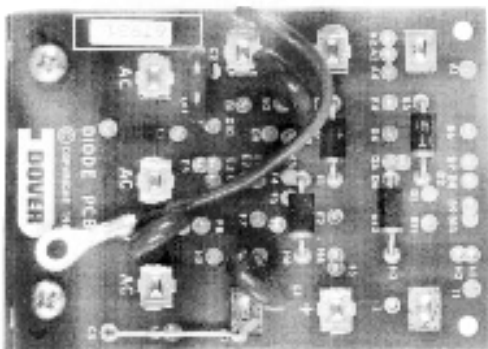

Single-phase, replaces 9721095 and 9768245 300 volts 3 Amp. Print number; 67981 **9879810**

3-PHASE RECTIFIER



(With 1000 volt 3 Amp diode) 250 volt, #1, #2, and D use 9879675 as the replacement. Print number; 113149. **9794359**

(1000 volt 3 Amp diode), replaces 9794359, 250 volts. Print number; 67967. **9879675**

(With 1000 volt 6 Amp diode), 250 volts. Print number; 115298. **9715289**

(With 1000 volt 3 Amp diode), 250 volts. Print number; 114129. **9841246**

BRIDGE RECTIFIER

Rectifier, 56.1 Amp. Print number; 77916. **9779164**

Magnetek drive, 800 volt, Magnetek-05P00050-0114. **9854903**

BRAKE ASSEMBLY RECTIFIER

Coil 140-160 volts DC. Print number; 63005. **9830054**

ROLLER ASSEMBLY



9832774



9831824

Guide roller wheel 4" counterweight used on 633214 roller guide 3/4" wide. Print number; 63187. **9831873**

Roller assembly, used on 9767952 assembly, 4" diameter 1-1/4" wide. Print number; 63277. **9832774**

3" diameter counterweight roller guide wheel 13/16" wide. Print number; 37230. **9872309**


Roller assembly, 18-1/2# rail, 8" diameter 1-1/4" wide. For 63190 and 63801 roller guides. Print number; 63182. **9831824**



9845781

Roller, Safety Edge Actuating Arm assembly, (145550, 145551). Print number; 64578.

TACHOMETER ROLLER



9716294

Tire color black or maroon, fits .625 shaft diameter, 3.00". Print number; 894AA2. **9716294**

Tire color black or maroon, fits .50 shaft diameter, 3.00". Print number; 894AA1. **9715447**

.625 Print number; 117328. **9717328**

MMII, used on 9780178. **9780180**

.50 Shaft. Print number; 30286. **9830285**

3.00" OD, used on 5/16" shaft. Print number; 136954. **9766169**

DOOR HANGER ROLLER



Hanger roller replaces 66426, (63853), high pocket, 3.3125 diameter. Print number; 124580. **9864295**

Hanger roller, (63834), low pocket, 2.875 diameter. Print number; 63830. **9838302**

INTERLOCK ASSEMBLIES

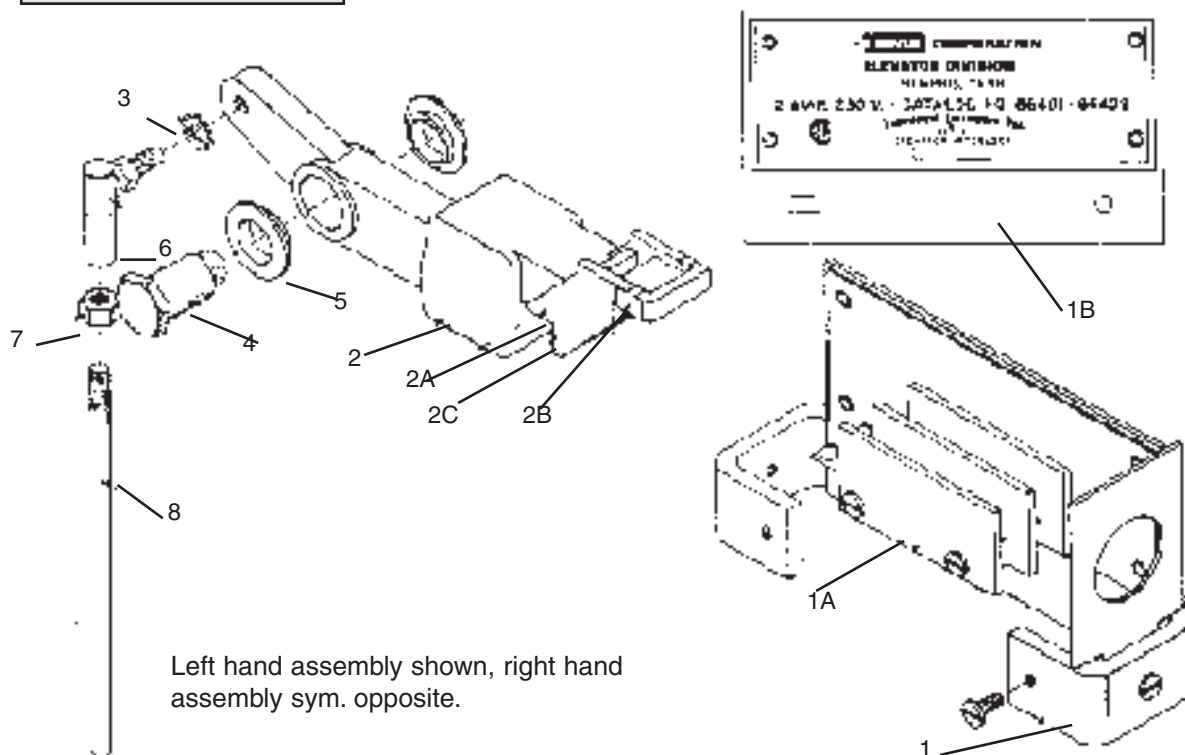


FIGURE NO.

DESCRIPTION

PRINT NUMBER

1	Contact Box Assembly	66504	9865044
1A	Contact Block Assembly	69291	9892916
1B	Contact Box Cover	63846	9838466
- 2	Interlock Hook Sub-Assembly	47521	9875219
2A	Esna #59-028-125-0812 Roll Pin	102207	
2B	Movable Contact	40104	9801042
2C	Contact Insulator	29765	
3	#10 Ext. Tooth Lock Washer	700432	
4	Interlock Hinge Screw (Single & 2 speed doors) or Interlock Hinge Screw (center opening doors)	40122 40135	9801224 9801352
5	Bushing	40101	9701011
6	Ball Joint Assembly	47530	9802400
7	#10-32 NF Hex Nut	700572	
8	Rod Link (for low pocket hangers) 18" or Rod Link (for high pocket hangers) 19"	47519 101203	9828667 9828679



Contact block, contact box assembly, **9892916**
(69290, 66504, 66505) used on
hatch switches (115163, 134201),
normally closed. Print number;
69291.

Contact block, contact box assembly, **9857072**
used on hatch switch (115464), nor-
mally open. Print number; 105705.




Contact box, interlock assembly, left **9865044**
hand. Print number; 66504.

Contact box, interlock assembly, right **9865056**
hand. Print number; 66505.

Cover, contact box assembly, door **9838466**
operator. Print number; 63846.

DOOR GUIDE KIT




Door guide kit, kit contains 1 gib
with necessary hardware. print
number; 142010. **9881980**

DOOR GIB

Door gib, molded nylon, (142010) **9818170**
Print number 118190.

Gib, blue, metal, sometimes called **9782102**
Model T.

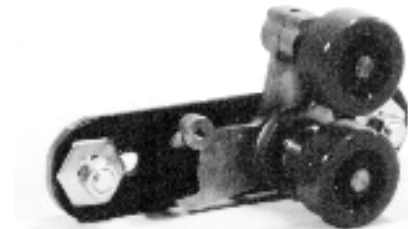

Door clutch roller assembly, **9875268,47526**
complete, right hand
(opposite of shown)

Door clutch roller assembly, **9875256,47525**
complete, left hand, (shown).

SAFETY EDGE ASSEMBLY



Safety Edge assembly, left hand. **9834400**
Print number; 145551.

Safety Edge Assembly,. Right hand. **9834412**
Print number; 145550.

Kit, safety edge, replacement parts includes bar for 7.0 doors, stiffener and hardware. Print number; 69174. **9891742**

Stiffener, only, safety edge. Print number; 45134. **9701837**

Bar, black, safety edge, only, 9.00 foot. Print number; 145548. **9866670**

Bar, plastic, safety edge, black, only, 7.00 foot. Print number; 145549. **9754490**

Bar, black aluminum, safety edge, only, 7.00 foot. Print number; 116948. **9806945**

Bar, grey, safety edge, only, 7.00 foot. Print number; 145549. **9851331**



Safety edge mounting arm, sub-assembly, (old 47412, 47543, 47413, 47548, current 145550, 145551). **9873971**

Arm, mounting, safety edge, DC-68. **9846955**
Print number; 44695.



Actuating arm assembly, safety edge, left or right hand, (145550, 145551). **9818248**
Print number; 118249.

Actuating arm sub-assembly, used on 47433. **9873958**
Print number; 47395.



Switch mount, safety edge, left hand. **9874136**
145550. Print number; 120854.

Switch mount, safety edge, right hand, 145551. **9874586**
Print number; 120853.



Roller, safety edge actuating arm assembly, (145550, 145551). **9845781**
Print number; 64578.

Pick-up roller, safety edge, (63831, 63871, 63871, 63861, 63817, 47525, 47526). **9838351**
Print number; 63835.



Motor, door operator, 230 volts 1/6 HP, **9746602**
HD-73, HD-91. Print number; 76406.


Motor, HD-85 door operator, 115 volts. **9801704**
Print number; 141707.



Cam, limit switch, door operator, HD-73, HD-91. Print number; 40170. **9701692**

Cam, slowdown switch, door operator, DC-68, HD-73, HD-91. Print number; 40123. **9701230**

Cam, gate switch, 65610, used on DC-68 and HD-73 door operators. Print number; 45090. **9850909**



9772637

Switch, gate, door operator, 150 volt. Print number; 77263.



9820966

Motor sheave, HD-73, HD-85, HD-91 door operators. Print number; 120969.




9876686

Sheave, jack shaft, all door operators. Print number; 67668.



9838820

Adjustable idler arm, door operators, DC-68, DC-68 mark 2, type D, HD-86. Print number; 63882.



Hanger assembly, low pocket hatch. Hanger assembly uses 63830 hanger roller assembly. Print number; 63834.

9838340

Bracket, (63834), low pocket hanger. Print number; 45220.

9752249

Hanger assembly, high pocket hatch. Hanger assembly, uses standard upthrust roller. Print number; 63853.

9838533

Bracket, (63853), high pocket hanger. Print number; 45217.

9752158




Hanger roller, replaces 66426, (63853), high pocket, 3.3125 diameter. Print number; 124580.

9864295

Hanger roller, (63834), low pocket, 2.875 diameter. Print number; 63830.

9838302

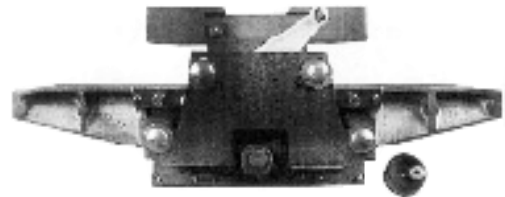

Kit, clutch, converts DC62 doors to HD73, includes 63891 RH clutch and hardware. Print number; 124930.

9824947

Clutch assembly, right hand. Print number; 63891.

9863898

Clutch assembly, left hand. Print number; 63856.

9863862

Kit, clutch, converts DC-62 doors to HD-73, includes 63856 LH clutch and hardware. Print number; 124930.

9824935



9700780

Stud, hanger pendant bolt, .50 inch diameter. Print number; 40139.



9800955


Vane, opening, clutch, (63856, 63891) 20 inch L ref. Print number; 40099.



9801443

Vane, closing, clutch, (63856, 63891) 9 inch L ref. Print number; 40144.

LEVELING SWITCH KITS

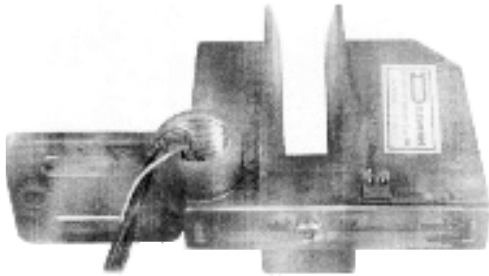

Kit, switch, contains 45731 magnetic leveling switch, top connector sytle with mounting hardware. Print number; 69726. **9769729**

Switch, magnetic leveling. Print number; 113204. **9813421**

Switch, magnetic, EECO-MV4A. Print number; 75601. **9856018**

HOISTWAY SWITCH




Mechanical, hoistway, (Old #105701), normally open. Print number; 115164. **9711545**

Roller, used on normally closed and normally open mechanical assembly, TIRE ONLY. Print number; 46889. **9768695**

Mechanical, hoistway, (Old #69290), normally closed. Print number; 115163. **9711557**

Mechanical assembly, double pole normally closed, DMC-1 tree, TSL. Print number; 141588. **9755585**

SLIDING GUIDE SHOE

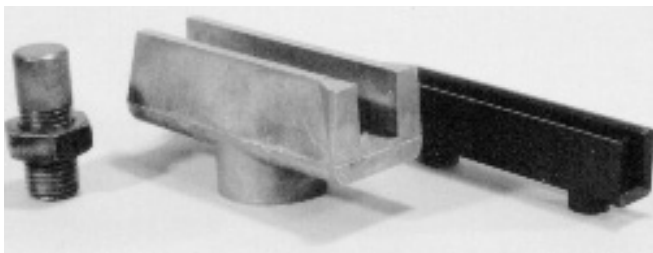


Sliding guide shoe used on 9844508. Print number; 40827. **9808279**

Guide shoe liner used on 9844508 assembly, nlyon. Print number; 10526. **9805266**

Guide shoe shaft with nut. Print number; 40828.

9745452



Switch, governor, used on digital and non digital. Print number; 108051.

9701345




Gate, GAL, also used on the catch rope. Release assembly for the wedge clamp safety, 2.25 x 5.00 (66002). Print number; 76818.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

SLIDING GUIDE SHOE ASSEMBLY

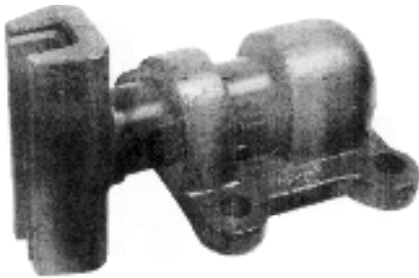

Sliding guide shoe assembly, nylon liner, uses 9808395 base, 9811643 shoe, 8-15# rail. Print number; 64581. **9845811**

Sliding guide shoe assembly, unlined, uses 9803895 base, 9808383 shoe, 30# rail. Print number; 63982. **9839823**

Sliding guide shoe assembly,, unlined, uses 9808395 base, 980-8371 shoe, 22# rail. Print number; 63981. **9838910**

Sliding guide shoe assembly, lined, contains 40827 shoe and 40826 base, 8 and 15#. Print number; 64450. **9844508**

SLIDING SHOE




Shoe, IVO sliding, 4/package. Print number; 124700. **9837700**

Fixed guide, assembly, IVO. Print number; 108768. **9787768**

Guide rail gib, nylon, 5/8" rail. Print number; E-1516-E. **9733905**

LUBRICATOR

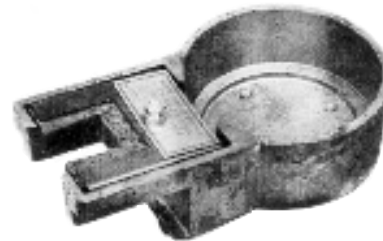

Lubricator, 1 pair for Omega Rail. Print number; 147864. **9742827**

Lubricator, for 30# Guide Rail. Print number; 66638. **9866383**

Lubricator, for 15# Guide Rail. Print number; 66639. **9866395**

Adapter kit, 66638, lubricator, heavy shoes, rail size 22-1/2-30#. Print number; 66640. **9866401**


SHOE LINERS



Guide shoe liner used on 9844508 assembly, nylon. Print number; 10526. **9805266**

Guide shoe liner. Used on 9845811 assembly, nylon. Print number; 42286. **9822860**

9825575



Guide shoe, temporary use only.

TRACKING IDLER SHEAVE



Sheave, idler, with bracket, composite selectors (shown). Print number; 44773. **9847730**

Sheave, tracking idler, selector, collar to collar 13.25. Print number; 126838 **9880574**

COMPOSITE SELECTOR PINION



Pinion, composite selector, 100:1. Print number; 46851. **9875438**

Pinion, composite selector, 60:1. Print number; 44079. **9840795**

9811230



Lead screw, selector, minimum travel up to 350 feet. Print number; 111230.

LEAD SCREW BEARING



Flange, 3 bolt hole, .75. Print number; 77059. **9870593**

Flange, insert style, 1.25. Print number; 77060. **9870600**

OPTICAL LEVELING CAM KIT



Kit, optical leveling cam, upgrade to optical leveling, one per landing, 100:1. Print number; 32868. **9832968**

Cam, micro switch leveling, 100:1. Print number; 41388. **9813895**

Leveling cam cap, optical leveling, 60:1, 100:1. Print number; 106363. **9763636**


Leveling cam, optical leveling, 60:1. Print number; 106367. **9763673**

Kit, optical leveling cam, upgrade to optical leveling, one per landing, 60:1. Print number; 32867. **9832877**



Nut, special, selector lead screw. Print number; **41443**

Nut, special, selector. Print number; **41442**

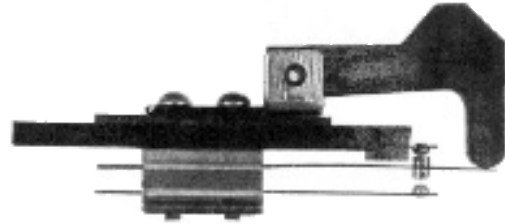

TM Switch, composite selectors, single pole double throw (shown). Print number; **68948**

TM switch, composite selectors, single pole single throw normally closed. Print number; **68947**

Contact, TM switch, selector, sivler contacts. Print number; **77055**



Contact, floor bar, copper, composite selector, 1.50" long, 8-32 thread (shown). Print number; **41443**

Holder, contact, vertical selector. Print number; **22218**

Cam, composite controllers, selector, direction selection. Print number; **65999**



Contact, movable, vertical selector, 2.797 x .50 wide. (shown). Print number; **22241**

Contact, movable, vertical selector, 2.297 x .50 wide. Print number; **22219**

Contact, movable, vertical selector, 6.125 x .50 wide. Print number; **22223**




TM contact switch, limit, composite selector (shown). Print number; **77131**

TM switch actuator, used on TM switch assembly, composite selectors. Print number; **68868**

SELECTOR GEAR


Gear, selector, 100:1, O.D. 7.125. Print number; **42491**

Gear, selector, 60:1, O.D. 8.125. Print number; **41409**

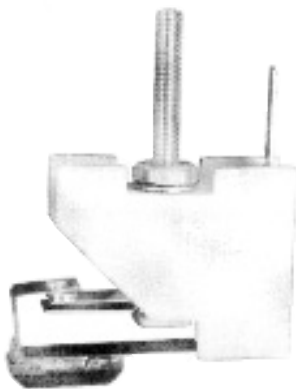

Selector brush switch, long. Print number; 102336. **9823360**

Selector brush switch, short. Print number; 101330. **9813380**

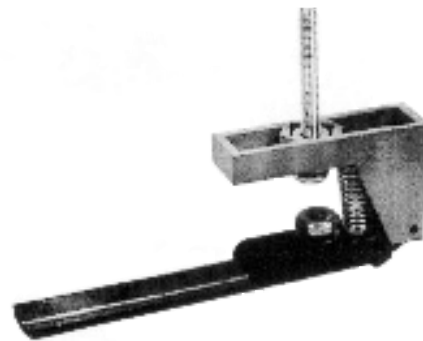


Position indicator brush, selector insulated butt. Print number; 129038. **9729045**

Position indicator brush, selector, conducting butt. Print number; 129050. **9729057**



9741653

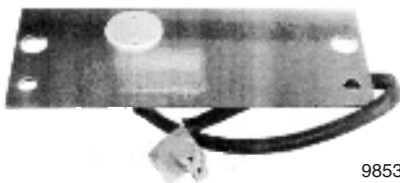

9853595

REED SWITCH KIT

Kit , reed switch with 220 Ohm 1 watt resistor mounting, T3. Print number; 32957. **9833778**

Reed switch assembly, includes bracket, DMC selector. Print number; 141555. **9741653**

Reed switch assembly, T3, includes hardware, lower. Print number; 805AB1. **9853595**


Reed switch assembly, T3, includes hardware, upper. Print number; 805AA1. **9853583**



Block, guide, vertical selector 2H x 3L x .875W. Print number; 22206. **9722087**

Guide shoe, selector crosshead (shown). Print number; 46027. **9842068**


Guide, upper leveling ring, composite, selectors. Print number; 41441. **9841441**

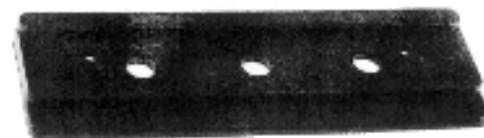

Guide, selector tape, (half) 1.50 (shown). Print number; 141549. **9841544**


Vertical selector switch cam, 6.375, special lengths can be made upon request. Print number; 22226. **9822264**

SOLID STATE BOARDS

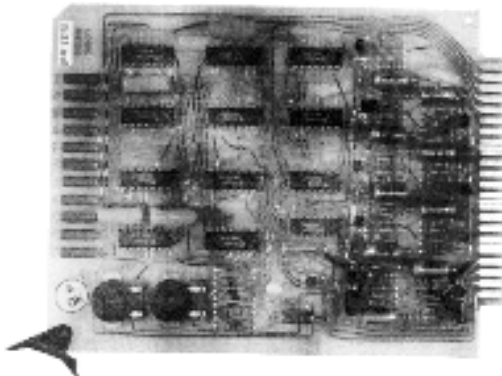


Logic, 3 slot. Print number; 68180.	9781808
Duplex, 3 slot. Print number; 68433.	9884336
Power, 4 slot. Print number; 105248.	9855245
Door, 4 slot. Print number; 124519.	9855233
Option, 6 slot. Print number; 105254.	9753217
Car, 4 slot. Print number; 123948.	9855221
Top & Bottom, 4 slot. Print number; 105251.	9855257
Intermediate, 4 slot. Print number; 105252.	9855269

DMC BOARDS

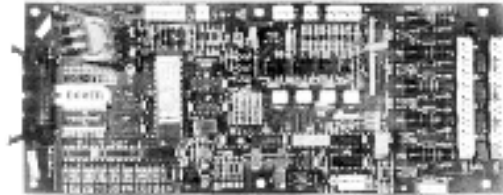


Auxiliary Sensor, DMC-I and T III. Print number; 6300CE2.	9741331
CLC, DMC-I, new style, w/o software. Print number; 6300BP4.	9715710
CLC, I/O expansion, DMC-I. Print number; 6300DC5.	9841453
Door Operator, DMC-I. Print number; 6300CW2.	9804134
Selector, DMC-I. Print number; 6300CV1.	9841313
Main sensor, DMC-I. Print number; 6300CD2.	9841325

MCS-1 BOARDS

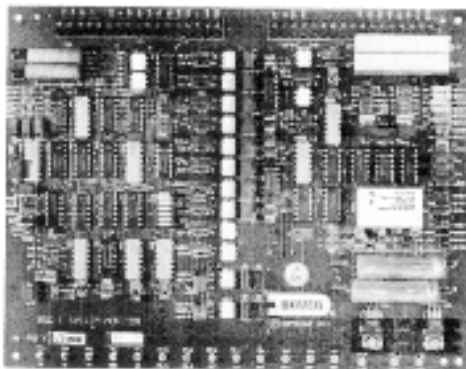


System monitor. Print number; 40500.	9840515
Speed Regulator. Print number; 140490.	9840497
Speed pattern. Print number; 115294.	9852943
Power, w/plug-in terminals. Print number; 6300DP1	9840485

TIMER




9852049

AC, digital 1.5 to 3.0 seconds, 120 volts AC. Print number; 6300BX2.	9852037
DC, digital, .01 to 260 seconds, 20-60 volts DC. Print number; 6300BY1.	9852049
DVR, .01-260 seconds, 115/240 volts. Print number; 139982.	9739981
Electronic, .02-180 second, 45 volts. Print number; 101528.	9815284
Pneumatic, .02-60 second range, 110 volts. Print number; 72166.	9711454
Pneumatic, .02-60 second range, 230 volts. Print number; 72167.	9711466

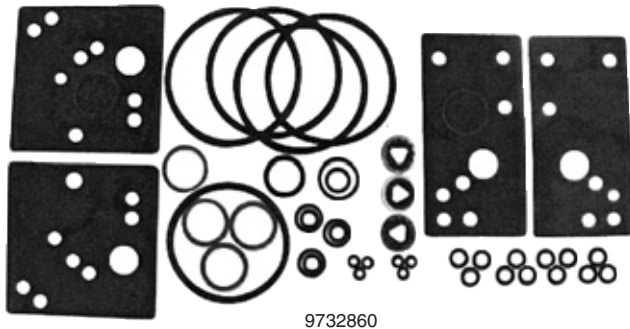

Kit, Integral and 1-2 valve, gaskets and O Rings, a print is included with the kit. Print number, 32869

9732860



9824510



9729525

Kit, Leveling Adjuster, I-3. Print number, 32924

9729525

Leveling Adjuster, I-3 Valve, Constant Speed lowering Main Body Assembly. Print number, 127074

9727073

Leveling Adjuster, I-2 Valve Assembly. Print number, 119012

9781456

Kit, Leveling Adjuster, I-1 & I-2 Valve. Print number, 32923

9729124



9826543



9834060

Valve Cap, Constant Speed Lowering Valve, pilot Assembly CSL-1, I-2 & I-3. Print number, 124055

9834151

I-2, I-3, Adjustment Screw Cap, Constant Speed Lowering Valve Assembly. Print number, 126643

9826543

Valve Cap, Constant Speed Lowering Valve, Pilot Assembly CSL-2, I-2 & I-3. Print number, 124054

9834059

Valve Cap, Constant Speed Lowering Valve, I-2 & I-3. Print number, 125657

9835659

Valve Cap, Constant Speed lowering Valve, Pilot Assembly CSL-3, I-2 & I-3. Print number, 124056

9834060



9868227



9868331

Lowering Piston, I1-12 Valve Assembly, Main Body Assembly, 10 Slot. Print number, 46822

9868227

Piston, I-2 Constant Speed lowering 10 Slot. Print number, 124219

9834217

Regulator Piston, I-2 Valve Assembly, 10 Slot. Print number, 46823

9868331

Regulator Piston, I1-12 Valve Assembly, 4 Slot. Print number, 118239

9897926

Regulator Piston, Constant Speed Lowering Valve, I-2, 10 Slot. Print number, 124218

9824418

Regulator Piston, Constant Speed Lowering Valve, I-2, 4 Slot. Print number, 124904

9824900



9731635

Normally open, 440 Volts Skinner. Print number, 103162SP
I-2 Valve, Used on 9731623 Solenoid Valve Assembly, 120 Volts.

9731635

9722300

Normally Open, 230 Volts Skinner. Print number, 103162SP

9731659

Normally Open, 120 Volts Skinner. Print number, 103162

9731623

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

Door/Hatch Equipment


Hanger/Components 4

Interlocks 1-3

Pulleys/Clutch 6-7

Switches/Cams 5

Relay Parts 8-9**Signal Fixtures** 10-11



MO keeper assembly, RH; included aluminum mounting base, brass keeper, keeper bridging block contact (not shown)

INT-1-4-RH

MO keeper assembly, LH; same as above (shown)


INT-1-4-LH

MO keeper bridging block contact

INT-1-5

MO upper linkage; includes snap link pin and retainer clip

INT-2-6

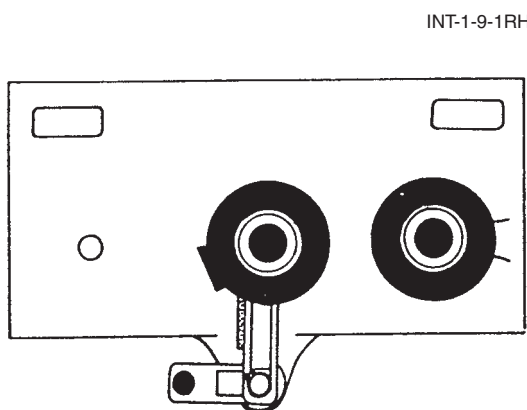

INT-1-11LH

INT-1-11RH



MOH horizontal release assembly, complete; RH; includes cast iron mounting base, release rocker, clutch roller, lower actuator link, snap link bushing.

INT-1-9-RH


MOH release rocker; includes set screws, nuts, bumper pad. Can be used for both right-hand and left-hand applications,

**INT-1-11RH,
INT-1-11LH**

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

INTERLOCK COMPONENTS

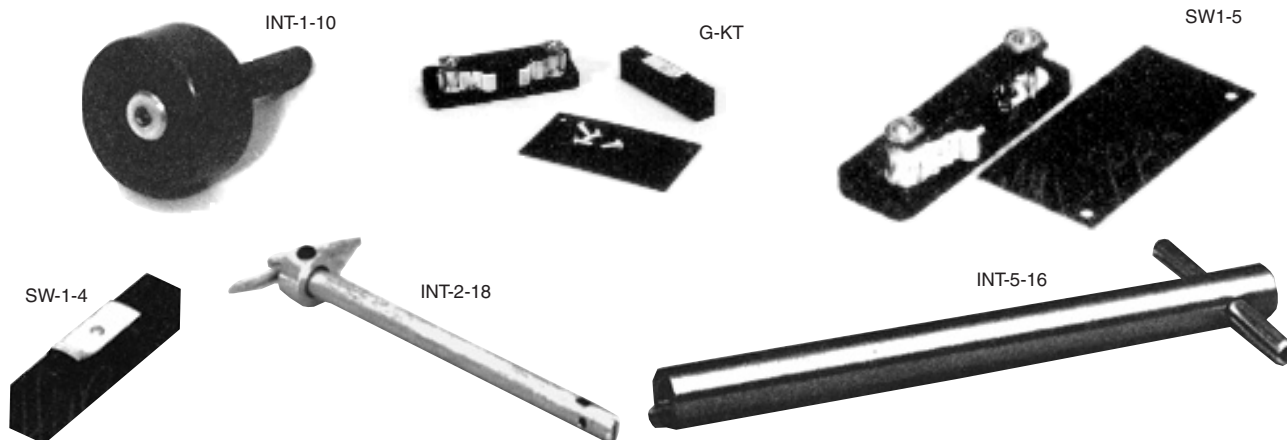

Replacement clutch roller (flat) & shaft; heavy-duty poly roller, dia. = 1-1/2"

INT-1-10

G-gate switch replacement kits; includes 1 each SW-1-5 stationary contact, SW1-4 movable contact, canvas/phenolic insulator, and mounting screws

G-KT

Stationary G-gate switch contact; includes insulator, 2 movable contacts, return springs, connecting strap

SW-1-5

Movable G-gate switch contact; includes micarta mounting block, silver laminate contact

SW-1-4

Corridor door lock key, KMO-type

INT-2-18

Type M key for swing doors

INT-5-16

MOCP



Interlock assembly, complete


INT-2-23



MOCP Keeper, fixed for center parting doors.

CONTACT KITS

MOCOP-KT-R



MO-KT-R



MO-KT-L

MOCP-KT-L



MO contact kit, RH; includes 1 each INT-1-3RH contact assembly, INT-1-5 MO keeper bridging block, canvas/phenolic insulator and mounting screws.

MO-KT-R

MO/MOCP contact kit, LH; includes 1 INT-1-3LH contact assembly, INT-1-5 MO keeper bridging block, canvas/phenolic insulator and mounting screws; used with MOCP-KT-R contact kit.

**MO-KT-L,
MOCP-KT-L**

MOCP contact kit, RH; includes 1 each INT-2-3RH contact assembly, INT-1-5 MO keeper bridging block, canvas/phenolic insulator and mounting screws.

MOCP-KT-R



MO interlock switch housing and contacts, RH; (SHOWN).

INT-1-1RH

MO interlock switch housing and contacts, LH; (OPPOSITE AS SHOWN).

INT-1-1LH

14639 Short St. • Posen, Illinois 60469 U.S.A.


Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

NH-DLX



Replacement door hanger roller solid hub w/poly .
O.D. (overall) = 3-1/4"; Bearing I.D. = .6693"

M-6410



Door Hanger (Specify LH or RH)
RH (Shown)

HH-1-2-E



Replacement felt wiper for G.A.L. original
roller impregnated with light oil for superior
cleaning action.




Door pivot arm and leaf spring, assembly,
upper.

SE-5-6

Door pivot arm and leaf spring, assembly,
lower.

SE-5-7

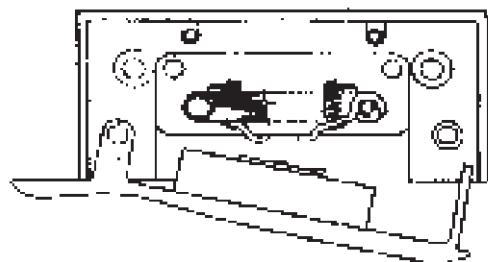

SW-1-G-1


Type G Gate Switch, made of die cast aluminum, the two studs permit left or right hand use.

G



OP-12-2D-1

OP-12-2E



OP-12-2D-2


- | | |
|-----------------------------|-------------------|
| Large assembly Bridging Cam | OP-12-2D-1 |
| Small assembly Bridging Cam | OP-12-2D-2 |
| Bridging Cam with pin | OP-12-2E |
| Spring for Bridging Cam | OP-12-2F |




OP-12-3

Activating Cams set, includes eight cams for MOM and MOH Operator Limit Control to control opening and closing cycles.

SW-1-15

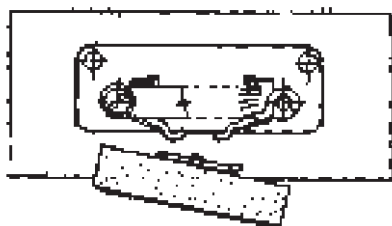

Gate contact kit for SW-1-G-1 gate switch




Door Contact Kit, RH

INT-1-15RH

Door Contact Kit, LH

INT-1-15LH

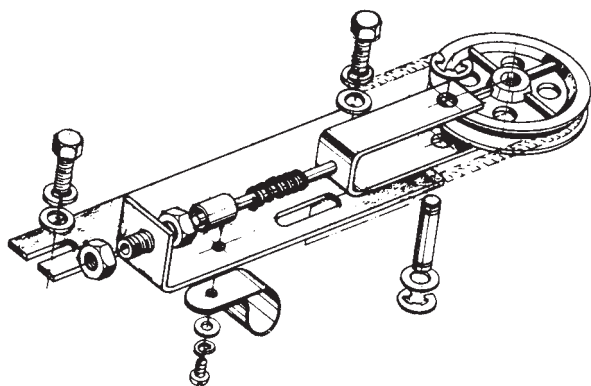


Tension pulley assembly, RH **HH-3-6RH**

Tension pulley assembly, LH **HH-3-6LH**


Idler pulley alone **HH-3-6B**

Relating cable, (specify length) **HH-3-6K**

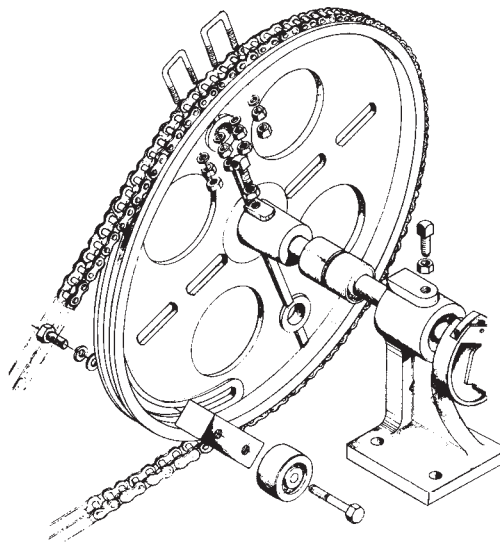

MOD operator drive pulley and bearing block assembly, RH **OP-10-5RH**


MOD operator drive pulley, and bearing block assembly, LH **OP-10-5LH**

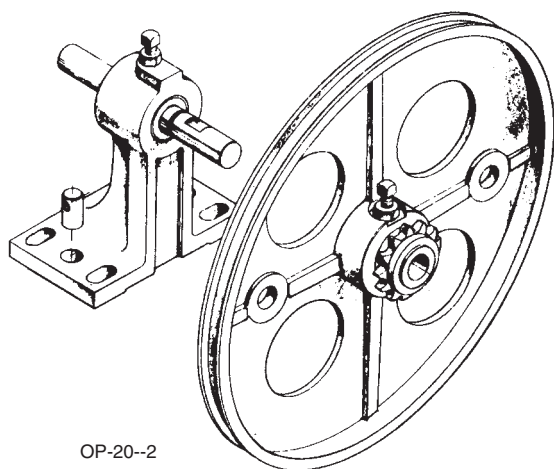

Intermediate pulley and bearing block assy. 1/2" chain **OP-20-1**

Intermediate pulley and bearing block assy. 3/8" chain. **OP-20-0001N**



Bearing block alone **OP-20-2**

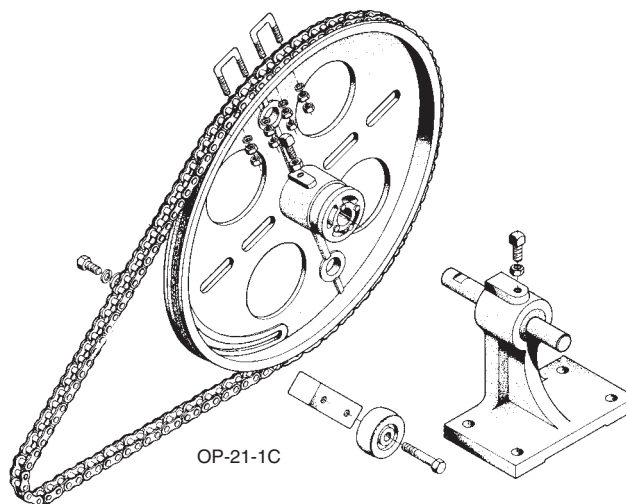

Drive pulley and bearing block, RH **OP-21-1RH**

Drive pulley and bearing block, LH **OP-21-1LH**

Bearing block alone **OP-21-1C**

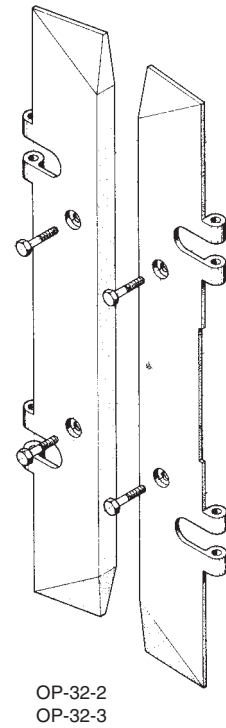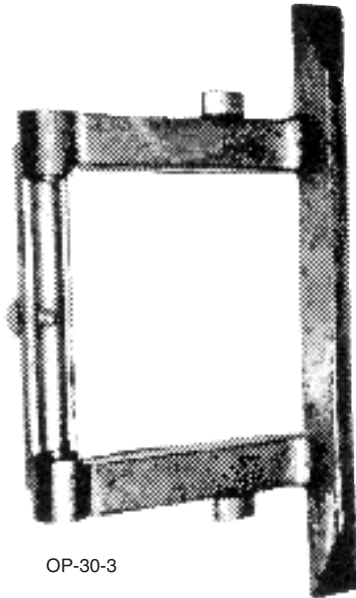

Retracting vane (4-3/4")

OP-30-3L

Door open vane

OP-30-2

Retracting vane (6-1/4")

OP-30-3LW

Door open vane


OP-32-2

Leaf vane for Type S Clutch

OP-33-2

Door open vane

OP-32-3




SM Door lock assembly, RH

INT-6-RH

SM Door lock assembly, LH

INT-6-LH



M-14-5

Slide door keeper

M-14-5

Swing door keeper

M-14-21-2


14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

LC-16-18



Main contact holder (3/8")

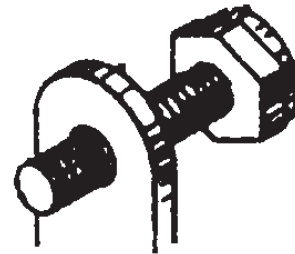


Stationary contact, silver, 3/8"

LC-16-#22

Stationary contact, carbon, 3/8"

LC-16-#23

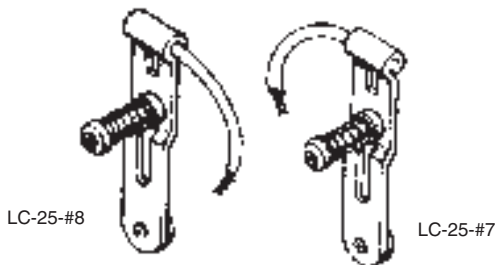

Movable contact, LH

LC-25-#8


Movable contact, RH

LC-25-#7

LC-28-17



Main contact spring assembly

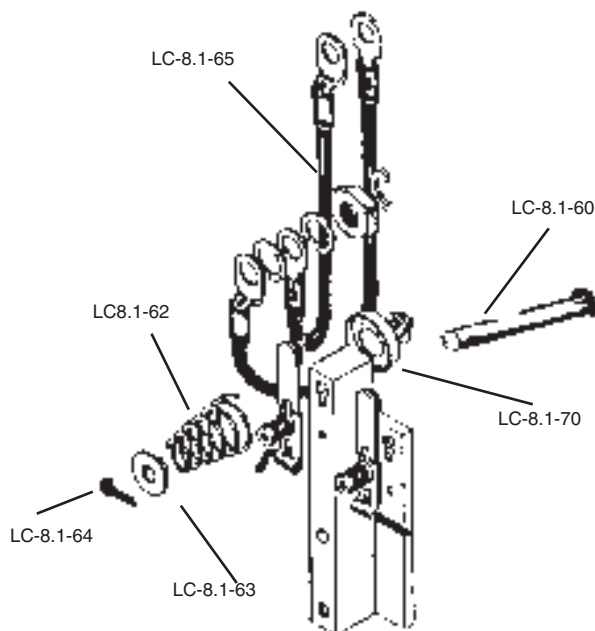

Knurled Rivet, 1/4" x 1-1/2"

LC-8.1-60

Compression Spring

LC-8.1-62

Spring Washer

LC-8.1-63

Cotter Pin

LC-8.1-64

Flexible Connector


LC-8.1-65

Nylon Bushing

LC-8.1-70


14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

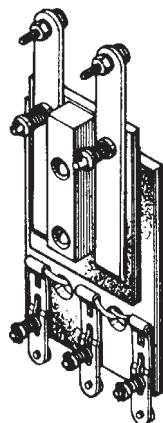


LC-28-5

N.C. Contact Plate (3 contacts)

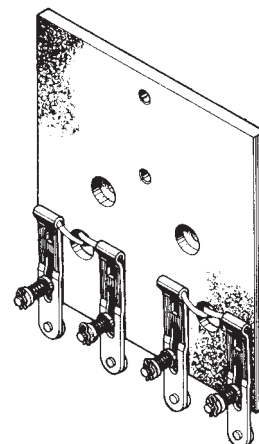


LC-28-6

N.C. Contact Plate (4 contacts)

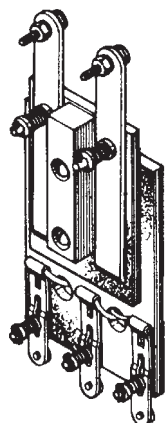


LC-28-2

N.O. Contact Plate with 2 main and 0 auxiliary

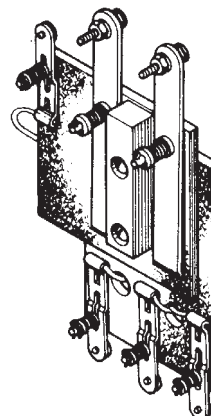


LC-28-3

N.O. Contact Plate with 2 main and 1 auxiliary

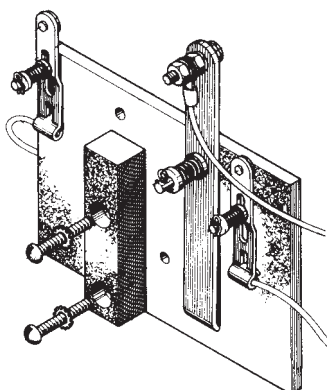

LC-28-4

N.O. Contact Plate with 2 main and 2 auxiliary

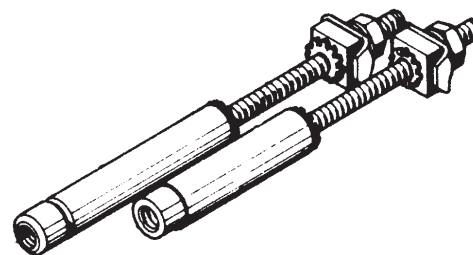

N.O Contact Post Assembly

LC-28-8


N.O Contact Post Assembly

LC-28-9

N.C. Contact Post Assembly


LC-28-10

HAMC

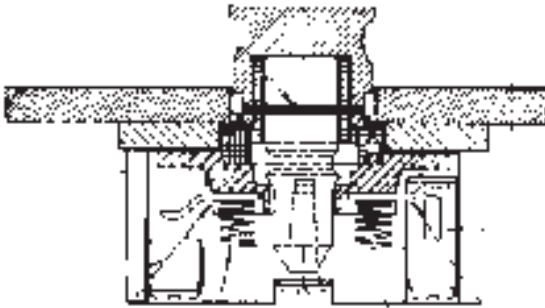


Push emergency stop switch. Contact arrangements available: 1 normally open, 1 normally closed.

HAMC-N

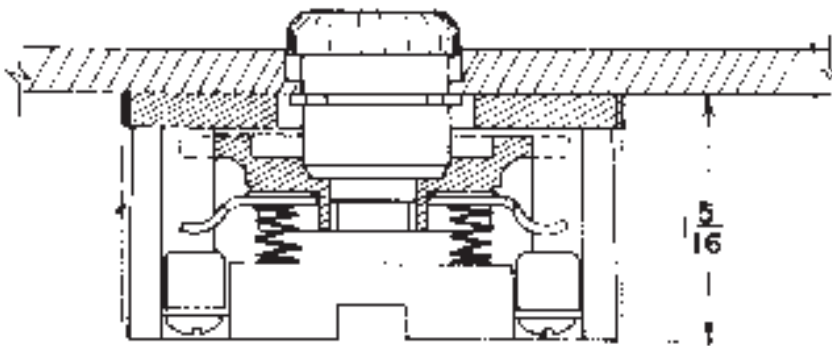


Push button module with ST. ST. cap non illuminated. Contact arrangements available: 2 normally open, 2 normally closed and 1 normally open, 1 normally closed.

RRB-1 RRW-1

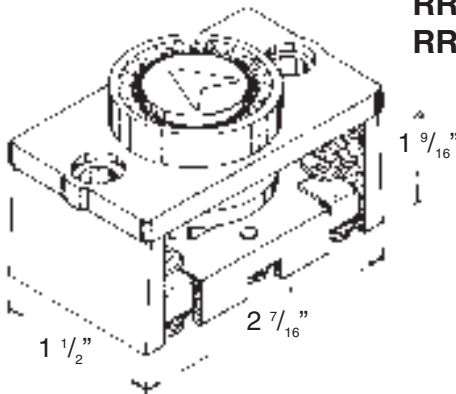

Push button module; "PSB" incandescent lamp or "PSB" neon; specify type of insert. (RRB: black insert white button, black arrow or numeral. RRW: white insert black button, white arrow or numeral.)


SRB-1 SRW-1

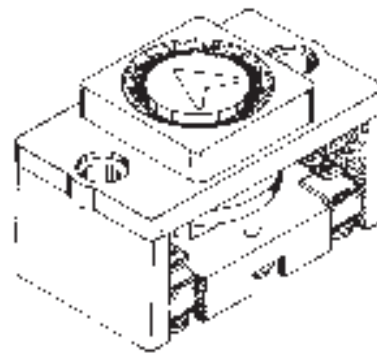


Push button module; "PSB" incandescent lamp or "PSB" neon; specify type of insert. (SRB: black insert white button, black arrow or numeral. SRW: white insert black button, white arrow or numeral.)

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

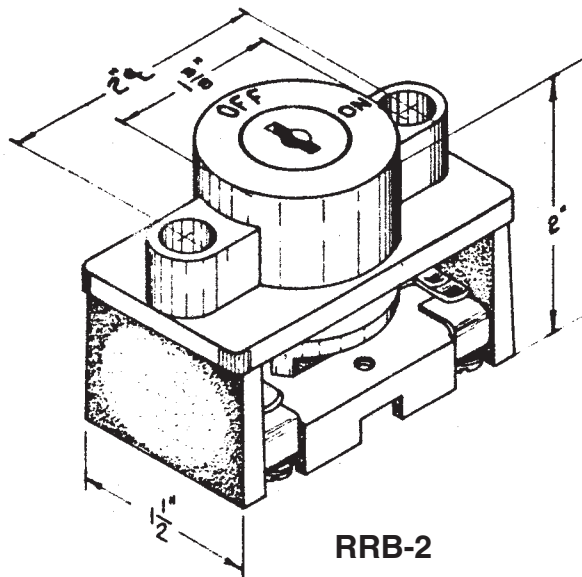


RRB-2

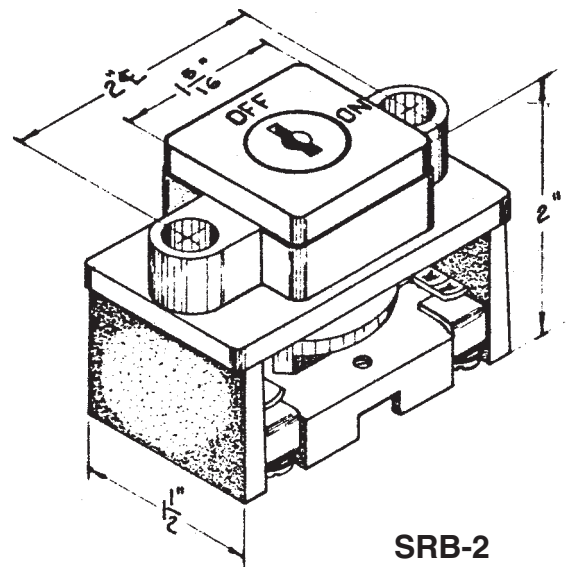


SRB-2


Keyswitch Assy. Key removable in "off" & "on" or "off" only. Available w/ (1) n.o. (2) n.o., or (2) n.c. contacts. Specify markings, configuration, & key position when ordering.

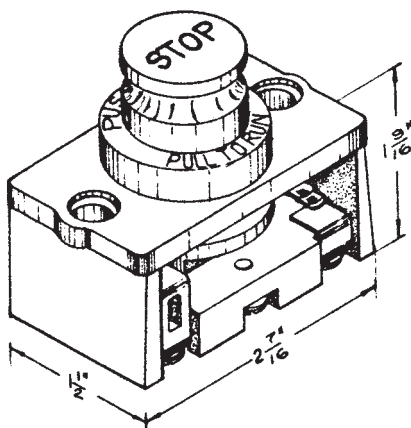

RRB-3

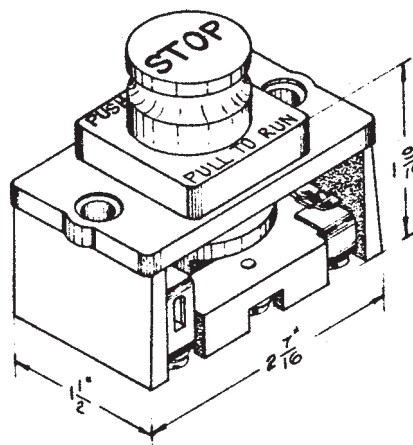

SRB-3

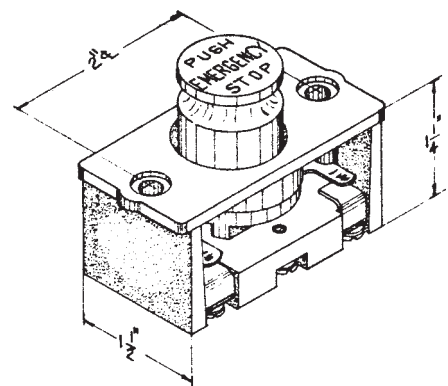

VP

Emergency Stop Switch. Assy available either "push to stop" or "pull to stop", can be mounted vertical or horizontal & can have contact configuration of (1) n.o. (1) n.c., (2) n.c. (1) n.o., or (2) n.o. (1) n.c. Please specify when ordering.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

Coils 3

Door Hatch Equipment

 Hangers 7-8

 Switches 6-8

Escalators 10-11

Relay Parts 1-2

 Timers 4-5

 Transformers 4


Resistors 3

Rollers 9

Signal Fixtures

 Push Buttons 5

CHRISTMAS TREE RELAY

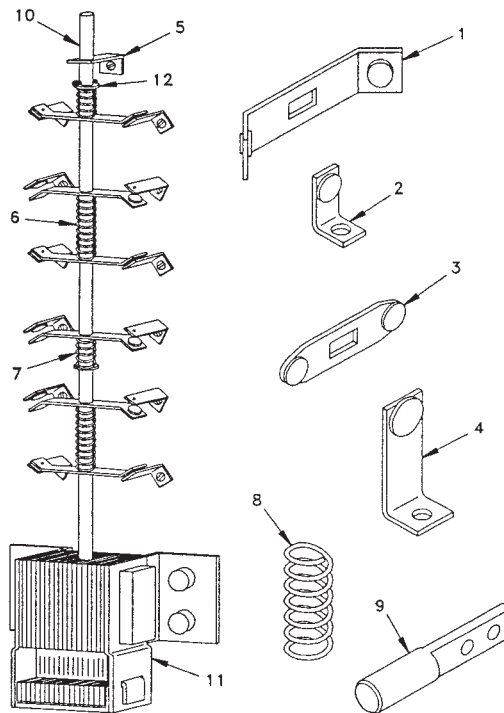

**FIGURE
NO.**

DESCRIPTION

1	Contact bar, angle, w/2 raised silver contacts, movable	P-14735-001
	Contact bar, angle, w/2 flat contacts, movable	P-14735-002
2	Contact angle, single, rivet, w/raised silver contact, stationary	P-14726-001
	Contact angle, single, rivet, w/flat silver contact, stationary	P-14726-003
3	Contact bar, w/raised silver contacts, movable	P-14727-001
	Contact bar, with flat silver contacts, movable	P-14727-002
4	Contact, angle mounted fixed, w/1 fine angle contact, stationary	P-14736
5	Stem guide, 16 ga x 5/8 inch, brass	16807
6	Spring, compression; L 2 in.; .50 OD	2881-148
7	Spring, compression; L .5 in.; .50 OD	2881-149
8	Spring, compression; L 1.75 in.; .50 OD	2881-192
9	Plunger, solenoid, diam.; 3/8 in.; nylon	41782
10	Stem, L. 4 feet; raw material; undrilled bakelite	58882
11	Solenoid; 115VAC-15A, MUST ALSO PURCHASE plunger 41782, & spring 2881-192	16929
	Solenoid; 230VAC	16910
12	Washer, insulating; Bakelite, 3/4 inch OD	11111

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



Relay with button actuator and light for electronic timer, 110 volts, 310 AMP. (shown) **36244**

Relay, 120 VAC, DPDT, 10 amp contacts. **46344**


Plug-In Relay, 4PDT, 120VAC **42844, 36244, 45516**

Plug-In Relay, 4PDT, 24VAC **43444**

Plug-In Relay, 4PDT, 110VDC **43744**

Plug-In Relay, 4PDT, 12VAC **45377**

POWER RELAYS

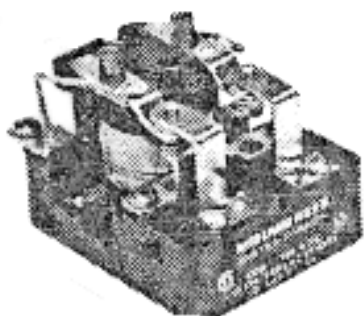

DPT, 120 VAC **19238, PR2678**

DPDT, 240 VAC **19240, PR2679**

DPDT, 110 VDC **26120, PR2680**


DPDT, 24 VAC **28383, PR2900**

RELAY PARTS



Contact, movable, 5/8" wide x 2-3/8" long, for 75 amp. **10400**

Contact, stationary contact for P, U,D & SB, 3/4" wide, for 75 amp. **10460**




21340

21339

Contact, same as 10400 but with silver pad. **21339**

Contact, same as 10460 but with silver pad. **21340**

RELAY PARTS



14203

14205

28150

Contact, movable contact finger, 7/8" wide x 2-3/8" long, for 125 amp **14203**

Contact, stationary, 1-1/6" wide, for 125 amp. **14205**

Contact, stationary, 1-1/6" wide, copper with silver tip, for 125 amp. **28150**



Contact leaf with 3/8" silver contact. **40594**

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

COILS



RESISTANCE IN OHMS

	<u>I.D.</u>	<u>O.D.</u>	<u>LENGTH</u>	<u>VOLTAGE</u>	
1580	1-3/8"	3-21/32"	1-5/8"	230 VDC	11265A
2200	1-3/16"	2-9/16"	2-13/16"	230 VDC	15660
1680	1-7/16"	2-31/32"	2-3/4"	230 VDC	15963
420	1-3/16"	2-51/64"	2-13/16"	115 VDC	16272
386	1-25/32"	4-3/8"	4"	230 VDC	18992, 17040
460	2-11/16"	6"	7-1/4"	230 VDC	17660



Gong Coil, 120 VAC, 12A series **43697**

Valve Coil, green, 110 VAC. **28951**

Valve Coil, red, 220 VAC. **30074**

RESISTORS

130 WATT FIXED RESISTORS 8-1/4" C/C STUD MOUNTING

2 OHM	P-2883-3	150 OHM	P-2883-21
3 OHM	P-2883-4	175 OHM	P-2883-22
4 OHM	P-2883-5	200 OHM	P-2883-23
5 OHM	P-2883-6	250 OHM	P-2883-24
50 OHM	P-2883-15	500 OHM	P-2883-28
60 OHM	P-2883-16	1 K OHM	P-2883-34
75 OHM	P-2883-17	2 K OHM	P-2883-40
80 OHM	P-2883-18	3 K OHM	P-2883-41
100 OHM	P-2883-19	4 K OHM	P-2883-42
125 OHM	P-2883-20		

200 WATT AJUSTABLE



200 W, 50 OHM	19510
200 W, 100 OHM	19315
200 W, 250 OHM	19511
200 W, 1K OHM	23200

25 WATT AJUSTABLE

5 OHM	29784
10 OHM	29785
1K OHM	32398
1.5K OHM	25270
2K OHM	19911
3 K OHM	25271
5 K OHM	32399

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



Transformer, 440VA, primary 200-480, secondary 109-218V.

28600

Transformer, 500VA, primary 200-480, secondary 109-218.

28601

Transformer, 1000VA, primary 200-480, secondary 109-218

28602

Transformer for door operator.

A46208

150 VA, multi-tap.

65115


120V primary, 5 V secondary, for photocell control

101393

32V 250VA for PMSSC door operator supply, 2 required for high performance option.

46208

CAPACITY TIMERS

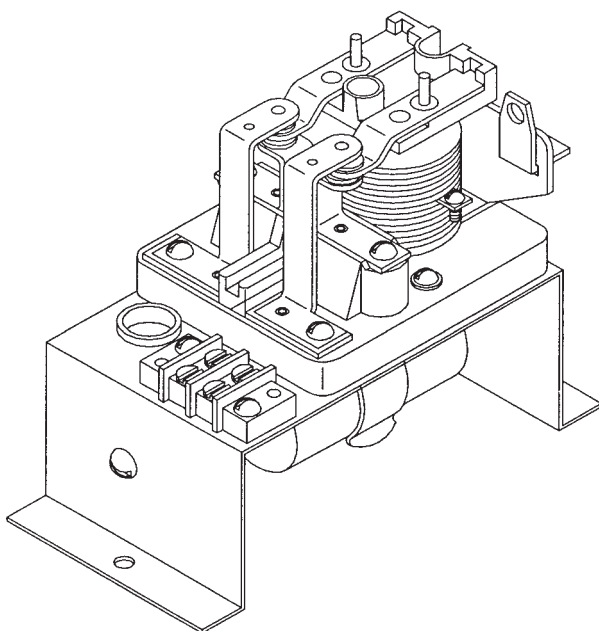

Timer, capacity, 1/2 second, 115VAC

P-5361

Timer, capacity, 1/2 second, 110VDC

P-5362

Timer, capacity, 1/2 second, 230VAC

P-5363

Timer, capacity, 3 second, 115VAC


P-7159

Relay, 230VAC

19240

Relay, 110VDC

26120

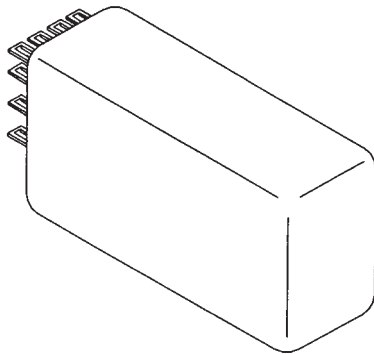


ELECTRONIC PLUG-IN TIMERS

Timer, plug-in, white cover; 10 second; 4PDT; 120 VAC. **47261**

Timer, plug-in; red cover; 90 second; 4 PDT; 120 VAC. **47262**

Timer, ext. resis.; green cover; 90 second; 4PDT; 120 VAC. **47263**

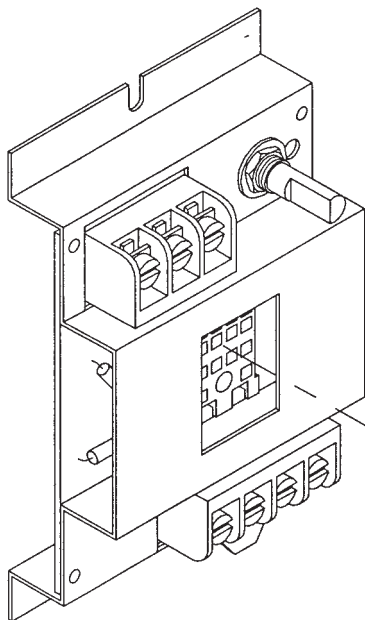


Timer, adjustable electronic, 0-2+ minutes, 115VAC input, SPST 6A contacts output. **P-16553**


Relay, plug-in; 4PDT, 120 VAC **36244**

Relay, plug-in; replace with 36244; 4PDT, 110V 3A **42844**


120 VAC, 4PDT with button & light **45516**



P-14426

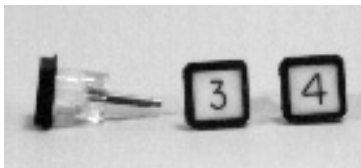

Button and stem, alone, for P16732 assembly, specify marking i.e.; P-14426-2

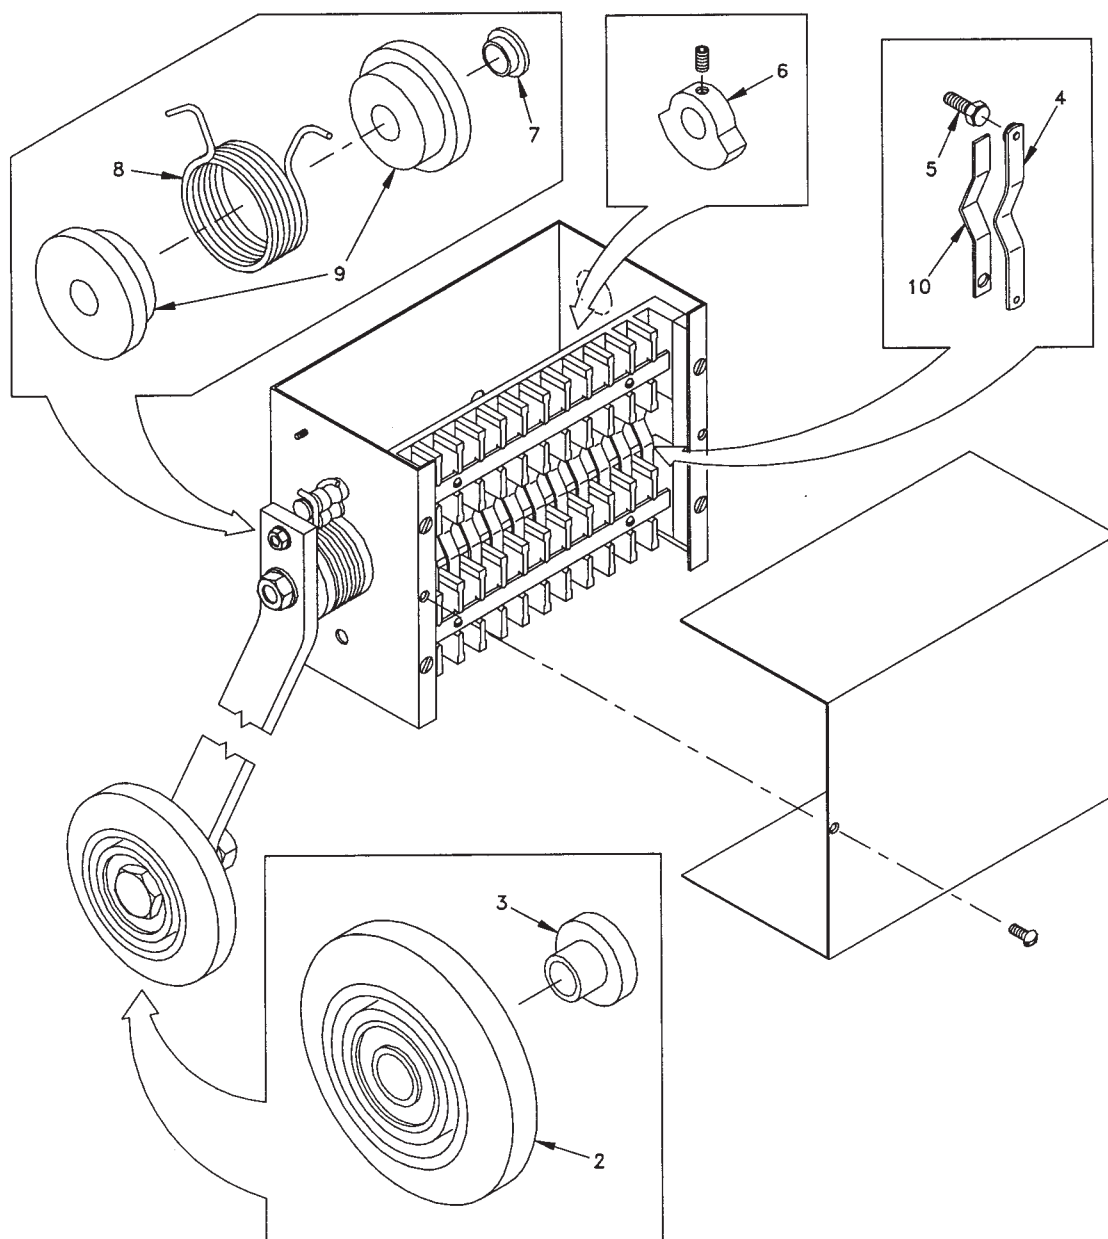

**FIGURE
NO.**

DESCRIPTION

1	Switch assembly, slowdown	P-12861
2	Wheel assembly	P-2654
3	Wheel adapter	16605
4	Contact assembly	41894
5	Contact, stationary	41893

**FIGURE
NO.**

DESCRIPTION

6	Cam	41898
7	Bearing, Oilite	45270
8	Spring, Coil	2881-99
9	Adaptor	41900
10	Contact, stationary	48283

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

SWITCHES




Switch, magnetic, floor; 120 VAC, 1.5A	P-13347
Switch, magnetic, floor; 45VDC	P-16578
Switch, magnetic, leveling, 120VAC, 1.5A	P-12926
Switch, magnetic, leveling, 45VDC	P-16577
Magnet, MFS actuator for magnetic floor switch	42984
Switch, gate for 2-1/4" sill applications.	P-1046-00C

Switch, gate for 1-3/4" sill applications.	P-1046-00D
Switch, limit; LH wire feed	P-28319-00C
Switch limit; RH wire feed	P-28319-01C
Switch; limit; leads exit from end opposite roller	P-1354-00C

Roller for P28319 and P-1354 limit switch.	10615
Switch assembly, limit	P-16264-00C
Switch assembly, limit	P-1943-00C
Roller for P-16264-00C & P-1943-00C limit switch	10615

DOOR HANGERS: CAR & HOISTWAY

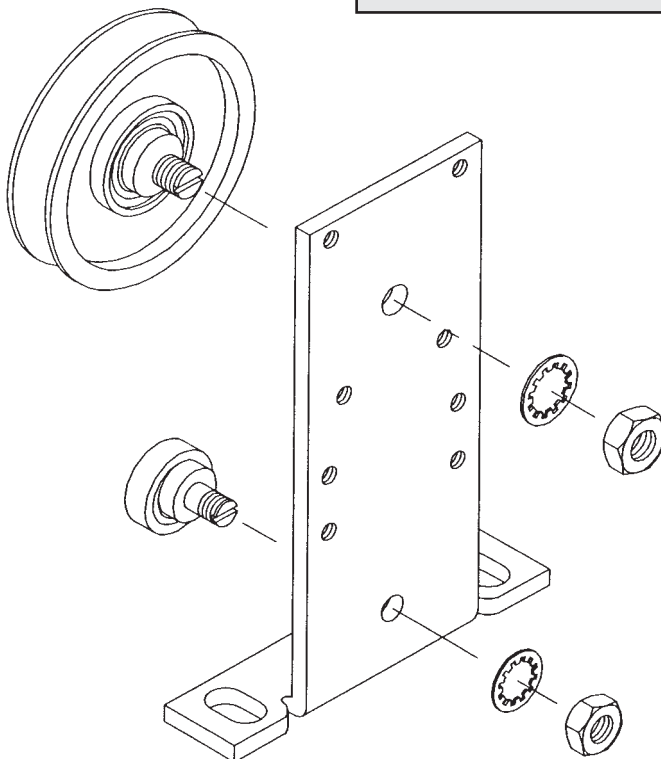

Pendant assembly for PE-1 car & heavy duty hoistway (2.5 in.) track.	P-31374
Pendant assembly for PE-1 hoistway (1.5 in) track.	P-31373
Sheave assembly; polyurethane, 3.25 in. running diameter.	P-31344
Sheave assembly; polyurethane, 2.5 in. running diameter.	P-31341
Upthrust roller assembly; 1.81 D, used with all PE-1 pendants.	P-31131
Bolt, pendant; 1/2 x 13 x 3, used for all PE-1 pendants.	P-31132



Ball rod end, left hand. **101724**

Ball rod end, right hand. **101229**

MA-1204



Lift rod; 5/16" diameter x 44" length.

MA-1142, 101142



Roller, 2" door pickup roller.


BELTS

Door operator single belt 55" X 1/2", #2550 **19501-21**

Door operator single belt, two required 68" x 1/2" #2680. **19501-22**

Heavy duty timing belt, 1/2" pitch 60" L x 1-1/2" W, 120 teeth. **20267**

ROLLER GUIDES

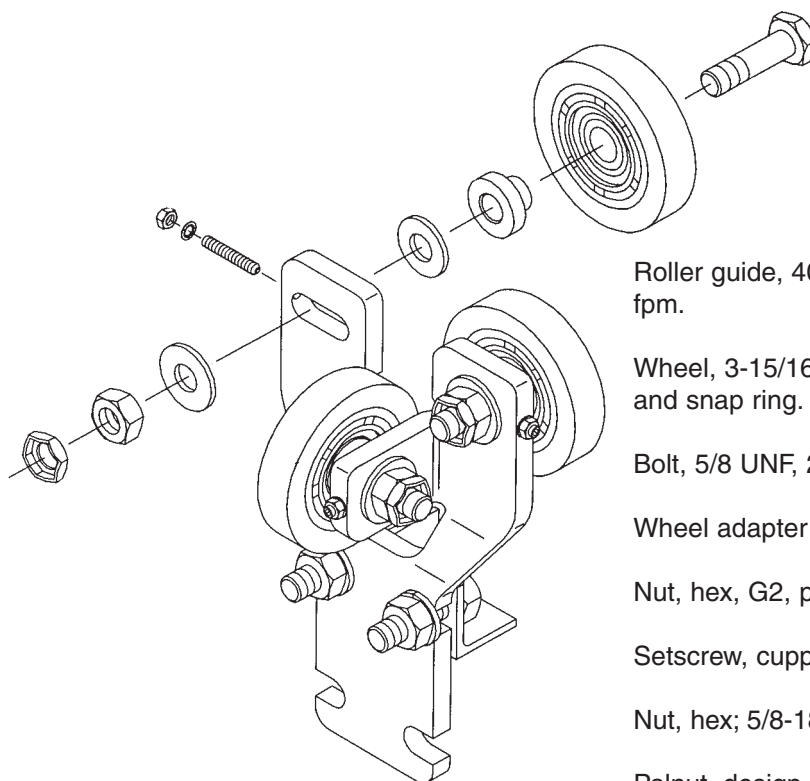

Roller guide, 4000 lb. capacity, 200 fpm. **P-12908**

Wheel, 3-15/16" diam., with bearing and snap ring. **P-12963**

Bolt, 5/8 UNF, 2-1/4: long, heat treated. **16607**

Wheel adapter for wheel guide wheels. **16605**

Nut, hex, G2, plated, 1/4-20 **48873-001**

Setscrew, cuppoint; 1/4-20, 1.5" long. **61214-016**


Nut, hex; 5/8-18 UNF. **48838-007**

Palnut, design 4; 5/8-18 **61328-052**

14639 Short St. • Posen, Illinois 60469 U.S.A.


Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

REPLACEMENT ROLLERS

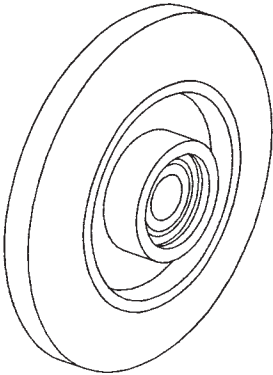


Wheel assembly; 7-3/4 " diameter.

P-12592



Wheel assembly; 6-1/2" diameter
crowned polyurethane, uses casting
26564.

P-13787

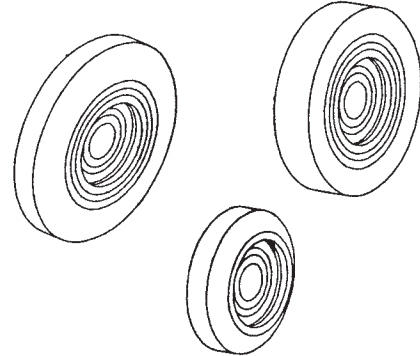

Wheel assembly; 3-15/16" diameter, with bearing and snap ring.

P-12963

Wheel assembly; 3-15/16" diameter.

P-2964

Wheel assembly; 4-3/8" diameter.

P-2654

P-22723



Escalator handrail roller with two 6201 bearings, .859" wide, 1.8125" O.D. (or 55/64" wide, 1-13/16" O.D.)

ROLLER GUIDE WHEELS

Roller guide wheel 10" O.D. for
P28305 assembly.

P-7087

Roller guide wheel, 3-15/16" O.D.
1-1/4" wide, .7874 bearing I.D.

P-5985


Roller guide wheel, 6-1/2" O.D. x
1-1/4" tire width.

P-3174

Roller guide wheel, 6-1/2" O.D.
tapered to 1/2" wide tire face.

P-2789

DRIVE CHAIN

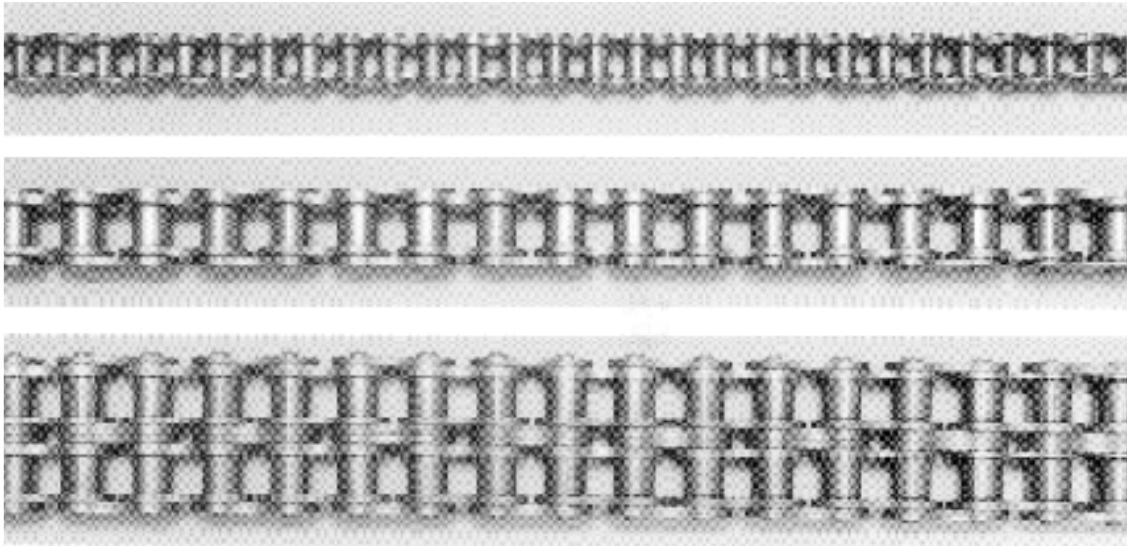

60-1, 3/4" Pitch, 170" Long

80-1, 1" Pitch, 296" Long

60-4, 3/4" Pitch, 133" Long

100-1, 1-1/4" Pitch, 140" Long

60-5, 3/4" Pitch, 133" Long

100-2, 1-1/4" Pitch, 140" Long

80-1, 1" Pitch, 200" Long

When replacing drive chain, check to see if the drive sprockets need replacement. If they do, contact PSI for additional information on these sprockets.

HANDRAIL



Flat, steel cord reinforcement. Used on Glass Escalators.




"V" Style, stranded steel wire reinforcement. Used on Opaque Escalators.

14639 Short St. • Posen, Illinois 60469 U.S.A.


Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

STEP CHAIN

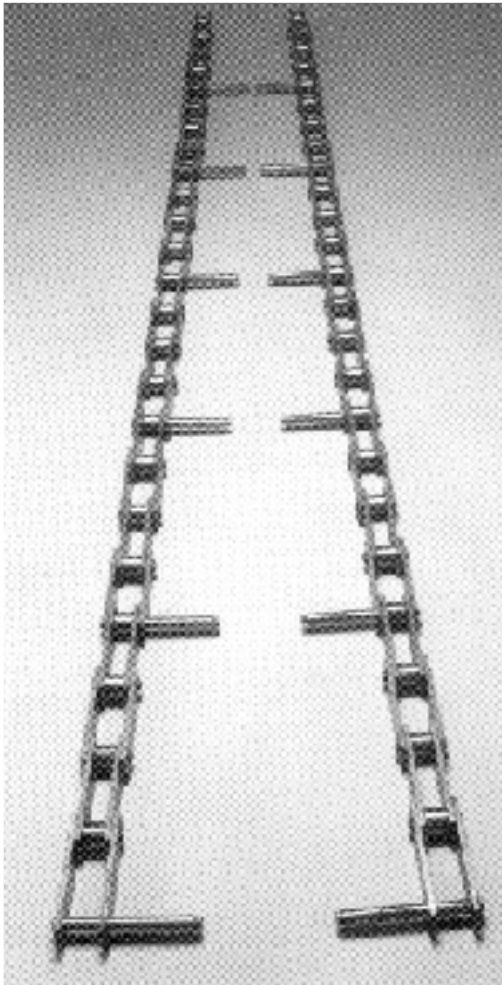

Step chain, 1 pair assembled with (24) **35671**
M-P12963 rollers between the links.

Step Chain, 1 Pair this amount will
accomodate 1 step both sides **35672**

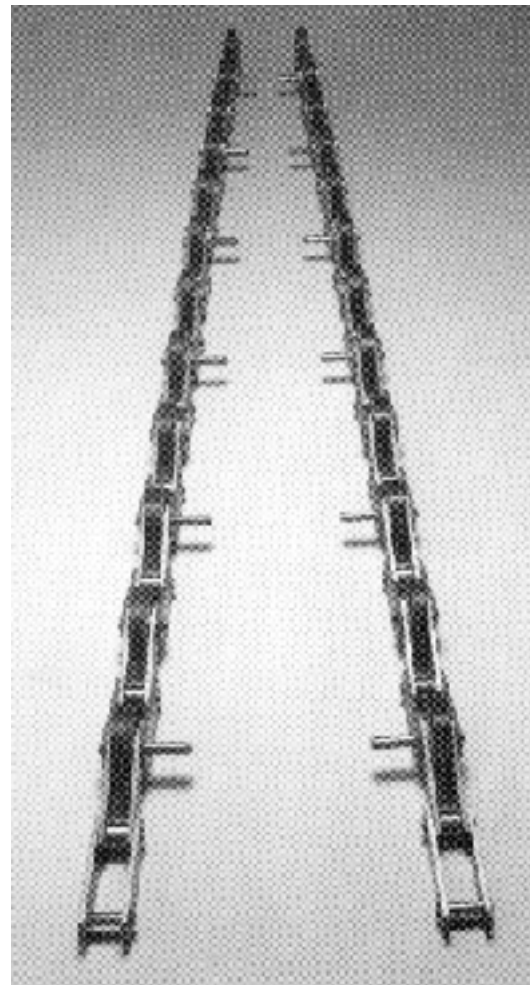

Step Chain, 1 pair assembled with (24) **A42860**
M-P12963 rollers between the links.

Step Chain, 1 Pair assembled with (4)
M-P12963 rollers between the links. **A42861**

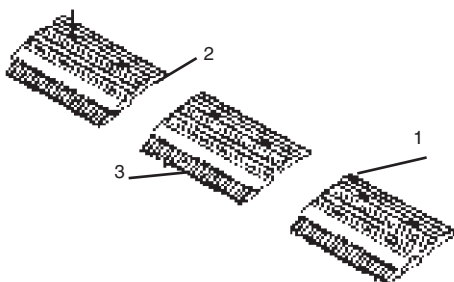


FIGURE
NO.

DESCRIPTION

- | | |
|---|---|
| 1 | Comb segment; solid glass, RH, -001 = black
-002 = yellow, -003 = red |
| 2 | Comb segment, solid glass, LH, -001 = black
-002 = yellow, -003 = red |
| 3 | Comb segment, solid glass, Center, -001 =
black, -002 = yellow, -003 = red |

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

Capacitors	1
Coils	2,3
Contactors	9
Door/Hatch Equipment	
Hanger/Components	4
Interlocks/Components	5,6
Operator Motors	6
Switches: Magnetic/Optical	14
PC Boards	14,15
Rectifiers	2
Relay Parts	10-12
Resistors	1
Rollers	6-8
Selector Parts	13

RESISTORS



8-1/2" Resistor, 160 watt, 50 OHMS, 1.79 Amps	33-1099-029
8-1/2" Resistor, 160 Watt, 100 OHMS, 1.26 Amps	33-1099-030
8-1/2" Resistor, 160 Watt, 260 OHMS, .80 Amp	33-1099-031
8-1/2" Resistor, 160 Watt, 500 OHMS, .57 Amp	33-1099-032
8-1/2" Resistor, 160 Watt, 2500 OHMS, .25 Amp	33-1099-033
10" Resistor, 190 Watt, 1 OHM, 13.8 Amps	33-1099-008
10" Resistor, 190 Watt, 3 OHMS, 7.9 Amps	3-26103-09
10" Resistor, 190 Watt, 7.5 OHMS, 5 Amps	3-26103-13
10" Resistor, 190 Watt, 10 OHMS, 4.35 Amps	3-26103-00
10" Resistor, 190 Watt, 15 OHMS, 3.56 Amps	3-26103-04
10" Resistor, 190 Watt, 20 OHMS, 3.08 Amps	3-26103-05
10" Resistor, 190 Watt, 25 OHMS, 2.76 Amps	3-26103-06
10" Resistor, 190 Watt, 50 OHMS, 1.95 Amps	3-26103-10
10" Resistor, 190 Watt, 100 OHMS, 1.38 Amps	3-26103-01
10" Resistor, 190 Watt, 250 OHMS, .87 Amp	3-26103-07
10" Resistor, 190 Watt, 500 OHMS, .61 Amp	3-26103-11
10" Resistor, 190 Watt, 1000 OHMS, .44 Amp	3-26103-02
10" Resistor, 190 Watt, 1500 OHMS, .37 Amp	33-1099-027
10" Resistor, 190 Watt, 2500 OHMS, .27 Amp	3-26103-08
10" Resistor, 190 Watt, 5000 OHMS, .19 Amp	3-26103-12
10" Resistor, 190 Watt, 10,000 OHMS, .14 Amp	3-26103-03
5 Watt Fixed Resistor, 1500 OHMS used on Pushbuttons	33-1099-009
8 Watt Fixed Resistor, 4300 OHMS used on Pushbuttons	3-40152-84

CAPACITORS



50 MFD @ 350 VDC Capacitor, Type FP (Four Prong)	3-36354-00
100 MFD @ 150 VDC Capacitor, Type FP	33-1025-019
750 MFD @ 150 VDC Capacitor, screw terminals, metal case	33-1025-016
650 MFD @ 200 VDC Capacitor, screw terminals, plastic case	33-1025-009
2000 MFD @ 50 VDC Capacitor, screw terminals, metal case	33-1025-026
800 MFD @ 50 VDC Capacitor, screw terminals, metal case	
3800 MFD @ 25 VDC Capacitor, screw terminals, metal case	
.47 MFD @ 100VDC Mylar Capacitor for EVC Drawer	3-40163-04

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

RECTIFIERS



Rectifier, 9 plates 1" x 1", for "AT" relays
 ARC suppressor rectifier for "BN-4 & BN-6" Relays
 Rectifier ARC suppressor marked 1543-11 used on power supply
 3 Amp selenium rectifier marked D261Z4EB1 used on power supply
 8.6 Amp selenium marked J262Z4EB1 used on power supply
 Silicon rectifier marked X2160Z1B1A used on power supply
 3 Phase power supply rectifier, 6 plates, 6 stud rectifiers, etc.
 Selenium rectifier, 16 plates 2" x 2", single phase
 Selenium rectifier, 24 plates 1-1/4" x 1-1/4", single phase bridge

3-36213-12
33-1094-003
3-40123-12
33-1094-004
3-40118-32
33-1094-006
35-1094-007

33-1094-008

EQA RELAY COILS



<u>VOLTS</u>	<u>OHMS</u>	
120 DC	11,300	44-1032-003
24 DC	450	44-1032-004
60 DC	2,000	44-1032-005
120 DC	4,000	44-1032-006
18 AC	2.1	44-1032-007
4 DC	13	44-1032-008
120 DC	4,000	44-1032-010
120 DC	20,000	3-40121-78
60 DC	2,000	44-1032-009
120 DC	5,000	44-1032-011
120 DC	8,000	44-1032-012



<u>TYPE</u>	<u>VOLTAGE</u>	<u>OHMS</u>	
T1	115DC	700	3-36102-13
T2	230DC	2940	3-36102-05
T6	60DC	480	3-40118-34
T8	80DC	740	3-36102-07
T15	115DC	780	36102
T18	230DC	1900	3-36102-06
T21	Series	8.2	3-36102-08
T25	230DC	2900	3-36102-01
T41	Series	1.9	3-36102-04
T71	Series	.51	3-36102-03
T90	Series	.14	3-36102-02
T91	Series	.04	3-36102-11
T1T	190/250DC	7200	34-1204-001





180V RPR Coil	3-40113-96
440V RPR Coil	34-1032-013
33.3 OHM/12V	3-40008-47
136 OHM/24V	3-40008-48
120DC, 2950 OHM	34-1032-001
370 OHM, "F" Switch	23036
4500 OHM, "F" Switch	23036A
450 OHM, "F" Switch	34-1032-002
795 OHM, 115AC	36271B
2900 OHM, 230DC	36271A
70 OHM, Rotodial	23023A
265 OHM, Rotodial	23023C
Brake Coil	3-40031-88
Tele. Relay Coil	3-40258-34



<u>TYPE</u>	<u>VOLTAGE</u>	<u>OHMS</u>	
E1	110AC	.65	3-23015-15
E2D	230DC	5000	3-23015-09
E5	55AC	8.6	3-23015-07
E11	115DC	818	3-23015-23
E12	120AC	60	3-23015-10
E12G	110AC	60	3-23015-21
E16	110AC	35	3-23015-04
E18	180AC	90	3-23015-11
E20	220/250AC	187	3-23015-24
E20G	208AC	210	3-23015-20
E23	230DC	3240	3-23015-22
E24	240AC	230	3-23015-16
E24G	240AC	230	3-23015-19
E26	220AC	145	3-23015-05
E26C	240AC	95	3-23015-03
E26G	208AC	145	3-23015-01
E26T	220AC	3400/300	3-23015-02
E45	220AC	1350	3-23015-17
E46	110AC	600	3-23015-06
E48	115DC	920	3-23015-08

**Parts Specialists, Inc. stocks
and can supply additional
Schindler-Haughton Coils.
Please call for availability.**

TYPE "B4" HANGER SHEAVE ASSEMBLIES (WITH PLAIN UPTHURST ROLLER)

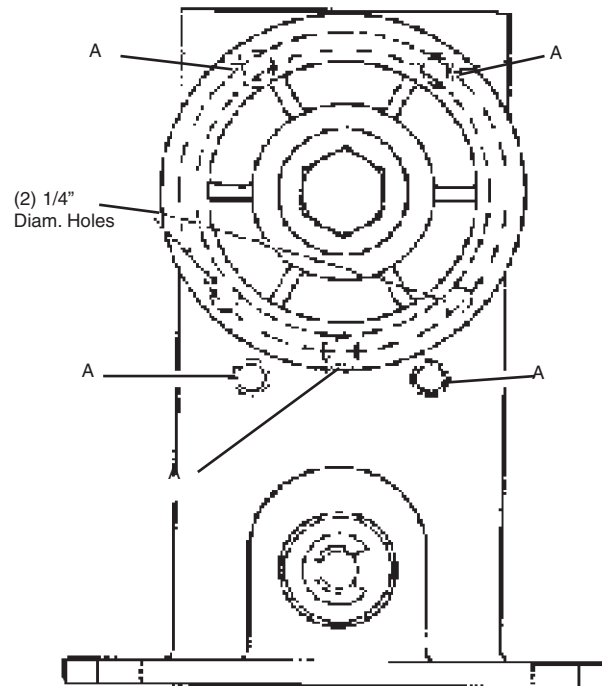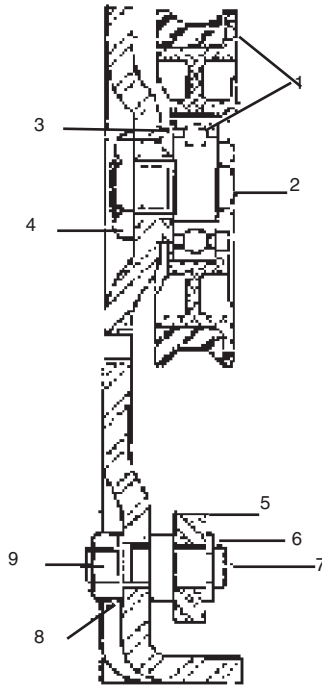


Description	Style	Holes "A" Specifications	
Hanger Sheave Assembly	Universal	5/16-24 Tapped	3-40133-48
Hanger Sheave Assembly	Plain	.272/.277 Plain Drilled	3-40133-49

(NOTE: Assembly 3-40133-48 can be used to replace 3-40133-49.
3-40133-49 will replace 3-40133-48 only difference is tapping of holes marked "A")

Figure

No	Description	
1	Polyurethane sheave & bearing assembly (3-5/16" diameter)	3-40130-79
2	Stud	3-40131-03
3	Bearing Spacer	3-40149-26
4	1/2-20 Palnut	3-40147-25
5	Upthrust Roller	3-40130-81
6	Retaining Clip	33-1100-010
7	Upthrust Roller Pin	3-40130-80
8	3/8" Internal Tooth Lock Washer	HR-932
9	3/8-24 Hex Thin Nut	16602

TYPE "B" & "B1" CONTACT ASSEMBLIES

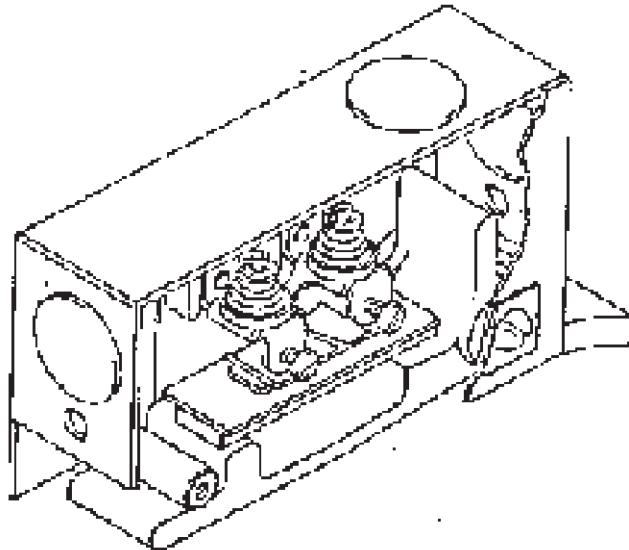

Application

Grip Contact Switch
 Roller Arm Switch
 Roller Arm Switch
 Gate Switch & 12" & 16W Governors
 Sliding Doors or Gate Contacts
 Gate Switch
 Oil Buffer Switch
 B5 Retiring Cam Switch
 Roller Safeties
 Car Safeties - Manual Reset
 OG Operator Gate Switch
 #2 Flexible Guide Clamp Safety Switch
 #1 & 2A Flexible Guide Clamp Safety Switch

Normal Contact Position

Closed
 Open
 Closed
 Open
 Open
 Open
 Open
 Open
 Closed
 Closed
 Open
 Closed
 Closed


3-06522-00
3-06522-01
3-06522-02
3-06522-03
3-06522-04
3-06522-05
3-06522-06
3-06522-07
3-06522-08
3-06522-09
3-06522-10
35-1135-001
35-1135-002

Description

Photo Cell assembly w/ 2'6" cable **3-40007-65**
 Photo Cell assembly w/20" cable **3-40007-66**
 Lunar Key **34-2551-28**

Description

Coiled cord assembly for safe ray lite. **3-40007-63**
 Amplifier PC Board for type "HE" safe ray. **3-40007-82**

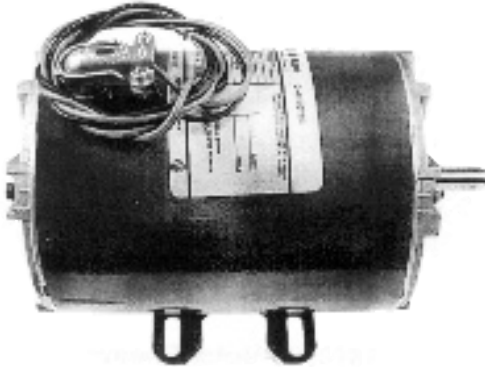

Motor, door operator 1/4 HP, 230VDC, 1140 RPM. **3-40144-36**

Motor, door operator 1/2 HP, 230VDC, 1140 RPM. **3-40196-50**

Cam **3-19538-03**

Drive Sheave assembly for single speed doors. **3-40151-13**

Drive Sheave assembly for two speed doors. **3-40151-14**

Drive Sheave, 6" J grooves **3-40132-72**

Sheave, cable driver sheave **3-40132-68**

Shaft, bearing bracket **3-40132-81**

Photo cell assembly complete with 30" cable **3-40140-22**


Light source assembly complete with 30" cable **3-40140-47**

Extension spring for type "H" safety edge, 10" long. **3-40106-41**

Coiled cord assembly for type "H" safety edge. **3-40140-45**

Micro switch for type "H" & "H1" safety edges **43-1161-001**

ROLLERS

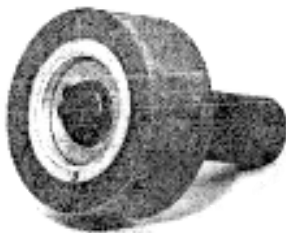

Door clutch roller, 2-1/4" OD x 9/16" wide face, 7/16" bore; for "T" and "TH" door operators.



3-16497-00

Interlock roller and pin assembly; polyurethane roller is 1-3/4" diameter x 3/4" wide face; 5/8" diameter axle is 1-3/8" L..

35-2551-006

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

ROLLERS



<u>Description</u>	<u>Material</u>		<u>Dimensions</u>		<u>Bearing Bore</u>	
	<u>Hub</u>	<u>Tire</u>	<u>O.D</u>	<u>Width</u>		
Upthrust roller for TH operator car door hanger		Nylon	3-3/8"	3/4"	0.6299"	3-40134A75
Idle sheave for car door hanger & safety edge retractor		Nylon	1-7/8"	3/4"	(sleeve) 0.5000"	35-1229-03
B-4 hanger roller wheel	Die cast aluminum	Polyurethane	3-5/16"	3/4"	0.6250"	3-40130-77
Hanger Roller	Die cast aluminum	Polyurethane	3-17/32" 3-5/16"	1-5/16" 3/4"	0.6693 0.6250	3-40130-79

<u>Description</u>	<u>Material</u>		<u>Dimensions</u>		<u>Bearing Bore</u>	
	<u>Hub</u>	<u>Tire</u>	<u>O.D</u>	<u>Width</u>		
Hanger roller wheel		Nylon	3-11/16"	3/4"	0.6299"	3-16847-01, 16847-C, J, R
Hanger roller wheel		Nylon	2-5/8"	3/4"	0.6299"	3-16847-03, NAS-16847-E
Hanger roller wheel	Die cast aluminum	Polyurethane	2-5/8"	3/4"	0.6299"	3-40157-60
Hanger roller wheel	Die case	Polyurethane	3-11/16"	3/4"	0.6299"	3-40157-63

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444




<u>Description</u>	<u>Material</u>		<u>Dimensions</u>		<u>Bearing Bore</u>	
	<u>Hub</u>	<u>Tire</u>	<u>O.D</u>	<u>Width</u>		
Upthrust roller assembly			1-3/8"	7/16"	0.6299"	34-1004-001, 34-0792-097
Roller guide wheel	Die cast aluminum	Polyurethane (1-5/16" W)	3-1/2"	3/4"	0.6993"	3-40150-71
Roller guide wheel	Die cast aluminum	Polyurethane (1-1/16" W)	3-1/2"	3/4"	0.5119"	3-40158-67
Roller guide wheel	Die cast	Polyurethane	3-1/2"	1"	0.7874"	3-40196-74

Eccentric wheel support kit for 3-40150-71; includes eccentric pin & washer axle pin, hardware, order 3-40150-71 separately

<u>Description</u>	<u>Material</u>		<u>Dimensions</u>		<u>Bearing Bore</u>	
	<u>Hub</u>	<u>Tire</u>	<u>O.D</u>	<u>Width</u>		
Roller guide wheel	Die-cast aluminum	Polyurethane (1-1/8" W)	5"	7/16"	0.630"	35-1159-004, 35-1159-001
Roller guide wheel	Die-cast aluminum	Polyurethane (1-3/8" W)	8"	1/2"	0.630"	35-1159-002
Roller guide wheel	Die-cast aluminum	Polyurethane	8"	1/2"	0.630"	3-40220-64



* Bearings feature a steel inner sleeve.

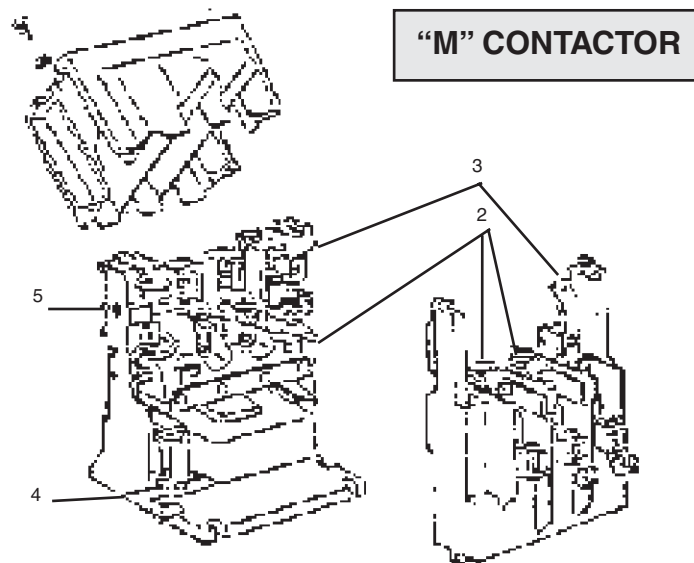

Figure

<u>No .</u>	<u>Description</u>	<u>Rating</u>	
1	Complete Assembly	56 Amp	3-40255-71
	Complete Assembly	110 Amp	3-40255-43
	Complete Assembly	180 Amp	3-40255-44
	Complete Assembly	260 Amp	3-40255-45
2	Main Contact Kit	56 Amp	WL-100-S
		110 Amp	WL-100-H
		180 Amp	WL-100-E
		260 Amp	WL-100-G
3	Main Contact Kit	56 Amp	WL-100-J
		100 Amp	WL-100-D
		180 Amp	WL-100-D
		260 Amp	WL-100-D
4	Coil Kit	56 Amp	WL-200-E
		110 Amp	WL-200-D
		180 Amp	WL-200-D
		260 Amp	WL-200-D
5	Aux. Contact Kit	56 Amp	WL-100-F
		110 Amp	WL-100-F
		180 Amp	WL-100-F
		260 Amp	WL-100-F

BN6, DN6, & EN6 RELAYS


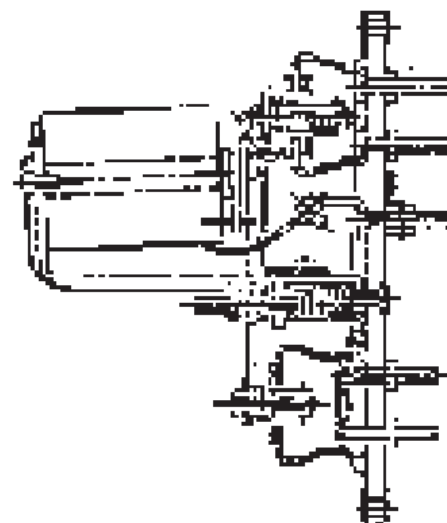
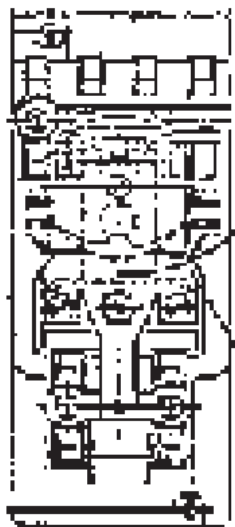


Type	Coil	B Contact	C Contact	ARC Suppressor	
BN-62	34-1032-001	0	12	33-1094-003	35-0539-008
BN-63		2	10		35-0539-009
BN-64		4	8		35-0539-010
BN-65		6	6		35-0539-011
DN-62	3-40008-48	0	12	3-40008-61	
DN-63		2	10		
DN-64		4	8		3-40253-10
DN-65		6	6		3-40253-11
EN-62	3-40008-47	0	12	3-40008-61	
EN-63		2	10		
EN-64		4	8		
EN-65		6	6		3-40255-11

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444


BN4, DN4 & EN4 RELAYS

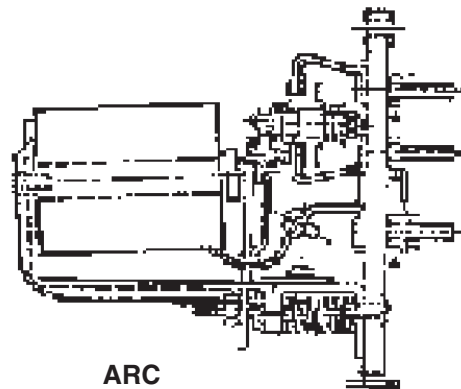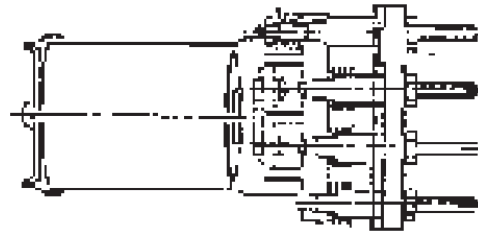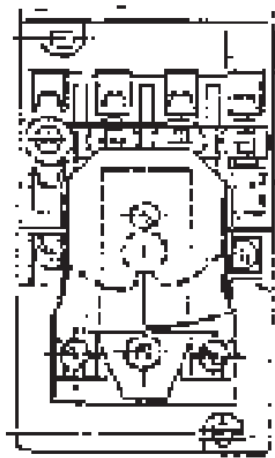

Type	Coil	Contact	Contact	ARC Suppressor	
BN-40	34-1032-001	0	8	33-1094-003	35-0539-003
BN-41		2	6		35-0539-004
BN-42		4	4		35-0539-005
BN-43		6	2		35-0539-006
BN-44		8	0		35-0539-007
DN-40	3-40008-48	0	8	3-40008-61	
DN-41		2	6		
DN-42		4	4		
DN-43		6	2		
DN-44		8	0		
EN-40	3-40008-47	0	8	3-40008-61	
EN-41		2	6		
EN-42		4	4		
EN-43		6	2		
EN-44		8	0		


14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



3-20456-01

3-20456-02



19487

19486



17548

3-17548-06



3-28763-01



28764



3-20696-02

3-20696-01

Short stationary contact for AN, AM & BN relays, 29/32" L; silver plated brass
Long stationary contact for AN, AM & BN relays, 63/64" L; silver plated brass

3-20456-01
3-20456-02

Contact bridge insulator for "4" 100062-series movable contact assemblies on AM, AN, BN & N relays.

19487

Contact bridge insulator for "2" 10062-series movable contact assemblies on AM, AN, BN & N relays.

19486

Adjustable stationary contact stud (standard duty) for AT, F & N relays, 13/16" L with 5/16" diameter silver contact, 6-32 threaded hex head screw; used with 3-28763-02, 28763-E contact bridge.

17548

Stationary contact stud for blowouts (heavy duty) for 35-0864-009 stationary contact & bracket assembly on AT relays; 13/16" L with 5/16" diameter silver contact, 6-32 threaded hex head screw, used with 3-28763-01, 28763-B contact bridge.

3-17548-06
17548-H

Heavy duty bridge contact for AT & N relays; 1-1/4" L x 3/8" W with 2-3/8" diameter silver contacts.

3-28763-01,
28763-B

Steel contact spring guide, 3/8" x 5/16" x 3/16" thick, with hole for 6-32 screw; used with 3-20696-02, 20696-B and 3-20696-01, 20696-A spring seat washers on 10062 series movable contact assemblies for AN, AT, F & N relays.


28764

Steel spring seat washer, 19/32" OD with 11/32" x 13/64" rectangular hole; used with 22100 spring and 28764 spring guide in 10062 series movable contact assemblies.

3-20696-02,
20696-B

Steel spring seat washer, 19/32" OD with 5/32" diameter hole; used with 22100 spring and 28764 spring guide in 10062 series movable contact assemblies.

3-20696-01
20696-A

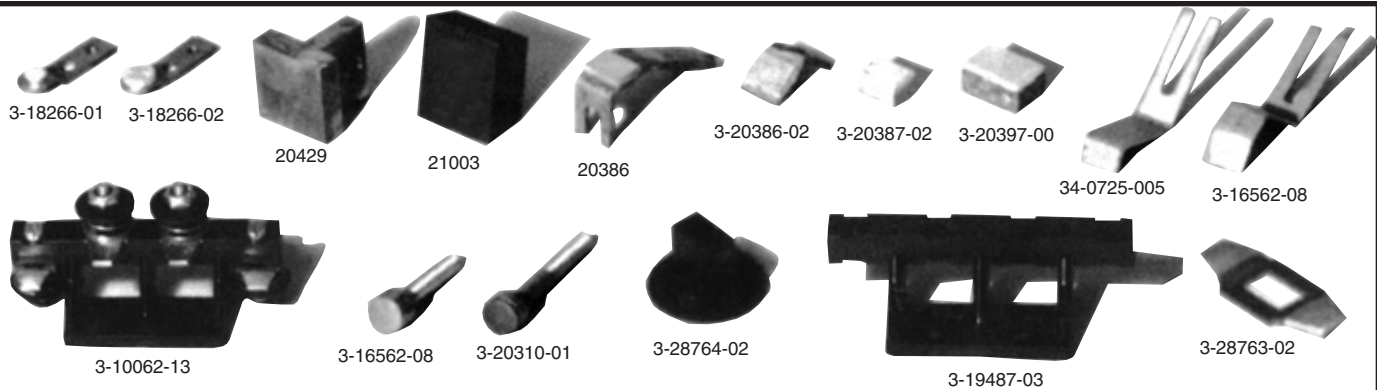

Movable contact, 1-1/4" L x 3/8" W offset base with 1/4" diameter silver contact; for 10019 and 10019-M interlock assemblies on Type F, & T contactors.

3-18266-01

Movable contact, 1-1/4" L x 3/8" W offset base with 3/8" diameter silver contact; for 10019 and 10019-M interlock assemblies on Type F, K & T contactors.

3-18266-02

Movable copper contact, 1" x 1" face; for type F magnet switch.

20429

Stationary carbon contact for 20429 movable contact.

21003

Movable M.G. start contact with blowout copper, 1/2" W: includes 3/8" x 1/2" silver contact.

20386

Same as 20386, but without blowout copper.

3-20386-02

Stationary/movable contact, 1/2" x 3/8" x 5/16"; includes silver face and 2 holes tapped for 6-32 machine screw; used for type F magnet switch and M.G. copper.

3-20387-02

Stationary copper contact, 3/4" x 1/2" x 3/8"; silver face and 2 holes tapped for 10-24 machine screw.

3-20397-00

Movable contact, 1-7/16" L base with 3/8" L contact surface, type 300 stainless steel, for type B, B-1 and B-2 BV Vernier and FA selectors.

34-0725-005

Same as 34-0725-005, but with 3/4" L contact surface.

3-20345-02

Button type selector contact, 1-5/16" L with 3/8" diameter head and 3/8" diameter silver contact; 10-24 thread; for type B, B-1, B-2 and FA selectors, and type K limit switch.

3-16562-08

Same as 3-16562-08, 1-13/16" L

3-20310-01

Movable contact assembly for AN, AM & BN relays; contacts supplied 2NO/2NC (can be reconfigured in field to match job requirements).

3-10062-13

Contact bridge guide (Bakelite) for 3-10062-13.

3-28764-02

Contact bridge insulator for 3-10062-13 .

3-19487-03

Contact bridge (brass) for 3-10062-13 ; formed silver contact faces for outstanding wiping action.

3-28763-02

Adjusting screw for AN & AM relays; 1-1/16" L with 10-32 thread.


3-17592-02

14639 Short St. • Posen, Illinois 60469 U.S.A.


Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444




Relay, plug-in 3 PDT, 12 VAC	3-40092-30
Relay, plug-in, 3 PDT, 24 VAC	3-40092-31
Relay, plug-in, 3 PDT, 120 VAC	3-40092-32
Relay, plug-in, 3 PDT, 240 VAC	3-40092-33
Relay, plug-in, 3 PDT, 110 VDC	3-40092-34
Relay, plug-in 6 PDT, 24 VAC	3-40008-67
Relay, plug-in 6 PDT, 24 VAC with Led	3-40259-36
Socket for relay	3-40008-75
Relay socket	3-40092-35

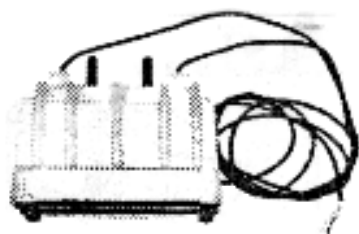

Magnetic leveling switch - Mechanical style switch	3-40156-88 35-2557-15
Repair kit for mechanical switch	3-40156-88-RK
Magnetic leveling switch - Electronic style switch	3-40156-89 35-2557-17
Optical leveling switch; 24 VDC single beam	3-40230-10
Optical leveling switch; 110 VDC dual beam	3-40341-77
Optical leveling switch; 24 VDC dual beam	3-40341-73
Optical leveling switch; 110 VDC	3-40025-75

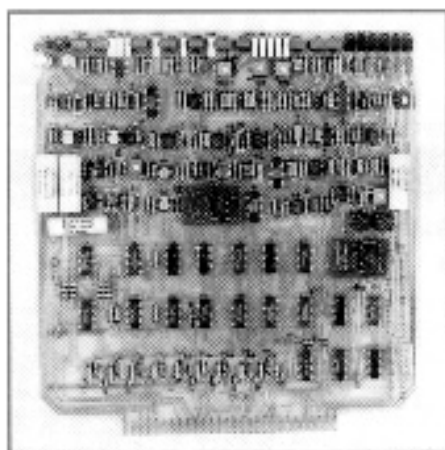

EVC Pattern Generator	3-40162-3
EVC High Voltage	3-40155-91
EVC Amplifier	3-40162-12
EVC SCR Trigger	3-40162-14
EVC Excess Error	3-40162-05
Amplifier	3-40229-96
EVC Pattern Generator	3-40000-41
Failure Detector	3-40221-95
ELC Pattern Generator	3-40000-42
120V SS Stepper Mother Bd	3-40233-59
Solid State Stepper Relay Bd	3-40233-63

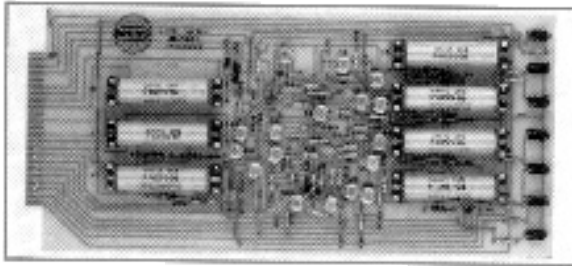

EVC leveling switch decoder printed circuit board **3-40143-00/76693**

EVC pattern generator printed circuit board **3-40155-97/76657**

EVC/ELC high voltage printed circuit board **3-40155-92/76652-1**

EVC/ELC amplifier printed circuit board **3-40143-01/76696**



EVC/ELC SCR trigger printed circuit board **3-40143-02/76699**

EVC/ELC excess error monitor printed circuit board **3-40162-07**

ELC leveling switch decoder printed circuit board **3-40181-58**

ELC leveling control printed circuit board **3-40179-99**

EVC mother board **3-40153-79**

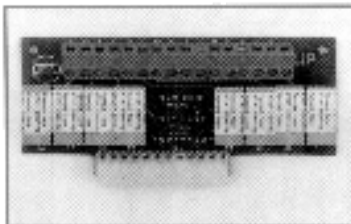

Amplifier printed circuit board for "TS" safe ray **35-1513-006**

Demand response module circuit board ("TS" #74261) **34-2168-003**

Printed circuit board for model 4 drawer **3-40162-22**

Reverse phase relay circuit board (etched #3-40244-28) **3-40256-74**

Terminal board assembly timer **35-2555-074**

Capacitors	23-24
Coils	29-34
Door/Hatch Equipment	
Interlocks, Hangers	5-13
Switches (Gate, Limit, Stop)	53-54
Escalator Parts	64-65
Machine Parts	
Bearings Packing	14-15
Relay Parts	
Copper, Carbon Contacts	49-52
Kits	47-48
Shunts	27-28
Switches	29, 35-47
Resistors	25-26
Rollers	1-4
Selector Parts	16-22
Signal Fixtures	55-59
Springs	60-63




Rubber roller, 0.593" wide. Diam.; 1.22", thickness; 0.337", tire; rubber. **456AA1**

Same as 456AA1 with 335D4 bushing. **456AA2**




Hanger roller with convex tire surface; for Type "A" (6178A) hangers. Diam.; 3-1/4", thickness; .687", bearing I.D.; 0.9843", solid steel. **456W1**

Hanger roller with convex surface; for type AU & 6178A flat track hangers. Diam.; 3-1/4", thickness; .687", bearing I.D. (bushed) ;0.500", solid steel. **A456W1**




456CP1

Upthrust roller with poly roller surface for integral hanger & track; eccentric axle has 1/2" shoulder; includes hex jamb nut. Diam.; 1-3/8", thickness; 1/2", material; steel.



456CP2

Upthrust roller with steel roller surface for integral track; eccentric axle has 1/4" shoulder; include hex jamb nut. Diam.; 1-3/8", thickness; 1/2", material; steel.

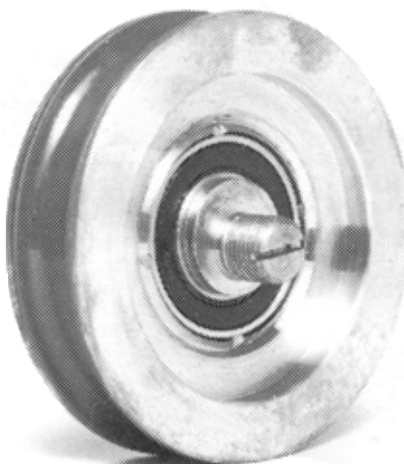

456EW1


Hanger flange roller, projection welded; eccentric axle has 1/2"-20 thread and 3/16" socket. Diam.; 3-3/8", thickness; 3/4", hub; steel flanges, tire; poly.3/8"



A456R2

Switch levers. Rubber roller. O.D.; 1.43, bore; 0.2230, width; 0.78

368203-907



Teeter-bar hanger w/(2) A456W1 and (1) 207Z4 up-thrust roller; for heavy doors. Diam.; 3-1/4", thickness; 11/16", bearing I.D.; 0.500" (bushed), solid steel.

456CC1



All-steel hanger roller for integral hoistway hanger. Diam.; 2-3/4", thickness; 11/16"; bearing I.D.; 0.785", hub; steel, tire; steel.

456CC1-P



All-steel hanger roller for integral hoistway hanger with poly roller face. Diam.; 2-3/4", thickness; 11/16", bearing I.D.; 0.785", hub; steel.

207Z4



Upthrust roller with steel roller surface; eccentric axle has 1/8" shoulder; incl. nut. Diam.; 1-3/8", thickness; 7/16", hub; steel, tire; steel.

456DH2



Flange roller, for round tracks. Diam.; 3-3/8", thickness; 13/16", bearing I.D.; 0.7874" hub; steel.

456CX-4



Hanger roller with 11/32" radius on concave surface. Diam.; 3-3/8", thickness; 13/16", bearing I.D. 0.7874", hub; steel.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



456AK2

Roller guide wheel with axle shaft for 6261A roller guide assembly. Diam.; 3-3/4", thickness; 1-1/8", tire; aluminum.



456CL4

Roller guide wheel w/axle shaft; used on 6261C guide assy, after Dec 62; perm lube. Diam.; 7-7/8", thickness; 1-1/2", tire; die-cast aluminum.

Roller guide wheel for 626C1 roller guide assembly, 1941 thru 1962; perm. lube. Diam.; 7-7/8", thickness; 1-1/2", die-cast aluminum.

456AJ2



456DN1

Roller guide wheel with 3/8" flat poly face; 1-1/4" L eccentric axle has 1/2-13 thread; can be used for Otis and Dover hydros. Diam.; 3", thickness; 13/16", material; steel.




456CN4

Guide roller with axle shaft, for 6261P roller guide assembly; w/pump shaft bearing. Diam.; 3-3/4", width; 1", hub; die-cast aluminum, tire; rubber or poly.




456CM4

Roller guide wheel with axle shaft enclosed by pump shaft bearing; used for 6261H roller guide assembly. Diam.; 4-7/8", width; 1-1/8", hub; die-cast aluminum, tire; rubber or poly.

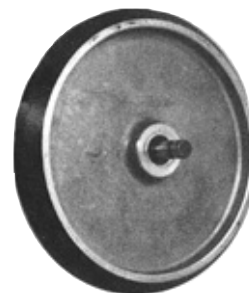

456CV4

Roller guide wheel, axle shaft with maintenance free sealed bearing; used on 6261T roller guide assembly. Diam.; 10", width; 1-1/2", hub; die-cast aluminum, tire; rubber or poly.

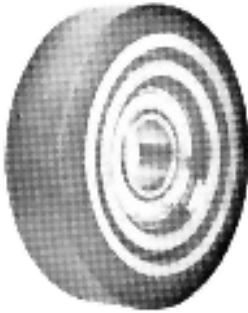

290BP4

Step roller for Otis models 32 & 48 RBC & J. Diam.; 3", width; 7/8", face width; 3/4", I.D.; 0.6693".




290F1Y

Chain roller for Otis model ML; incl. Alemite grease fitting and bronze sleeve bearing. Diam.; 5-1/2", switch overall width; 1-1/2", face width; 1-1/8"; I.D.



290AJ2

Step roller for Otis models 32 & 48 R, RA & RB; chain roller for Otis models 32 & 48 R, RB, & RBC. Diam.; 3", overall width; 7/8", face width; 3/4", I.D.; 0.750".

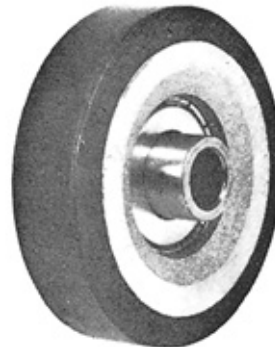

290BR2

Step chain wheel. "J", "R", "RB", "RBC", and "UB" Escalators. Die cast aluminum, rubber tire, 3.0" O.D. x 1-5/16" overall width, 207BH1 bearing assembly, 1/2" I.D.



A290AB1

Step & chain roller for Otis model O. Replaces canvas tire model, includes spacer and Alemite grease fitting. Diam.; 5-1/2", width (overall); 1-1/8", Bearing I.D.; 0.6693".



456BT1

Rubber roller with bushing, 1" x 7/16".

Axle pin for OEM part 456BT1. **78C2**



Rubber roller with bushing, 1-5/8" L **456C1**

Rubber roller with bushing, 1-5/32" L **456C2**

Rubber roller with bushing, 9/32" L **456C3**

Rubber roller with bushing, 1-1/2" L **456C4**



Eccentric Pin for 456C series roller.

2-19/32" L **77A4**

2-7/32" L **77A2**

2-11/32" L **77A3**

2-1/2" L **77A1**

2-5/32" L **77A5**

306FM1



Base contact, with silver contact face.



307AE1

Aluminum die cast bell crank lever for OEM #6940A door lock. (Right hand)

307AE2

Same as 307AE1 except left hand.



331AP1

Pivot arm of ductile iron for OEM #6940A door lock.




DOOR CLOSER CHAIN
3/8" PITCH - 2 X 2 (.050) PLATES

Chain (shown) assembly of OEM #A430BD1 link one end. OEM #96AD2 threaded rod other end. 7-1/8" chain length. **A332AS1**

Chain assembly of OEM #392AV1 hitch one end. OEM #A430BD1 link other end. 11-1/4" chain length **A332AS2**

Same as A332AS2 w/14-1/4" length. **A332AS3**

A237AJ2

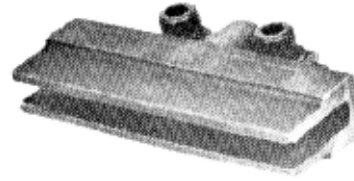

Door guide shoe complete. 4" long



Gate guide (vertical lifting) 8" long **237AR1**

Gate guide (vertical lifting) 4-1/2" long **237AR2**



Hoistway emergency door two section key. **194AD6**

Hoistway emergency door three section key. **194AD7**



Door guide complete with insert and 6-1/4" long bracket. For car doors. **2213R1**

Door guide complete with insert and 8" long bracket. For hoistway doors. **2220D16**

Door guide insert; 3" long. **251BJ1**

6168F1




Dash pot (door check) for safety edge.

209E1



Roller bearings (single row needle) w/sleeve.
Bore; .625"; O.D. 1.187"; length; 1.000"

156A8



Leaf spring contact for A306EB2 base.



Rubber bumper with hole
For 6940 lock; 15/16" W 1-1/2" L

320AY1

Rubber bumper with stem
For 6940 lock; 1-1/2" D; 1-7/16" L

320P4



Steel retaining ring .97 x .579" x
.035"

172DE9

Steel washer, .395" I.D. x 1-1/4"
O.D. x .0313" thick

127VB52

Steel washer, 33/64" I.D. x
3/4" O.D. x 1/16" thick

127VB56

Steel washer, 41/64" I.D. x 1-1/2"
O.D. x 3/64" thick

127VB83




Thin washer for 6940 door lock

127L4

Thick washer for 6940 door lock

127L5

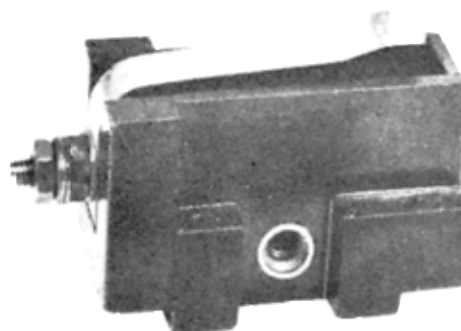


A306EB2

Interlock switch base for 6047A2 interlock
assembly (2 required), with formed leaf spring
contact; for N and NC style interlocks.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

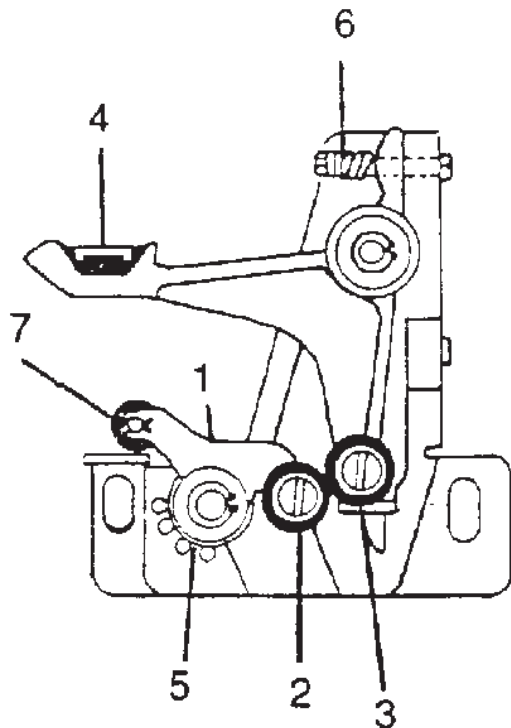

Figure

No. Description


- | | | |
|---|--|---------------|
| 1 | Lever, bell crank (used on 6940C1 & 6940C3) | 307AE1 |
| | Lever, bell crank (used on 6940C2 & 6940C4) | 307AE2 |
| 2 | Roller, rubber, 1-1/2" O.D. (used on 6940C1 & 6940C2) | 456C3 |
| | Roller, rubber 1-1/2" O.D. (used on 6940C3 & 6940C4) | 456C2 |
| 3 | Pin, eccentric (used on 6940C1 & 6940C4) | 77A3 |
| | Pin, eccentric (used on 6940C3 & 6940C4) | 77A2 |
| 4 | Contact with base (used on all arrangements) | 306FM1 |
| 5 | Spring (used on 6940C1 & 6940C3) | A92AG1 |
| | Spring (used on 6940C2 & 6940C4) | A92AG2 |
| 6 | Spring (used on all arrangements) | 90HB9 |
| 7 | Roller, rubber with bushing and pin 1" dia. (used on all arrangements) | 456BT1 |

6940A DOOR LOCKS COMPLETE


Right hand door lock (as shown) **6940C1**

Left hand door lock (opposite above) **6940C2**

6940B-CH-49800



Contact assembly complete with contacts and base for 6940B interlock switch.




Interlock switch assembly, right hand; as shown **6940B3**

Interlock switch assembly; left hand; opposite **6940B4**


14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

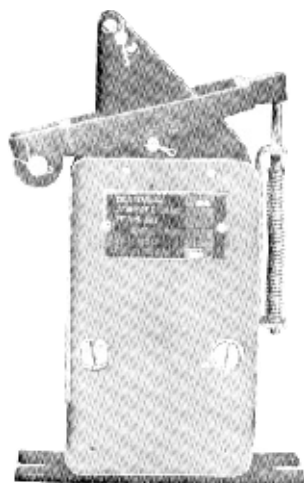

6047A2

Type "O" operator.
Door interlock
switch



Formed strip with silver contact, RH **152BE2**

Formed strip with silver contact, LH **152BE4**



152AV2

Movable contact



152AW2

Stationary contact



A325P1

Formed polyurethane cup for M.L. A6940-
AD1 to AD3 door closer weight.



389J2

Hanger complete for Type "B" and 7087 hoistway
hanger with 456CC1 roller and 207Z4 bearing
(acts as roller)

14639 Short St. • Posen, Illinois 60469 U.S.A.


Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

77RK1



Eccentric pin for type 389J2 hanger,
used with a 456 CC1 roller.

288FA1



Arm used on dashpot.

288LV1



Lever for hoistway door emergency
key device.

331AN2



Catch used on electrical box for
6940B lock.



For interlock switch. Switch assembly
complete.

6940AF1

Switch base (2 required)

306JJ1

Formed strip w/silver contact, RH

152BE2


Formed strip w/silver contact, LH

152BE4

140391



Bronze bushing .625 O.D., .312 O/A
length for "L" door lock.



Contact base for "L" & "LA"
door locks.

132037

Contact base with 10-32 thread
for "LA" door lock.

177855




Brass lock shaft bearing 5/8"
hex. 4-1/4" long for "L" door lock.
(Shown).

147451


Brass lock shaft bearing 2-9/16"
hex. for "L" door lock.

141246



156143

Contact bridge assembly, silver contact for
"L" door lock



140233

Silver contact assembly with base for
"L" door lock; 1-1/8" wide.




Contact assembly, keeper OEM
#132027 & silver contact OEM
#14233 for "L" door lock.

143447

Bronze keeper for "L" door lock.

132027



132028

Bronze hook used on "L" door lock.

132033



Hardened steel spring spindle, to disengage OEM #132028.

147976



Contact holder with two silver tipped fingers for "L" door lock.

151076



Contact support assembly with OEM #132037 and two OEM #147976 for "L" door.

156144



Contact holder, with one silver tip finger and one copper finger for "LA" & "L" door locks.



Contact support assembly, with OEM #177855 and two OEM #156144 for "L" door lock.

147986

Contact support assembly, with OEM #132037 and two OEM #156144 for "LA" door lock.

158492



Steel rock shaft, 6-1/2" long for "L" door lock.

132038

Steel rock shaft, 4-9/16" long for "L" door lock.


141245

167594



Terminal block with two copper contacts with silver inlay tips.

327AZ1




Bronze tumbler cam for "L" door lock.

430FA2




Bronze tumbler for "L" door lock.


144404

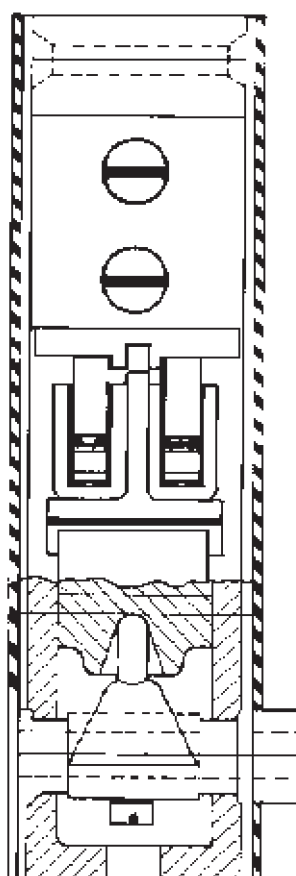

View w/keeper removed for "L" Door Lock.

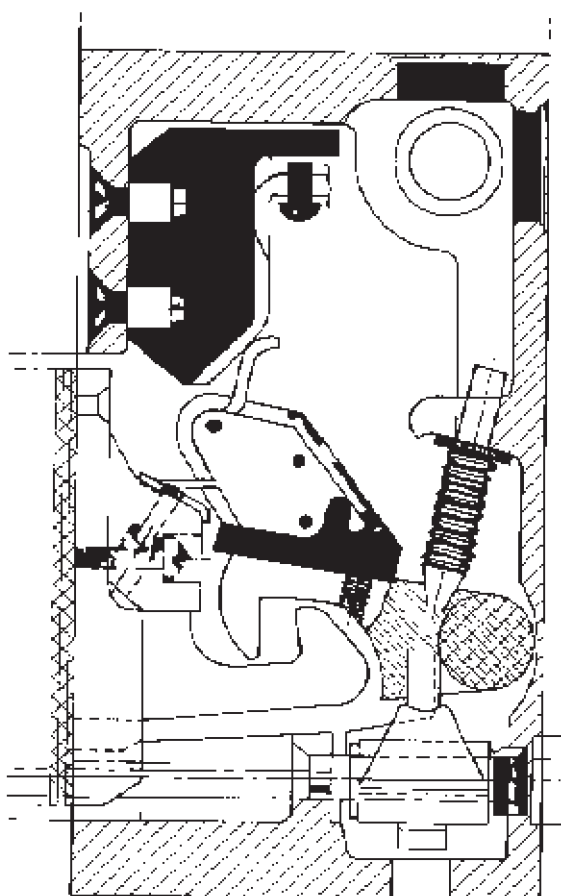


"L" Door Lock

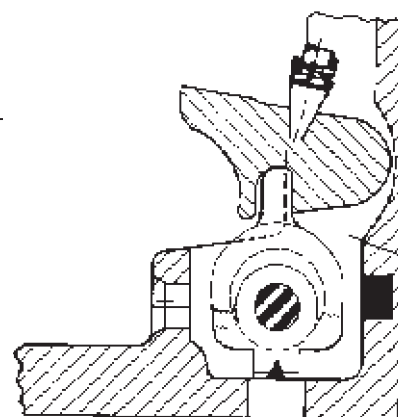

Tumbler Assembly for "L" Door Lock

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



Babbitted bearing for 1A/1B MG,
89F motor. Bore; 2-3/16",
Length; 5-1/4".

**1215MO-1;
210AA1
(supercedes
140694)**

Babbitted bearing for 2A/2B
4AMG, 98G, 112G sets.
Bore; 2-3/8", Length; 6".

**1084MO-1;
210BA1
(supercedes
138109)**

NOTE: Babbitted motor bearings are iron castings
sealed and shipped in oil to protect against rust.



151354, 101319, 132348

Casting; R-2963, bore; 2", length, 5", motor no. 3-1/2, 4,
4-1/2 S

151355, 101322, 132349

Casting; R-3110, bore; 2-1/8", length, 5-3/8", motor no. 5-
1/2S & A-S

151352

Casting; R-5964, bore; 1-7/16", length, 3-1/2", motor no.
1-1/4S, 1-1/2S, 2-1/2 AC

151353

Bore; 1-1-5/8", length, 4", motor no. 2-1/4S, 2-1/2S



151357, 121932, 132347

Casting; R-2671, Bore; 2", length, 5", motor no. 5 & 7-1/2
AC

151358, 121919, 132346

Casting; R-2675, Bore; 2-1/4", length, 5-3/4", motor no. 10,
15, 17 AC

151359, 18742, 122236

Casting; R-2676, Bore; 2-3/4", length, 6-7/8", motor no. 20
to 35 AC

157385

Casting; #3 A.C. motor shaft. Assembly of 18744 sleeve &
ring. Bore; 1.6250", O.D.; 2.4955, width; 4.50 to 3 & 4 AC



Use 3-1/2" flat, bore; 2.000, O.D;
3.250, length; 7.750

101261

Use 5-1/2" & 5-1/2A flat, bore; 2.125,
O.D; 3.250 length; 7.750

101277

Use 4-1/2" flat, bore; 2.000, O.D; 3.250
length; 7.250

101306



Bore size; 2", for motor size; 5S,
D-25, D-35

BB501

Bore size; 2-3/8", for motor size; 7-
1/2 S, 10 S

BB502



Bore size; 1-11/16", for motor
size; 4A, 4D

BB212

Bore size; 1-7/8", for motor size;
5D

BB213



182A2

MACHINE PACKING

182A18



Worm Shaft	Diameter		Packing Length	
	Packing Space			
1-5/16"	2-1/16"	1-3/8"		182A2
1-9/16"	2-9/16"	1-11/16"		182A3
1-7/8"	3-1/8"	2-1/16"		182A4
2-1/8"	3-3/8"	2-5/8"		182A5
2-1/4"	3-1/2"	2"		182A6
1-7/16"	2-7/16"	1"		182A14
1-9/16"	2-9/16"	1-1/4"		182A15
1-7/8"	3"	2-5/8"		182A18

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



Perforated Tape - Perforated selector tape, 1" wide .015" thick **297-B1**


Plain Tape - Unperforated selector tape, 1" wide x .018" **297-B2**

3/4 x .015 Steel Tape - Unperforated selector tape, 3/4" wide x .015" thick. **297-B3**

NOTE: Specify part number and length in feet.



Contact brush assembly with sliver contact and cam. Rocking Contact. **6839AB1**



Brush switch with silver contact (shown). **6839B1**

Brush switch with elkonite cam. **6839B2**


Brush switch with silver contact (longer screws). **6839B3**

Brush switch with fiber cam **6839B4**




Contact brush (incl. 154AD2, AD7 short contact arm) **6839D1, D3**

Contact brush (incl. 154AD4, AD8 long contact arm) **6839D2, D4**

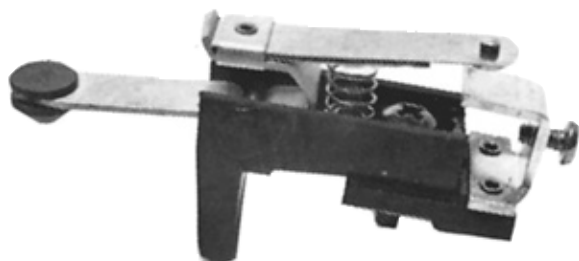

Door zone assembly with 150P37 short cam arm. **A6839E1**

Door zone assembly with 150P41 long cam arm. **A6839E2**

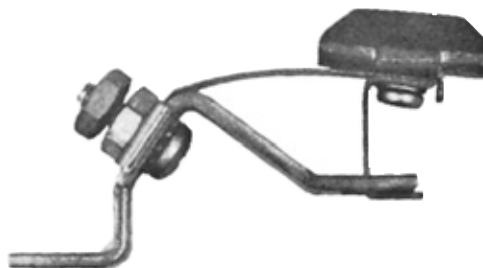

Brush switch with long carbon contact. **A6839F2**

Brush switch with short carbon contact. **A6839F5**




Brush switch assembly with carbon contact.

A6839F3

Brush switch assembly with metallic contact.

A6839F4

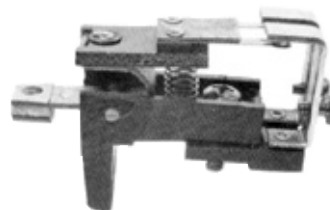

Leveling switch with short cam are 2-1/4"

A6839G1

Leveling switch with long cam are 2-3/4"

A6839G3



6839AA1

6850 selector. Brush assembly.




91AG1

Extension Spring. Free length; 17.50", No. active coils; 115.0; O.D.; 1-1/2; material diam.; 0.1350"



SP0011A


Selector contact, 2-1/2" L; 3/8" x 3/4" contact face with 3/4" radius.

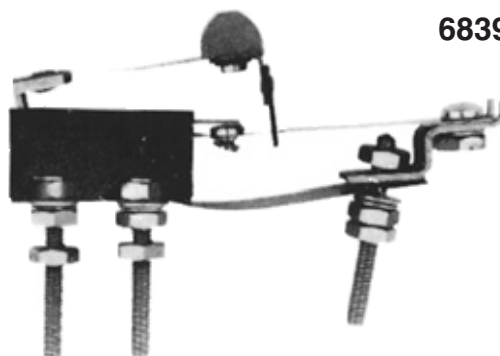

6839H1


Brush switch assembly.

6839J1

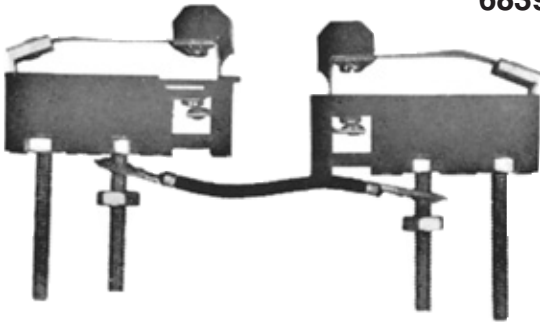


Brush switch. Double unit with fiber cams and connecting shunt.

6839W1

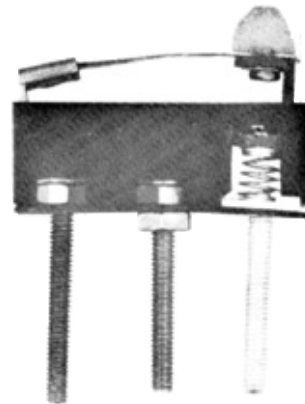


Brush switch assembly.

7042A1

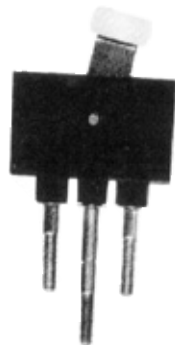

Toggle P.I. switch

177AH1

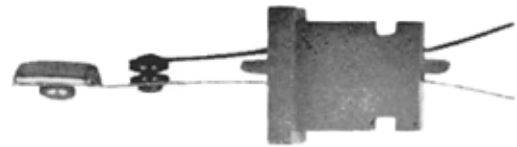

Hook switch.

A6482C2



Brush Plunger.

A151C2



Contact, carbon tip for assembly. Brush, plunger. A6482C2; length; 2-3/4", Number threads; 8-32.

156E3




Contact, copper with top lay silver. For selector floor bars. Length; 1-11/32", Thread; 8-32.

6850F1



Selector contact with 156E3.

156AV2



Contact 1-1/2" long, end of bolt threaded 8-32 and cadmium plated.

Selector contact with 156AV2

6850F2

(6839B1) with hardware.

6850F3



Brush switch for crosshead and advanced panels; includes 7/16"L fiber insulated tip

6839Y1, Y3

Brush switch for crosshead and advancer panels; 7/16" L carbon contact.

6839Y2, Y4



Silver contact with cam

150P43

Silver contact


150P32

Back up blade

93BM

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



Cam assembly

6827C1

Cam (only)

327FT2

Clamp for cam

336CM1


Also used on 327DE2 cam



Selector contact for floor bar ass'y.;
5/16" dia. hex head with 3/16" dia.
silver contact; 2-5/16"L with #10-32
thread.

**150R1,
181874**

327DE2

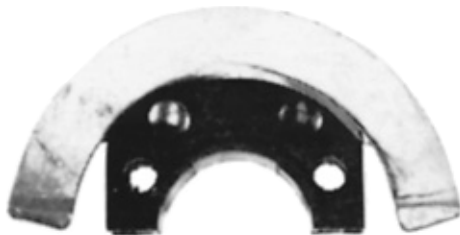

Cam for selector switches, use
336CM1 clamp

156F2



Contact, carbon. For OEM #6104AY
selector crosshead, 3-15/16" long

156G4




Contact, 8x32 threaded stud with a solid
silver "G" contact.

150C10



Selector contact 3/8" hex with 1/4"
dia. silver tip, 1-5/16" long with 8-32
thread

156H1

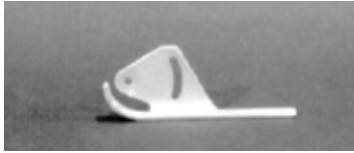

Upper stop control contact arm for 6851B stop control switch.

332AP1



Chain #35, 3/8" pitch nonroller assembled with rods OEM part no. 96R2 and 96R3 at each end. Chain length 28-1/8" (For 30-S operator).

B152H2



Rectangular copper head. 3/8" x 5/8", 2-11/32" long with 10-32 thread 140-M selector.



Contact, 1-1/2" long with 1/4" dia. silver contact for Pawl Magent switch.

150P33

Contact, 1-5/8" long with 1/4" dia. silver contact for Pawl Magnet switch.

150P34



Contact assembly complete with three spring contacts mounted on insulator base for 21-0 car switch.

6266A1

Blue spring tempered steel blade with solid silver contact.

156A6



Contact cam, 7/16" wide. U Form for OEM #6104AY selector floor bars.

156AX2

Same as above, except 5/8" inside width.

156AX4

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



6104 & 6850 selectors. Phenolic floor bar base, 1.870" x 9/16" x 29/64", (3) 0.172" holes with hexagonal counterbores. **306GD1**

6850 Selector. Phenolic floor bar base, 0.620" x 9/16" x 29/64", (1) 0.172" hole with hexagonal counterbore. **306GD2**

6850 Selector. Phenolic floor bar base, 1.240" x 9/16" x 29/64", (2) 0.172" holes with hexagonal counterbore. **306GD3**

6850 Selector. Phenolic floor bar base, 1.246" x 0.562" x 3/4", (3) 0.129" holes. **306GT1**




Brush switch with 5/8" long graphite contact, for 140-M advancer panel. **181893**

Brush switch with 15/16" long graphite contact, for 140-M advancer panel. **181894**


Bracket for selector brush. **181892**

156H2

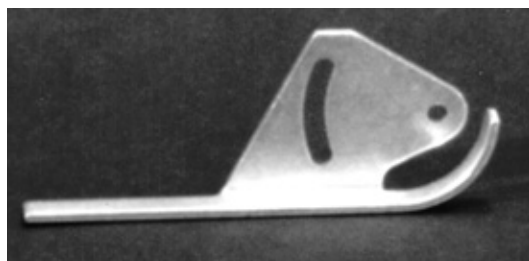

Lower stop control contact arm for 6851B stop switch.

327GS1



Bracket/cam assembly; used at end of crosshead panel.

327GJ1



Toggle cam for advancer panel.



<u>Capacitance</u>	<u>Max Input Voltage (VDC)</u>	<u>Diameter</u>	<u>Resistor On (+) Term</u>	
8	450	1-3/8"	N/A	226C1
125	150	1-3/8"	232AE1	226H3
250	150	1-3/8"	232AE1	226H4
5	150	1-3/8"	N/A	226H5
1600	150	2-1/2"	232AE1	226W2



<u>Mircor-farads</u>	<u>Volts DC</u>		
1.00	500	1-3/8" O.D., paper oil impregnated condenser without resistor	226D1
2.50	200	1-3/8" O.D., paper oil impregnated condenser without resistor.	226D2
1.00	500	1-3/8" O.D., with 232AE1 resistor, paper oil impregnated condenser.	226D3
2.50	200	1-3/8" O.D., with 232AE1 resistor, paper oil impregnated	226D4

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



<u>Mircor- farads</u>	<u>Volts DC</u>		
125.00	150	1-3/8" O.D., polarized, dry electrolytic condenser without resistor.	226H1
250.00	150	1-3/8" O.D., polarized, dry electrolytic condenser without resistor.	226H2
60.00	150	1-3/8" O.D., polarized, dry electrolytic condenser without resistor.	226H7
230.00	200	1-3/8" O.D., polarized, dry electrolytic condenser without resistor	226H9
730.00	150	1-3/8" O.D., polarized, dry electrolytic condenser	226H11
125.00	200	1-3/8" O.D., polarized, dry electrolytic condenser without resistor	226H13
1600.00	150	Polarized, 2-1/2" O.D., dry electrolytic condenser	226W1
1600.00	200	Polarized, 2-1/2" O.D., dry electrolytic condenser	226W3

14639 Short St. • Posen, Illinois 60469 U.S.A.


Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



60 WATT RESISTOR - Lava tube 8" long with adjustable band.


Resistance in Ohms

10	232E121
30	232E125
40	232E126
50	232E127
100	232E129
125	232E130
150	232E131
200	232E133
250	232E134
300	232E135
400	232E137
500	232E138
750	232E140
1000	232E141
2000	232E143
For conductors additional bands	175J60 & 297H2



30 WATT RESISTOR - Encapsulated lava tube with one adjusting band 3" long.

Max Rated current MA	Resistance in Ohms	
2450	5	232B1
775	50	232B7
630	75	232B8
545	100	232B9
435	150	232B10
370	200	232B11
340	250	232B12
290	300	232B13
276	400	232B14
235	500	232B15
195	750	232B16
193	800	232B17
170	1000	232B18
155	1250	232B19
140	1500	232B20
125	2000	232B21




20 WATT RESISTOR - 2" long tube with center tap.

Resistor, max. rated 200 MA; 400 Ohms

232Y25

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

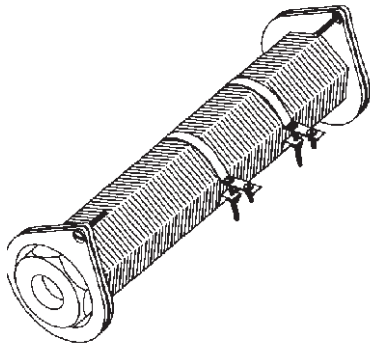


700 WATT RESISTOR - Lava tube 10-1/8" long with adjustable band and conductor.

Resistance in Ohms

1.32	232AA10
1.65	232AA11
2.08	232AA12
2.61	232AA13
3.82	232AA14
4.93	232AA15
6.12	232AA16
9.28	232AA17
14.1	232AA18

For additional bands order (336CCV1).
For conductors order (175AN2).

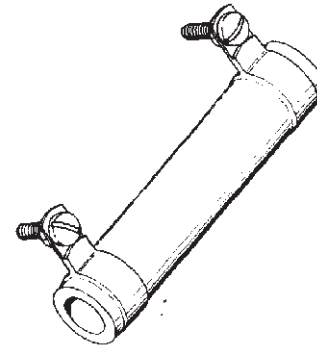

30 WATT RESISTOR - Lava tube 10-1/8" long with adjustable band and conductor.

<u>Max Rated current MA</u>	<u>Resistance in Ohms</u>	
106	2500	232BA23
93	3500	232BA25
76	5000	232BA28
	8000	232BA32
	9000	232BA33
	10000	232BA34

Parts Specialists, Inc. supplies virtually any resistor no matter the wattage or type. Call the specialists at PSI for any part not listed.



<u>Lght.</u>	<u>Size Stud or Hole</u>		<u>Wire Size</u>	
10.00	0.281	0.281	50/30, 13 AWG, tube covers wire	175AN2
6.00	0.265	0.265	26/30, 16 AWG, tube covers wire	175A1
9.00	0.265	0.265	26/30	175A2
11.00	0.265	0.265	16 AWG	175A5
7.25	0.328	0.328	50/30	175A11
10.00	0.265	0.265	50/30	175A14
12.00	0.328	0.328	50/30, 13 AWG	175A17
14.00	0.328	0.328	50/30, 13 AWG	175A19
18.00	0.265	0.328	50/30	175A22
14.50	0.328	0.328	104/30, 10 AWG	175A26
16.00	0.328	0.328	104/30, 10 AWG	175A33
18.00	0.390	0.390	324/30, 5 AWG	175A39
8.00	0.265	0.265	13 AWG	175J25
7.50	0.265	0.265	105-30	175H1



Braided with terminals punched through fabric

<u>Lght.</u>	<u>Hole Sizes</u>	<u>Width</u>		
4-1/2"	9/32"	1/2"	(Pictured on Right)	118
8"	1/2"	1"	(Pictured on Left)	175

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444




Braided Connector

<u>Length</u>	<u>Hole Size</u>	<u>Hole Size</u>	
6.25	0.390	0.390	176KA1
13.50	0.328	0.328	176KA3
7.00	0.265	0.390	176KA4
6.50	0.265	0.265	176KA5
6.50	0.265	0.265	176KA6
9.50	0.265	0.265	176KA8
7.00	0.265	0.265	176KA10
6.37	0.203	0.265	176KA13
6.37	0.328	0.265	176KA14




Single Shunt; terminals at each end; flexible stranded.

<u>Lght.</u>	<u>Size Stud or Hole</u>		<u>Equiv. Gage</u>	
4-3/4"	0.193	0.193	19AWG	175J1
2-1/2"	0.193	0.193	19AWG	175J2
7-1/4"	0.193	0.193	19AWG	175J3
2"	0.193	0.193	19AWG	175J4
3"	0.193	0.193	19AWG	175J5
3-3/4"	0.193	0.193	19AWG	175J6
5-1/4"	0.193	0.193	19AWG	175J8
7"	0.203	0.265	16AWG	175J7
5-3/4"	0.193	0.193	19AWG	175J9
4-1/2"	0.193	0.193	19AWG	175J16
8"	0.265	0.265	13AWG	175J25
9"	0.265	0.328	13AWG	175J27
10-1/2"	0.265	0.328	13AWG	175J29
11"	0.328	0.328	13AWG	175J32
17-1/2"	0.265	0.265	13AWG	175J39
8"	0.193	0.193	16AWG	175J60
16"	0.193	0.203	19AWG	175J77
5-3/4"	0.203	0.203	14AWG	175J80

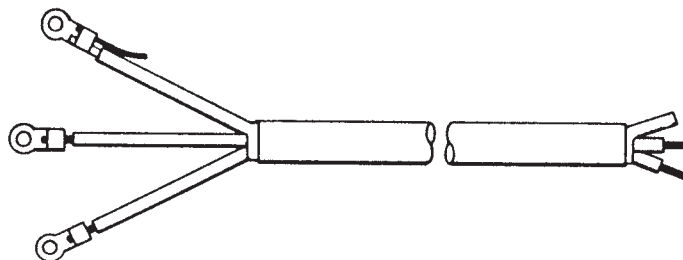

Length

168"	(3) 16 AWG conductors with terminals type S, SU, ST or STO hard service cord	174AA1
168"	(4) 20 AWG conductors with terminals one end, shielded microphone cable	174AB1
25.5"	Electrical cable with (10) conductors and terminals at each end	174AF1
240"	Electrical cable has (2) No. 20 conductors, (1) with a terminal one end, (1) twist shield and terminal and a lead	174AK2
240"	Electrical cable has (4) No. 20 conductors with terminals at one end, twist shield with terminal	174AV1

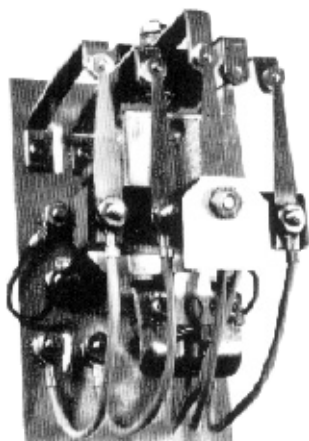

COMPLETE REPLACEMENT A6164 RELAYS

General Purpose, 2 & 3 Lead Coil

	4B	A6164BP104CY1
1M	1B	A6164BP111CY1
1M	3B	A6164BP113CY1
1M	4B	A6164BP114CY1
1M	4B	A6164BP114CY2
2M		A6164BP120CY1
2M	2B	A6164BP122CY1
2M	3B	A6164BP123CY2
3M	1B	A6164BP131CY1
3M	2B	A6164BP132CX1
3M	2B	A6164BP132CY10
3M	2B	A6164BP132CY2
3M	2B	A6164BP132CY1
4M		A6164BP140CY1
4M	1B	A6164BP141CX1
5M		A6164BP150CY1
5M		A6164BP150CY2

General Purpose, 4 Lead Coil

2M	3B	623CZ5
4M	1B	641CZ1

Self-Holding, 3 Lead Coil

2M		320CX1
2M	3B	323CX1
3M	2B	332CX1
4M		340CX1
4M	1B	341CX1

Self-Holding, 4 Lead Coil

3M	2B	732CZ1
4M	1B	741CZ1



6164BP RELAYS (2-lead coils)

<u>Turns</u> <u>wire size</u>	<u>Res. In</u> <u>OHMS</u>		<u>Turns</u> <u>wire size</u>	<u>Res. In</u> <u>OHMS</u>	
15310-39	3384	222CY1	5544-38	870	222CY7
10664-37	1488	222CY2	430-23	2.2	222CY8
3396-33	213	222CY3	2368-33	116	222CY9
1872-30	48.7	222CY4	5576-34	386	222CY10
884-26	9.3	222CY5	8352-37	1110	222CY11
94-18E	.1	222CY6			

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

6164BP RELAY 3-lead coils



Description

**Res. In
OHMS**

15320-39; Tap at 14800	3.233	222CX1
15320-239; Tap at 8980	1.753	222CX2

6164BP RELAY 4-lead coils

Description

**Res. In
OHMS**

15320-39; Tap at 14800	3.233	222CZ3
15320-39; Tap at 8980	3402	222CZ1
10490-37; Tap 7560	1477	222CZ2
8120-37	1075	222CZ4
10200-37; Tap 5100	1455	222CZ5
222-21	.73	222CZ6



(Left: 22F14, Right: 222G19)

6163 DC MAGNET SWITCHES

9905-33; 745 OHM	222F14
12785-34; 1210 OHM	222F15

E6830 DC MAGNET SWITCHES

Description

**Res. In
OHMS**

1930-27	34.5	222G17
2480-28	55.0	222G19
2770-28	65.2	222G20

USED ON 6164 SWITCH



<u>Description</u>	<u>Res. In OHMS</u>	
272-21	854	222W2
342-22	1.352	222W3
474-23	2.36	222W4
583-24	3.66	222W5
702-25	5.56	222W6
920-26	9.2	222W7
1090-27	13.74	222W8
1446-28	23.00	222W9
1785-29	35.8	222W10
2188-30	55.4	222W11
2806-31	89.50	222W12
3367-32	135.2	222W13
4120-33	209.3	222W14
5265-34	336.5	222W15
6685-35	539	222W16
8140-36	826	222W17
10.355-37	1329	222W18
12830-38	2070	222W19
16320-39	3325	222W20
19710-40	5065	222W21

USED ON E6754 SWITCH

Two Lead Coils



<u>Description</u>	<u>Res. In OHMS</u>	
12890-36	1860	222EB1
10818-35	1230	222EB2
8820-34	800	222EB3
6864-33	495	222EB4
5546-32	316	222EB5
4301-31	201	222EB6

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444




USED ON 6830 SWITCH

<u>Description</u>	<u>Res. In OHMS</u>	
13725-34	1410	222CV1
5670-30	231	222CV2
11020-33	900	222CV3
7300-31	375	222CV4
11020-33	900	222CV5
7300-31	375	222CV6
17200-35	2230	222CV7
4760-29	155	222CV8



USED ON 6164 SWITCH

<u>Description</u>	<u>Res. In OHMS</u>	
1335-37; Tap 8090	948	222Z1
8115-36; Tap 7410	715	222Z3
6360-35; Tap 6065	491	222Z4
12750-38; Tap 11960	1880	222Z5
10515-37; Tap 10165	1270	222Z8

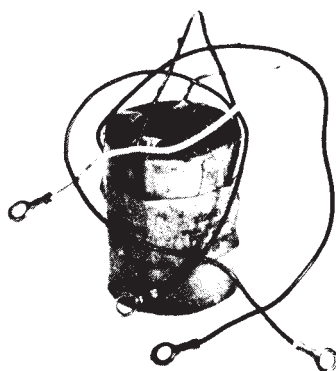

USED ON 6850 PAWL SWITCH

<u>Description</u>	<u>Res. In. OHMS</u>	
(Inner) 7660-32	477	222DE1
(Outer) 1350-32	108	



USED ON 6754 A&B SWITCHES

Two Terminal Leads

<u>Description</u>	<u>Res. In OHMS</u>	
13025-36	1690	222CD1
10825-35	1118	222CD2
4870-32	241.5	222CD3
7000-33	455	222CD4
3675-30	119	222CD5



USED ON 6164 SWITCH

<u>Description</u>	<u>Res. In OHMS</u>	
4830-34; Tap 4100	238	222T4
11875-38; Tap 10025	1480	222T5
12037-38; Tap 5775	754	222T8



PHASE SPLITTING COILS


Description

#14GA Brass 1-1/16" wide x 2-7/16" long; for 0-D-6 A&C switches

138142

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



USED ON 6754 SWITCH

Blowout Coils

<u>Turns</u>	<u>Wire Gauge</u>	<u>Ohms</u>	<u>Description</u>	
55	30	0.04	6754 Magnet Switch, 2.0 O.D., 3/8" wide cooper strip, rating = 15-19 Amps, contact side 5-6; hand: as shown.	A222DB1
55	30	0.04	6754 Magnet Switch, 2.0 O.D., 3/8" wide cooper strip, rating = 15-19 Amps, contact side 1-2; hand: opposite.	A222DB2
45	28	0.03	6754 Magnet Switch, 2.0 O.D., 3/8" wide cooper strip, rating = 20-24 Amps, contact side 5-6; hand: as shown.	A222DB3
45	28	0.03	6754 Magnet Switch, 2.0 O.D., 3/8" wide cooper strip, rating = 20-24 Amps, contact side 1-2; hand: opposite.	A222DB4
36	26	0.02	6754 Magnet Switch, 2.0 O.D., 3/8" wide cooper strip, rating = 25-30 Amps, contact side 1-2; hand: as shown.	A222DB5
36	26	0.02	6754 Magnet Switch, 2.0 O.D., 3/8" wide cooper strip, rating = 25-30 Amps, contact side 1-2; hand: opposite.	A222DB6

USED ON 6754 SWITCH

49	24	0.03	6163 Magnet Switch, 3.0 O.D., 3/8" wide cooper strip, hand: as shown.	A222Y1
49	24	0.03	6163 Magnet Switch, 3.0 O.D., 3/8" wide cooper strip, hand: opposite.	A222Y2
33-1/2	20	0.03	6163 Magnet Switch, 3.0 O.D., 3/8" wide cooper strip, hand: as shown.	A222Y3
33-1/2	20	0.03	6163 Magnet Switch, 3.0 O.D., 3/8" wide cooper strip, hand: opposite.	A222Y4
40	22	0.02	6163 Magnet Switch, 3.0 O.D., 3/8" wide cooper strip, hand: as shown.	A222Y5
40	22	0.02	6163 Magnet Switch, 3.0 O.D., 3/8" wide cooper strip, hand: opposite.	A222Y6

TYPE A6164BP MAGNET SWITCHES


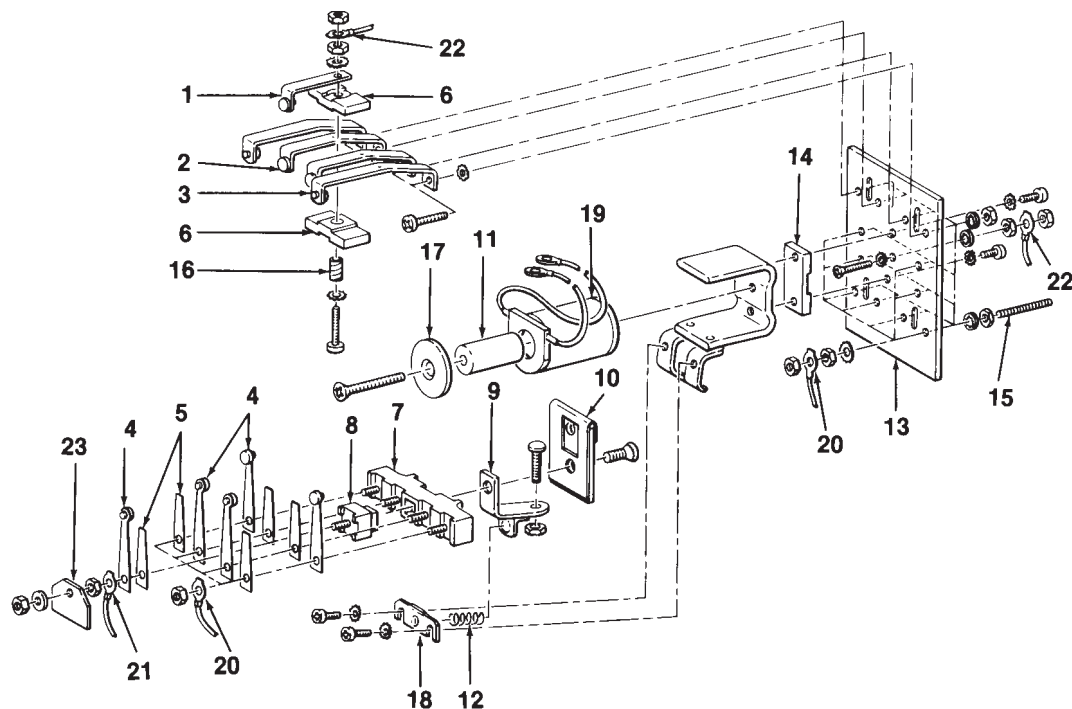


Fig No.	Description		Fig No.	Description	
1	Contact, stationary	150P25	12	Spring	90TA6
2	Contact, stationary	150P26	13	Panel	433AG1
3	Contact, stationary	150P27	14	Strip	298BV1
4	Contact, movable	150P4	15	Stud	99G1
5	Spring, Flat	93D2	16	Tube	137E5
6	Base, contact	306CN1	17	Washer, magnet core	131BH1
7	Base, contact	306CZ1	18	Stop	A477BJ1
8	Base, contact	306EF1	19	Coil	VARIOUS
9	Stop	A477BH1	20	Shunt	175J89
10	Armature	245Z2	21	Shunt	175J90
	Armature	245Z1	22	Shunt	175J6
11	Core, Magnetic	400AY1	23	Identification Tag	102DA1
	Core, Magnetic with groove	400AY2		Pin	A79AN1



Steel "L" contact w/1/4"-dia. silver tip. 1-3/4"L x 5/8"	150P25
Making contact w/1/4"-dia. silver tip. 2-5/8" L	150P26
Breaking contact w 1/4" -dia. silver tip. 3-3/32" L	150P27

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

USED ON A6164BP SWITCH



150P4

Contact, movable with 1/4" dia.
silver tip 2-1/8" L.

150P4




93D2

Spring flat, 1-5/8" long x 5/16" W

93D2



245Z1

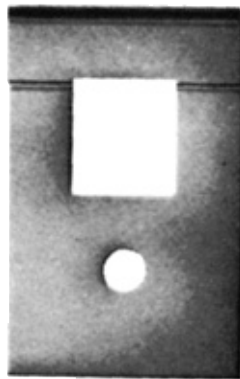

384FN1

Armature

245Z1


Guard, brass

384FN1

USED ON A6164BP SWITCH



245Z2

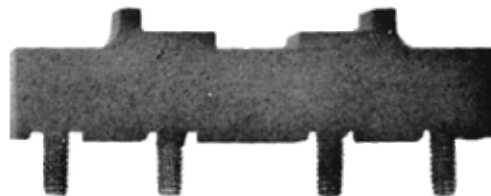

306CZ1



306CN1



306EF1

Armature w/A477BH1 stop
Base, movable contact
Base, movable contact
Base, stationary contact
Base, movable contact, two studs
Stud (Not shown)



306CY1

245Z2

306CZ1

306EF1

306CN1

306CZ1

99G1

USED ON A6164BP SWITCH




Brass phenolic shim for
magnetic switch

129BR1

PSI stocks a full range of Otis A6164BP Replacement Relays. Relays are shipped complete with coil as specified. When ordering, please give number of making and breaking contacts and coil part number.

TYPE E6830A SWITCH

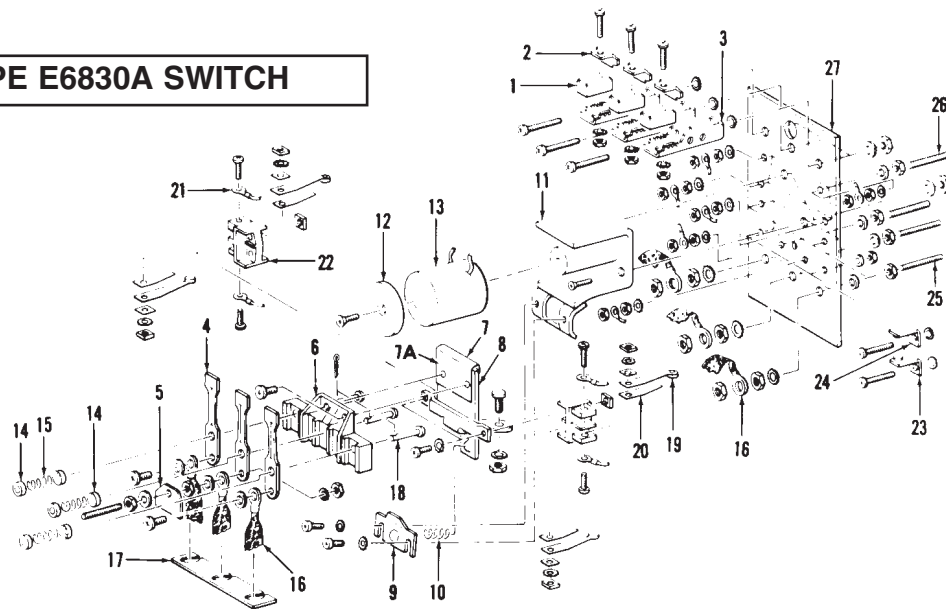

**Fig
No.**

Description

- | | | |
|----|----------------------------------|----------------|
| 1 | Carbon contact 5/8" sq x 1-1/32" | 154C1 |
| 1 | Metal Graphite Contact | 154C2 |
| 2 | Retaining Clamp for Carbon | A336Z1 |
| 3 | Carbon Holder | 179P3 |
| 4 | Copper Contact | 153B1 |
| 5 | Tag | 102DA1 |
| 6 | Base for 3 Contacts | 306CL1 |
| 7 | Brass Guard | 384FX1 |
| 7A | Phenolic Guard | 384EW1 |
| 8 | Armature | A245AA1 |
| 9 | Stop | A477BP1 |
| 10 | Spring | 90BB8 |
| 11 | Frame & Core | A374FM2 |
| 12 | Core Washer | 131BD1 |

**Fig
No.**

Description

- | | | |
|----|------------------------|----------------|
| 13 | Coil | VARIOUS |
| 14 | Washer | 133A1 |
| 15 | Spring | 90DB4 |
| 16 | Braided Shunt | 176KA10 |
| 17 | Separator | 464BJ3 |
| 18 | Rivet | 141Y2 |
| 19 | Contact, Movable | 93A2 |
| 20 | Flat Spring | 93AD1 |
| 21 | Silicone Covered Shunt | 175J150 |
| 22 | Base for Aux Contacts | 306CJ1 |
| 23 | Stationary Contacts | 150C13 |
| 24 | Stationary Contacts | 150C14 |
| 25 | Stud, 1-3/8" Long | 99G1 |
| 26 | Stud, 2" long | 99G2 |
| 27 | Panel | 433AB1 |

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

USED ON E6830 SWITCH MOVABLE CONTACTS



Contact, copper straight - 4-3/16" long.

153B1



Contact, copper with 1/2" dia. silver tip,
3/32" offset - 4 3/16" long.

150AK2



Contact, copper with 3/8" dia. silver tip,
straight - 4 3/16" long.

150Y2

Contact, copper with 1/2" sq. silver tip,
straight - 4 3/16" long.


153AG6

179P3



Carbon holder with mounting screw.

A336Z1



Carbon clamp for 179P3.

306CL 2/1



Bakelite base, 1" x 9/16" x 4 1/16" long.

141Y2



Rivet, 1 1/8" Long.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

384EW1



Fiber guard for 6830 mag switch

154C2




Graphite contact 6830 relay, width 5/8" x 5/8" x 1".

A245AA1




Magnet armature

93AD1




Flat spring

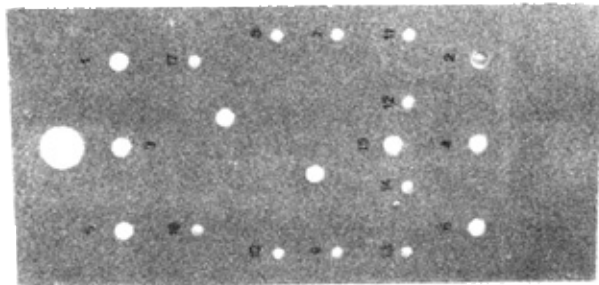

Switch panel
9-15/16" H x 5" W

433AB1

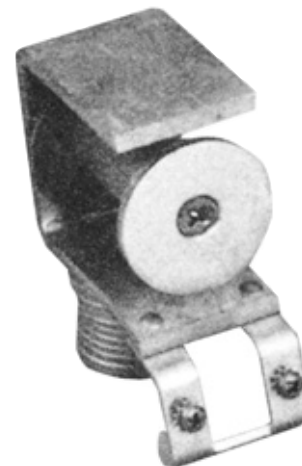


Magnetic frame w/core

A374FM2

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

TYPE E6754C SWITCH

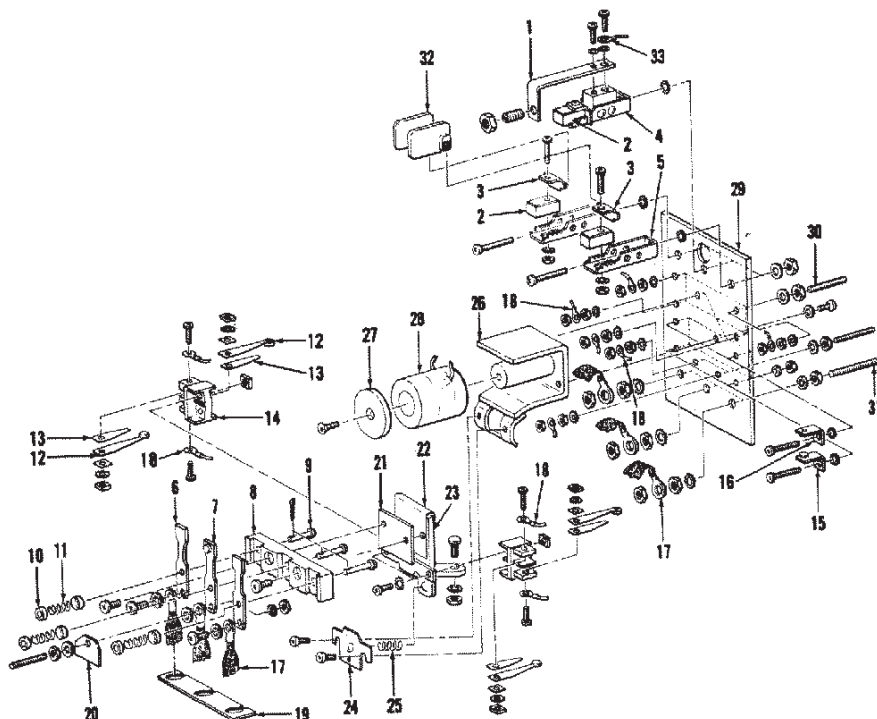

Fig

No. Description

1	Holder for threaded contact	179AM1
2	Carbon cont. 7/16" sq x 29/32"	154AB1
2	Same in carbon graphite	154AB2
3	Retaining Clamp for Carbon	A336BR1
4	Carbon Holder w/Fiber insert	A179AK5
5	Carbon Holder	A179AK3
6	Copper contact, offset	153Z4
7	Same w/ 3/8" dia silver tip	150Y7
8	Base for 3 non-offset contacts	306BR1
8	Base for 3 offset contacts	306BR2
9	Rivet	141Y1
10	Washer	133A6
11	Compression Spring	90TA6
12	Contact	150P4
13	Spring	93D2
14	Base for Aux. Contacts	306CJ1
15	Stationary Contact	150C13
16	Stationary Contact	150C14
17	Braided shunt	176KA13
18	Silicone covered shunt	175J88

Fig

No. Description

19	Seperator	464BJ2
20	Tag	102DA1
21	Guard 6754, Phenolic	384EW3
21	Guard for E6754	384EW2
22	Brass Guard 6754 Switch	384FS1
22	Same for E6754	A384FS1
23	Magnet Armature for 6754	A245AE1
23	Same for E6754	B245AE1
24	Stop	A477BL1
25	Spring	90VA15
26	Magnet Frame & Core 6754	A374CP1
26	Same for E6754	B374CP1
27	Washer	131AY1
28	Coil	VARIOUS
29	Relay Mounting Panel	A433Z1
30	Stud, 1-3/8" Long	99G1
31	Stud, 2" Long	99G2
32	ARC Barrier	276H1
33	Shunt	175J204

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

USED ON 6754 SWITCH



Contact, copper with coin-groove on opposite side, of 3/8" dia. silver tip 2-3/4" long.

150Y4



Contact, same as part 150Y4 except 5/64" offset.

150Y6



Contact, same as part 150Y8 except 5/64" offset.

150Y7



Contact, copper with coin-groove on opposite side of silver tip.

150Y8



Contact, copper without offset, with coin-groove, 2-3/4" long.

153Z1



Contact, copper 2-3/4" long with 5/64" offset.

153Z4

Contact, copper with 15/16" square silver tip, offset 2-3/4" long.

153AG5

USED ON 6754 SWITCH



Copper contact with 1/2" dia. silver face; 5/8" x 5/8" x 1" long.

150AK3




Copper contact with 3/8" dia. silver tip; 7/16" sq x 13/16" long.

150AL3



Threaded contact with silver tip, 3/8" dia. x 24 threads, 13/16" long.

150W6

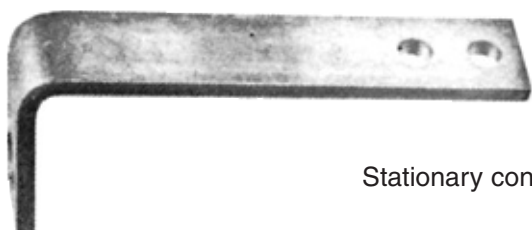

Stationary contact holder for 150W6.

179AM1

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

AUXILIARY CONTACTS FOR 6754 SWITCHES



6810A1



6810A3



150C13



150C14

Contact assembly complete without coil spring.

Contact assembly complete with coil spring.

6810A1

6810A3

AUXILIARY CONTACTS FOR 6830 & 6744 SWITCHES

Contact assembly complete without coil spring, used on 6830 and 6744.

Contact assembly complete with coil spring (not for 6744 switch)

Contact, stationary.

Contact, stationary.

6810A2

6810A5

150C13

150C14

6164 RELAY CONTACTS



150P7



150P7



93A2



150P13



150P14

Contact arm with 1/4" dia. silver contact; 2-1/4" long.

Contact arm with 1/4" dia. silver contact; 3-1/64" long.

Contact arm with 1/4" dia. silver contact; 2-3/4" long.

Contact arm with 1/4" dia. silver contact; 3-19/32" long.

Movable auxiliary contact arm

Contact backing spring.

150P7

150P8

150P13

150P14

93A2

93AD1

153H1



Silver contact; 4-1/2" long.

154AB2



Graphite contact with 5/32" mounting hole;
7/16" x 7/16" x 29/32"



Contact
Phenolic Guard
Brass Guard
Brass Guard

384AR1
384EW2
384FS1
384FX1

SA-18



Spring adjuster, offset with .018" (.457mm)
lengthwise slots.

SA-32



Spring adjuster, offset with .032" (.812mm)
lengthwise slots.

N-415B




Contact spring adjusting tool. Intended for
use in the maintenance of horizontal type
relays in step-by-step dial telephone systems.
.020" (.508mm) slots.

153AG7



Movable contact arm, 5-1/2" long; w/1" x 1" silver tip; used on 6744 A&B Magnet Switch

150HA3

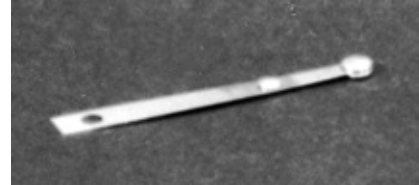

Leaf spring contact with 1/4" dia. 2-sided silver contact and 1/8" dia. contact on 1 side 15/16" from tip; 2-3/4".

6534B1



Arc deflector, complete

133A6



Spring seat washer.

276B1




Arc barrier

153AE10




SIDE A: 3/8" dia. silver; SIDE B: 7/16" square silver.

153AE1

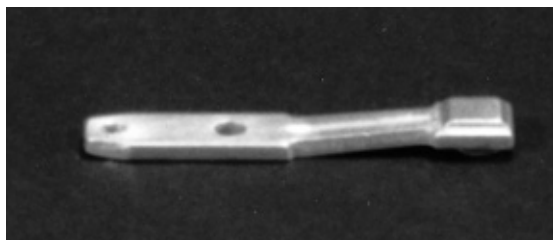

SIDE A: 3/8" dia. silver; SIDE B: 7/16" square silver with 3/32" offset.

150H4



Stationary contact, with double sided 1/4" dia. silver contact used on 6098 switch.

153W1



2-23/32" long copper contact for 6744 switch, with a 1" silver toplay.

150H6



Double blade contact 5/16" x 2-13/16" with double 1/4" dia. silver contact used on a 6401 throw-over switch.

153Y1



3-7/8" long copper contact for 6744 switch, with a 3/4" silver toplay.

150C7



Contact 1/4" hex, 3-1/4" long with 1/4" silver contact tip.



154C1



154AB1

Contact, carbon 5/8" x 5/8" x 1-1/32" with 3/16" dia. mounting hole used in 6830 switch.

154C1

Contact, carbon, intermediate 7/16" sq. x 29/32" long used on 6754 switch.

154AB1



150C2



150C3

5/16" dia. hex contact with silver contact; 3/4" long.

150C2

5/16" dia. hex contact with silver contact; 1-1/8" long.

150C3



153T1



154AA1

Movable contact, copper, 5-1/2" long used on 6744A switch

153T1

Contact, carbon 1" sq x 1-7/32" long used on 6744A switch.

154AA1



153D1




154G1

Contact, copper 6-9/16" long used on 6520 switch.

153D1

Contact, carbon 1-1/4" sq. x 1- 1/2" long used on 6520 switch.

154G1



276H1



464BJ2



306BR2

6754 SWITCH COMPONENTS

Arc barrier.

276H1

Fiber separator 3-1/8" x 5/8"

464BJ2

Red phenolic base, contact for copper contacts, 3-1/8" long.

306BR2

USED ON A6161BP411 RELAY



Movable contact with 1/4" double silver tip; 1-5/8" long x 7/16" wide; used on A6164 definite voltage switch.

150H10

Contact with brass body and silver alloy tip, 0.843 long, threaded 8-32.

150AY1

Holder, contact for part number 150AY1, 2" long.

179AR1

Holder, contact for part number 150AY1, 2-3/4" long.

179AR2

SPECIAL VALUE RELAY KITS

RP-KIT-01

To repair A6164BP Relay

200 pieces	150P4
100 pieces	93D2

RP-KIT-02

To repair A6164BP Relay

100 pieces	150P26
100 pieces	150P27
25 pieces	150P25
10 pieces	306CN1

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

RP-KIT-03



153Z1

To repair 6754 switches

100 pieces; copper contact	153Z1
100 pieces; carbon contact	154AB1

RP-KIT-04



153B1

To repair 6830 switches

100 pieces	153B1
100 pieces	154C1

RP-KIT-05



150Y4

To repair 6754 switches

Any 100 piece combination of 150Y4
150Y6 150Y7 150Y8 150AL3

RP-KIT-07



150AK2

To repair 6830 switch

50 pieces	150AK2
50 pieces	150AK3

RP-KIT-06

To repair A6164BP Relay

1 piece	(245Z2)	2 pieces	(175J90)
2 pieces	(384FN1)	10 pieces	(175J89)
5 pieces	(150P25)	2 pieces	(175J6)
12 pieces	(150P26)	6 pieces	(102DA1)
12 pieces	(150P27)	1 piece	(90TA6)
36 pieces	(150P4)	1 piece	(90VA16)
36 pieces	(93D2)	5 pieces	(99G1)
15 pieces		8 x 32 hex nut	




<u>Carbon</u>	<u>Insulator</u>	<u>Spring</u>	<u>Nut</u>	<u>Carbon Holder</u>	<u>Distance Piece</u>	
1194	18038, 10758	90MB4				1555
1203	13416	90MB4	68A3	108713	126229	13234
1194	13416	90MB4	68A3			13417



<u>Carbon Diameter</u>	<u>Stem</u>	
1 1/2"	1-1/2" x 3/8"	214SW11
1 1/2"	1-1/2" x 1/2"	158446
1 3/4"	1-1/2" x 1/2"	109578
2"	1-3/4" x 1/2"	108713
2 1/2"	1-7/8" x 5/8"	107430




<u>Carbon Diameter</u>	<u>Stem</u>	
1/2"	1-1/4" x 1/4"	106671
1/2"	1-9/16" x 1/4"	179C1
5/8"	2-5/8" X 1/4"	127686
5/8"	1-1/4" X 1/4"	141436
3/4"	1-9/16" X 3/8"	118348
3/4"	1-7/8" X 3/8"	108492
3/4"	2" X 1/4"	121787
3/4"	2-1/8" X 3/8"	107075
1"	1-1/4" X 3/8"	126223
1"	4-7/8" X 3/8"	106182
1"	2" X 3/8"	121891
1"	1-5/8" X 3/8"	121014



<u>Head</u>	<u>Stem</u>	<u>Thread</u>	
5/8" x 3/16"	1-1/2" x 5/16"	3/4" x 1/4"	106578
5/8" x 3/8"	3" x 3/8"	1-1/12" x 3/8"	1482
3/4" x 1/4"	1" x 1/4"	3/4" x 1/4"	1489
7/8" x 1/4"	2-5/16" x 7/16"	1" x 5/16"	1189
7/8" x 3/8"	1-5/16" x 7/16"	1" x 7/16"	1533
1" x 1/4"	1-3/4" x 3/8"	1" x 3/8"	130190
1" x 1/4"	2-5/8" x 3/8"	1-1/8" x 3/8"	1539
1" x 1/4"	3-3/4" x 3/8"	1-1/2" x 3/8"	1541
1-1/8" x 1/4"	2-7/16" x 7/16"	1-1/8" x 5/16"	1191
1-1/8" x 1/4"	2-1/8" x 7/16"	1-1/8" x 5/16"	114228
1-3/4" x 3/8"	2-3/8" x 7/16"	1" x 5/16"	106569
2" x 3/8"	2-7/8" x 1/2"	1-3/16" x 3/8"	13417
2" x 3/8"	3-1/4" x 5/8"	1-3/8" x 1/2"	1555
2" x 3/8"	2-7/8" x 1/2"	2" x 1/2"	1554
2-1/2" x 3/8"	2-13/16" x 5/8"	1-1/4" x 1/2"	1561
2-1/4" x 3/8"	2-7/8" x 1/2"	1-1/8" x 3/8"	13234
2-1/2" x 3/8"	2-7/8" x 5/8"	1" x 1/2"	
2-1/2" x 3/8"	3-1/4" x 5/8"	1-3/8" x 1/2"	1559
2-1/2" x 3/8"	2-3/4" x 1/2"	2-1/4" x 1/2"	1560
5/8" x 1/8"	1/2" x 7/32"	1/2" x 7/32"	103994
3/4" x 3/16"	1-1/8" x 3/8"	1-1/8" x 3/8"	1493
2-1/2" x 3/8"	1-3/4" x 1/2"	1-7/16" x 1/2"	1558



Top 1" x 1-1/4"; bottom 1-1/4" x 1-3/16" height 3/4"	1042
Top 1-1/2" x 1-1/2", bottom 1-1/2" x 1-7/8", height 1"	1073
Top 2" x 2", bottom 2" x 2-1/4", height 1"	1088
Top 1-1/2" x 1-1/8", bottom 1-1/8" x 1-7/8", height 1"	137726



Top 1-1/2" x 2"; bottom 2" x 2" height 2"

1077



Top 3/4" x 1-1/4"; bottom 1-3/8" x 1-1/4" height 3/4"



1039

Top 1" X 1", bottom 1" x 1-1/4", height 3/4"

1046

Top 1-1/2" x 1-1/2", bottom 1-1/2" x 2", height 1"

1072



Head

1-1/4" x 1" x 3/8"
1-1/4" x 1-1/2" x 3/8"
1-1/2" x 1-1/2" x 3/8"
2" x 1-1/2" x 3/8"
2" x 1" x 3/8"
1-5/8" x 1-1/2" x 5/15"
2-1/4" x 2" x 3/8"

Stem

1-3/4" x 3/8"
1-3/4" x 1/2"
2-5/8" x 1/2"
2-5/8" x 1/2"
2" x 1/2"
1-5/16" x 3/8"
2-1/2" x 1/2"

Thread

1-3/8" x 3/8"
1-1/4" x 1/2"
2-1/8" x 1/2"
2-1/8" x 1/2"
1-3/8" x 1/2"
1-1/2" x 3/8"
1-7/8" x 1/2"

1351

1371

14452

1387


1436

1373


122064

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



3/8" x 5/16"	174101
3/8" x 9/16"	1198
1/2" x 1/2"	1197
1/2" x 1"	1129
5/8" x 1/2"	103921
3/4" x 3/4"	121992
3/4" x 7/8"	1144
1" x 3/4"	114255
1" x 1"	1168
1" x 1-3/16"	1173
1-1/2" x 3/4"	1207
1-3/4" x 1-3/8"	1194
2" x 1-1/16"	1203



1-3/4" dia. x 1" long with 1/2" stem **169941**




31/32" dia. x 1-1/12" long **1176**

(Also available in these sizes)

5/8" dia. x 1-1/2" long

3/4" dia. x 1-1/2" long

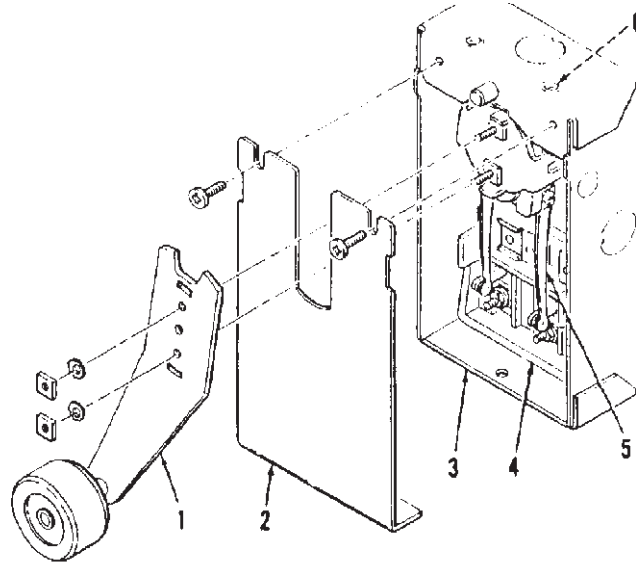

**A6098B3 LIMIT SWITCH - Single Pole,
Single Throw - Breaking as shown.**

**Fig
No.**

Description

- | | | |
|---|---|-----------------|
| 1 | Arm with roller | 287F2 |
| 2 | Cover | A346MB4 |
| 3 | Contact box complete with lever, contacts and bases | 6151B2 |
| 4 | Contact base with stationary contacts | A306G6 |
| 5 | Movable contacts (two used) | 93A2 |
| 6 | Spring, returning (not shown) | 90YA18 |
| | Switch complete as shown. | A6098B3 |
| | Switch complete assembled with arm 287F6 - Opposite | A6098B11 |

A6098B TYPE SWITCHES - Double Pole-Making


Description

- | | |
|--------------------------|-----------------|
| Switch complete as shown | A6098B5 |
| Switch complete Opposite | A6098B13 |



A6098A1

Floor Stop Switch; single pole double throw with auxiliary contacts.



6098E MECHANICAL SWITCH GATE SWITCH TYPE

<u>Circuit</u>	<u>Hand</u>	
SPM	As shown	6098E1
SPM	Opposite	6098E10
DPM	As shown	6098E11
DPM	Opposite	6098E12
SPM	Opposite	6098E2
DPM	As shown	6098E5
DPM	Opposite	6098E6
SPM	As shown	6098E9



6098D MECHANICAL SWITCH TRIPPER SWITCH TYPE

<u>Circuit</u>	<u>Hand</u>	
SPB	As shown	6098D1
SPB	Opposite	6098D3
DPB	Opposite	6098D5
DPB	As shown	6098D6



Limit switch arm with pin and roller.

287F4



Spring steel contact 2-3/4" long with 1/4" double silver tip used on 6098 mechanical switch & throw-over switch.

150H2

Stationary contact used with 150H2 (no picture)

150H4



SPDT, right hand arm

287F2A

Arm with pin and roller, right hand

287F6



SPDT, left hand arm

287F6A

Arm with pin and roller, left hand


287F8

PUSH BUTTON SWITCHES




Switch, single (make) contact
Switch, single (make-break) contact

7035A9, A2
7035A8



Switch, Double (make) contact
Switch, Double (make-break) contact

7035A11
7035A10



7035A12

Switch, (make-break) contact, with black button 3/4" dia. x 3/4" long



7035A14

Switch, single (make-break) contact with black button 3/4" dia. x 3/8" long



7035A25

Switch, single (break) contact



7035A28

Switch, single (make) contact with lamp assembly

6526A1




Pushbutton contact assembly with single make contact

VP728210



Vandal resistant button; machined to a bullet shape out of aluminum rod stock; for installations requiring vandal-resistant pushbuttons; can be substituted for A323 series buttons

323BP1

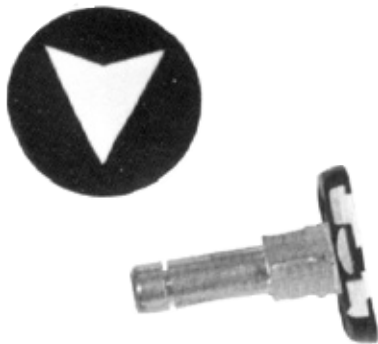

Push button, manufactured through a two color injection molding process, resulting in a clear and sharp character for the life of the button. 7/8" round black button, white molded markings with a 15/16" long steel stem.

Markings available numbers 1-60. A, Alarm, Arrow, B, Bell, Blank, BR, B1-B5, C, Door Close, D, Door Open, Door Reset, E, Emergency Call, F - G, Garage, Ground, H, Hold Door, I - L, Lower, Lobby, M, Main Floor, Mezzanine, N, Non Stop, O, P, Plaza, P1-P4, R, RDC, RDO, RT, S, SB, Street, U, and UL.

(SPECIFY MARKING)



Figure 1



Figure 2

1-9/16" square jewel with a 1-1/8" square insert face white plexiglas with black hot stamp characters (fig. 1).

499AD1

Markings available: Numbers 1-99, A-H, J, L, M, P, R, S, T, LL, U, Alarm, Emergency, Close Door, Priority, RSB, Emergency Call, Emergency Power, Main Lobby, Plaza, Credit Dept, Reve, Down, Start, Stop, Door, Lobby, RDC, RDO, Non Stop, FLC, FDC, Open Door, Reset Door and Basement.

Same as above, except Arrow Only

499AD3

1-9/16" square jewel with 1" round insert face, white plexiglas with black hot stamp characters. Markings available as above (fig. 2)

499AE1

Same as above, except Arrow Only

499AE3

(SPECIFY MARKING)



Figure 1



Figure 2



Figure 3




Figure 4

Push button manufactured through a two color injection molding process, resulting in a clear and sharp character for the life of the button 7/8" square black button, white molded markings with 5/16" brass conductor stem (fig. 1).

323AS2

Markings available numbers 1-60, A-G, L, LL, BR, GR, B1-B5, P1-P4, R, RDC, RDO, RT, S, SB, T, U, UL, Door Close, Emergency Call, Hold Door, Lobby, Mezz., Door Open, Alarm Bell, Plaza, Blank and Arrow.

Button, manufactured with an Aluminum Cast Arrow only, 7/8" square button (not shown).

323BH2

Push button manufactured through a two color injection molding process, resulting in a clear and sharp character for the life of the button, 7/8" round black button, white molded markings with 5/16" brass conductor stem (fig. 2). Markings available same as above.

323BL2

Button, manufactured with an Aluminum Cast Arrow only, 7/8" round black button (fig. 3).
(SPECIFY MARKINGS)

323BM2



Figure 1




Figure 2

1" diameter black lexan button with hot stamped markings. Replaces OEM numbers 323BD, 323AF, A323AF, 323AM and 323AP (fig. 1)

A323BD1

Markings Available number 1-99, A-H, J, L, M, R, S, P, T, LL, U, Plaza, Emergency, Close Door, Priority, RSB, Rev., Down, Start, Stop, Door, Lobby, Main Lobby, RDC, RDO, Non Stop, FLC, FDC, Open Door, Reset Door, BSMT, Credit Dept., and Emergency Power. Complete assembly (fig. 2)

A323BD2

Alarm - 1" diameter Red lexan button with hot stamped white lettering.

A323BD6

Emergency Call - 1" diameter Red, lexan button with hot stamped white lettering.
(SPECIFY MARKINGS)

A323BD7

MT - 114289



Swaging tool used to lock in A385AV1 guide to cover plate.



Figure 1



Figure 2



Figure 3

Button base, black lexan with a threaded insert. This button base is used on OEM #A323BD1, A323AF2 and 323BD2 series. (fig. 2)

A323AF1


Button guide, zink die casting used on OEM #A323BD1, A323AF2 and 323BD2 series. (fig. 1)

A385AV1

Spring 25/32" I.D. x 1" long used on the push buttons.

90YA26

90WE14



Compression springs, 1/2" I.D. large; end 15/64" I.D. small end x 3/4" long. Active turns: 6.

7069AF



Pushbutton assemblies, latest design used on Otis LRV, LRV-III and Elevonic 401 installations. Specify Otis part number if known or exact marking of switch including floor number or function such as door open or down arrow.



Key switch module assemblies, latest design used by Otis on LRV, LRV III, MRVF and Elevonic 401 installations. Specify exact function of key switch and marking found on present switch such as : On-Off-Fan or Inspection-On-Off

7069AH

Stop switch module for LRV, MRVF, Etc.

7069AK1



Module housing, black molded plastic used with 7069AF series pushbutton assemblies.

396VB1


Chicklet, black molded plastic, snaps into 396VB1 and holds insert marker and button.

396PB1

Printed circuit board for illuminated hall and car station pushbutton assemblies includes light blub and 177DA1 micro-switch.

A8200AA1

10



7/8" round black button with hot stamped white marking. Specify marking.

323BL2

Base, round clear "lucite" halo.

306KH2

Nut for stem, brass, 5-40 thread

72CG1

Spring, brass

90WE14



340AA2

Collar, black phenolic 1" O.D., 1/2" I.D. 3/16" thick with set screw. Specify marking.

340AA3

Same as above but manufactured in red phenolic.

329J4

Cap, black phenolic 3/4" O.D., 5/16" I.D., 1/4" thick with set screw. Specify marking.



94FA1

Spring, square plated metal.

323DA1

Target (button), 1-1/16" square base with 29/32" square raised face, 7/16" face height. Opaque white plastic, no engraving required.



Gong, 115 VAC .064A

311B1

Gong, 115 VAC .192A

311B2

Gong, 115 VAC .29A

311B3

Gong, 115 VDC .032A

311B4

Gong, 115 VDC .305A

311B6

These gong assemblies are identical to current Otis production units.



Figure 1



Figure 2

STEEL COMPRESSION SPRING

<u>Description</u>	<u>Approx. Active Coils</u>	
(Figure 1)		
1-1/16" I.D. x 1" long	2	90BB3
(Figure 2)		
1/4" I.D. x 1-5/16" long	12	90BB15
5/16" O.D. x 39/64" long	7	90BB19
.445 I.D. x 1-1/8" long	8	90DB4



COMPRESSION SPRING

<u>Description</u>	<u>Approx. Active Coils</u>	
1/4" I.D. x 9/16" long	7	90KA3
9/32" O.D. x 5/8" long	6	90KA5
9/32" O.D. x 3/16" long	5	90KA6
5/16" I.D. x 1" long	8	90KA8
9/32" O.D. x 5/8" long	6	90KA2



STEEL COMPRESSION SPRING

<u>Description</u>	<u>Approx. Active Coils</u>	
11/32" O.D. x 1" long	10	90LA4
9/32" O.D. x 1-5/16" long	7	90LA5
13/64" O.D. x 9/16" long	7	90LA10
1/4" O.D. x 5/16" long	3	90LA11



COMPRESSION SPRING

<u>Description</u>	<u>Approx. Active Coils</u>	
7/32" I.D. x 9/16" long	5	90PA4
5/16" I.D. x 1" long	6	90PA7
1/4" I.D. x 57/64" long	6	90TA3
.318 I.D. x 27/64" long	7	90TA6




COMPRESSION SPRING

Description	Approx. Active Coils	
5/16" O.D. x 1-3/16" long	9	90VA15
9/32" I.D. x 1-1/16" long	9	90VA16
11/32" O.D. x 1-1/16" long	10	90VA8



COMPRESSION SPRING

Description	Approx. Active Coils	
7/16" I.D. x 1-3/8" long	10	90YA15
11/32" O.D. x 1-1/2" long	11	90YA18
1/4" O.D. x 25/32" long	7	90YA25
25/32" I.D. X 1" long	2	90YA26



TORSION SPRING

Description	
1-25/32" I.D. x 5/16" wide, (Right Hand)	92AG1
1-25/32" I.D. x 5/16" wide, (Left Hand)	92AG2

91AE1



1-1/2" Dia. x 12-1/16" long (includes hooks).
51 Active Coils, 3/16" Wire Dia., complete
with hooks both ends.

90EB5



Compression Spring. 3/8" I.D. x 1-1/8" long.
Approximately 6-1/2 active coils.

91B1




Spring Extension (018" Wire Size), 17/64"
O.D. 21/32" coiled length, 1-5/32" overall
length with (2) 1/4" loops, approximately 30
Active Coils.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

90WE14



Conical Compression Spring. 1/2" I.D. large end, 15/64" I.D. small end x 3/4" long. Approximately 6 active coils.

90HB9



Compression Spring. 11/16" O.D. x 1-5/8" long. Approximately 7 active coils.

90KC10



Compression Spring. 1" O.D. x 3-1/4" long. Approximately 10 active coils.

90LB3



Steel Compression Spring. 5/16" I.D. x 2-1/2" long. Approximately 18` active coils.

A96AJ1



Stud with 90KC10 compression spring.

91W2



Heavy-Duty Extension Spring. 1-3/8" dia. x 10-3/4" long with hook at each end; black oxide finish. Approximately 64 active coils. Wire dia. 0.148



Diam. 0.0630, 8.12 long with 21.0 active coils

90KB10

Diam. 0.1000, 4.62 long with 20.0 active coils.

90XB3

90AX1



Material diameter; 0.0630, free length; 1.25, 8.0 active coils. 3/8" O.D, 4 active coils each end.

90BB1



O.D.; 1.080 + .15, length; 1", wire dia.; 0.041", 2 active coils.

90CB6



O.D.; .3125, length; 1", wire diameter; 0.041", 8 active coils.

90VA8




O.D.; .328, free length; 1.0625, 10 active coils.

90LA11



O.D.; .250, free length; .3125, 2 active coils.

90KA2




O.D.; .312, free length; .50, 7 active coils.



NOTE: For safe riding, PSI recommends strongly that you replace any comb plate that has even one tooth broken or missing.

453Y - Series: Buffed die-cast aluminum plates with recesses filled with black. 1/4" thick x 4-1/4" deep; width as shown in table. Mounting holes on 4" centers. Replacements for Otis "O" and "R" escalators.


<u>Width</u>	<u>Teeth</u>	
6"	18	453Y1
5-7/16"	16	453Y2
5-11/16"	17	453Y3
5-3/4"	17	453Y4
5-3/8"	16	453Y5
5-5/8"	17	453Y6
5-9/16"	17	453Y7
5-13/16"	18	453Y8
5"	15	453Y9
5-7/8"	17	453Y13

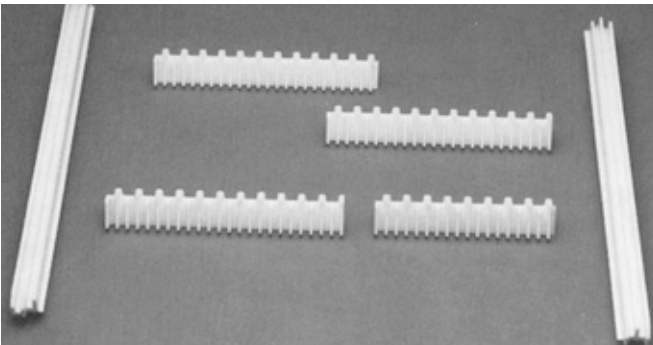

Demarcation Insert, yellow plastic, left side **455G2**

Demarcation Insert, yellow plastic, right side **455G1**

Demarcation Insert, yellow plastic, intermediates **455G(3-7)**

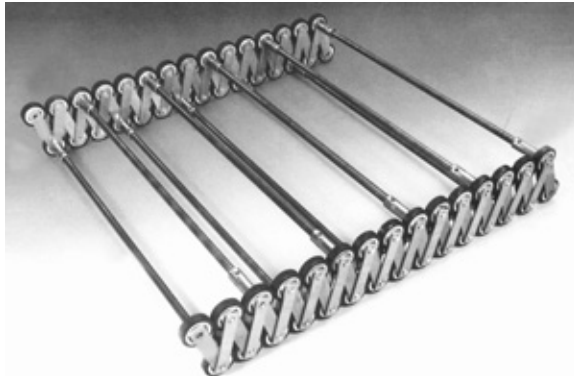

PSI step chain is produced using the O.E.M. specifications as our guideline. Outdoor step chain is special using different material and manufacturing processes. Be sure to advise us if your step chain is for outdoor applications.

STEP CHAIN 32" R, RB-C, J

Description


Step Chain, 10 axle section	GX6283E500
Step Chain, 2 axle section	GX6283E505
Step Chain, 1 axle section	GX6283F500

STEP CHAIN 48" R, RB-C, J


Description

Step Chain, 10 axle section	GX6283E504
Step Chain, 2 axle section	GX6283E506
Step Chain, 1 axle section	GX6283F502

<u>Ref.</u>	<u>No.</u>	<u>Description</u>
1	290BR2	Roller
2	210AL1	Sleeve Bushing
3	502G1	Axle, 32" Chain
3A	502G2	Axle 48" Chain
4	430AZ1	Link, Outer
5	430AZ2	Link, Inner

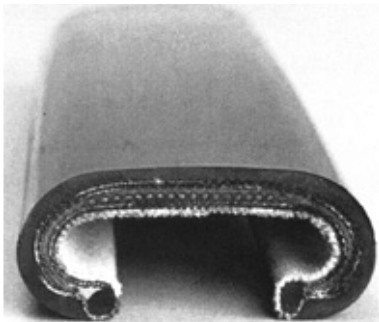

Steel Cord Reinforcement	16420
Steel Tape Reinforcement	16010
Ustex Tape Reinforcement	16661
Duck and Rubber Reinforcement	16005

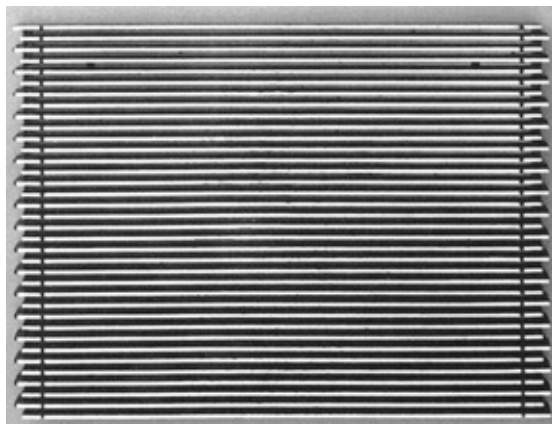


Tread, right hand, tapped holes for bolts. 16" long x 12" wide, black finish	455AD1
Tread, left hand, tapped holes for bolts. 16" long x 12" wide, black finish	455BA1
Tread, center section, tapped holes for bolts. 16" long x 16" wide, black finish	455CA1
Tread, removable, drilled holes for screws. 16" long x 12" wide, black finish	455R1
Tread, tapped holes for bolts. 16" long x 12" wide, black finish	455R2
Tread, center section, tapped holes for bolts. 16" long x 16" wide, black finish	455Z1

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

Coils	19-21
Escalator Parts	24-27
Door/Hatch Equipment	
Hanger/Components	1-2
Interlocks	5-8
Miscellaneous Components	10
Safety Edges	9
Switches	18
Machine Parts	17
Rectifiers	18
Relay Parts	11-15
Resistors/Capacitors	16
Rollers	2-4
Selector Parts	23
Signal Fixtures	22

TYPE AC2 HANGER ROLLER ASSEMBLIES FOR HATCH & CAR DOORS

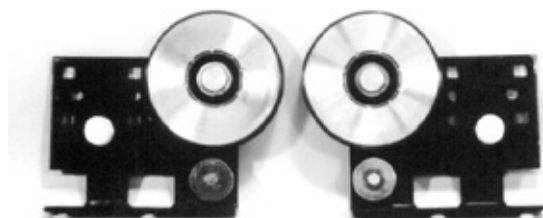

Cold rolled steel hanger assembly frame measures 5"H x 6"W

RH assembly, complete, includes upthrust roller for hatch door and 4-3/8" dia. steel roller wheel with polyurethane tire (part number 323C235G02)

324C083G03

LH assembly, complete; same as 323C083G03

324C083G04

TYPE ACD HANGER ROLLER ASSEMBLIES FOR HATCH & CAR DOORS



RH assembly, complete, includes 2-3/4" dia. solid steel roller with polyurethane tire.

M7405-G99

LH assembly, complete, includes 2-3/4" dia. solid steel roller wheel with polyurethane tire (part number 576B535-G98)

M7405-G99

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

TYPE A3M HANGER ROLLER ASSEMBLY



T5409

Hanger assembly, complete, includes 4-3/8" dia. aluminum roller with polyurethane tire; all holes tapped to accept cable studs.

TYPE B3M HANGER ROLLER ASSEMBLY



T5411

Hanger assembly, complete, includes 3-3/8" dia. aluminum roller with polyurethane tire; all holes tapped to accept cable studs.

CABLE STUDS FOR TYPE "AC" T5411-G99 HANGER ASSEMBLIES



Eye cable stud with 3/8"-16 threads 3/4" diameter. **K3268-V**

Pin 1/2" diameter with 3/8"-16 threads. **R8026-V1**

Clamp bolt stud with 3/8"-16 threads, 3/4" square. **R8026-V2**

TYPE E-4 HATCH ALUMINUM ROLLER



325C798G09

Aluminum roller only, 2-3/4" diameter.



M5594G02

Cast aluminum roller guide wheel, 4-1/2" diameter; 1.250" width; 0.6693" bearing bore; rubber tire.

M5594G03

Guide roller, 10-1/4" diameter; 1.250 width; 0.6693" bearing bore; rubber tire.

323C160G01



Cast aluminum roller guide wheel, 6" diameter; 1.200 width; 0.6693" bearing bore; rubber tire.

144A277G01



Solid steel counterweight roller guide wheel, 3" diameter; 1.000 width; 0.6693" bearing bore; rubber tire.

323C235G03



Polyurethane tire, 4.25" diameter with 0.7874" bearing bore used on "AC-2" type hanger assembly.

576B535G98



Steel roller with 2-3/4" diameter; 0.5905" bearing bore; polyurethane tire used on type "AC" hanger assembly.

152B011-G02



Upthrust roller assembly for "AC" hangers; 31/32" dia. x 7/16" wide; case hardened steel, cadmium plated.

576B535-G04



Nylon roller only, 2-3/4" diameter; 0.5906" bearing bore.

325C798G10



Upthrust roller assembly; 1" diameter x 7/16" wide roller. For ACA hanger assembly.

M6029G01



Upthrust roller assembly for "AC" hangers; 1-3/8" diameter x 29/64" wide; case hardened steel, cadmium plated.

R8636G01



Hanger roller, 4-3/8" diameter, aluminum with polyurethane tire.

R8858G98




Polyurethane hanger roller 3.25" diameter with aluminum hub used on type T5411-G99 hanger assembly.

323C235G02



Aluminum/polyurethane; 4-3/8" diameter; 0.7874" bearing bore; for AC2 hanger assembly

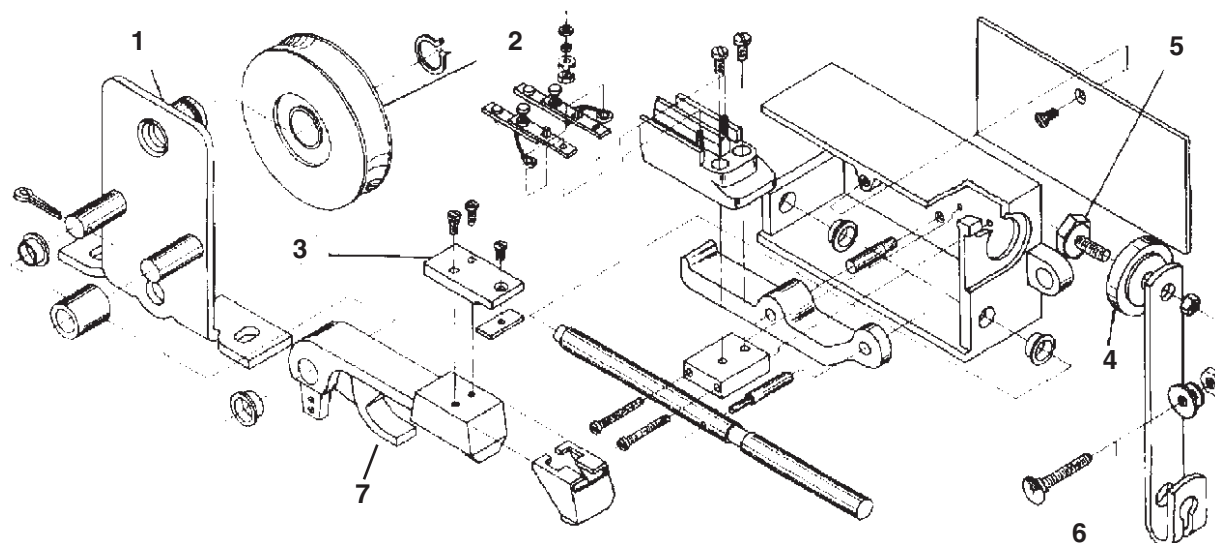

B-2 INTERLOCK COMPONENTS

FIGURE NO.

DESCRIPTION

- | | | |
|---|--|-------------------|
| | Interlock assembly complete - clear plastic cover - right hand | 626D686G01 |
| | Interlock assembly complete - clear plastic cover - left hand | 626D686G02 |
| 1 | Door hanger assembly | T5411 |
| 2 | Door hanger roller (shown on page 4) | R8858G98 |
| 3 | Contract bridge block with copper contact | R6952-10 |
| 4 | Roller | K3244G01 |
| 5 | Roller stud, threaded | K65831 |
| 6 | Roller arm | K7028H01 |
| 7 | Interlock latch | 216B812H01 |

626D686G01
626D686G02
T5411
R8858G98
R6952-10
K3244G01
K65831
K7028H01
216B812H01

K65831



Roller stud, threaded


R6952-10



Contact bridge block with copper contact.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

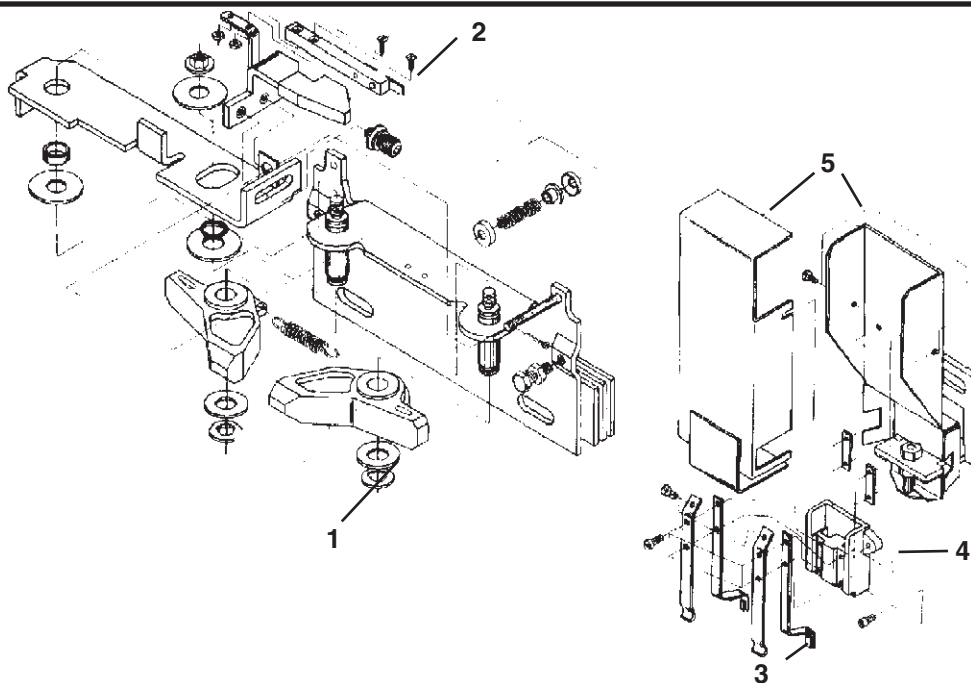

E-1 INTERLOCK COMPONENTS

FIGURE NO.

DESCRIPTION

- | | |
|---|--|
| 1 | Nylon drive block assembly |
| 2 | Contact bridge assembly, micarta with copper contact |
| 3 | Contact finger with silver tip |
| 4 | Contact Base |
| 5 | Interlock switch in case, complete |


576B812H01
576B807G01
144A568G01
215B687H01
628D075G01

144A568G01



Stationary contact for S & MS door operators; makes with K3802G1


628D075G01

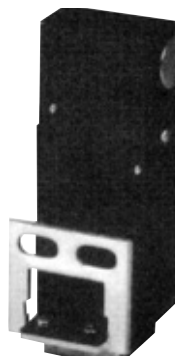

Interlock switch in case, complete.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

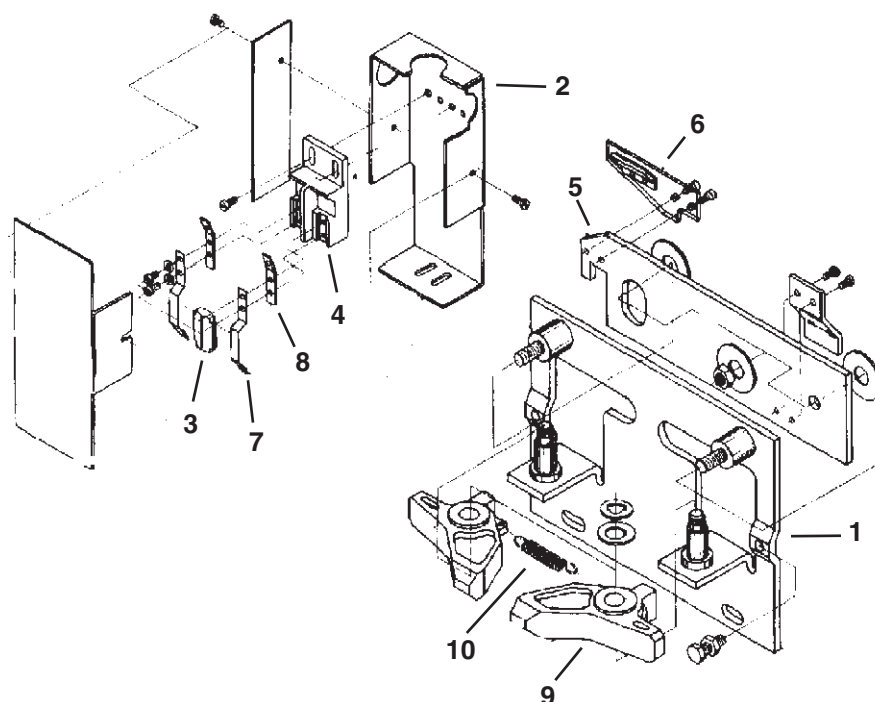

E-5/E5A INTERLOCK COMPONENTS


FIGURE NO.

DESCRIPTION

1	Drive block assembly complete; right hand	5194D85G01
	Drive block assembly complete; left hand	5194D85G02
2	Interlock switch in case complete; right hand	196C527G01
2	Interlock switch in case complete; left hand	196C527G02
3	Contact separator	864A963H01
4	Contact base for stationary contacts	682A226H01
	Mounting bracket; double bend	197C534H01
	Mounting bracket; triple bend	197C534H03
5	Latch lever	196C523H01
6	Contact bridge assembly; right hand	682A244H01
	Contact bridge assembly; left hand	682A245G01
7	Contact blade with silver contact	682A227G01
8	Contact blade support	682A302H01
9	Nylon drive block	630B424H01
10	Drive block spring	X9KS1H02

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

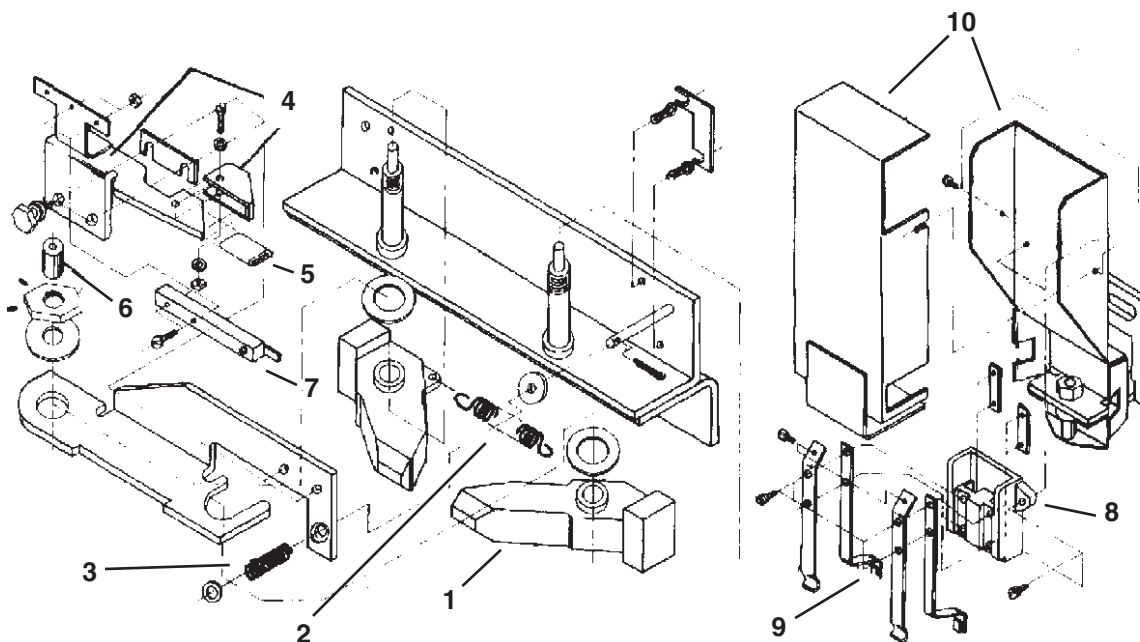

E INTERLOCK COMPONENTS

FIGURE NO.


DESCRIPTION

1	Nylon drive block assembly for stationary vane 4-3/16"L	151B671H01
2	Drive block spring, 1-7/8"L x 3/8" OD	X9K-1
3	Latch arm springs, 1-9/16"L x 7/16" OD	X9J-18
4	Latch with rubber nose, complete; LH	144A563H01
	Latch with rubber nose complete; RH	144A563H02
5	Rubber bumper, sleeve	X14B5
6	Rubber bumper	X14B4
7	Contact bridge assembly, micarta with copper contact	144A520G01
8	Contact base	215B687H01
9	Contact finger with silver tip	144A568G01
10	Interlock switch in case, complete	465D864G01

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

"SAFETY-T-EDGE" REPLACEMENTS, 2 ARM

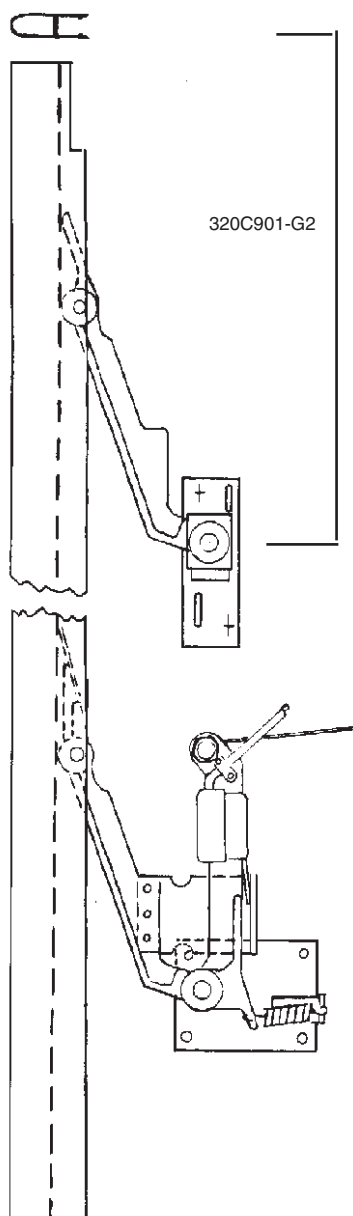

320C901-G1

Upper pivot assembly, left hand; includes reinforced pivot arm bracket.

320C901-G2

Upper pivot assembly, right hand; includes reinforced pivot arm bracket.

T-4483G19



Inductor switch, complete

M3665G2



Brake contact assembly; includes 2 silver contacts; 7/16" diameter




T96113

Main rail gib, micarata; 9-1/4"L x 1-3/8"W x 1-5/16"H; 1" deep slot

T9611

Counterweight gib, nylon; 5-1/4"L x 1-3/8"W x 1-5/16"H; 0.925 deep slot.

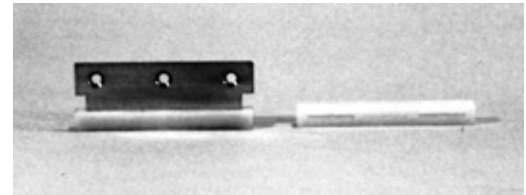

691B971H01


Door gib (4"L x 1-1/2"H) with nylon runner

146A746H01

Replacement nylon runner for 691B971H01; 4"L x 7/16" x 1/2"

Type E hatch limit switch

321C201G01

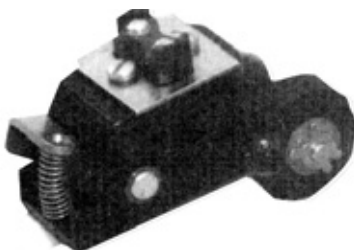

Inching switch n.o. cont.


321C201G02

324C969G04



Type E landing switch; 1 make/1 break

EST/SOLDERS WITHOUT COILS

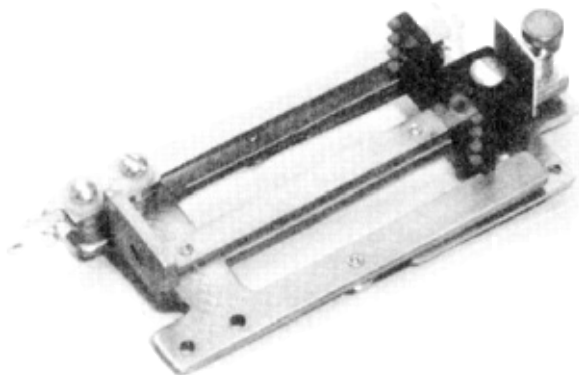

CONTACT CONFIGURATION

2 Make	H3056G04
1 Make	H3056G01
1 Break	H3056G02
1 Make/1 Break	H3056G05
2 Break	H3056G06

(Replacement relays may have more contacts than your original "EST" relay).



ES/SOLDERS WITHOUT COILS

CONTACT CONFIGURATION

1 Make/1 Break	T9560G35
1 Make/2 Break	T9560G36
1 Make/3 Break	T9560G37
1 Make/4 Break	T9560G38
1 Make/5 Break	T9560G39
1 Make/6 Break	T9560G40
1 Make/7 Break	T9560G41
2 Make	T9560G34
2 Make/1 Break	T9560G35
2 Make/2 Break	T9560G36
2 Make/3 Break	T9560G37
2 Make/4 Break	T9560G38
2 Make/5 Break	T9560G39
2 Make/6 Break	T9560G40
3 Make	T9560G34
3 Make/1 Break	T9560G35
3 Make/2 Break	T9560G36
3 Make/ 3Break	T9560G37
3 Make/4 Break	T9560G38
3 Make/5 Break	T9560G39
4 Make	T9560G34

CONTACT CONFIGURATION

4 Make/1 Break	T9560G35
4 Make/2 Break	T9560G36
4 Make/3 Break	T9560G37
4 Make/4 Break	T9560G38
5 Break	T9560G34
5 Make/1 Break	T9560G35
5 Make/2 Break	T9560G36
5 Make/3 Break	T9560G37
6 Make	T9560G34
6 Make/1 Break	T9560G35
6 Make/2 Break	T9560G36
7 Make	T9560G34
7 Make/1 Break	T9560G35
8 Make	T9560G34
2 Break	T9560G36
3 Break	T9560G37
4 Break	T9560G38
5 Break	T9560G39
6 Break	T9560G40
7 Break	T9560G41
8 Break	T9560G42

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

EST COILS

D.C. VOLTAGE

125 V	X19BG-G03/X19CA-G03
125 V	X19BG-G04/X19CA-G04
62.5 V	X19BG-G06/X19CA-G06

When ordering specify relay part number & coil part number; i.e. H3056G03/X19CA-G03.

ES COILS

TWO LEAD

D.C. VOLTAGE

125 V	X19BG-G01/X19CA-G01
62.5 V	X19BG-G02/X19CA-G02
64 V	X19BG-G05/X19CA-G05
125 V	X19BG-G07/X19CA-G07
21 V	X19BG-G08/X19CA-G08

THREE LEAD

D.C. VOLTAGE

125 V	X19BH-G01/Z19CA-G01
-------	----------------------------

When ordering specify relay part number & coil part number; i.e. T9560G37/X19CA-G01

K7305G01



Fingerboard assembly with bakelite base and leaf spring; receives K7310G01 contact bridge assemblies.

STATIONARY & MOVABLE CONTACTS



FIGURE NO.

DESCRIPTION

1	Heart shaped movable contact for 6B, CR and TC relays	K4277G01
2	Stationary contact for DS relay, 1-1/8" L with 7/16" diameter; silver	M1230G20
3	Stationary contact for KS, 15A, VVR, 30V relays (1-1/8" L)	M1230G23
4	Stationary contact for 6B & CR relays, with threaded mounting stake and 1/4" silver tip. Measures 2-7/8" 'U'/contact outside.	X24AS1G04
5	Stationary contact for 6B & CR relays with threaded mounting stake with 3-11/16" 'U'/contact outside.	X24AS1G01
N/S	Same as above with 3-3/4" 'U'/contact outside.	X24BS1G01
N/S	Same as above with 3-3/32" 'U'/contact outside.	X24BS1G02

CONTACT BLADES

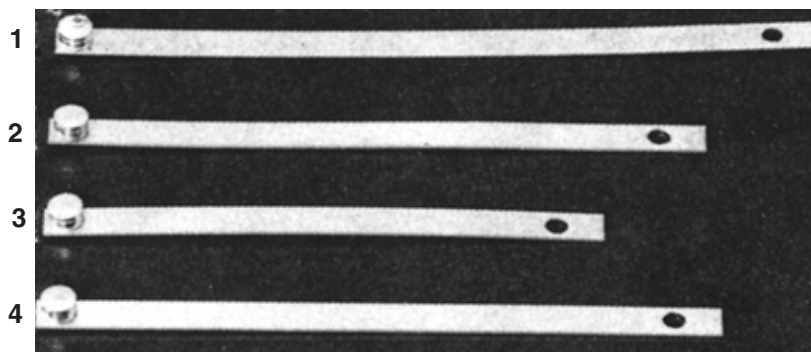



FIGURE NO.

DESCRIPTION


- | | |
|---|---|
| 1 | Contact finger for Type SW interlock; 3-5/8" L |
| 2 | Contact finger for Type SW interlock; 3" L |
| 3 | Contact finger for Type SW interlock; 3-1/2" L |
| 4 | Contact finger for Type SW interlock; 4-3/16" L |

K3125-G1
K3125-G2
K3125-G3
K3125-G4

EC RELAY REPAIR KIT



1



2



3

FIGURE NO.

DESCRIPTION

- | | |
|---|---|
| 1 | Bridge contact assembly |
| 2 | Stationary contact; top make/bottom break |
| 3 | Stationary contact; top break/bottom make |

K7310G01
K7307G01
K7307G02

RHEOSTAT CONTACTS

Rheostat contact, type P-200, 1"x 3-7/8" includes 1/4" diameter silver contact (left hand).

T453G04

Same as above (right hand).

T453G08



ACCESSORIES FOR ES SERIES RELAYS



ES relay ladder, high-temp
phenolic.

216B711H04

ES relay ladder, clear
plastic. (Not shown).

216B711H01

CARBON CONTACT

K4495H01



Dimensions; 5/8" x 5/8" x 3/4", mounting hole;
6/32; makes with: K47278-G1/630B610G01,
K4278--G2/630B610G02 for 6B contactor.


COPPER CONTACTS




1



2

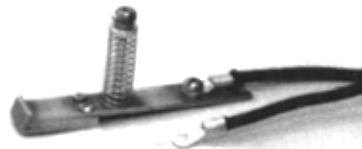

3



4

FIGURE NO.

DESCRIPTION

- | | | |
|---|---|-----------------|
| 1 | Dimensions; 2" x 2-5/16" | T1139H07 |
| 2 | Dimensions; 3/4" x 1-3/4" | P1524-6 |
| 3 | Contact assembly; 3/4" x 5-1/4"L holder with 10-1/8"L shunt
incl. P1524-6. | P1534-1 |
| 4 | Contact assembly; 1-5/8"L x 1/2"W, incl. 2-strand bare
copper shunt, 4-1/2"L with 1/4" ID eyelet terminal. | K180 |

T1139H07
P1524-6
P1534-1

K180


CONTACT ASSEMBLY



For 30VS relay and 15A contactor. No silver
contact. Dimensions; 1-1/4"L x 1/2"W plus
7"L shunt.

K181G2/G3

CONTACT ASSEMBLIES

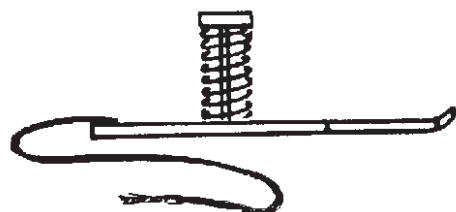

<u>CIRCUIT</u>	<u>CONTACT PART NO.</u>	<u>SHUNT PART. NO</u>	<u>SHUNT LENGTH</u>	
"Make"	K4278G01	X22G02	1-7/8"	M4522G01
"Make"	K4278G01	X22G03	6-3/4"	M4522G02
"Break"	K4278G02	X22G02	1-7/8"	M4522G04
"Break"	K4278G02	X22G03	6-3/4"	M4522G05

CONTACT ASSEMBLIES

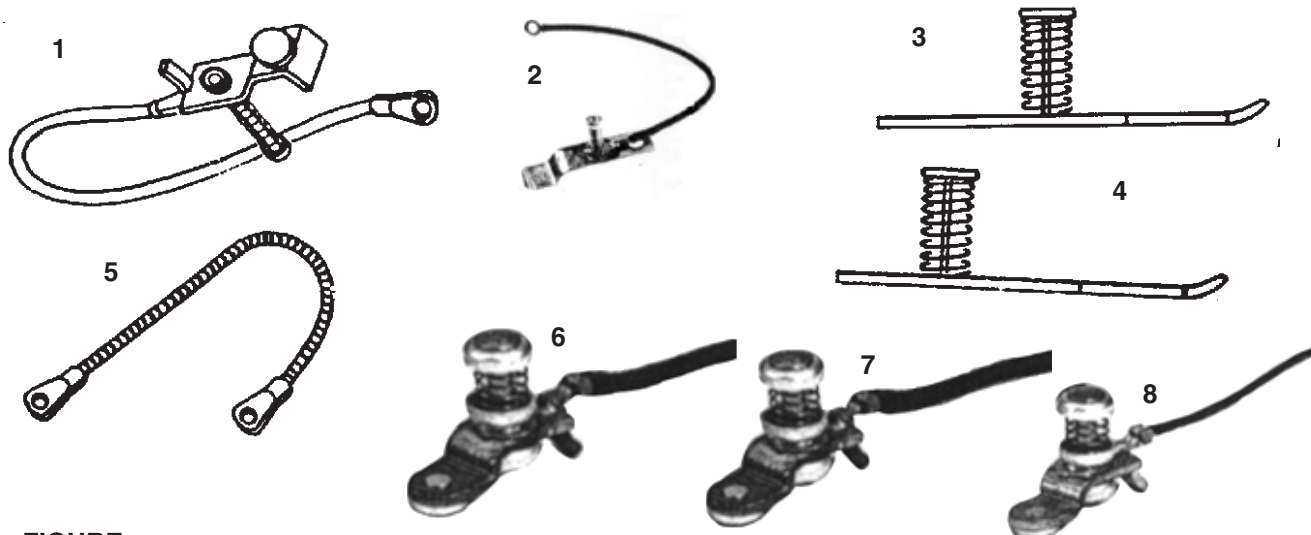


FIGURE NO.


DESCRIPTION

1	For DS relay; silver contact face; 7/16" diameter. Assembly 1-1/4" long x 1/2" wide, plus 7"L shunt.	M3466G01
2	Copper base 5/8" x 2-1/2". Heavy fabric covered shunt. 6" long with 3/16" I.D. eyelet terminal.	T3534G8
3	Contact "Makes" with K4495 carbons for M4522 assemblies	K4278G01
4	Contact "Breaks" with K4495 carbons for M4522 assemblies	K4278G02
5	Shunt 6-3/4" Long.	X22G03
N/S	Shunt 1-7/8" Long.	X22G02
6	KS multi pole relay and 15A contactor, 1/4" dia. silver contact, 6-1/4" shunt	M1230G6
7	KS multi pole relay and 15A contactor, 1/4" dia. silver contact, 5-1/4" shunt	M1230G5
8	KS multi pole relay and 15A contactor, 1/4" dia. silver contact, 4-3/4" shunt	M1230G4

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

RESISTOR TUBES

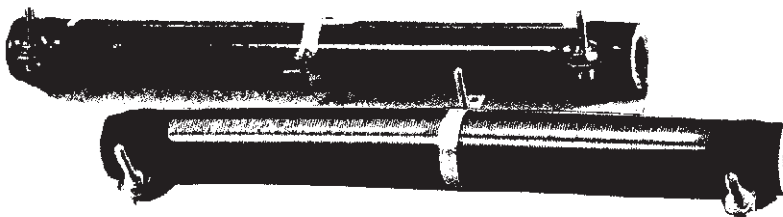

TEN INCH TUBES

Resistance

17.0	X28A6
21.5	X28A7
25.2	X28A8
43	X28A9
64.2	X28A10
84	X28A11
126	X28A12
168	X28A13

Resistance

252	X28A14
455	X28A15
642	X28A16
800	X28A17
1000	X28A18
2000	X28A21
2500	X28A22
4000	X28A24

FIVE INCH TUBES

Resistance

12.6	X28F5
21.5	X28F7
64.2	X28F10

These 10" or 5" long resistor tubes are rated for 250V and 150W maximum the length of the entire tube. If less than the whole length is used, you must derate the tube accordingly.



ROYALITE CAPACITORS

Capacitance	Max input voltage (VDC)	Diameter	
90-110	125	1-3/8"	K-3412G1
68-82	125	1-3/8"	K-3412G2
45-55	125	1-3/8"	K-3412G3


CAPACITORS

Capacitance	Max input voltage (VDC)	Diameter	Diode	
10	150	1"	Yes	466D034G01
50	150	1"	Yes	466D034G02


14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

MACHINE PARTS

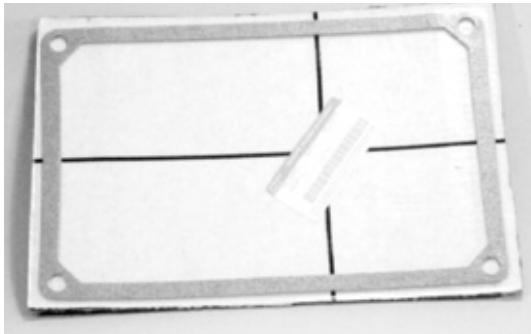

#38 Machine front side gasket **144A524H01**

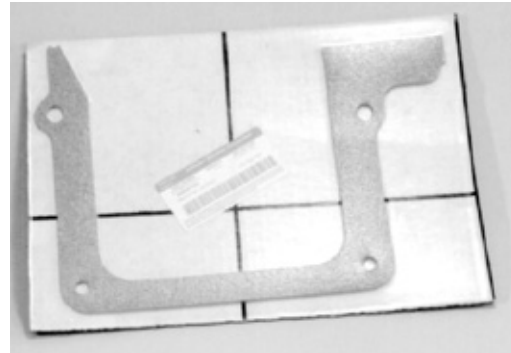

#38 Machine gear housing gasket **215B690H01**



R5027H03

Hand Hole Gasket

OIL SEALS



<u>Shaft Diam.</u>	<u>Bore Diam.</u>	<u>Thickness</u>	<u>Machine</u>	<u>Material</u>	
2-9/16"	3-3/4"	3/8"	#18, gear center	Silicone	X30E12
1-3/4"	3-3/16"	1/2"	#18, worm shaft	Silicone	X30E13
3-1/4"	4-1/2"	5/8"	#58 new, worm shaft, clipper	Viton	X30E14
3-11/16"	4-3/4"	1/2"	#28, gear, ctr./sheave	Silicone	X30E15
4"	5"	1/2"	#38 type 534F909, gear ctr.	Silicone	X30E16

BRAKE PARTS



Contact plate for machine numbers 18, 27, 28, 28A, 37, 38, 57, 58 and 61

R7533H01

14639 Short St. • Posen, Illinois 60469 U.S.A.


Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

195C928G01




Three phase rectifier complete with mounting hardware.

151B931G01

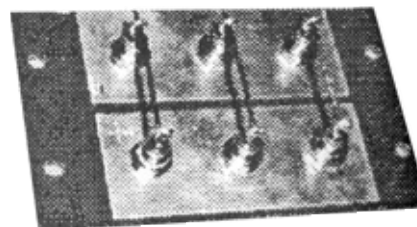

Rectifier assembly, solid state.

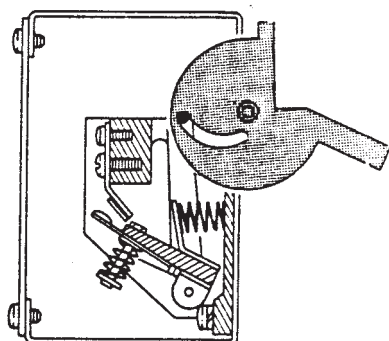


Gate switch LH (Shown)

T9165-G02

Gate switch RH (Opposite as shown)

T9165-G01

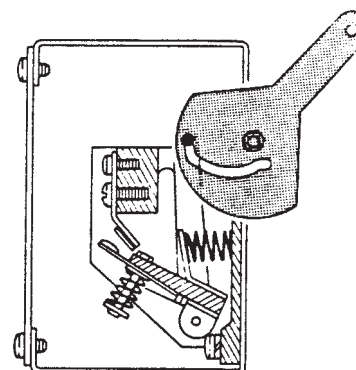


Safety switch LH (Shown)

T9165-G05


Safety switch RH (Opposite as shown)

T9165-G04

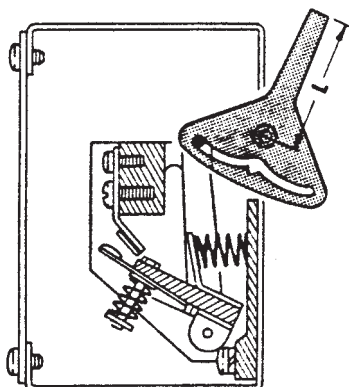

Governor or counter weight switch

T9165-G08

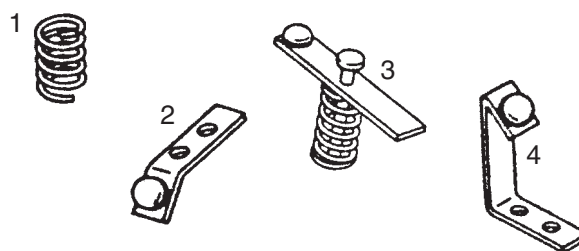

ITEM

- 1 Spring
- 2 Stationary Contact
- 3 Moving Contact
- 4 Stationary Contact

X9JS1H11
K6995G01
K4277G02
865A022G01

FOR CR RELAY



Voltage

125

**X19BBG16,
X19ZG4,
X19ZGR4**

696668



I.D., 1-9/16", O.D.; 2-3/4", Length, 4-1/16";
resistance; 330

FOR SRL RELAY




Voltage

125

48

**X19BG9, K6738G1
X19BG10, X19BBG7,
K6738G2**

FOR STL-2 RELAY



Voltage

125

125

48

Resistance

I-2,010

O-1,330

I-1,815

O- 765

I-8,210

O-1,650


K5802G01

K5802G02

K5802G03

NOTE: I = Inner winding resistance; O= Outer winding resistance

FOR SR RELAY



Voltage

125

62.5

62.5

125

Resistance

2,900

504

714

2,180

K5801G01

K5801G02

K5801G03

K5801G04

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



Resistance

582	R9822G04
1,910	R9822G05
354	R9822G06



Resistance

2,030	X19CCG01
545	X19CCG02
7,322	X19CCG03



Resistance

32.4	X19BVG01
0.73	X19BVG02



Resistance

18	X19BKG01
1,100	X19BKG02



Resistance

918	X19EG19
13,310	X19EG22
5,640	X19EG23
727	X19EG25



Resistance

405	X19NG10
1000	X19NG11



Resistance

1,625	X19BBG03
-------	-----------------



Resistance


557	X19BCG01
85	X19BCG02



Resistance

I-2,295	X19CBG01
O-917	X19BHG10

NOTE: I = Inner winding resistance; O= Outer winding resistance



Resistance

3,300	X19BBG01
987	X19BBG02
2,900	X19BBG04
2,180	X19BBG05
1,755	X19BBG06
430	X19BBG07
504	X19BBG08
714	X19BBG09
1,720	X19BBG10
1,240	X19BBG11
4,550	X19BBG12
324	X19BBG13
1,235	X19BBG14
1,090	X19BBG15
1,800	X19BBG16
275	X19BBG17
4,510	X19BBG18
178	X19BBG19
197	X19BBG20
4,160	X19BBG21
1,090	X19BBG22
1,790	X19BBG23
1,800	X19BBG24
4,510	X19BBG25
0.09	X19BBG26



Resistance

205	X19BG01
2,820	X19BG02
810	X19BG03
637	X19BG04
53	X19BG05
3,300	X19BG06
1,200	X19BG07
3,840	X19BG08
2,400	X19BG11
994	X19BG14



Resistance


5,790	X19YG01
390	X19YG02
104	X19YG03
1.8	X19YG04
0.0066	X19YG05
0.0166	X19YG06
0.0025	X19YG07
4.4	X19YG08



Resistance

4,250	X19GG01
1,060	X19GG02
6,250	X19GG03
166	X19GG04
410	X19GG05
272	X19GG06
1,920	X19GG07

Type "A" Car Switch Assembly

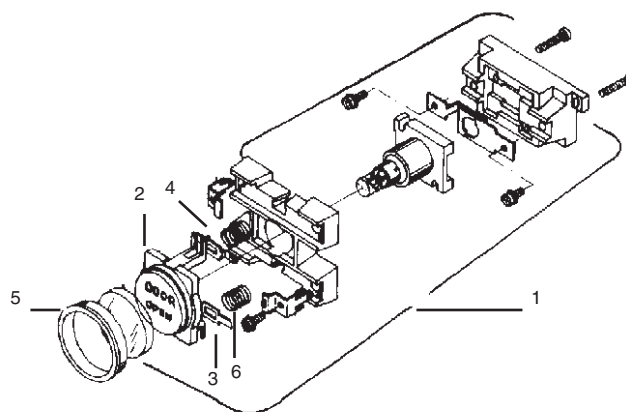

CAR PANEL COMPONENTS

FIGURE NO.

DESCRIPTION

- | | | |
|---|--|-----------------------|
| 1 | Complete switch assembly, 2NO contacts; specify character | 103D250G,
103D251G |
| 1 | Complete switch assembly, 1NO/1NC contacts; specify character | 103D252G |
| 2 | White button with black character, clear cap; specify character | 103D250H
196C921 |
| 2 | Black button with white character, clear cap; specify character | 103D251H
5204D59 |
| 3 | Movable contact bridge, NO | 151B439G01 |
| 4 | Movable contact bridge, NC | 151B439G02 |
| 5 | Ferrule, with speed nut; high impact Lexan | 151B440H01 |
| 6 | Compression spring for movable contact bridge, 7/16"L x 5/16" OD | X9J27 |

681A790H01



Lamp holder for A & AE signal.

325C805G01



Push/pull-type emergency stop switch, 1NO/1NC. Complete assembly.

694B338H02



Micro switch.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

TYPE E LANDING SWITCHES



1 Break (1NC) **324C969G08, G02**

2 Break (2NC) **324C969G07, G05**


SELECTOR PARTS



Floor to floor switch (not shown) **216B713G01**

Pawl Switch **216B713G02**

SELECTOR PARTS

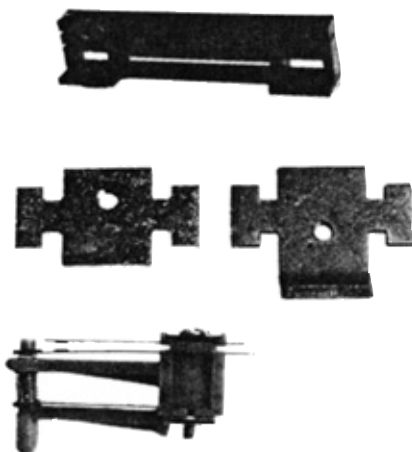

Description

Nylon Tape Guide	145A110H01
Tape Clip - Short	145A111H01
Tape Clip - Long	145A111H02
Selector switch - 1 make	217B203G01
Selector switch - 1 break	217B203G02

TACH GENERATOR



Tach generator **569A803H01**

Tach generator brush **569A803H02**


7055-C PILE UP ASSEMBLIES



3M (make); 5B (break); used on relay 7058B; 135, 235. **7055C351**

8M (make); 0B (break); used on relay 7058B; 180, 280 **7055C801**

DIE-CAST ALUMINUM COMB PLATES

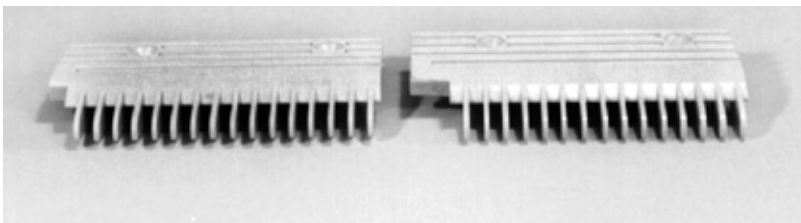

These comb plates are die-cast aluminum with black accent paint. Yellow models are solid yellow with no black accents.

<u>Description</u>	<u>Escalator Model No.</u>	
6-1/4" W, 16 teeth, RH	32N, 32BB, 32BT, 48BB, 48BT	626D315H03
5-3/4" W, 16 teeth, center		626D315H06
6-1/4" W, 16 teeth, LH		626D315H02
6-1/4" W, 16 teeth, RH (in yellow)		626D315H03
5-3/4" W, 16 teeth, center (in yellow)		626D315H06
6-1/4" W, 16 teeth, LH (in yellow)		626D315H02
6-1/4" W, 15 teeth, RH	48N	626D315H05
6-1/4" W, 15 teeth, LH		626D315H04
6-1/4" W, 15 teeth, RH (in yellow)		626D315H05
6-1/4" W, 15 teeth, LH (in yellow)		626D315H04
<u>Description</u>	<u>Escalator Model No.</u>	
5-7/8" W, 16 teeth, RH	32NT	628D184H02
5-7/8" W, 16 teeth, LH		628D184H01
5-7/8" W, 16 teeth, RH (in yellow)		628D184H02
5-7/8" W, 16 teeth, LH (in yellow)		628D184H01
5-1/2" W, 15 teeth, LH	48NT	628D184H04
5-1/2" W, 15 teeth, RH		628D184H03
5-1/2" W, 15 teeth, LH (in yellow)		628D184H04
5-1/2" W, 15 teeth, RH (in yellow)		628D184H03


NOTE: For safe riding, PSI recommends strongly that you replace any comb plate that has even one tooth broken or missing.

196C271G01



Handrail drive/pressure; quiet poly tire.
Escalator model number; BB, BT; diameter;
5.165", overall width; 1-3/8", width face; 1-3/8".

217B235H07




Step chain roller for "L", "M", "S" and "NT" model
escalators. Die cast aluminum hub, poly tire 5-
1/4" O.D. x 1-3/16" width hub with a 7/8" wide
tire face. Complete with bearing.

691B759G02



Solid aluminum hub with poly tire, 3" O.D. x 1-
1/4" width, with 1-3/32" wide tire face, contains
two bearings. Step guide roller used on "BB"
and "BT" escalators.

216B509G04



Steptrail roller for "N" & "NT" model escalators.
Die cast aluminum hub, poly tire 4" O.D. x 7/8"
width with 3/4" tire face. Complete with bearing.



Step guide roller for Type
BB&BT 3" diameter x 1-1/4",
single bearing, .6693 I.D.

**691B785G01,
691B785G03**

Step guide roller 3" diameter
x 1-1/4" same as above but
with double bearings.

**691B785G02,
691B785G04**



Trail roller for Type
BB&BT 3" diameter x 1-1/4",
single bearing, .6693 I.D.

**691B785G05,
691B785G07**


Trail roller 3" diameter
x 1-1/4" same as above but
with double bearings.

**691B785G06,
691B785G08**

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

2637C34H14



Applicator brush

X4WS1H03



Plug nut, used on hinge cap.

1727C81G02



Plunger assembly

196C269G01



Timing drive pulley

5061A04H02



Beam switch, 10' cable

5063A04H03



Actuator, level adjustable horizontal and vertical to match the switch to the application.

692B011H01



Splice bar

X6BDS1H04

X6ZS6H82



"C" Retaining Rings

X6BCS1H01



"C" Retaining Rings

196C117H04




Bushing

866A348H01



Collar

103D291G01

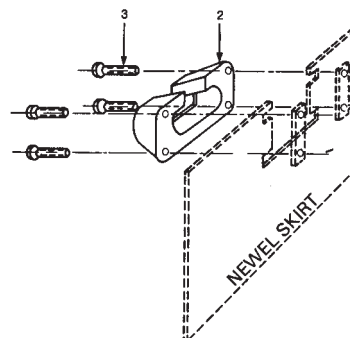

Handrail Guards

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



ARMOR

Coils 1

Door/Hatch Equipment

Hangers/Components 4

Interlocks 2-3

Switches 3

Rectifiers 1

Relay Parts 6

Rollers 4

Selector Parts 7

Signal Fixtures 5-6

COURION 15

PEELLE 7-10

U.S. ELEVATOR

Relay Parts 13

Resistors/Capacitors 14

Rollers 14

Signal Fixtures 11-13

Switches 13


C

COILS



270VDC	10470-01	240VDC	10472-01
80VDC	10471-01	5.025KQ	A4118-P2
270VDC	10473-01	270VDC	10474-01
80VDC	10477-01	60VDC	10475-01
7VDC	10478-01	140VDC	10480-01
110VDC	10501-01	110VDC	12076-01
110VDC	10476-01		

RECTIFIERS

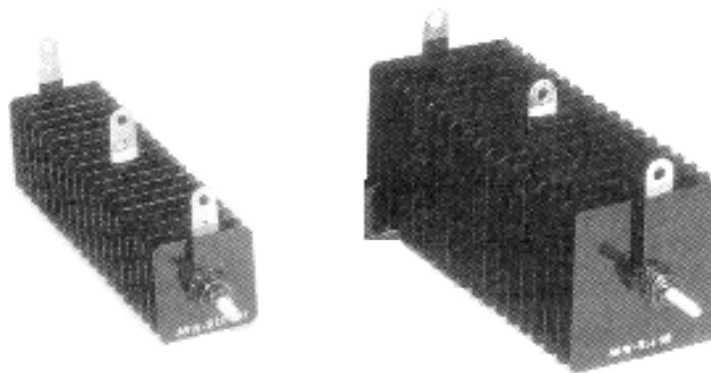


Dimensions (Cell Size x Length)	Electrical Configuration	No. of Plates	Max AC Input	DC Output per Section		
				Max V	Nom. Amps	
1-9/16" x 1-9/16" x 6-1/2"L	Doubler	18	234VAC	265VDC	3.5	C16D9D1S12G
2-5/8" x 2-5/8" x 7-1/4"L	Doubler	20	260VAC	290VDC	10.0	11282-01, C44S10D1H11G
1-9/16" x 1-9/16" x 10"L	3 Bridge	24	104VAC	119VDC	3.5	11280-01, C16S4BA1H11G
2" x 2" x 7-1/4" L	Doubler	20	260VAC	290VDC	6.0	C25S10D1H11G
2-5/8" x 2-5/8" x 6-1/2"L	Doubler	18	230VAC	265VDC	10.0	11298-01, C44S9D1512G
1" x 1" x 4-1/2"L	1 Doubler	18	260VAC	290VDC	1.2	C6S10D1H12G
2-5/8" x 2-5/8" x 8-3/4"L	3 Bridge	24	104VAC	119VDC	10.0	11285-01, C44S4BA1H11G
1-9/16" X 1-9/16" X 7-1/4"L	Doubler	20	260VAC	290VDC	3.5	11281-01, C16S10D1H11G
1" x 1" x 3-13/16" L	Doubler	18	234VAC	265VDC	1.2	11296-01, C6S9D1512G
2" x 1-1/4" x 1-13/16"L	Half-Wave	12	312VAC	130VDC	1.2	11288-01, C16-9919
1-1/4" x 1-1/4" x 6"L	3 Bridge	18	78VAC	89VDC	2.8	C11S3BA1H11G
4"x 5-3/8" x 9-1/8"L	Doubler	20	260VAC	290VDC	2.6	11279-01, C13S10DH11G
2-5/8" x 2-5/8" x 4-1/4"L	1 Bridge	12	78VAC	63VDC	7.2	11287-01, C44S3B1H11G
2-5/8" x 2-5/8" x 4-1/2"L	3 Bridge	12	52VAC	68VDC	10.0	11283-01, C44S2BA1H11G

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

DOOR INTERLOCK

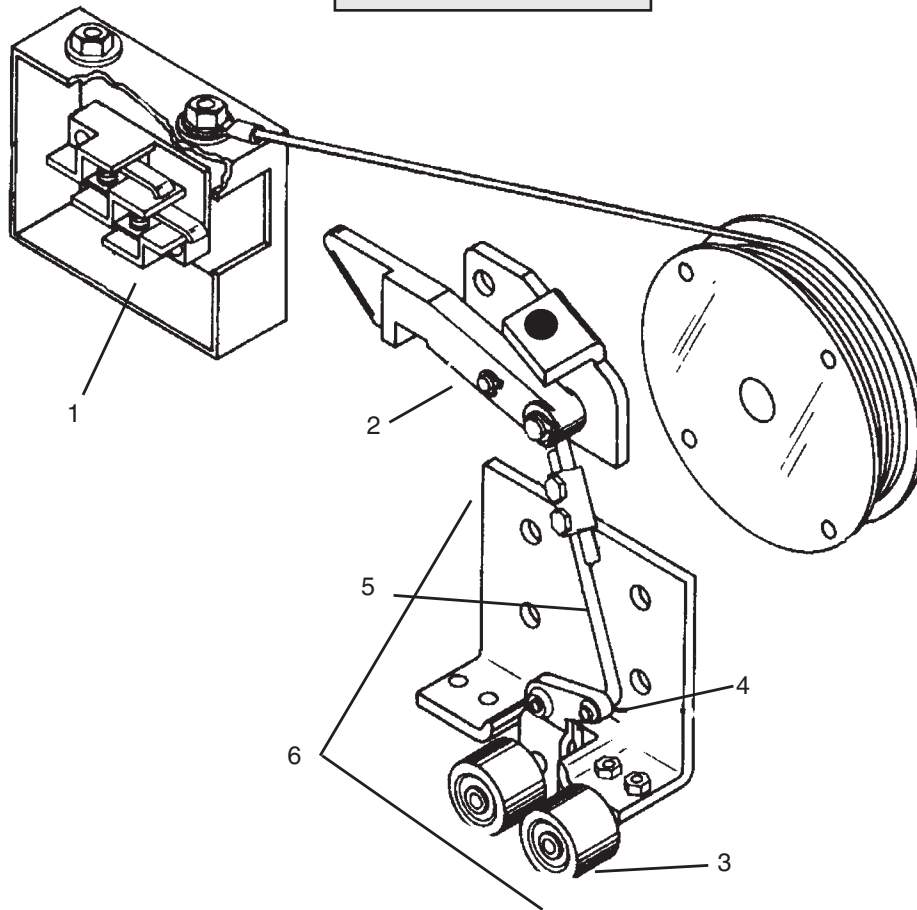


**FIGURE
NO.**

DESCRIPTION

1	Contact base assembly, LH (Shown)	A-749007, 12680-01
	Contact base assembly, RH (Opposite)	A-749019, 12679-01
2	Latch keeper; aluminum bronze w/insulated plastic nose & copper contact bridge; order link separately	B-326005, 11905-01
3	Roller assembly w/ solid polyurethane roller, 1-1/4" O.D. x 7/8"; incl. steel axle & circular retainer	A-466022, 11921-01
4	Interlock lever, No. 1 (LH & RH)	B-339023, 11907-01
5	Fixed link for latch keeper	A-343018, 11909-01
6	Release assembly, complete LH (shown)	B-787004, 11966-01
	Release assembly, complete RH (opposite)	B-787003, 11965-01


BASE CONTACT ASSEMBLY

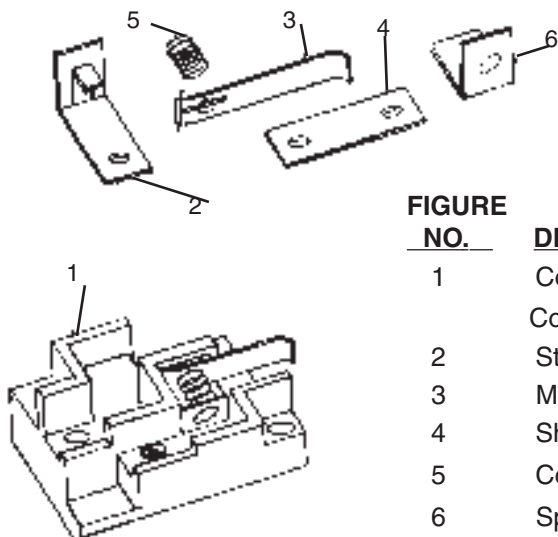

FIGURE

<u>NO.</u>	<u>DESCRIPTION</u>	
1	Contact base only, LH (shown)	B-021026, 11995-01
	Contact base only, RH (opposite)	B-021025, 10210-01
2	Stationary Contact	A-164045, 11181-01
3	Movable Contact	A-164004, 11150-01
4	Shunt	A-521002, 11997-01
5	Compression Spring	A-509042, 11996-01
6	Spring Seat	A-520006, 12102-01

SWITCHES

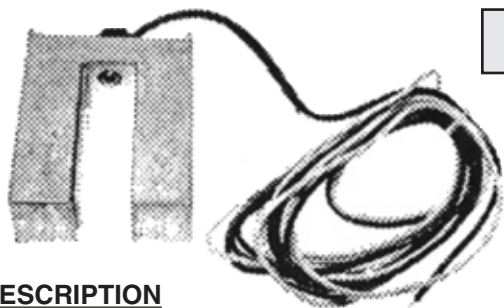


DESCRIPTION

Magnetic leveling switch, normally closed contacts.

11845-01, B723006

Magnetic leveling switch, normally open contacts.

13239-01, B723016

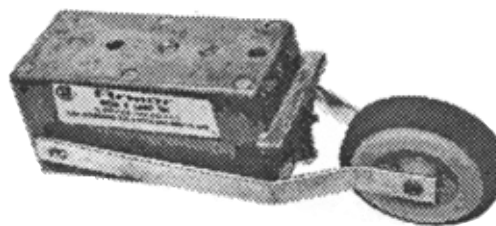

DESCRIPTION

Limit switch, normally closed contacts

**11858-01
B723002**

Limit switch, normally open contacts

**11859-01
B723001**



DESCRIPTION

Photo switch #1
Photo switch #3

**13626-01, B817-8375-01
13626-03**

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

DOOR HANGER ASSEMBLIES AND REPLACEMENT ROLLERS



11929-03

3-1/4" diameter polyurethane roller (convex) for 12101-01, hanger assembly; 0.6693" bearing. Attaches to base with removable retaining ring.



11971-01, A-776005

Eccentric upthrust roller for 12101-01, hanger assemblies; 1-1/6" diameter nylon wheel.

COUNTERWEIGHT ROLLER, ROLLER GUIDE WHEEL



**11940-01,
B-653003**


Replacement roller for No. 7 roller guide wheel. Heavy die cast aluminum wheel with 7" diameter polyurethane tire.



11942-01, B-653010. A-471002

Counterweight guide roller for No. 3 guide roller assembly; 3-1/2" O.D. polyurethane tire.

DOOR HANGER ASSEMBLIES AND REPLACEMENT ROLLERS



**12103-01,
B-733004**

Hanger assembly for No. 1 hatch door hanger and track; base dimensions 5"W x 4-1/8" H; includes 3-1/4" steel roller, 3/8-16 mounting bolts, nuts.



11929-01, A-491101


Door hanger roller wheel, 3-1/4" O.D. with concave polyurethane tire; 0.6693" bearing.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

C

PUSHBUTTON ASSEMBLIES

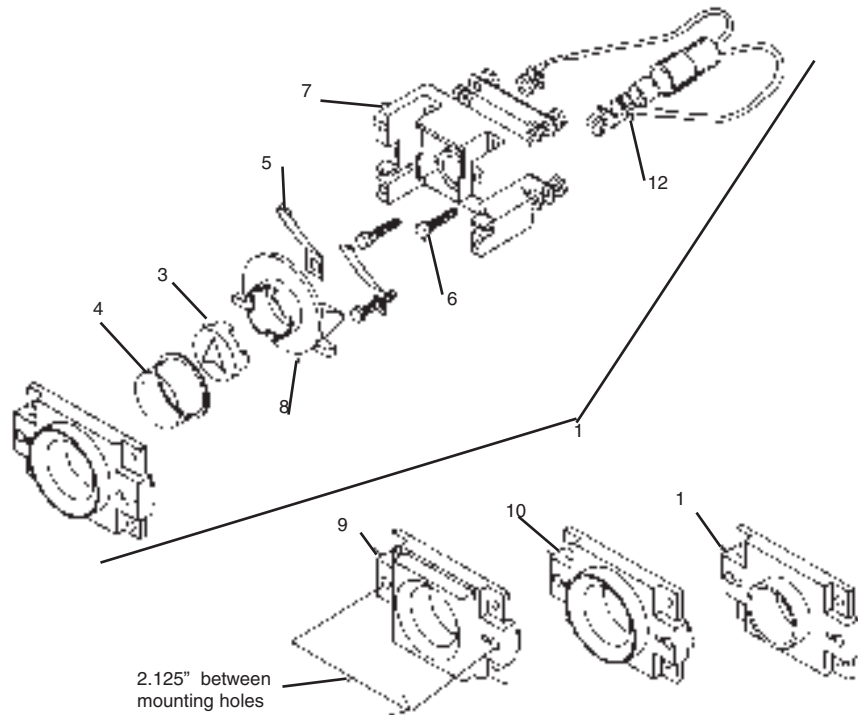

**FIGURE
NO.**

DESCRIPTION

- | | |
|---|--|
| 1 | White square, 2 NO contacts, includes halo. |
| 1 | Black square, 2 NO contacts, includes halo. |
| 1 | White round, 2 NO contacts, includes halo. |
| 1 | Black round, 2 NO contacts, includes halo. |
| 3 | White plastic button w/black characters; add suffix for characters |
| 3 | Black plastic button w/white characters; add suffix for characters |
| 4 | Clear impact-resistant plastic protective cap |
| 5 | Movable stainless steel contact arm w/silver contact |
| 6 | Brass stationary contact stud w/silver contact |
| 7 | Switch base w/bulb socket, no contacts |
| 8 | One piece contact cam actuator |
| 7 | Switch base assembly with 2 NO contacts, illuminated |
| 7 | Switch base assembly with 2 NO contacts, no lamp socket |
| 7 | Switch base assembly with 1 NO/1 NC contacts, illuminated |

C-37297
C-37297
C-37297
C-37297
A32120,11133
A32120, 11134
A320111, 10431-01
A-36865B, 11864-01
A-18526, 12061-01
B-37038
B-37039, 10419-01
10312-01
10312-02
10313-01

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

PUSHBUTTON ASSEMBLIES

FIGURE

NO.	DESCRIPTION	
9	Collar White/1.362" square	C-27809A, 11144-01
9	Collar Black/1.362" square	A-20798B, 11144-02
10	Collar White/1.362" diameter round	A-20725W, 11143-01
10	Collar Black/1.362" diameter round	A-20725B, 11143-02
11	Collar Black/0.0.987" diameter round, Armor type 24B	11146-02
12	Minature bayonet lamp, 120V; sold only 10/package	10947-01



10411-01

Stop switch, red button with "Pull to STOP, Push to Run", molded in white. Electrical configuration is 2 NC contacts with 1NO auxiliary contact.

NUMBER 2 RELAY

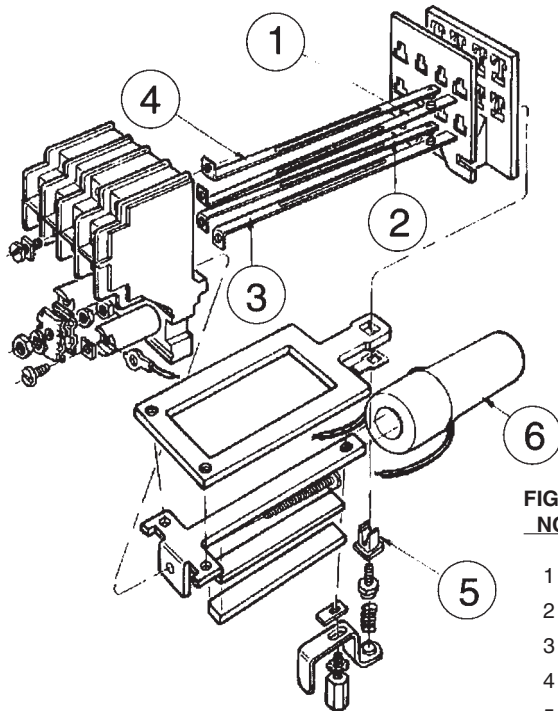


FIGURE NO.

DESCRIPTION

1	Contact blade, fixed; 5-1/4" L	A-1640026, 11168-01
2	Contact blade, movable; 5-1/16" L	A-1640024, 11166-01
3	Contact blade, fixed; 4-7/8" L	A-1640023, 11165-01
4	Contact blade, movable; 4-11/16" L	A-1640025, 11167-01
5	Bushing, nylon	V-0460020, 10338-01
6	Coil	A-1580013-A


14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

10978-02



Perforated selector tape. This tape is the highest quality steel, high flex, high yield to give longer life. 1" wide x .015" thick and perforations are at 1.00" intervals.




11173-01

11172-01

11171-01


Brass selector contacts stepper



10349-01

Cam for #3 and #4 door operator switch assembly.

CHAIN STUDS & CHAIN FOR FREIGHT ELEVATOR CAR GATES

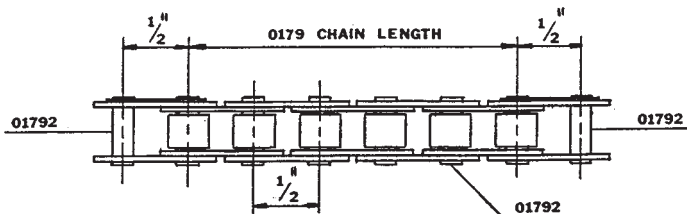

Roller Chain used on jobs installed after January, 1968. **0179**


Chain assembly consists of 0179 chain and two 01792 connecting link. **01794**

Connecting Link **01792**

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

CHAIN ROD & CHAIN FOR FREIGHT ELEVATOR DOORS

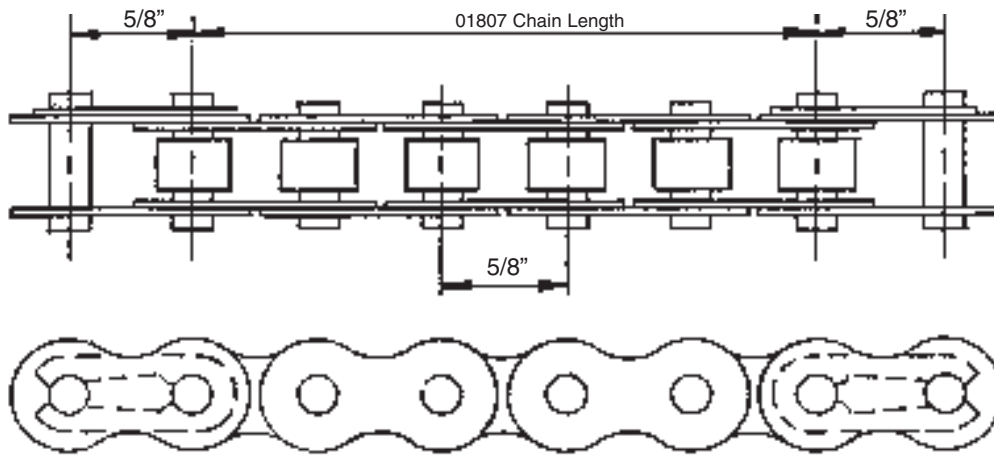

Roller Chain used on jobs installed after January, 1968.


Chain assembly consists of 01807 chain and two 01801 connecting link.

Connecting Link


01807

01806


01801

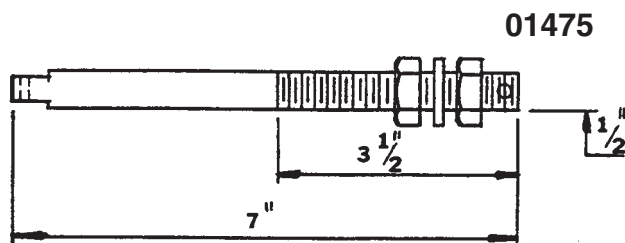

The chain stud is fastened to the gate panel and is used with 0179 roller chain on jobs installed after January 1, 1968.

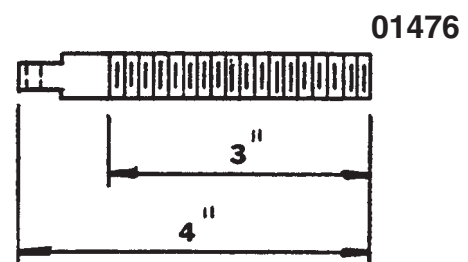


The chain stud is fastened to the gate counterweight and is used with 0179 roller chain on jobs installed after January 1, 1968.

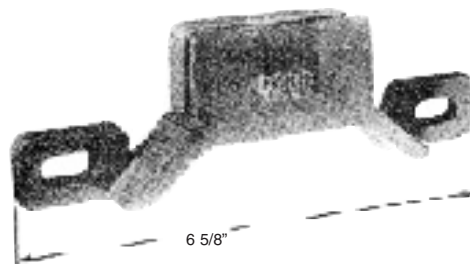

Guide Shoe **0238**


Guide Shoe **0239**

0342 UM-1 GATE CONTACT

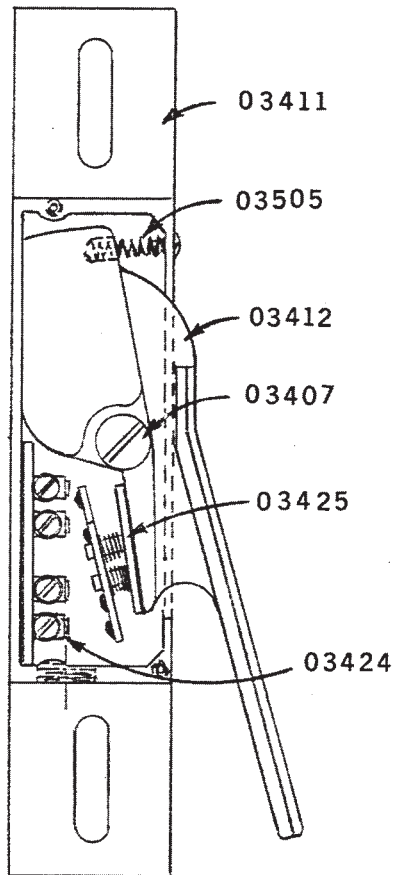

R.H. Gate Contact Assembly	0342R
L.H. Gate Contact Assembly (Opposite Hand)	0342L
Switch Box	03411
Switch Arm	03412
Switch Cover (Not Shown) (Two 10-24 x 3/8" R. Hand. Screws)	034171
Contact Point Sub-Assembly (Two 10-24 x 1/4" F. Hand Screws)	03424
Contact Bar Sub-Assembly (Two 10-24 x 1/4" F. Hand Screws)	03425
Arm Spring	03505
Bearing Stud	03407


SHEAVE ASSEMBLY

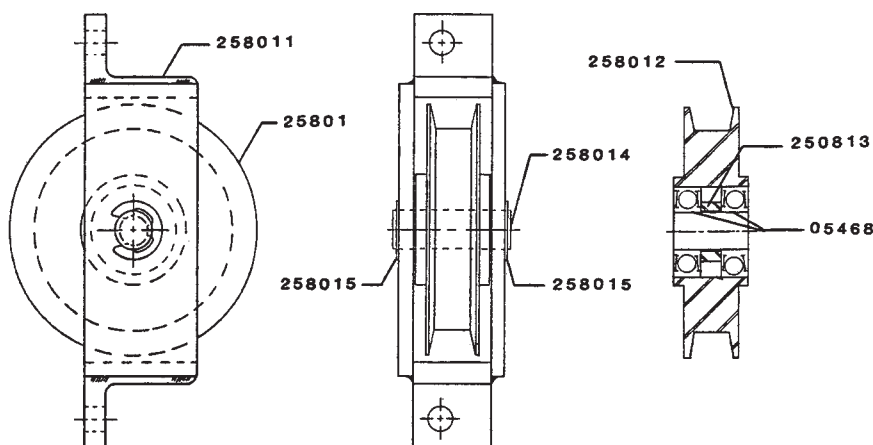

4-1/2" Diameter Sheave Assembly	2580
Sheave Wheel Assembly	25801
Sheave Wheel	258012
Sheave Bearing	05468
Bearing Spacer Ring	258013
Sheave Housing	258011
Sheave Wheel Shaft	258014
Retaining Rings	258015

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

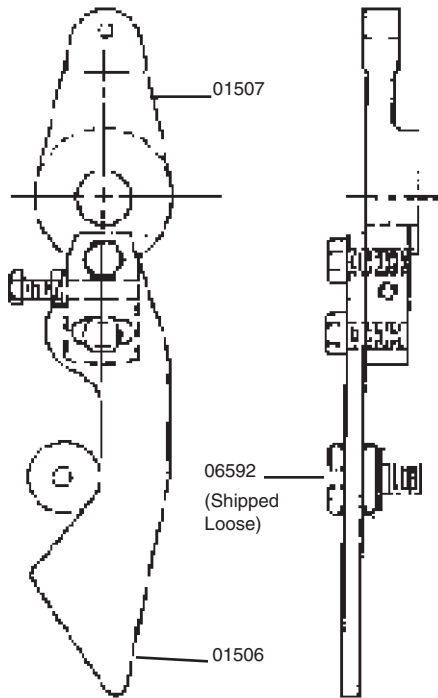

ADJUSTABLE LATCH HOOK ASSEMBLY

Adjustable Latch Hook Assembly Right Hand Shown **06696**

Latch Pivot Chain Hitch with Adjustable Stop Screw **01507**

Adjustable Latch Hook **01506**

Spring Pin (1/8" x 1-1/2") **035719**

Roller Keeper with 7/16" Lockwasher **06592**


This assembly used with 01807 roller chain.

The following items can be used with but are not part of 06696 assembly.

Keeper mounting bracket for pass type doors **066921**

ALTERNATE: **06593**

Roller keeper with nut and lockwasher

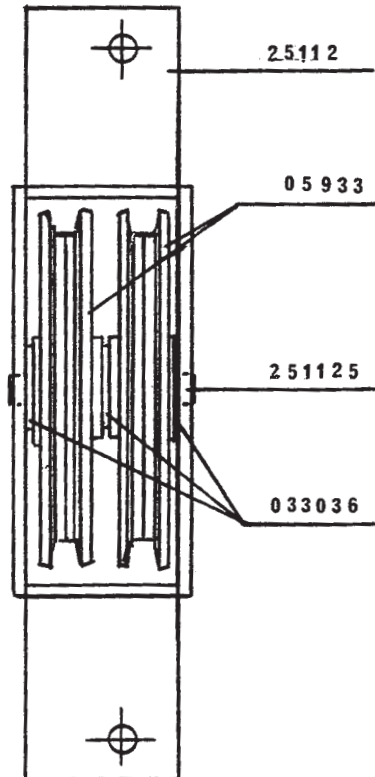

GATE SHEAVE

1968 - 1983


6-1/2" Diameter Gate Sheave **2511**

Sheave Housing **25112**

Bearing Shaft **251125**

Sheave Wheel Assembly **05933**

Spacer Washers **033036**



Arrow, extruded large plastic, **467-00012-007**
2-1/2" sides, 1-5/8" base.

Lens, white flat lantern arrow **467-00028-007**
on plastic mounting base.

Diffuser, green, for lantern **167-03003-700**
arrow lens.


Diffuser, red, for lantern arrow **167-03004-700**
lens.



Black Bezel for digital P.I. **467-00020-007**


Clear Bezel for digital P.I. **467-00021-007**

146-00550-300

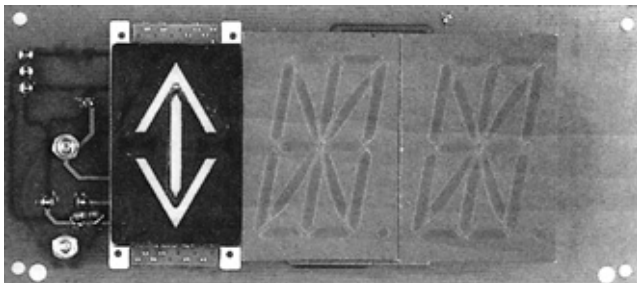

P.C. board for horizontal digital P.I. w/arrow. Full
alphanumeric capability 64 positions, double
character.

467-00022-007



Black Bezel retainer for digital position
indicator.

C


P.C. board for vertical Digital **154-05006-301**
P.I. single character.

P.C. board for horizontal **154-05005-301**
Digital P.I., single character.

934-10061-000




Fixed Resistor 2", 500 ohm, 20 W.

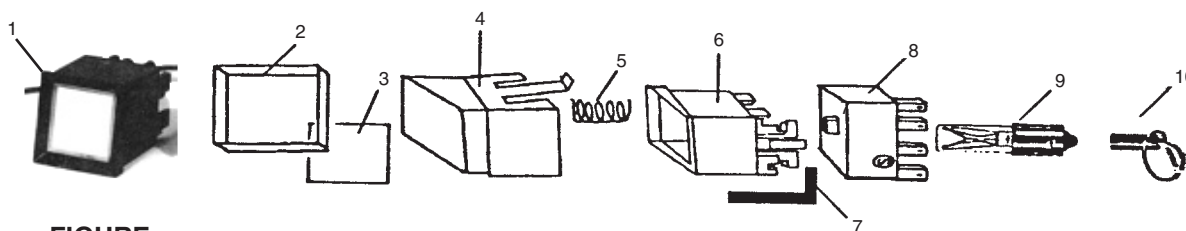

**FIGURE
NO.**

DESCRIPTION

1	Push Button Assembly complete, square black housing, white button insert, specify marking.	167-03017-100
2	Clear Cap, square plastic button cap.	467-01006-007
3	Insert, square white button insert, specify marking.	167-03015-700
4	Body, square white molded plastic button body.	467-01005-007
5	Spring (four required per assembly).	920-36001-000
6	Housing, square black molded plastic button housing.	467-01001-007
7	Clamp, push-button "L" clamp.	167-02014-700
8	Micro Switch	467-00026-007
9	Lamp, 60 MB, 60V	930-27004-000
10	Lamp Socket	940-31001-000

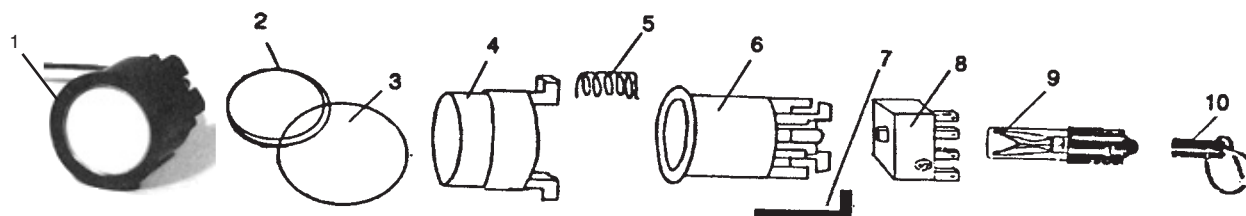


**FIGURE
NO.**

DESCRIPTION

1	Push Button Assembly complete, round black housing, white button insert, specify marking.	167-03011-100
2	Clear Cap, round plastic button cap.	467-05006-007
3	Insert, round white button insert, specify marking.	167-03014-700
4	Body, round white molded plastic button body.	467-05005-007
5	Spring (four required per assembly).	920-36001-000
6	Housing, round black molded plastic button housing.	467-05001-007
7	Clamp, push-button "L" clamp.	167-02014-700
8	Micro Switch	467-00026-007
9	Lamp, 60 MB, 60V	930-27004-000
10	Lamp Socket	940-31001-000

940-35011-000

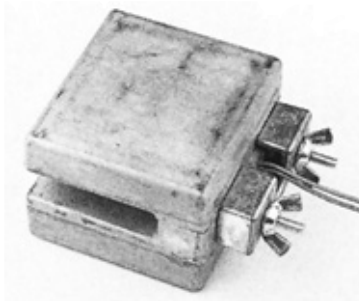

Magnetic Switch

167-03012-100





Stop Switch Assembly, square black molded plastic housing with red insert marked "Pull Emergency Stop"

167-03013-100



Stop Switch Assembly, round black molded plastic housing with red insert marked "Pull Emergency Stop"

RELAYS



Relay, IBM 4 PDT - 48 VDC

930-35019-000

Latching Relay IBM 4PDT, 48 VDC

930-35017-000

Relay, IBM 6 PDT, 48 VDC

930-02001-000

Relay, IBM 12 PDT, 48 VDC

930-35020-000

Relay, VC152A2B-120V

930-35056-000

Relay, VC153A1B-120V

930-35056-001

Relay, VC154A-120V

930-35056-002

Relay, type KUP, DPDT, 48 VDC

930-35030-000

Relay, flange mount

930-35031-000

Type KUP - 48 VDC

930-35032-000

Relay, Flange mount

930-35033-000

Type KUP 3 PDT-240 VDC

930-35033-000

Relay, Plug in Type K10-2P,48VDC

930-35053-000

Relay, Type R10-4PTD, 48VDC

930-35051-000

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



ADJUSTABLE RESISTOR 10-1/2"

Resistor, 10 OHM, 200 Watt, Adjustable	934-10055-000
Resistor, 25 OHM, 200 Watt, Adjustable	934-10054-000
Resistor, 50 OHM, 200 Watt, Adjustable	934-10063-000
Resistor, 100 OHM, 200 Watt, Adjustable	934-10057-000
Resistor, 200 OHM, 200 Watt, Adjustable	934-20206-000
Resistor, 250 OHM, 200 Watt, Adjustable	934-10056-000
Resistor, 500 OHM, 200 Watt, Adjustable	934-10062-000
Resistor, 1K OHM, 200 Watt, Adjustable	934-10060-000



CAPACITORS


Capacitor 300 Mfd, 150V	936-10032-000
Capacitor 320 Mfd, 350 VDC	936-40003-000
Capacitor 150 Mfd, 150 VDC	936-10027-000
Capacitor 5300 Mfd, 100 VDC	936-60042-000
Capacitor 108-130 Mfd, 250 VAC	936-60022-000
Capacitor 0.25 Mfd, 600V	936-50004-000



Roller Guide Assembly with 3" diameter wheels, hydro	100-00057-001
Roller Guide Assembly 3" diameter wheels for counterweight	114-00054-001
Roller Guide Wheel 3" 5/8" ID tire face 15/16" wide	114-00009-007
Roller Guide Assembly 6" diameter replacement kit consisting of roller guide assembly and adapter	100-00075-001
Roller Guide Wheel 6" diameter, polyurethane tire, face 5/8" wide	100-00080-001
Roller Guide Assembly, Car, 6" diameter wheels.	100-00054-001

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

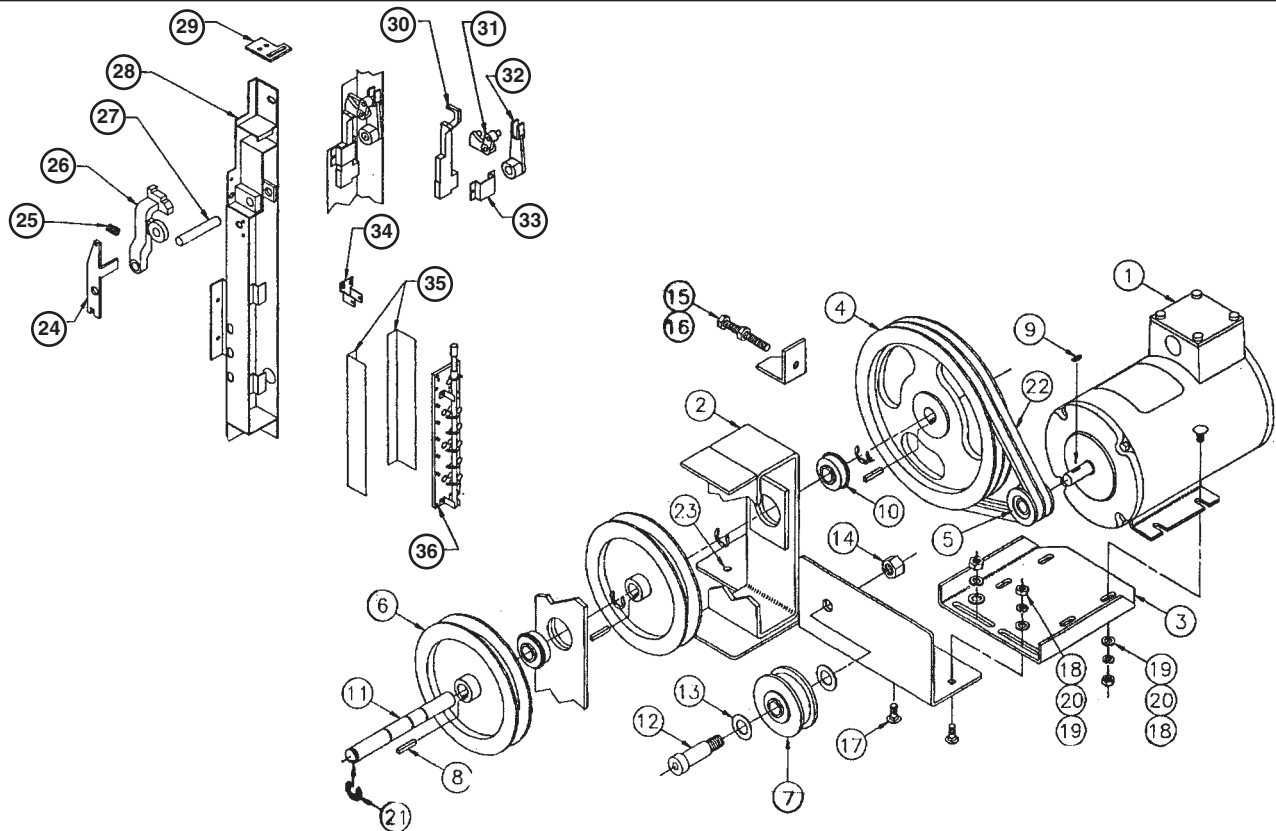

**FIGURE
NO.**

DESCRIPTION

1	65 oz gate motor	90-853500
2	Gate operator base assembly	07-200701R/1
3	Motor mount gate	07-229700
4	Double belt 10" pulley	90-871700
5	Double belt 1 1/2" pulley	900-871200
6	Gate sheave wheel	07-220303
7	Idler sheave with flange bearings	07-251000
8	3/16" square key - 1 1/4" long	95-010005
9	9 woodruff key	95-010022
10	Nice 7512DLG bearing	90-808000
11	Gate sheave shaft	07-228303
12	3/4" x 1 3/4" shoulder bolt	95-016150
13	1 1/2" x 3/4" 14 ga. machinery bushing	95-034450
14	5/8" - 11 flex lock hex nut	95-012265
15	3/8" - 16 x 3 hex capscrew full thread	95-016083
16	3/8" - 16 hex nut	95-012010
17	5/16" - 1 carriage bolt	95-002127

**FIGURE
NO.**

DESCRIPTION

18	5/16" - 18 hex nut	95-012009
19	5/16" flat washer	95-031071
20	5/16" lock washer	95-031205
21	External retaining ring (RR- 1000 - X74)	90-868500
22	Mated AX38 v-belts	90-808200
23	Hardware kit - 20	94-080020
24	EUD Lever	04-011800R/L
25	Spring	04-009900
26	Lever arm	04-011700R/L
27	Shaft	04-000100
28	Enclosure assembly	04-326201R/L
29	Lock bar guide	04-041601
30	Slide	04-637600R/L
31	Cam	04-015600R/L
32	Fork lever	04-015700
33	Slide keeper	04-300101
34	Adjustable bail	04-601002
35	Contact insulator (2)	04-301202
36	PA contact assembly	04-359600

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



Alarm Bells, Gongs, and Chimes	22
Cab/Pit Products	
Certificate Frames	15
Elevator Pad/Hooks	24
Pit Switches	15
Pit Pads	15
Carbon Brushes	31-37
Door/Hatch Equipment	
Astragals	14
Bumpers	13
Door Keys	10-11
Door Pull Straps	13-14
Hardware	9-10
Safety Edge	23
Spirator	10
Lamps & Fuses	16-18
Lubricants	1
Rectifiers	30
Seals/Packing	2-8
Signage	25-29
Tachometer	38-39
Tools/Hardware	
Door Pressure Gauge	12
Flex Files/Burnishing Tools	20
Magnetic Tank Heater	1
Orange Sticks	21
Seating/Cleaning Stones	19
Spanner Driver	11
Spanner Screws	12
Universal Gibs	21




SLIPIT LUBRICANT

"SlipIt" has gained national recognition as the single most effective lubricant used in the Elevator Industry. Unlike WD-40, "SlipIt" won't run or evaporate. You can use it on guide rods, hinges, door tracks, and anywhere you need lubrication. If you have never used "SlipIt", try it, and you'll never want to use any other product.

FEATURES & BENEFITS

- Lasts at least 4 times longer than conventional lubricants.
- Won't run or evaporate - excellent adhesion. "The Stay-On Spray-On."
- Won't attract dirt or dust.
- #1 lubricant for aluminum applications. Prevents rusting and pitting.
- Silicone free version available for wood applications. Lubricant of choice among experts.
- FDA rated OK for food contact. USDA rating is pending.
- Non toxic, non-staining, Environmentally friendly, will not pollute.
- Prevents rust and corrosion while reducing friction, Displaces moisture.
- Forms a grease when applied. Excellent dielectric material.
- Compatible with conventional lubricants.

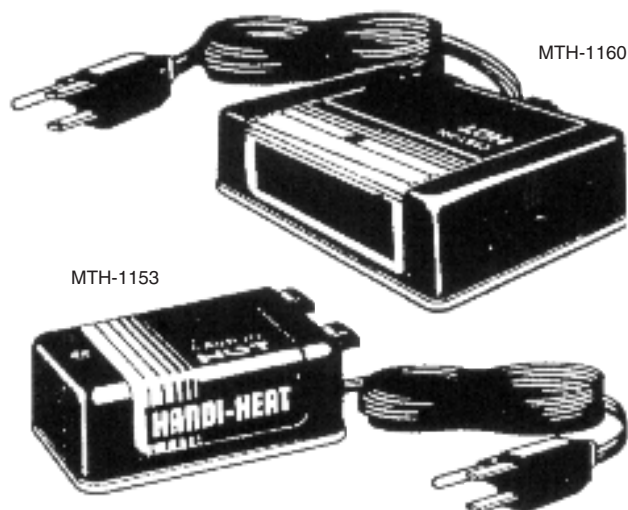

MAGNETIC HEATERS

If you have ever had your elevator hydraulic oil get cold and slow down it's performance, then PSI's magnetic tank heater is your answer. They are easy to install, just place them on the lowest part of the tank, and plug them in. This device can save you those expensive service calls, and keep your elevators running smooth on those cold winter days.

All PSI Tank Heater models operate on standard 115-110 volt house current. The heating range is pre-set and thermostatically controlled so that the unit should only draw as much power as necessary to compensate for freezing temperatures. The unit automatically turns on and off as heat is needed. In extreme operating ranges, the Model MTH-1153 draws approximately 2 amps/hour. The Model MTH-1160 draws approximately 3 amps/hour.

These stick to any magnet attracting surface. Models with removable handles give you the versatility to move from one application to another. Experiment with the heater in different locations.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

PSI has available Packing and Seals for numerous OEM's in all available sizes. The following illustrations show some of the more common OEM's and sizes. If you cannot find a specific size or style, call your PSI rep for assistance.

ARMOR ELEVATOR CO. - U.S. (KONE)

Autopak



PLUNGER SIZE	SET NO. (4 PIECES)	REPLACEMENT PACKING SEAL	AUTOPAK NUMBER
4-7/16"	2EA003-01	6E-032	1A091-01
5-1/2"	2EA003-02	6E-221SF	1A091-02
6-9/16"	2EA003-03	6E-031	1A091-03
7-9/16"	2EA003-04	6E-059	1A091-04
8-9/16"	2EA003-05	6E-064	1A091-05
9-9/16"	2EA003-06	6E-007	1A091-06
10-11/16"	2EA003-07	6E-069	1A091-07
12-11/16"	2EA003-08	6E-068	1A091-08



Wiper



Seal



O-Ring



Rota Wiper



Rota Seal


DOVER ELEVATOR

PLUNGER SIZE	SET NO. (2 PIECES)	REPLACEMENT PACKING SEAL
3-1/2" (3S)	3EA023-11	4E-002
4-3/8" (4S)	3EA023-12	4E-003
5-7/16" (5S)	3EA023-13	4E-004
6-1/2" (6S)	3EA023-14	4E-005

A gasket is furnished with rota-seal.



Autopak



Seal

PLUNGER SIZE	SET NO. (3 PIECES)	REPLACEMENT PACKING SEAL	AUTOPAK NUMBER
3-7/8" (IVO-3S)	3EA023-21	6E-205SF	1A084-10 *
3-7/8" (Cimmarron)	3EA023-22	6E-164SF	

* Autopack is the recommended replacement and includes an "O" ring.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

DOVER ELEVATOR (ROTARY)



Autopak

PLUNGER SIZE	SET NO. (3 PIECES)	REPLACEMENT PACKING SEAL	AUTOPAK * NUMBER
4-3/8"	3EA023-01	3E-206	1A084-01
5-7/16"	3EA023-02	3E-219	1A084-02
6-1/2"	3EA023-03	3E-208	1A084-03
7-1/2"	3EA023-04	3E-029	1A084-04
8-1/2"	3EA023-05	3E-030	1A084-05
9-1/2"	3EA023-06	3E-039	1A084-06
10-5/8"	3EA023-07	3E-042	1A084-07
12-5/8"	3EA023-08	3E-041	1A084-08
15-3/4"	3EA023-09	3E-042	1A084-09

The above Packing Set and Seals are for Dover Rotary Lift Unit manufactured prior to 1955.

* Autopak is the recommended Replacement Packing.



Seal




Lantern Ring



Seal

MONTGOMERY ELEVATOR



Seal



Spacer



Wiper

PLUNGER SIZE	SET NO. (3 PIECES)	REPLACEMENT PACKING SEAL	AUTOPAK * NUMBER
3-15/16"	3EA026-11	6E-019	1A074-01
4.460"	3EA026-12	6E-032	1A074-02
5.520"	3EA026-13	6E-221SF	1A074-03
5.720"	3EA026-14	6E-003	1A074-04
6.590"	3EA026-15	6E-089	1A074-05
7.470"	3EA026-16	6E-029	1A074-06
8.570"	3EA026-17	6E-064	1A074-07
9.470"	3EA026-18	6E-039	1A074-08

PLUNGER SIZE	SET NO. (5 PIECES)	REPLACEMENT PACKING SEAL	AUTOPAK * NUMBER
10.7"	3EA026-19	6E-051	1A074-09
12.7"	3EA026-20	6E-062	1A074-10

* For all Plunger sizes the recommended alternative is Autopak

HOLELESS

PLUNGER SIZE	SET NO. (5 PIECES)	REPLACEMENT PACKING SEAL	AUTOPAK * NUMBER
3"	6EA018-01	6E227-SFSS	1A-079
3-1/2"	6EA018-02	6E227-SS	1A-080




Autopak

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

OTIS ELEVATOR (CAST HEAD) "D"



Lantern Ring



Spacer

PLUNGER SIZE	SET NO. (6 PIECES)	REPLACEMENT PACKING SEAL	AUTOPAK NUMBER
4" (3-7/8")	6EA001-01	6E-205SF	1A085-01
4-1/2" (4-3/8")	6EA001-02	6E-206SF	1A085-02
5-1/2" (5-7/16")	6EA001-03	6E-219SF	1A085-03
6-1/2" (6-1/2")	6EA001-04	6E-208SF	1A085-04
7-1/2" (7-1/2")	6EA001-05	6E-029	1A085-05
8-1/2" (8-1/2")	6EA001-06	6E-053	1A085-06
9-1/2" (9-1/2")	6EA001-07	6E-054	1A085-07
10-1/2" (10-5/8")	6EA001-08	6E-051	1A085-08
12-1/2" (12-5/8")	6EA001-09	6E-052	1A085-09
14" (13-3/4')	6EA001-10	3E-063	1A085-10
16" (15-3/4")	6EA001-11	1E-038	1A085-11

This packing configuration is used on the Otis Cast Cylinder Head Model made prior to 1974. It is additionally distinguishable from the new Otis Welded Cylinder Head Design by the fact that the clamp plate is tightened using bolts on the "Cast" Model while the new "Welded" Model uses allen screws.

(WELDED HEAD) "AP"

PLUNGER SIZE	SET NO. (5 PIECES)	REPLACEMENT PACKING SEAL	AUTOPAK *
4" (3-7/8")	6EA003-01	6E-205SF	1A085-01
4-1/2" (4-3/8")	6EA003-02	6E-206SF	1A085-02
5" (4-7/8")	6EA003-03	6E-207SF	1A085-12
5-1/2" (5-7/16")	6EA003-04	6E-219SF	1A085-03
6-1/2"	6EA003-05	6E-208SF	1A085-04

This packing configuration is for the Otis Welded Cylinder Head Model manufactured since 1974.



Autopak

TELESCOPIC JACK

PLUNGER SIZE	SET NO. (5 PIECES)
3.000 (1500#)	6EA067-01
3.562 (2000#)	6EA067-02
4.437 (2500#)	6EA067-03
3.940 (2500#)	6EA067-04 *

* After 4/23/79



Shoulder Bearing



Wiper

A

AMTECH RELIABLE ELEVATOR



Autopak

PLUNGER SIZE	AUTOPAK NUMBER
3-7/8"	1A104-09
4"	1A104-10
4-3/8"	1A104-01
4-1/2"	1A104-02
5"	1A104-03
5-7/16"	1A104-04
5-1/2"	1A104-05
6"	1A104-06
6-1/2"	1A104-07
7"	1A104-08

SCHINDLER ELEVATOR F SERIES

PLUNGER SIZE	O.D.	REPLACEMENT PACKING SEAL
3-1/2"	4"	S7E-010U
3-3/4"	4-1/4"	S7E-007U
4"	4-1/2"	S7E-011U
4-1/2"	5"	S7E-008U
5"	5-1/2"	S7E-009U
5-1/2"	6"	S7E-012U
6"	6-1/2"	S7E-013U
6-1/2"	7"	S7E-014U
7"	7-1/2"	S7E-015U
8"	8-1/2"	S7E-016U



Wiper

U.S. ELEVATOR

PLUNGER SIZE	AUTOPAK NUMBER
3-7/8"	1A108-06
4"	1A108-05
4-1/2"	1A108-01
5"	1A108-02
5-1/2"	1A108-07
6"	1A108-03
7"	1A108-04

MT HEAD

PLUNGER SIZE	SET NO. (3 PIECES)	REPLACEMENT PACKING SEAL
4"	6EA012-01	6E-165SF
4-1/2"	6EA012-02	6E-168SF
5"	6EA012-03	6E-169SF
5-1/2"	6EA012-04	6E-171SF
6"	6EA012-05	6E-172SF
6-1/2"	6EA012-06	6E-173SF
7"	6EA012-07	6E-174SF
8-1/2"	6EA012-08	6E-177SF



Seal



Spacer

ECON-O-HEAD (Mfg. Before 1990)

PLUNGER SIZE	SET NO. (3 PIECES)	REPLACEMENT PACKING SEAL
3-3/4"	6EA083-01	6E-114SF
4"	6EA083-02	6E-128SF
4-1/2"	6EA083-03	6E-129SF
5"	6EA083-04	6E-130SF
5-1/2"	6EA083-05	6E-131SF
6"	6EA083-06	6E-132SF
6-1/2"	6EA083-07	6E-133SF
6-5/8"	6EA083-08	6E-145SF

PLUNGER SIZE	SET NO. (3 PIECES)	REPLACEMENT PACKING SEAL
4-7/8"	6EA090-10	6E-160FS
3-3/4"	6EA090-01	6E-114SF
4"	6EA090-02	6E-128SF
4-1/2"	6EA090-03	6E-129SF
5"	6EA090-04	6E-130SF
5-1/2"	6EA090-05	6E-131SF
6-1/2"	6EA090-07	6E-133SF
6-5/8"	6EA090-08	6E-145SF
6-9/16"	6EA090-09	6E-116SF

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

WESTINGHOUSE ELEVATOR

PLUNGER SIZE	SET NO. (5 PIECES)	REPLACE- MENT PACKING SEAL
3-1/2"	6EA025-01	6E-001
3-3/4"	6EA025-02	6E-223SF
4"	6EA025-03	6E-213SF
4-1/2"	6EA025-04	6E-215SF
5-1/2"	6EA025-05	6E-216SF
6"	6EA025-06	6E-224SF
6-1/2"	6EA025-07	6E-231SF

ARMOR ELEVATOR

MACHINE NUMBER	PACKING DIMENSIONS	MODEL NUMBER
#1	1.500" x 2.500" x .828"	10PA01-29
#2	1.750" x 2.750" x .828"	10PA01-30(1)
#3 OLD	1.875" x 2.875" x 1.297"	10PA01-31
#3 INT	1.938" x 3.063" x 1.359"	10PA01-32
#3 FIN	1.938" x 2.875" x 1.266"	10PA01-33(2)
#4	2.000" x 3.000" x .500"	1R020
#5	2.750" x 3.750" x .500"	1R081

(1) Substitute Worm Gear Seal Part Number 1R059
(2) Substitute Worm Gear Seal Part Number 1R012

DOVER ELEVATOR

MACHINE NUMBER	PACKING DIMENSIONS	MANUFACTURER PART NUMBER	MODEL NUMBER
GD45	3.125" x 4.250" x .500"	9767897	1R103
GD45	1.749" x 2.650" x .500" Worm	9752146	1R043
GD45	5.125" x 7.00" (Spider)	9808644	5E006
GD50	3.125" x 4.250" x .500" Inner	9767897	1R103
GD50	1.749" x 2.650" x .500" Worm	9752146	1R043
GD75	3.125" x 4.250" x .500" Inner	9767897	1R103
GD75	1.749" x 2.650" x .500" Worm	9752146	1R043
GD105	7.125" x 8.625" (Spider)	9825526	5E004
GD105	4.500" x 5.500" x .500" Inner	9727346	1R048
GD200	2.345" x 3.220" x .500" Worm	9752122	1R002
GD240	2.345" x 3.200" x .500" Worm	9825514	1R002
GD240	5.000" x 6.250" x .563" Inner	9824479	1R101
GD240	8.500" x 10.250" (Spider)	9808760	5E005

HAUGHTON MACHINES

MACHINE NUMBER	PACKING DIMENSIONS	MODEL NUMBER
E	2.000" x 2.750" x 2.250"	10PA01-20
EK	2.750" x 3.750" x 1.063"	1R081
H	1.438" x 2.250" x 1.688"	10P01-21
O	1.438" x 2.250" x 1.625"	10PA01-22
R	1.750" x 2.500" x 1.750"	10PA01-23
OH	2.500" x 3.500" x .875"	1R100 + 6 Shims
N	3.188" x 4.250" x 2.500"	10PA01-24
L	2.688" x 3.750" x 2.500"	10PA01-25
K	2.188" x 3.250" x 2.313"	10PA01-26
EKU	2,750" x 3.750" x 1.063"	1R081

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

MONTGOMERY ELEVATOR

MACHINE NUMBER	PACKING DIMENSIONS	MANUFACTURER PART NUMBER	MODEL NUMBER
207E	1.938" x 3.194" x .437"	9096-017	1R086N
207E	1.125" x 1.832" x .437"	9096-021	1R049N
207E	2.625" x 3.548" x .375"	9096-047	1R095N
208E	1.938" x 3.194" x .438"	9096-017	1R086N
208E	1.125" x 1.832" x .438"	9096-021	1R049N
208E	4.000" x 5.004" x .438"	9096-024	1R064N
210E	2.438" x 3.548" x .500"	9096-005	1R047N
210E	4.500" x 5.725" x .438"	9096-046	1R094N
214E	2.438" x 3.548" x .500"	9096-005	1R047N
214E	4.375" x 5.756" x .563"	9096-029	1R093N
215E	2.438" x 3.548" x .500"	9096-005	1R047N
215E	2.938" x 4.008" x .438"	9096-008	1R039N
215E	4.375" x 5.756" x .563"	9096-029	1R093N

OTIS ELEVATOR - WORM SHAFT PACKING

MACHINE NUMBER	PACKING DIMENSIONS	MANUFACTURER PART NUMBER	MODEL NUMBER
	1.000" x 2.875" x 1.250"	182A1	10PA01-01
	1.313" x 2.063" x 1.375"	182A2	10PA01-02
	1.563" x 2.563" x 1.688"	182A3	10PA01-03
	1.875" x 3.125" x 2.063"	182A4	10PA01-04
	2.125" x 3.375" x 2.625"	182A5	10PA01-05
	2.250" x 3.500" x 2.000"	182A6	10PA01-06
	2.500" x 3.750" x 1.938"	182A7	10PA01-07
	3.500" x 4.500" x 2.313"	182A8	10PA01-08
	0.625" x 1.406" x 0.938"	182A9	10PA01-09
	1.188" x 1.688" x 1.625"	182A10	10PA01-10
	1.313" x 1.875" x 1.063"	182A11	10PA01-11
	2.000" x 3.000" x 1.313"	182A12	10PA01-12
	1.813" x 2.813" x 1.500"	182A13	10PA01-13
	1.438" x 2.438" x 1.000"	182A14	10PA01-14
	1.563" x 2.563" x 1.250"	182A15	10PA01-15
	3.625" x 5.250" x 2.313"	182A16	10PA01-16
	1.875" x 3.125" x 1.688"	182A17	10PA01-17
	1.875" x 3.000" x 2.625"	182A18	10PA01-18
	2.500" x 3.750" x 1.438"	182A19	10PA01-19

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

OTIS ELEVATOR

MACHINE NUMBER	PACKING DIMENSIONS	MANUFACTURER PART NUMBER	MODEL NUMBER
17	1.938" x 2.875" x .313"	33AA1	1R079
22	2.000" x 3.000" x .500"	33D29	1R020
22 OLD	2.000" x 3.250" x .500"		1R021
29	3.000" x 4.500" x .500"	33D26	1R019
	6.875" x 7.875" x .438"	33D31	1R077
	8.250" x 9.500" x .625"	33D27	1R096
	5.000" x 6.000" x .500"	33D5	1R091
	5.313" x 6.313" x .500"	33D23	1R084
	5.313" x 6.250" x .500"	33D20	1R0105

WESTINGHOUSE ELEVATOR

MACHINE NUMBER	PACKING DIMENSIONS	MANUFACTURER PART NUMBER	MODEL NUMBER
18	1.750" x 3.188" x .500"	X30ES1H13	10PA01-34
18 (3)	2.563" x 3.750" x .500"	X30ES1H12	1R050
18	6.855" x 8.500" (Sheave)	6918C45H01	1M139
27	2.125" x 3.140" x .688"	R7311H23	1RXXX
28	2.500" x 3.500" x .625"	X30ES1H19	1R100
28 (3)	3.688" X 4.750" X .500"	X30ES1H15	1R022
28	8.125" x 9.250" (Sheave)	6917C89H01	1M130U
31	2.125" X 3.140" X .688"	R7311H23	1RXX
37	2.438" x 3.438" x .500"	R7311H17	1R006
38	3.125" x 4.250" x .500"	X30ES1H20	1R004
38 (3)	4.500" x 5.500" x .500"	X30ES1H18	1R048
38	4.000" x 5.000" x .688"	R7311H25	1R031
38	9.750" x 11.30" (Sheave)	2890C79H01	1M057U
57	3.240" x 4.250" x .688"	X30ES1H09	1R005
58 New	3.250" x 4.500" x .625"	X30ES1H14	1R028
58 Old	3.240" x 4.250" x .688"	X30ES1H09	1R005
61	3.240" x 4.250" x .688"	X30ES1H09	1R005
81	4.000" x 5.000" x .688"	R7311H25	1R031
18	MACHINE KIT	6918C44G02	1K006
28	MACHINE KIT	6917C91G02	1K005
38	MACHINE KIT	2900C27G02	1K004

(3) Geared Center

A

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

DOOR HARDWARE

DOOR ESCUTCHEONS/PLATES



321CV1

Otis stainless steel escutcheon 2-3/4" L X 1/2" diameter

321CV1

Otis hoistway door emergency release lever.

288LS1

Westinghouse "T Key" escutcheon.

WE-T

Westinghouse "Lunar Key" escutcheon.

WE-L

Otis "Lunar Key" escutcheon.

386TZ1-3

Escutcheon plate "Specify OEM configuration".

EP



386TZ1-3



WE-T



WE-L



SL-M SAFETY LOCK



Mounts same as SL-A on normal thickness slide doors through 7/8" hole. Utilizes Medeco U.L. approved cylinder for optimum security.

Chrome Finish **1750**

Brass Finish **1755**

SL-AC SAFETY LOCK



Similar to SL-A lock but has 4" #10 ball chain that attaches directly to interlock or solenoid.

Chrome Finish **1560**

Brass Finish **1565**

12" Extension Chain **1165**

SL-A SAFETY LOCK




Secures door lock release key-holes with Ace 7-pin removable cylinder. Mounts on normal thickness door through 7/8" hole.

Chrome Finish **1550**

Brass Finish **1555**


DOOR HARDWARE

DOOR SPIRATORS



Eliminate elevator door reel replacement problems with one heavy duty Hunter Spring spring-powered spirator. Pre-winding the reel upon installation allows universal replacement. Spring is made of high-carbon steel, the 1/16" diameter cable is nylon coated galvanized steel with a crimped loop as opposed to eyelet. Each case is steel and the arbors are Delrin. Replaces Dover, Haughton, Montgomery, GAL, Otis, U.S. and Armor Spirators.


ARBOR (MOUNTING)	DISTRIBUTION THRU HUB	CABLE LENGTH	REEL DIAMETER	
5/16" Clear, Square Hole	1	144"	6"	6940AR1-HD
5/16" Clear, Square Hole	1	120"	5"	6940AR1
2 Hole (Westinghouse)	1	120"	5"	215B951H01

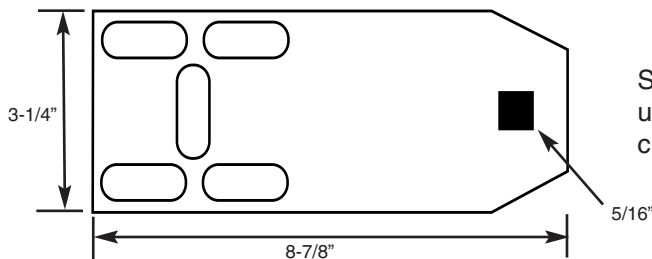

Square stud mounting bracket for use with 6940AR1 includes retaining clip & spacer

299ADP2

DOOR KEYS

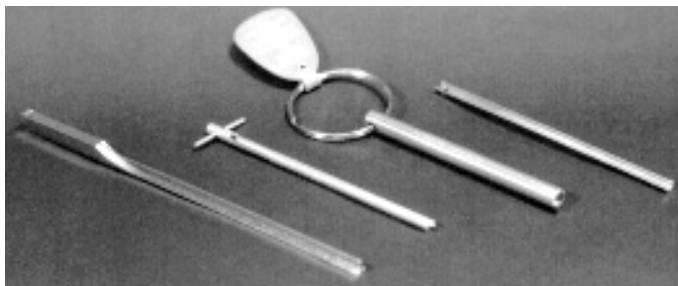

Shown Left to Right

Westinghouse "T" 9" Length	M3550
Otis L Lock	194AD8
GAL Type M Lock	INT 5-16
Westinghouse Lunar 6" Length	569A884H01

A

DOOR KEYS

DOOR HARDWARE




Shown Left to Right

Otis lunar 10-1/2" Length	194AD2
Otis 2 section	194AD6
Otis 3 section	194AD7
GAL model KMO	INT 2-18

FOR ELEVATOR FIXTURES

SPANNER DRIVER

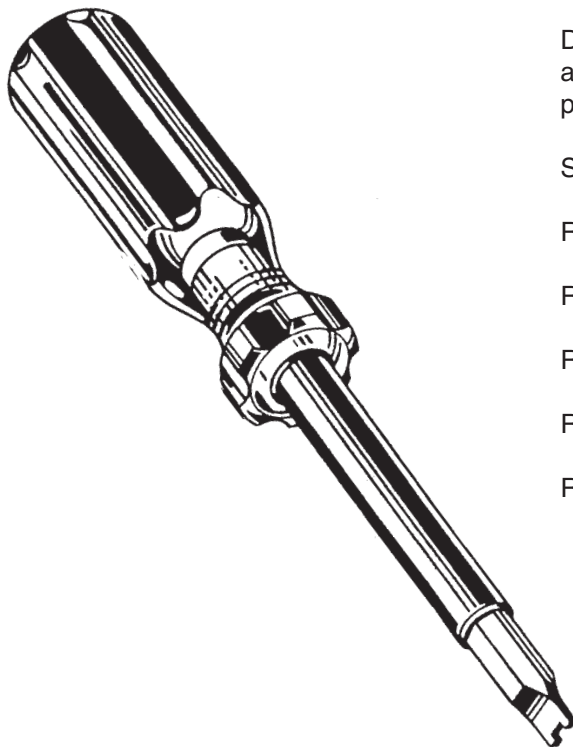

Standard spanner driver kit includes #6, #8 and #10 spanner bits. **SD**

Deluxe Spanner Driver Kit includes #6, #8 and #10 spanner bits, slotted bit and phillips. **SD-10DLX**

Spanner Driver Only **SD-DO**


Replacement bit, #6 spanner **B - 6**

Replacement bit, #8 spanner **B - 8**

Replacement bit, #10 spanner **B - 10**

Replacement bit, slotted **B - S**

Replacement bit, phillips **B - P**



Spanner Bits




Phillips Pin-Head Bit

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

SPANNER SECURITY SCREWS

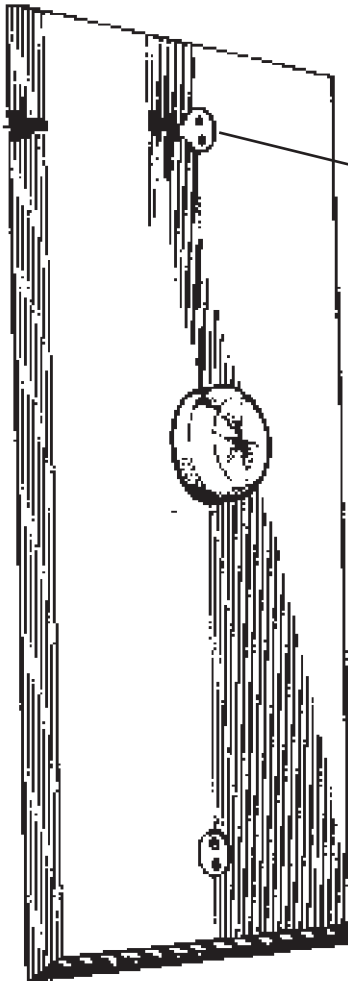

50 Screws Per Box

6 - 32 x 1/2" oval head spanner screw, S.S.	S-1
6 - 32 x 1" oval head spanner screw, S.S.	S-2
8 - 32 x 1/2" oval head spanner screw, S.S.	S-3
8 - 32 x 1" oval head spanner screw, S.S.	S-4
8 - 32 x 1-1/2" oval head spanner screw, S.S.	S-5
8 - 32 x 2" oval head spanner screw, S.S.	S-6
10 - 32 x 3/4" oval head spanner screw, S.S.	S-7
10 - 32 x 1" oval head spanner screw, S.S.	S-8
10 - 32 x 1-1/2" oval head spanner screw, S.S.	S-9
10 - 32 x 2" oval head spanner screw, S.S.	S-10
10 - 32 x 2-1/2" oval head spanner screw, S.S.	S-11

NOTE: All of the above are also available in brass finish.
A complete line of sizes and styles available.

DOOR PRESSURE GAUGES

FOR ELEVATOR EQUIPMENT

DPG-100

0-35 Pound Force Range



An instrument designed specifically to measure force.

In addition to satisfying door codes, the DPG may be used to determine correct belt tensions on drives of auxiliary equipment such as air compressors, fans and refrigeration and air conditioning equipment.


A

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

FOR ELEVATOR EQUIPMENT

RUBBER DOOR BUMPERS

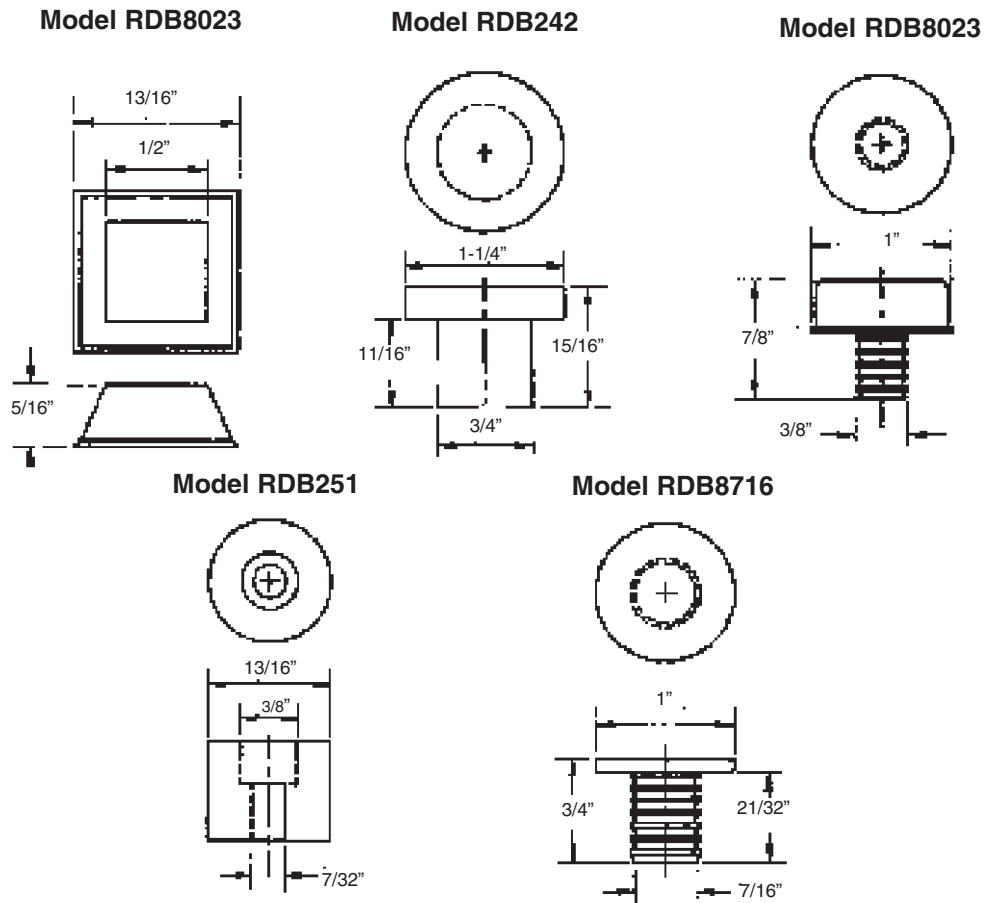

DOOR PULL STRAPS



Our 2" wide, 5,000-lb. test door pull straps are made of durable nylon webbing with 5/8" grommet.

18" Long	DPS-18
24" Long	DPS-24
30" Long	DPS-30
36" Long	DPS-36
48" Long	DPS-48

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

HEAVY DUTY DOOR PULL STRAPS



Our 12,000 lb., test heavy-duty door pull straps is made of durable black nylon. A mounting bracket is sewn into one end for easy attachment.


18" Long	DPS-18-HD
24" Long	DPS-24-HD
30" Long	DPS-30-HD
36" Long	DPS-36-HD
48" Long	DPS-48-HD

DOOR ASTRAGALS

These parts have been compounded to meet specifications of ASTM-D-2000 SAE J200 2BC 715 B14 C12 F17 GP20.


The astragals are stocked in 7" lengths. If a special length is required, please specify when placing order.

Astragal #119 Reversing




Glue on replacement astragal. Use Eastman super weather strip or equivalent adhesive per directions.


Astragal #120




Astragal #126




Astragal #124 Companion Part to #125



Astragal #125 Companion Part to #124



CERTIFICATE FRAMES

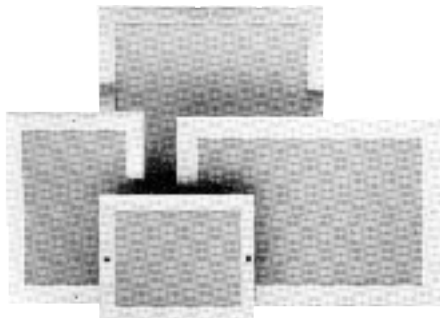

- Stainless Steel or Bronze finish with acrylic window.
- Hidden mounting screws prevent vandalism.
- Mounts vertically or horizontally.

	Dimensions		STAIN-LESS	BRONZE
	Width	Length		
Window	3-1/2"	4-3/4"		
Outside	4-1/2"	4-3/4"	CF34	CF34B
Window	3"	6"		
Outside	5-1/2"	7-1/2"	CF46	CF46B
Window	4-1/4"	8-1/4"	CF48	
Outside	5-3/4"	9-3/4"		
Window	5-5/8"	8-5/8"		
Outside	7-1/8"	10-1/8"	CF69	CF69B
Window	7-3/4"	9-3/4"	CF810	CF810B
Outside	9-1/4"	11-1/4"		



PIT SWITCHES


MODEL PS100

Steel guard prevent damage or accidental switching.

Designed to meet NASI A17.1, rules 106.1f and 210.2e/2g elevator safety code requirements. Red run/stop control switch (20 amp - 250V AC) conforms to Rule 210.2e(4).

PIT PADS

TYPE 156

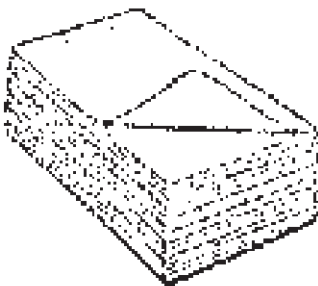

100 PER PACKAGE

Inexpensive alternative to conventional "kitty litter" oil clean-up products.

- Frees up storage space for more important items.
- Keeps service areas looking presentable.
- Light-weight pads are easy to move to the job site and easy to discard.
- Cuts dramatically your cost and labor for routine clean-up chores.

Absorb leaking or spilled oil in hydro pits, escalator bays, anywhere oil has to be cleaned up. Each 18" x 18" x 3/8" thick non-flammable Pit Pad absorbs 20 times its weight in petroleum products. One 18 lb. bag replaces nearly 3,000 pounds of Oil Dri.


Pit Pads polypropylene fibers do not absorb water. This means you can store them indefinitely, even in humid areas without affecting their absorptive capacity.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444


Parts Specialists, Inc. is a master distributor of thousands of types and styles of lamps and fuses. Here are some illustrations of the more commonly used components for the industry. If there is any lamp or fuse not listed, please contact your PSI rep for assistance.

T-1 3/4 Midget Flange




Lamp No.	Volts	Amps	Watts
334	10	.014	.014
380	6.3	.04	.046
327	28	.040	1.12
349	6.3	.200	1.26

T-1 3/4 Wedge Base




Lamp No.	Volts	Amps	Watts
85	28	.04	1.12

TL-1 3/4 Midget Grooved




Lamp No.	Volts	Amps	Watts
253X	2.5	.350	.87

T-2 Miniature Bayonet




Lamp No.	Volts	Amps	Watts
6MB	6	.14	.84
24MB	24	.070	2
28MB	28	.040	1
48MB	48	.053	2.5
60MB	60	.505	3
90MB	90	.030	2.7
120MB	120	.025	3
NE102MB	Neon with resistor to replace 120MB		
155MB	155	17	3

T-2 Telephone




Lamp No.	Volts	Amps	Watts
6PSB	6	14	85
12PSB	12	.170	2
24PSB	24	.073	1.7
24CSB	24	.017	.40
28PSB	28	.040	1.1
48PSB	48	.053	2.5
60PSB	60	.050	3.0
120PSB	120	.025	3.0
NE120PSB	Neon with resistor to replace 120PSB		
155PSB	155	.017	3.0

T-3 1/4 Miniature Bayonet




Lamp No.	Volts	Amps	Watts
44	6.3	.25	1.5
238	6.3	.50	3.15
755	6.3	.15	1
756	14	.08	1.12
757	28	.08	2
1815	14	.20	2.8
1820	28	.10	2.8
1822	36	.10	3.6
1828	37.5	.05	1.85
1829	28	.07	1.96
1835	55	.05	2.75
1843	28	.022	.60
1847	6.3	.15	1
1864/313	28	.27	4.75
1873	28	.20	2
1892	14.4	.12	1.72
1893	14	.33	4.62

T-4 1/2 Candelabra Screw

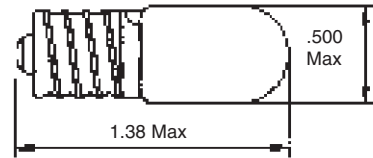


Lamp No.	Volts	Amps	Watts
6T4-1/2	48	.125	6
6T4-1/2	120	.05	6

T-6 Candelabra Screw

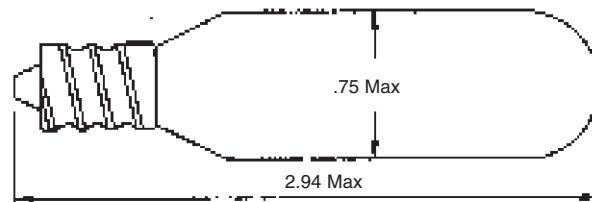


Lamp No.	Volts	Amps	Watts
15T6	125	115	15

T-7 Candelabra Screw

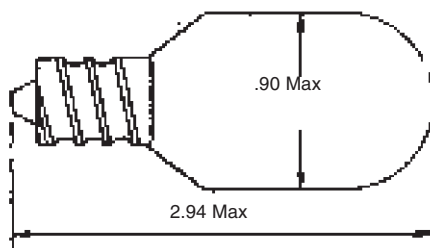



Lamp No.	Volts	Amps	Watts
15T7C	130	115	15

ECSR (FRS-R) 600 Volt Delay



Model No.	Amps
ECSR30	30
ECSR40	40
ECSR60	60



General Purpose Plated Contact Surfaces (KON) (OT) (NLN) (NON) 250 Volt One Time

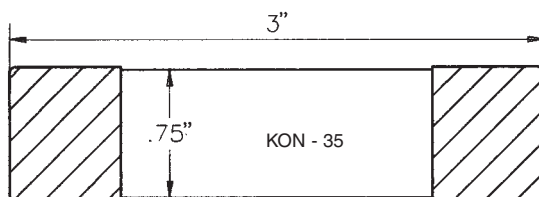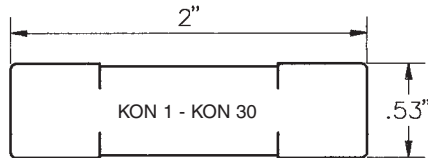

Model No.	Amps
KON1	1
KON2	2
KON3	3
KON4	4
KON5	5
KON6	6
KON7	7
KON8	8

Model No.	Amps
KON10	10
KON12	12
KON15	15
KON20	20
KON25	25
KON30	30
KON35	35


General Purpose Plated Contact Surfaces (KOS) (OTS) (NLS) (NOS) 600 Volt One Time



Model No.	Amps
KOS1	1
KOS2	2
KOS3	3
KOS4	4
KOS5	5
KOS6	6
KOS7	7
KOS8	8

Model No.	Amps
KOS10	10
KOS12	12
KOS15	15
KOS20	20
KOS25	25
KOS30	30
KOS35	35

General Purpose Midget Fuse (MOL) (OTM) (BLF) (BLN) (BAN) 250 Volt One Time

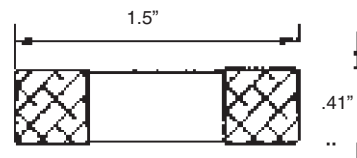

AGC 1/4" x 1-1/4" 250 Volt Glass Fuse None Time Delay (AGC) (311) (GGC)




Model No.	Amps
AGC1/4	1/4
AGC3/10	3/10
AGC1/2	1/2
AGC3/4	3/4
AGC1	1
AGC1.5	1.5
AGC2	2
AGC3	3

Model No.	Amps
AGC4	4
AGC5	5
AGC6	6
AGC7	7
AGC8	8
AGC10	10
AGC15	15
AGC20	20

Model No.	Amps
MOL1-1/2	1-1/2
MOL1	1
MOL2	2
MOL3	3
MOL5	5
MOL6	6
MOL10	10
MOL15	15
MOL30	30

BRUSH SEATING AND CLEANING STONES

When ordering specify code number and grade required. Brush Seaters are only sold in the standard boxes listed. Grade selection ES (extra soft) FH (fine hard) MS (medium soft) MH (medium hard).

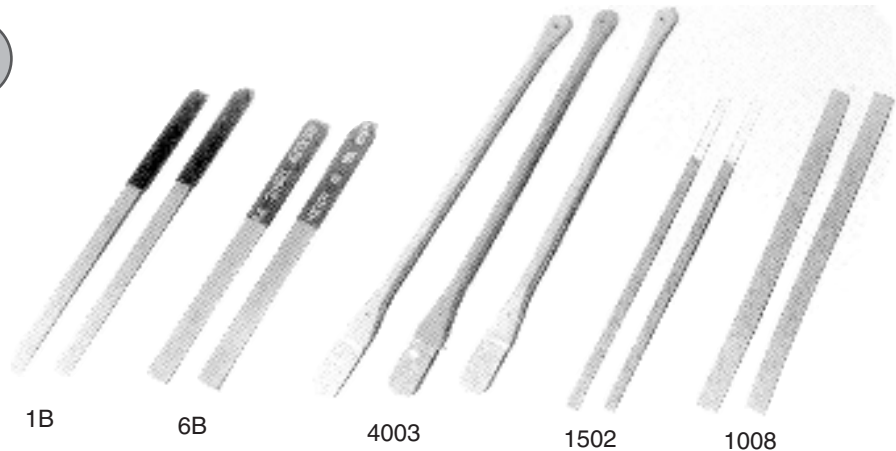

Code No.	Size	No. Per Box
1	4-3/4" x 2" x 1-1/4"	2
2	4-3/4" x 1-1/2" x 1-1/4"	2
3	4-3/4" x 1-1/4" x 1-1/8"	2
4	4-3/4" x 1-1/4" x 3/4"	4
5	4-3/4" x 1-1/8" x 5/8"	4
6	4-3/4" x 1" x 1/2"	4
7	4-3/4" x 3/4" x 5/8"	4
8	4-3/4" x 3/4" x 1/2"	4
9	4-3/4" x 1/2" x 1/2"	2
10	4-3/4" x 1/2" x 3/8"	2
11	4-3/4" x 3/4" x 1/4"	2
12	4-3/4" x 1/2" x 1/4"	4
13	4-3/4" x 1/4" x 1/4"	6

Code No.	Size	No. Per Box
14	4-3/4" x 1/4" x 1/8"	12
15	4-3/4" x 3/8" x 3/8"	4
16	4-3/4" x 1" x 1"	4
17	4-3/4" x 2" x 1"	2
18	4-3/4" x 3/8" x 1/4"	4
20	8" x 3" x 2"	1
21	6" x 3" x 2"	1
22	5" x 2" x 2"	1
23	4" x 3" x 2"	2
24	4" x 2" x 1-1/2"	2
25	2" x 2" x 2"	4
26	4-3/4" x 2" x 1/2"	2
27	8" x 1-1/2" x 1-1/2"	1
28	4-3/4" x 5/8" x 1/2"	4

DIAMOND SPATULAS

Catalog No.	Description
4000	Coarse grit for rapid cleaning. This spatula has two diamond faces with a green shaft. Packed one to a bag.
4001	Medium grit for use on intermediate size contacts. This spatula has two diamond faces with a red shaft. Packed one to a bag.
4002	Fine grit for use on small, sensitive contacts. Made with only one diamond face, selective cleaning of closely set contacts is possible. Supplied with a blue shaft and packed one to a bag.
4003	A kit, consisting of three spatulas of your choice.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

DIAMOND D PLASTONE FEXIBLE FILES

Catalog No.	Width	Length	Thick-ness	Grit
1002	1/4"	4-3/4"	.020"	240 Extra Fine
1004	3/8"	4-3/4"	.020"	240 Extra Fine
1006	1/4"	4-3/4"	.015"	320 Polish
1008	3/8"	4-3/4"	.015"	320 Polish
1044	3/8"	4-3/4"	.025"	120 Medium
1045	1/2"	4-3/4"	.025"	180 Fine
1502	1/4"	4-3/4"	.025"	240 Extra Fine
1504	3/8"	4-3/4"	.025"	240 Extra Fine
1506	1/4"	4-3/4"	.025"	320 Polish
1508	3/8"	4-3/4"	.025"	320 Polish
3002	1/4"	4-3/4"	.040"	180 Fine
3004	3/8"	4-3/4"	.040"	180 Fine
3006	1/4"	4-3/4"	.040"	240 Extra Fine
3008	3/8"	4-3/4"	.040"	240 Extra Fine
3010	1/4"	4-3/4"	.040"	320 Polish
3012	3/8"	4-3/4"	.040"	320 Polish
3033	3/8"	4-3/4"	.040"	80 Coarse
3043	1/2"	4-3/4"	.040"	80 Coarse
3044	1/2"	4-3/4"	.040"	120 Medium

Catalog No.	Width	Length	Thick-ness	Grit
3045	1/2"	4-3/4"	.040"	180 Fine
3046	1/2"	4-3/4"	.030"	240 Extra Fine
3048	1/2"	4-3/4"	.030"	320 Polish
3073	7/8"	4-3/4"	.030"	80 Coarse
3074	7/8"	4-3/4"	.030"	120 Medium
3075	7/8"	4-3/4"	.030"	180 Fine
3076	7/8"	4-3/4"	.030"	240 Extra Fine
3077	7/8"	4-3/4"	.030"	320 Polish
6043	1/2"	4-3/4"	.080"	80 Coarse
6044	1/2"	4-3/4"	.080"	120 Medium
6045	1/2"	4-3/4"	.080"	180 Fine
6046	1/2"	4-3/4"	.080"	240 Extra Fine
6047	1/2"	4-3/4"	.080"	320 Polish
6048	3/8"	4-3/4"	.080"	120 Medium
6049	3/8"	4-3/4"	.080"	180 Fine
6050	3/8"	4-3/4"	.080"	240 Extra Fine
6051	3/8"	4-3/4"	.080"	320 Polish
6073	7/8"	4-3/4"	.080"	80 Coarse
6074	7/8"	4-3/4"	.080"	120 Medium

BURNISHING TOOLS


Catalog No.	Description	Standard Package
1B	3/16" W x .007" thick x 4" L with plastic handle	12 per bag
2B	1/4" W x .007" thick x 4" L with plastic handle.	12 per bag
3B	3/8" W x .007" thick x 4" L with plastic handle.	12 per bag
4B	1/4" W x .011" thick x 5" L with plastic handle	12 per bag
5B	1/4" W x .020" thick x 5" L with plastic handle	12 per bag
6B	1/4" W x .011" thick x 3-1/2" L with plastic handle	12 per bag
7B	1/4" W x .020" thick x 3-1/2" L with plastic handle	12 per bag

Catalog No.	Description	Standard Package
D21	Pen holder with 3/16" W x .007" thick x 1-3/4" L blade	1 Pen Holder w/12 blades
D22	Pen holder with 1/4" W x .007" thick x 1-1/2" L blade	1 Pen Holder w/12 blades
D23	Pen holder with 1/4" W x .011" thick x 1-1/2" L blade	1 Pen Holder w/12 blades
RB21	3/16" W x .007" thick x 1-3/4" L replacement blades for D21	25 per bag
RB22	1/4" W x .007" thick x 1-1/2" L replacement blades fro D22	25 per bag
RB23	1/4" W x .011" thick x 1-1/2" L replacement blades for D23	25 per bag

ORANGE STICKS

OS

10 per package

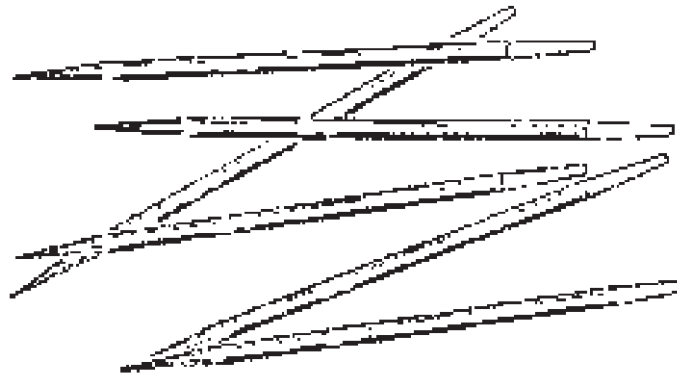

UNIVERSAL CHASSIS & GIBS

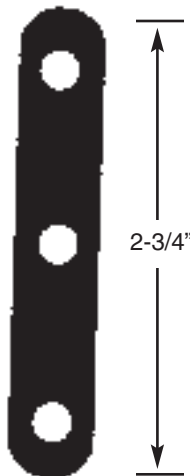
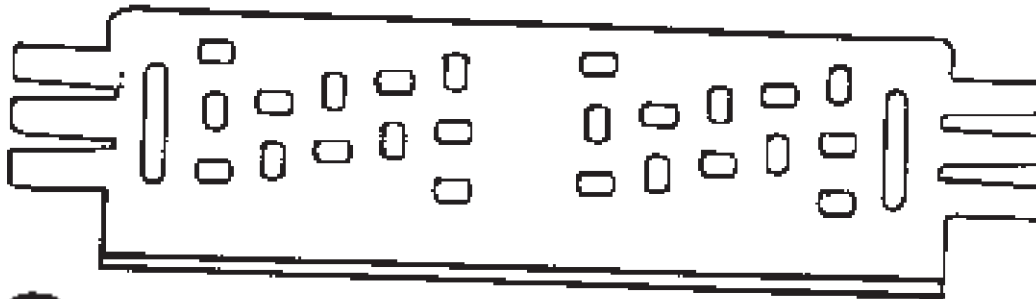


TABLE 1

Chassis (Only)

Part No.	No. of Adjustments	Width
DGC-875	7	7/8"
DGC-100	8	1"
DGC-113	10	1-1/8"
DGC-125	12	1-1/4"

TABLE 2

Gib (Only)

Part No.	Color	Width
DG-A	White	15/32"
DG-B	Blue	1/2"
DG-C	Brown	5/8"
DG-D	Green	17/32"
DG-E	Yellow	23/64"
DG-F	Black	7/16"

When ordering Nylon Gib assemblies:

1. Determine appropriate chassis width & corresponding chassis part number from Table 1.
2. Select appropriate gib from Table 2.
3. To order a complete assembly, specify complete chassis part number (i.e., DGC-100) and include the designation for the gib (i.e., DG-C) to form the chassis/gib part number.

EXAMPLE: 1" wide Chassis = DGC-100, 5/8" Wide Gib = DG-C, Assembly Part No. = DGC-100/DG-C


14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

ALARM BELLS

Six quality models available. AB6 is a red bell designed to work off most standard emergency light units. The AB6, AB12, AB120 and AB120-4 are built with universal adaptaplates which mount directly on the surface of any single, double or octagon box. Quick easy, installation.

<u>Model</u>	<u>Bell</u>	<u>Amp</u>	<u>Voltage</u>	<u>Decibel (At 10'-0")</u>
AB6	6"	.25	6VDC	92
AB61	6"	.18	6VDC	90
AB12	6"	.18	12VDC	92
AB120	6"	.07	120VAC	92
AB120-4	4"	.062	120VAC	88

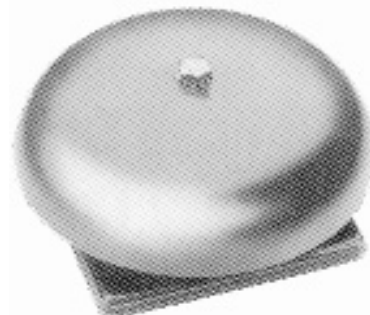

BRASS BELLS



2-1/2" Diameter single stroke brass bell for elevator floor leveling indication. Each bell individually packaged. Includes identifying label with circuit and operational information.

Model BB115A

- 115V 60Hz

Model BB25A


- 25W 115V AC, wire in series with hall lantern

Model BB40A

- 40W 115V AC, wire in series with hall lantern



HANDICAP CHIMES

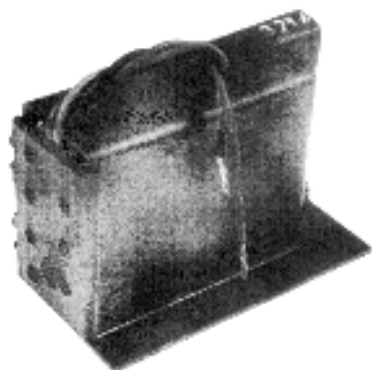

Electronic replacement for mechanical bells.

Model CA100

Arrival Chime - 20-130 VAC/VDC
- ANSIA117.1, Rule 4.10.4


Model CP101

Passing Chime - 20-130 VAC/VDC
- ANSIA117.1, Rule 4.10.13

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444


UNIVERSAL SAFETY EDGE

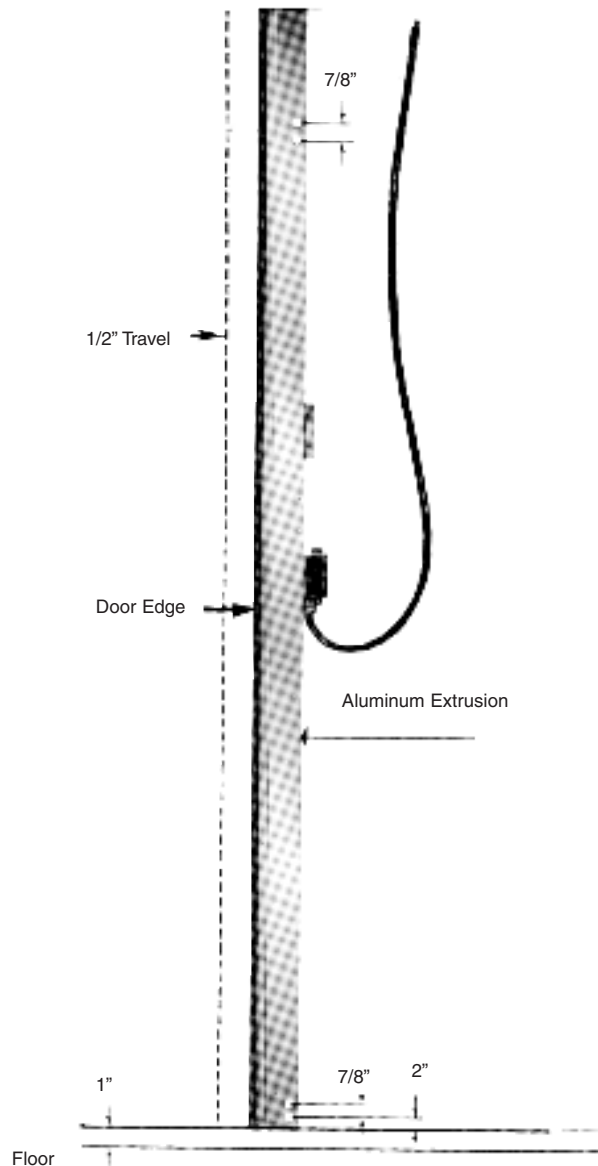

PART NUMBER SESO

- Heavy Duty Safety Edge is durable, easy to install, needs minimum space, and requires no maintenance.
- Rugged 1/8" minimum aluminum extrusion designed for heavy duty use.
- Specially enclosed Micro Switch with permanently connected wires, capable of normally open or closed applications.
- Universal one unit design.
- Reversible right hand or left hand.
- Housing Authority tested and proven.
- Built-in retractor system, easy access to sensitivity adjustment.
- Eliminates old retractor systems.
- Designed for installation requiring heavy usage.
- Vandal resistant.
- Heavy duty neoprene jacketed cable resists breaking or cutting.

ELEVATOR PADS

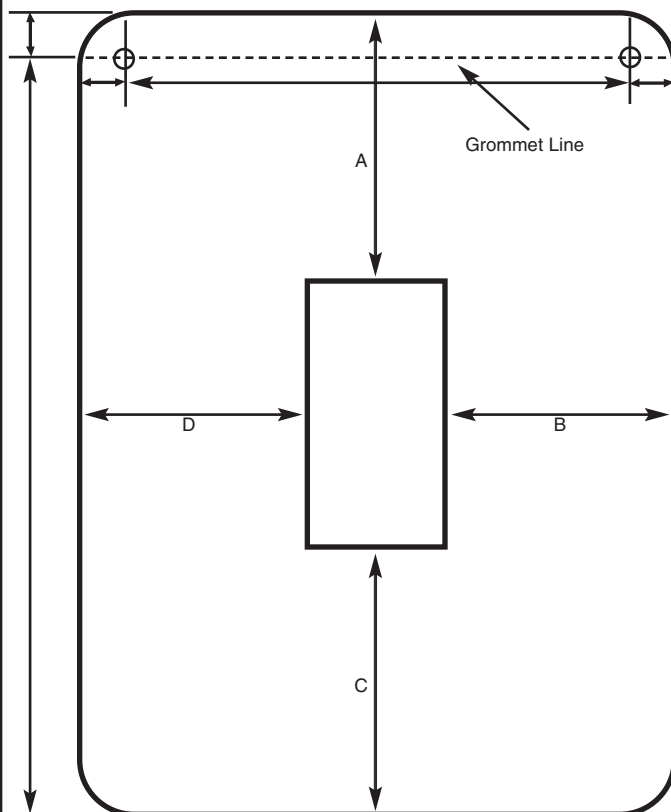

1. Measure from Panel Top to Grommet Line.
2. Measure precise distance between Grommet centers.
3. Measure distance from Grommet center to panel edge.
4. Measure overall height & width (do not block cab ventilation outlets).
5. Measure dimensions A thru D for each cutout.

Carefully label each panel

When ordering:

1. Provide complete drawing(s) as specified above.
2. Specify material (canvas or vinyl)
3. Specify color (see material color chart).

MATERIAL COLOR CHART

Vinyl

Slate Grey	Forest Green	Burgundy	Lt. Blue
Tan	Royal Blue	Black	Lt. Grey
Nutmeg Brown			

Canvas

Lt. Blue	Lt. Grey	Brown
----------	----------	-------

Outer Fabric

Canvas - Heavy duty, flame retardant, quilted canvas - samples available upon request.

Vinyl - Wipe-clean, commercial grade quilted vinyl. Flame retardant per ASST E-84 & Und. Lab. UI94

Inner Filler - Flame retardant Border - Double stitched vinyl Grommets - 5/8" I.D. brass (unless otherwise stated) Corners - slightly radiused or squared

PAD HOOKS


Available in high quality stainless steel and bronze with 10/24 thread or threaded for wood (specify when ordering). Pad hook is permanently secured to threaded rod to prevent vandalism.



Finish	Rod Length (A)	Model
Stainless Steel	1/2"	SPH5 *
Stainless Steel	2-1/2"	SPH25
Bronze	1/2"	BPH5 *
Bronze	2-1/2"	BP25
(* Wood stud available on request)		
Silver Plastic		SPPH
Brown Plastic		BPPH
Black Plastic		BLPPH
(Also available in plastic to install from inside of the car)		

JAMB BRAILLE PLATES

Single and double character jamb plate 1-31, LL, BR, P1, P2, P3, PH. Other markings available. Black background, brushed character, stainless or bronze.

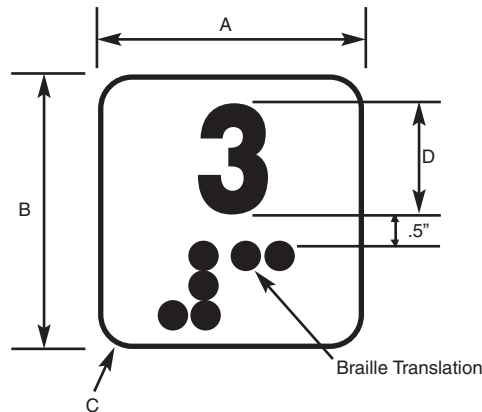

Model No.	Size W(A) x H(B)	Radius Corners(C)	Size Characters(D)
J200	3.25" sq.	1/16"	2"
J332	3" sq.	1/4"	2"
J335	3" x 3.5"	1/8"	2"
J342	3" x 4"	1/6"	2"
J352	3.5" sq.	1/4"	2"
J442	4" sq.	1/16"	2"
JR452	4.5" diam.		2"
J432BL *	4" x 3"	1/16"	2"
J442BL *	4" sq.	1/16"	2"

* Braille left of character - California code

Standard Mounting Method:

1. 10 Mil. pressure sensitive backing.
2. (2) #6-32 x 3/8" stud mount.
3. (4) .014" diameter mounting holes

CAPACITY PLATES

CP

**CAPACITY
2000 LBS.**

Plates 4" W x 2" H. Adhesive backed or mounting holes. Two versions available:

1. Black background with brushed stainless letters.
2. Black background with bronze letters.

Specify Marking When Ordering.

DATA PLATES

DP

TEST DATE 1 YR		3 YR	
W.P.		RP	
ELEVATOR CO, INC			


Plates 3" W x 1" H. Aluminum adhesive backed or mounting holes. Art preparation on initial orders. Custom size or other base material available.

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

CAR STATION BRAILLE PLATES

Stainless or bronze 22 gauge car plate, black background, brushed character and your choice of one mounting method (pressure sensitive, holes with drive pins or stud mount). Standard car station plates will hold any 1 or 2 letter/number combinations (3 or more characters available).

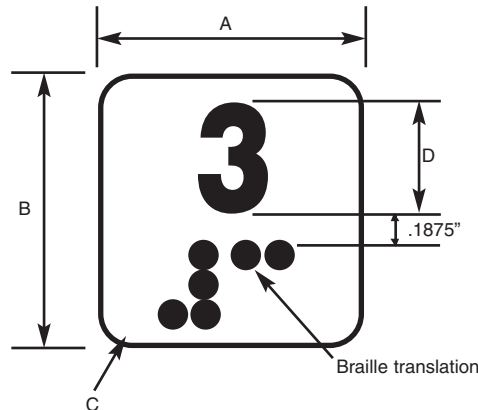

Model No.	Size W(A) x H(B)	Radius Corners(C)	Size Characters(D)
J100	1" x 1.25"	1/16"	5/8"
J125	1.25" sq.	1/16"	5/8"
J138	1" x 1.375"	1/8"	5/8"
J325	3.25" x 1.25"	1/16"	5/8"
J780	.875" x 1.375"	1/16"	5/8"
J1382	1.375" x 1.375"	1/16"	5/8"
J13828	1.375" sq.	1/8"	5/8"
J1825	1.125" x 1.25"	1/8"	5/8"
JR25	1.25" diameter		5/8"
JR38	1.350" diameter		5/8"

Standard Mounting Method:

1. 10 Mil. pressure sensitive backing.
2. (2) #6-32 x 3/8" stud mount.
3. (2) .104" diameter mounting holes

LOBBY FIRE/EMERGENCY



F-1004-B(225) 6" x 6"



F-1004-D(224) 6" x 6"




F-1004-FS 6" x 6"

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



F-1005 9" x 6"

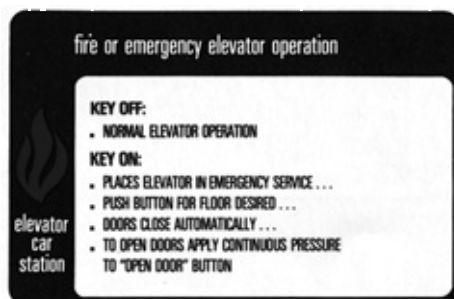

F-1005B 9" x 6"



F-1005-W 6" x 6"

CAB ELEVATOR/EMERGENCY

Signs are black and white with flame and directional copy printed in highly visible red.



F-1005-AE 6" x 6"



F-1005-B(226) 6" x 6"




F-1005-C 6" x 6"



F-1005-G-O 6" x 6"

LOBBY FIRE/SAFETY

Designed for durability and ease of maintenance. Printed surface has 10 mil of clear, hard plastic fused to a rigid 70 mil base. Has cushion foam tape adhesive around perimeter of sign.



F-200 6" x 7"

F-250 3" x 3-1/2"



F-201 6" x 7"

F-251 3" x 3-1/2"

LOBBY FIRE/SAFETY



F-225 6" x 7"



F-235 6" x 7"



F-243 5" x 8"



F-245 3" x 3-1/2"

F-246 6" x 7"



F-249 5" x 8"




F-248 6" x 7"



F-244-BLK
5" x 8"

ESCALATOR

Signs are 50 mil thick and flexible enough to allow curving to attach to escalator sides where necessary.

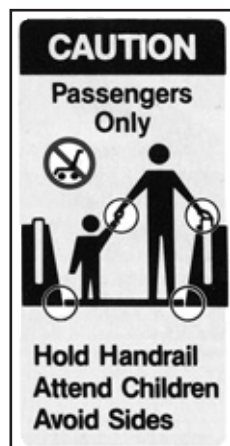

F-699-CN
4-1/4" X 8-3/4"
(sign)




F-699-LA
4" X 8-3/4"
(sign)




DEC-F-699-U-86
4" X 9"
(decal)

CAPACITY SIGNS


Signs are available in custom sizes, colors, and words. Please inquire.




F-1080 10" x 7"

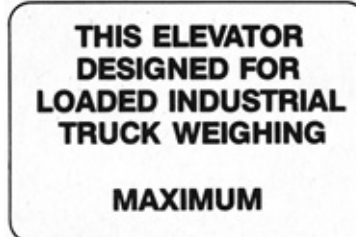


F-1102 9" x 6"




F-1104 10" x 7"

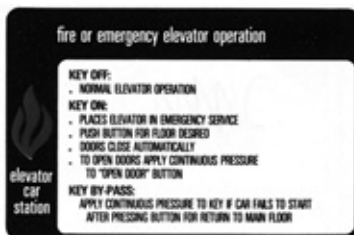


F-1105 10" x 7"



F-1106 10" x 7"



F-1107 9" x 6"



F-1108 10" x 7"



F-1109 10" x 7"


RECTIFIERS

Part No.	Plate Size	Number Of Plates	Type
ARMOR			
11296-01	1" x 1"	18	Double
11280-01	1.6" x 1.6"	24	3 Phase Bridging
11281-01	1.6" x 1.6"	20	Doubler
11282-01	2.6" x 2.6"	20	Doubler
11285-01	2.6" x 2.6"	24	3 Phase Bridging
11300-01	1" x 1"	10	Halfwave

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

RECTIFIERS

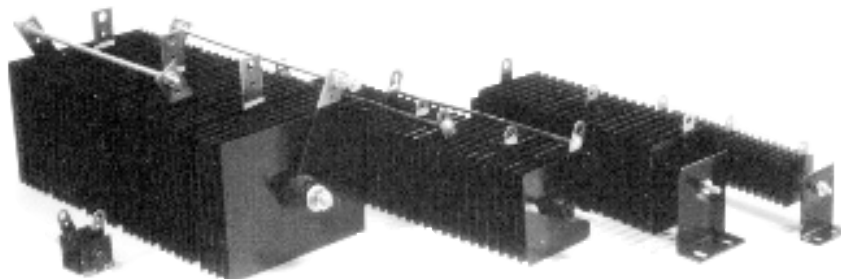


<u>Part No.</u>	<u>Plate Size</u>	<u>Number Of Plates</u>	<u>Type</u>
<u>GAL</u>			
C44S10D1H11G	2.6" x 2.6"	20	Doubler
C11S10D1H11G	1.3" x 1.3"	20	Doubler
<u>DOVER</u>			
Z7858	1.3" x 1.3"	72	Latter Network
C44S8D1H12G	2.6" x 2.6"	18	Doubler
<u>MONTGOMERY</u>			
62-0755	1.3" x 1.3"	60	3 Phase Bridging
<u>VIRGINIA CONTROLS</u>			
C966	1.3" x 1.3"	20	Doubler
<u>F.S. PAYNE</u>			
C6S10HB1H11G	1" x 1"	30	3 Phase Bridging

<u>Part No.</u>	<u>Plate Size</u>	<u>Number Of Plates</u>	<u>Mounting Length</u>	<u>A.C. In</u>	<u>D.C. Out</u>
<u>OTIS</u>					
230AR1, 2 or 3	1" x 1"	6	2-1/8"	156V Max.	.09 Amps
230AZ1	2-1/6" x 2-1/6"	6	3-1/4"	198V Max.	.50 Amps
230AG1	2-5/8" x 2-5/8"	36	11-7/8"	165V Max.	3.6 Amps
230BJ1	1-5/8" x 2-5/8"	30	7-19/32"	130V Max.	.80 Amps
230BJ2	2" x 2"	30	7-19/32"	130V Max.	.80 Amps
230BJ3	2-5/8" x 2-5/8"	30	12" overall	100V Min.	130V No Load
230BJ4	4" x 4"	30	12" overall	100V Min.	130V No Load
230BJ5	4" x 5"	30	12" overall	100V Min.	130V No Load
230AL1	2" x 2"	30	9-1/8"	132V Max.	1.8 Amps
230AJ1	2-5/8" x 2-5/8"	30	12"	105V Max.	4.3 Amps
230 AV1	4" x 5"	4 Doubler	3-1/8"	132V Max.	.80 Amps


14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444


PSI is an elevator distributor for **Carbone of America**. Carbone's newly developed "Mega Brush" will provide: 2-4 years brush life, even commutator film, stable compounding, low maintenance; **(guaranteed)**; brushes will be replaced or refunded. This long life Carbon Brush has been field tested and proven. You provide a machine with a good commutator and stable brush holders and we will supply the best brush suitable for your elevator equipment.




COA-15



COA-18




COA-29




COA-8BE




COA-15




COA-20



COA-23



COA-20BE



COA-1BE


DOVER

Part No.	Size	Type	HP/KW	Set	Style
DVE-82	1/4 x 1 x 1-1/4	Motor	7-1/2 HP	8	COA-8BE
DVE-4	5/16 x 1-1/4 x 2	Motor	12.5 HP	4	COA-29
MML-172	3/8 x 1-1/4 x 2	Motor	12.5 HP	4	COA-15
DVE-3A	1/2 x 1-1/2 x 2	Motor	20 HP	4	COA-15
DVE-87	1/2 x 1-1/2 x 2	Motor	20 HP	4	COA-18
DVE-132	1/2 x 1-1/2 x 2	Motor	40 HP	12	COA-15
DVE-70	1/2 x 1-1/2 x 2	Motor	45 HP	8	COA-15
DVE-198	1/4 x 1 x 1-1/4	Generator	7.5 KW	4	COA-8BE
DVE-151	5/16 x 1-1/4 x 2	Generator	7.5 KW	4	COA-29
DVE-190 *	1/2 x 1-1/2 x 2	Generator	10 KW	4	COA-15
DVE-70	1/2 x 1-1/2 x 2	Generator	12.5 KW	4	COA-15
DVE-70	1/2 x 1-1/2 x 2	Generator	15 KW	4	COA-15
DVE-190 *	1/2 x 1-1/2 x 2	Generator	15 KW	4	COA-15
DVE-129	1/2 x 1-1/2 x 2	Generator	20 KW ++	4	COA-15
DVE-190 *	1/2 x 1-1/2 x 2	Generator	20 KW ++	4	COA-15
DVE-129	1/2 x 1-1/2 x 2	Generator	MG1500 +	4	COA-15
DVE-190 *	1/2 x 1-1/2 x 2	Generator	MG 1500+	4	COA-15


(* Mega Brush)

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444




COA-15



COA-20




COA-20BE



COA-23



COA-1BE



COA-17BE



COA-20

BULL


Part No.	Size	Type	HP/KW	Set	Style
TES-5	3/8 x 1-1/4 x 2	Motor	20 HP	8	COA-15
BLL-6	1/2 x 1-1/4 x 2	Motor	40 HP +	12	COA-20
BLL-16	1/2 x 1-1/4 x 2	Motor	40 HP +	18	COA-20BE
BLL-17	16 x 20 x 36 MM	Motor	30 HP +	12	COA-23
BLL-19	5/16 x 1 x 1	Generator	15 KW	8	COA-1BE
TES-5	3/8 x 1-1/4 x 2	Generator	15 KW	8	COA-15
MGE-104	1/2 x 1-1/4 x 2	Generator	25-40 KW	8	COA-20
BLL-16	1/2 x 1-1/4 x 2	Generator	50 KW	8	COA-20BE
BLL-2	1/2 x 1-1/4 x 2	Generator	60 KW	12	COA-20

IMPERIAL


Part No.	Size	Type	HP/KW	Set	Style
MGE-25	1/4 x 1 x 1-1/2	Motor	10/12.5 HP	4	COA-15
IMP-33	5/16 x 1-1/4 x 1-3/4	Motor	15 HP	8	COA-29
IMP-39	3/8 x 1-1/4 x 1-1/2	Motor	15 HP	8	COA-15
MGE-92	3/8 x 1-1/4 x 1-3/4	Motor	20 HP	8	COA-29
MGE-51	3/8 x 1-1/4 x 2	Motor	25 HP	8	COA-17BE
USE-2	3/8 x 1-1/2 x 2	Motor	25 HP +	8	COA-15
BWE-6	7/16 x 1-1/4 x 1-3/4	Motor	20 HP	8	COA-29
IMP-35	1/4 x 1 x 1-1/2	Generator	7.5 KW	4	COA-15
IMP-44	5/16 x 1-1/4 x 1-1/2	Generator	15 KW	8	COA-29
IMP-33	5/16 x 1-1/4 x 1-3/4	Generator	7.5 - 20KW	8	COA-29
IMP-35	3/8 x 1 x 1-1/2	Generator	10 KW	4	COA-15
IMP-39	3/8 x 1-1/4 x 1-1/2	Generator	15/20 KW	8	COA-15
IMP-34	3/8 x 1-1/4 x 2	Generator	15 KW +	8	COA-29
IMP-32	3/8 x 1-1/2 x 2	Generator	15 KW +	8	COA-29
SGE-1	7/16 x 1-1/2 x 1-3/4	Generator	25 KW +	8	COA-15
GEL-45	7/16 x 1-1/2 x 2	Generator	25 KW +	8 or 12	COA-15

14639 Short St. • Posen, Illinois 60469 U.S.A.


Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444




COA-8BE




COA-11-




COA-15



COA-19



COA-25



COA-29

GENERAL DYNAMICS

Part No.	Size	Type	HP/KW	Set	Style
CMW-2	5/16 X 1 X 1-1/4	Motor	10 HP	4	COA-8BE
MGE-51	3/8 x 1-1/4 x 2	Motor	25 HP	8	COA-15
IMP-34	3/8 x 1-1/4 x 2	Motor	30 HP	8	COA-15
IMP-61	1/2 x 1-1/4 x 1-3/4	Motor	20 HP	8	COA-15
ED-10	5/16 x 1 x 1	Generator	10 KW	8	COA-15
MGE-51	3/8 x 1-1/4 x 2	Generator	15 KW	8	COA-15
IMP-34	3/8 x 1-1/4 x 2	Generator	20-25 KW	8	COA-15
GE-125	1/2 x 1-1/4 x 2	Generator	25-35 KW	8	COA-15




OTIS

Part No.	Size	Type	240#	Set	Style
OE-175	.360 x .984 x 2	Motor	240F26	18	COA-29
OE-402	.360 x .984 x 2	Motor	240F26	24	COA-29
OE-289	3/8 x 1-1/2 x 1-3/4	Motor	240P2	4	COA-25
OE-162	3/8 x 1-1/2 x 1-3/4	Motor	240J1	8	COA-19
OE-91	3/8 x 1-1/2 x 1-3/4	Motor	240J1, J2	12	COA-19
OE-119	.610 X .984 X 2	Motor	240F27	6	COA-29
OE-107	.610 x .984 x 2	Motor	240F27	12	COA-29
OE-127	.610 x 1.480 x 2	Motor (OR)	240F11, F12, F13	6	COA-29
OE-127	.610 x 1.480 x 2	Generator	240F23, F25	12	COA-29
OE-167	1/2 x 1-1/2 x 1-3/4	Motor	240F19	8	COA-29
MGE-58	3/8 x 1-1/2 x 1-3/4	Generator	240P2	8	COA-25
OE-105	3/8 x 1-1/2 x 1-3/4	Generator	240J1	8	COA-19
OE-363 *	.492 x 1.575 x 2	Generator	240AA1, AA2	8	COA-11
OE-356 *	1/2 x 1-1/2 x 2	Generator	240R3	8	COA-19
OE-300	1/2 x 1-1/2 x 2	Generator	240R3	8	COA-19
OE-385 *	1/2 x 1-1/2 x 2	Generator	240W1	8	COA-15
OE-190	.610 x 1-1/2 x 2	Generator	240R4	8	COA-19

(* MegaBrush)

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



ELECTRODYNAMICS

Part No.	Size	Type	HP/KW	Set	Style
CMW-2	5/16 x 1 x 1-1/4	Motor	10 HP	4	COA-15
CTN-3	5/16 x 1 x 1-1/4	Motor	12 HP	8	COA-15
IMP-39	3/8 x 1-1/4 x 1-1/2	Motor	25 HP	8	COA-15
MGE-51	3/8 x 1-1/4 x 2	Motor	30 HP	8	COA-15
ED-6	7/16 x 1-1/4 x 1-3/4	Motor	35 HP	8	COA-15
OE-26	1/2 x 1-1/4 x 1-1/2	Motor	40 HP	8	COA-29
ED-23	1/2 x 1-1/4 x 1-5/8	Motor	40 HP	8	COA-15
DVE-92	1/4 x 1 x 1-1/8	Generator	2 KW	2	COA-29
ED-10	5/16 x 1 x 1	Generator	7.5 KW	4	COA-15
ED-10	5/16 x 1 x 1	Generator	10 KW	8	COA-15
CMW2	5/16 x 1 x 1-1/4	Generator	7.5 KW	4	COA-15
CTN-3	5/16 x 1 x 1-1/4	Generator	10 KW	8	COA-15
ED-2	3/8 x 1-1/4 x 1-1/2	Generator	15-20-25 KW	8	COA-15
ED-3	7/16 x 1-1/4 x 1-1/2	Generator	25 KW	8	COA-17BE


LEROY-SOMER

Part No.	Size	Type	HP/KW	Set	Style
LRS-29	.315 x .787 x 1.260	Motor	10/12.5 HP	8	COA-1
LRS-8	.315 x 1.260 x 2	Motor	15 HP	8	COA-15
LRS-8	.315 x 1.260 x 2	Motor	25 HP	12	COA-15
LRS-1	.394 x .984 x 2	Motor	20/30/40 HP	8	COA-15
LRS-26	.472 x .787 x 1.260	Motor	10/12.5/15 HP	8	COA-1
LRS-12	.472 x 1.260 x 1.260	Motor	40/50 HP	8	COA-1
LRS-26	.472 x 1.260 x 1.260	Motor	40/50 HP	12	COA-1
LRS-2	.492 x 1.260 x 2	Motor	40 HP	8	COA-15
LRS-25	.315 x .787 x 1.260	Generator	15 KW	12	COA-1
LRS-92 *	.315 x .787 x 1.260	Generator	15 KW	12	COA-1
LRS-7	.315 x 1.260 x 1.340	Generator	15 KW	8	COA-12
LRS-90 *	.315 x 1.260 x 1.340	Generator	15 KW	8	COA-12
LRS-22	.472 x .787 x 1.260	Generator	7.5 -40 KW	8/12/16	COA-1
LRS-85 *	.472 x .787 x 1.260	Generator	7.5 -40 KW	8/12/16	COA-1
LRS-20	.492 x .787 x 1.378	Generator	10/20 KW	8/12	COA-12
LRS-83 *	.492 x .787 x 1.378	Generator	10/20 KW	8/12	COA-12
ELN-4	.492 x 1.260 x 1.378	Generator	15/25 KW	8	COA-12
LRS-82 *	.492 x 1.260 x 1.378	Generator	15/25 KW	8	COA-12
LRS-21	.236-.236 x .787 x 1.260	Generator	40 KW	16	COA-37
LRS-85 *	.236-.236 x .787 x 1.260	Generator	40 KW	16	CAO-37


(*Mega Brush)

14639 Short St. • Posen, Illinois 60469 U.S.A.


Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444




COA-15




COA-29




COA-19




COA-22



COA-30



COA-39



COA-40

G.E.


Part No.	Size	Type	HP/KW	Set	Style
GE-212	7/16-7/16 x 5/8 x 1-1/2	Motor	10 HP	4	COA-30
DVE-7	5/16 x 1-1/4 x 2	Motor	12.5 HP	4	COA-29
GE-121	5/16-5/16 x 1-1/4 x 2-1/8	Motor	30-50 HP	8/12	COA-39/80 **
GE-144	5/16-5/16 x 1-1/4 x 2-1/8	Motor	30-50 HP	8/12	COA-39/70 **
MML-172	3/8 x 1-1/4 x 2	Motor	12.5/15 HP	8	COA-15
GE-80	3/8-3/8 x 1-1/2 x 2-3/8	Motor	40+ HP	12	COA-40
COA-22	1/2 x 1 x 2	Motor	20/30 HP	8/12	COA-22
GE-125	1/2 x 1-1/2 x 2	Motor	20 HP	8	COA-15/80 **
GE-229	1/2 x 1-1/4 x 2	Motor	20 HP	8	COA-15/70 **
OWC-7	5/8-5/8 x 3/4 x 2	Motor	20-30 HP	4	COA-30
GE-123	5/8 x 1-1/4 x 2-1/8	Motor	30-50 HP	8	COA-15/70 **
DVE-9	3/8 x 3/4 x 2	Generator	7.5/15 KW	4/8	COA-19
GE-127	3/8 x 1 x 2	Generator	7.5-25 KW	4/8	COA-15
GE-406 *	3/8 x 1 x 2	Generator	7.5-25 KW	4/8	COA-15
GE-139	1/2 x 1 x 2	Generator	10-25 KW	8	COA-22
GE-519 *	1/2 x 1 x 2	Generator	10-25 KW	8	COA-22
MML-172	3/8 x 1-1/4 x 2	Generator	10-25 KW	8	COA-15
GE-520 *	1/2 x 1-1/4 x 2	Generator	10-25 KW	8	COA-15
GE-123	5/8 x 1-1/4 x 2-1/8	Generator	25 KW+	8	COA-15
GE-486 *	5/8 x 1-1/4 x 2-1/8	Generator	25 KW+	8	COA-15
GE-121	5/16-5/16 x 1-1/4 x 2-1/8	Generator	25 KW+	8	COA-39/80 **
GE-144	5/16-5/16 x 1-1/4 x 2-1/8	Generator	25 KW+	8	COA-39/70 **
GE-83	3/8-3/8 x 1-1/4 x 2-1/8	Generator	40 KW+	8	COA-39/80 **

(* Megabrush)

(**Bottom Bevel Angle)

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

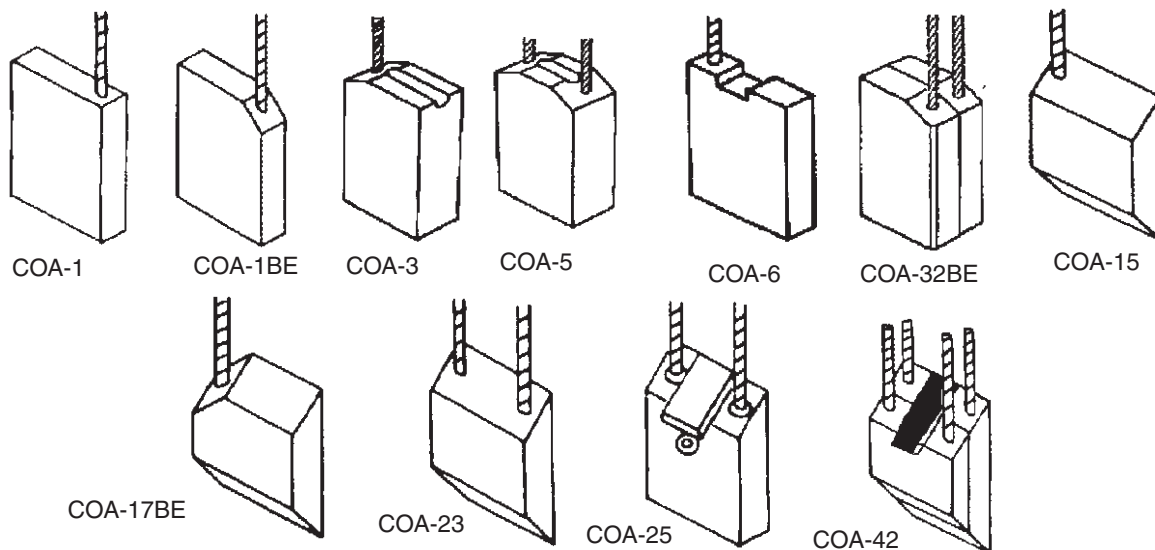

WESTINGHOUSE

Part No.	Size	Type	X38 NO.	Set	Style
BAX-14	1/4-1/4 x 1 x 1-1/2	Motor	X38L1	8	COA-32BE
WEL-280 *	1/4-1/4 x 1-1/2 x 1-1/2	Motor	X38L2	4	COA-32BE
OE-191	1/4-1/4 x 1-1/2 x 1-1/2	Motor	X38L2	8	COA-32BE
WEL-25	1/4-1/4 x 1-1/2 x 1-1/2	Motor	X38Q3	4	COA-5
WEL-22	5/16-5/16 x 1-1/2 x 1-1/2	Motor	X38Q9, Q14	8	COA-5
OE-114	3/8 x 5/8 x 1-1/4	Motor	X38R14	8	COA-3
WEL-104	3/8 x 3/4 x 1-1/4	Motor	X38B28	8	COA-6
MML-93	3/8 x 1 x 1-1/4	Motor	X38M3	4	COA-1
MGE-47	3/8 x 1 x 1-1/2	Motor	X38A64	8	COA-1BE
WEL-106	3/8 x 1 x 1-1/2	Motor	X38C18	8	COA-42
WEL-44	3/8 x 1 x 1-1/2	Motor	X38R21	8	COA-5
OE-113	3/8 x 1-1/2 x 1-1/2	Motor	X38R4, R11, R16, R57	4	COA-5
WEL-254 *	3/8 x 1-1/2 x 1-3/4	Motor	X38C4, C16, C24	8	COA-25
MGE-56	1/2 x 1 x 1-3/4	Motor	X38A39	8	COA-1BE
MML-89	1/2 x 1 x 1-3/4	Motor	X38A5	12	COA-1
WEL-225 *	1/2 x 1-1/4 x 1-3/4	Motor	X38A9, A16	8	COA-1BE
WEL-32	1/2 x 1-1/2 x 1-1/2	Motor	X38R5	4	COA-5
WEL-280 *	1/4-1/4 x 1-1/2 x 1-1/2	Generator	X38L10	8	COA-32BE
OE-191	1/4-1/4 x 1-1/2 x 1-1/2	Generator	X38Q17	8	COA-32BE
WEL-241 *	1/4-1/4 x 1-1/2 x 1-1/2	Generator	X38Q17	8	COA-32BE
WEL-293 *	1/4-1/4 x 1-1/2 x 1-3/4	Generator	X38Q51	8	COA-5
WEL-257 *	1/4-1/4 x 1-1/2 x 1-3/4	Generator	X38L9	8	COA-32BE
WEL-36	5/16 x 1-1/2 x 1-1/2	Generator	X38M12	16	COA-1
WEL-275 *	5/16 x 1-1/2 x 1-1/2	Generator	X38M12	16	COA-1


(* Megabrush)

(Please refer to Leroy-Somer for Metric Brushes)

A

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

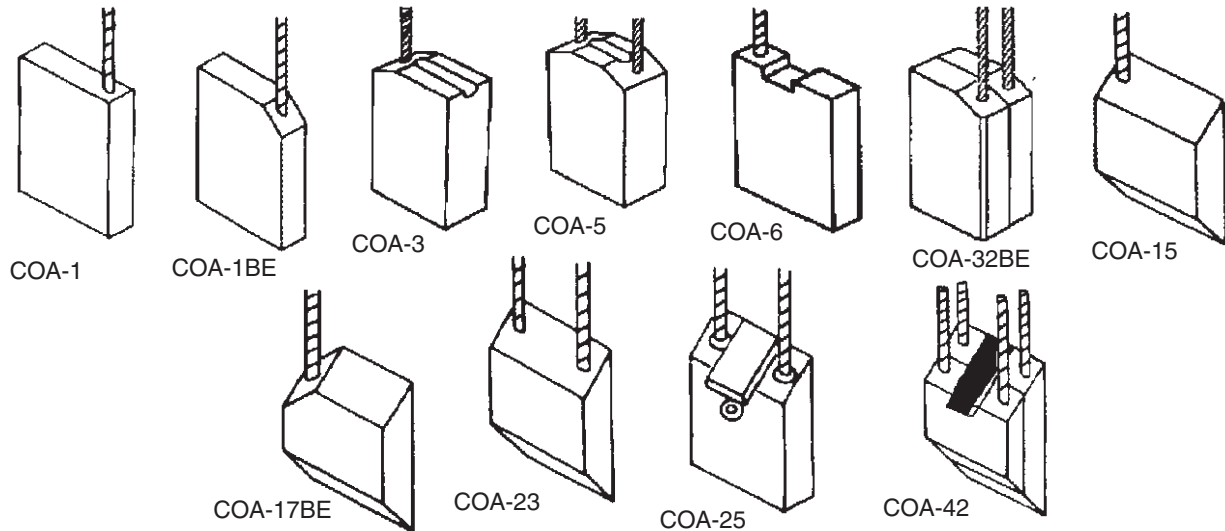

WESTINGHOUSE

Part No.	Size	Type	X38 NO.	Set	Style
WEL-267 *	5/16 -5/16 x 1-1/2 x 1-1/2	Generator	X38Q14	8	COA-5
WEL-18	5/16 x 1-1/2 x 1-3/4	Generator	X38M10	16	COA-1
WEL-274 *	5/16 x 1-1/2 x 1-3/4	Generator	X38M10	16	COA-1
WEL-263 *	3/8 x 1 x 1-1/4	Generator	X38R36	8	COA-3
WEL-107	3/8 x 1 x 1-1/2	Generator	X38A12, A64	4	COA-1BE
WEL-261 *	3/8 x 1 x 1-1/2	Generator	X38A12, A64	4	COA-1BE
WEL-107	3/8 x 1 x 1-1/2	Generator	X38A82	4	COA-15
WEL-94	3/8 x 1 x 1-3/4	Generator	X38K5, K8	8	COA-17BE
WEL-245 *	3/8 x 1 x 1-3/4	Generator	X38K5, K8	8	COA-17BE
WEL-106	3/8 x 1 x 1-3/4	Generator	X38C18, C32	8	COA-42
WEL-235 *	3/8 x 1 x 1-3/4	Generator	X38C18, C32	8	COA-42
IMP-34	3/8 x 1-1/4 x 2	Generator	X38A80	8	COA-15
WEL-103	3/8 x 1-1/2 x 1-3/4	Generator	X38C4, C16, C24	12/16	COA-25
WEL-245 *	3/8 x 1-1/2 x 1-3/4	Generator	X38C4, C16, C24	12/16	COA-25
WEL-37	1/2 x 1 x 1-3/4	Generator	X38C14, C10	8	COA-25
WEL-249 *	1/2 x 1 x 1-3/4	Generator	X38C14, C10	8	COA-25
MGE-56	1/2 x 1 x 1-3/4	Generator	X38A16	12	COA-1BE
WEL-214 *	1/2 x 1 x 1-3/4	Generator	X38A16	12	COA-1BE
WEL-109	1/2 x 1 x 1-3/4	Generator	X38K8	8	COA-23
WEL-246 *	1/2 x 1 x 1-3/4	Generator	X38K8	8	COA-23
WEL-227 *	1/2 x 1-1/4 x 1-3/4	Generator	X38A67	8	COA-1BE
WEL-108	1/2 x 1-1/4 x 1-3/4	Generator	X38C2, C15, C29	8	COA-42
WEL-200 *	1/2 x 1-1/4 x 1-3/4	Generator	X38C2, C15, C29	8	COA-42
WEL-187	1/2 x 1-1/2 x 1-3/4	Generator	X38C17	8	COA-25
WEL-276 *	1/2 x 1-1/2 x 1-3/4	Generator	X38C17	8	COA-25



(* Megabrush) (Please refer to Leroy-Somer for Metric Brushes)

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

Radio Energie has been manufacturing electrical rotating machines for more than 50 years and has over 30 years of worldwide experience in designing and manufacturing over one million tachometer generators.

Radio Energie offers more than 50 models of AC and DC tachometers with a wide range of output voltages.

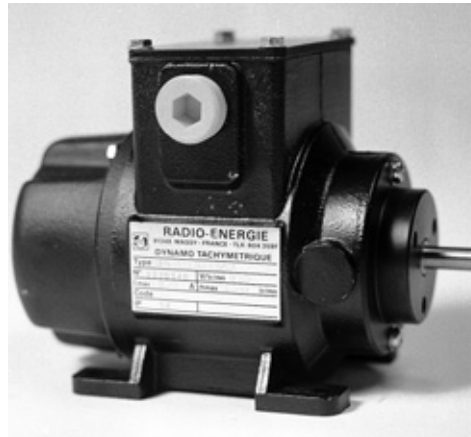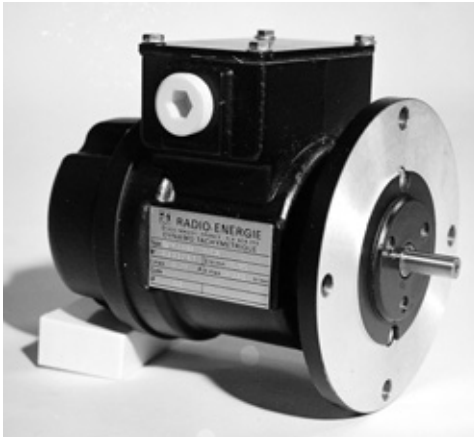

RES 444 US

Radio Energie's REO 444 US tachometer generator satisfies the requirements of a control system demanding accurate and continuous speed measurement due to its output stability and very high quality linearity.

The totally enclosed construction is particularly suitable for drive control systems operating in severe environmental conditions.

FEATURES

- Voltage range = up to 200 V at 1000 rpm
- Machines available with two separate output circuits (with two commutators)
- Speed = maximum speed up to 12.000 rpm with an output voltage which does not exceed 600 V
- Temperature compensated

TACHOMETER DYNAMOS

Standard models and custom models of direct current generators.

- Energized by permanent magnets
- Selection of 7 models engineered to the system requirements (current, voltage, precision, environment)
- Design options of these models include:
 - an explosion - proof design
 - a possibility to compensate the flux variation of the magnets for temperature
 - a model with separate excitation

TACHOMETER ALTERNATORS

Standard models and custom models of alternating current generators.

- Energized by permanent magnets
- Designed without rings or brushes (brushless)
- Selection of 6 models engineered for the necessary of frequency, voltage and current
- Design options of these models include:
 - an explosion-proof model
 - a selection of voltage and frequency variants
 - a possibility to compensate the flux variation of the magnets for temperature

A


14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444


CONSTRUCTION CHARACTERISTICS

- Frame and rear cover: Cast aluminum
 - Armature: Available with 1 or 2 electrically independent circuits and 1 or 2 commutators
Varnish impregnated
Dynamically balanced
 - Magnet: Alnico
 - Bearings: Sealed ball bearings
 - Brushed: Cartridge type for easy replacement
Carbo-silver brushes are fitted on standard machines
For higher maximum speed limits different brush grades should be used.
 - Enclosure: Totally enclosed construction protected to IP 54 standard
 - Mounting: Flange or foot
 - Connections: Internal terminal board with conduit entrance
 - Polarity: For ccw rotation when facing driven shaft end
- Machine with 1 commutator: term. A1 = +
 - Machine with 2 commutators:
 - Commutator 1: term. 1A1 = +
term. 1A2 = -
 - Commutator 2: term. 2A1 = -
term. 2A2 = -

FLANGE MOUNT

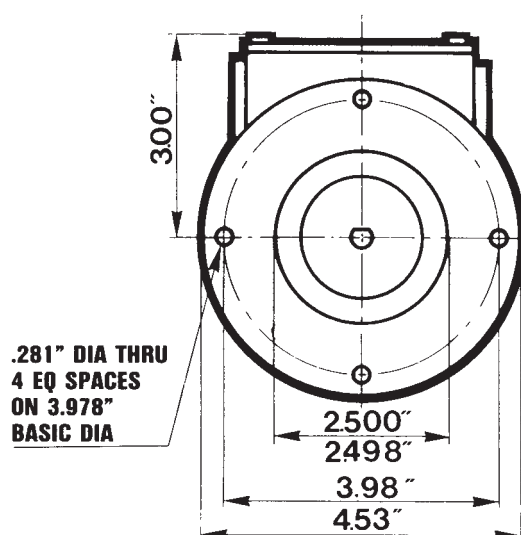

FOOT MOUNT

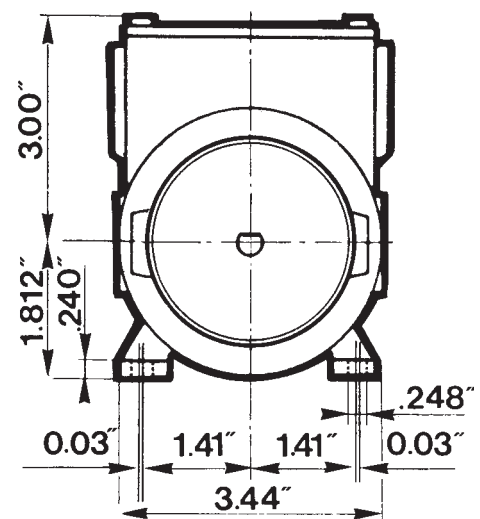

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

10074	30	138289	3	700505	15
101203	34	139687	12	700570	12,18,19
10149	30	139690	12	700572	34
10150	30	139799	27	701151	15
10152	30	140549	12	701773	1
102207	34	140809	15,18	7097	30
10283	30	147171	26	711AA1	2
117571	12	148402	26	7371	30
126745	28	148403	26	780AB1	2
128AA2	18	148404	26	780AC1	2
128AA4	18	148407	27	900AB14	2
128AC1	3	148562	26	922	30
128AC10	3	148563	26	9700780	38
128AC19	3	148564	26	9701011	34
128AC2	3	171AT1	18	9701072	25
128AC3	3	200AA1	15	9701230	37
128AC4	3	200AA2	15	9701345	39
128AC5	3	228AA1	2	9701692	37
128AC6	3	228AA2	2	9701837	36
128AC7	3	228AA3	2	9703019	1,5
128AC8	3	228AA4	2	9703020	1,5
128AC9	3	25249	30	9703032	1,5
128AD1	3	29765	34	9703093	8
128AD10	3	31735	30	9703123	8
128AD16	3	3197	30	9703135	1,2
128AD19	3	35890	30	9703147	8
128AD2	3	35891	30	9703159	8
128AD20	3	35892	30	9703196	1,2
128AD21	3	35893	30	9703202	1
128AD3	3	35894	30	9703214	1
128AD4	3	35895	30	9703238	8
128AD5	3	35900	30	9703391	2,8
128AD6	3	35902	30	9705533	28
128AD7	3	35909	30	9706744	10
128AD8	3	36926	30	9708960	26
128AD9	3	41111	30	9710255	8
129AA1	18	434	30	9710267	8
129AF1	18,19	44778	30	9710279	8
129AF2	18,19	45221	30	9710280	8
129AY1	2	45555	30	9710292	26
130471	12	46603-1/2	30	9710334	8
130AB1	19	47519	34	9711454	44
130AC1	14	562AA1	2	9711466	44
130AF1	19	638AA1	2	9711545	39
130AF2	19	638AC1	2	9711557	39
130AH1	19	660AC2	2	9711818	23
131AF1	2	660AD1	2	9711820	23
132594	27	660AD2	2	9713025	27
134AA1	12	700391	1,12,18,19	9713207	27
134AB1	19	700394	1	9713219	27
1367-3/8	30	700415	1,15	9713232	12
138287	3	700432	34	9713244	12

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



9713256	28	9724448	14	9741100	27
9713268	28	9724473	14	9741112	28
9713270	28	9724485	14	9741124	27
9713360	27	9724497	14	9741136	28
9713384	31	9724503	14	9741148	28
9713396	31	9724527	14	9741150	28
9713451	31	9724539	14	9741161	28
9713463	31	9724590	11	9741185	28
9714200	13	9724801	14	9741215	12,16
9714212	13	9724813	14	9741318	16,12
9714339	42	9724825	14	9741331	44
9715046	25	9725088	14	9741379	24
9715265	25	9725120	14	9741392	24
9715289	32	9725271	14	9741653	43
9715447	33	9725283	14	9741884	31
9715629	26	9725295	14	9741963	31
9715710	44	9725866	13	9742049	25
9715952	6	9726184	1	9742062	25
9715976	6	9726287	7	9742104	25
9715990	6	9726457	13	9742116	25
9716294	33	9726603	22	9742190	25
9716798	21	9727073	45	9742207	25
9716865	24	9727152	12,19	9742244	25
9717328	33	9727413	22	9742281	25
9718187	31	9727425	23	9742300	25
9718205	31	9727759	24	9742323	25
9718618	31	9728648	26	9742347	25
9719039	25	9729045	43	9742360	25
9719040	25	9729057	43	9742542	25
9719076	25	9729124	45	9742554	25
9719398	21	9729525	45	9742827	40
9719570	17	9730266	12,17	9742918	28
9719581	17	9730618	12,14	9742920	28
9719726	6	9731064	2,8	9745452	39
9719763	6	9731623	45	9746006	5
9719970	26	9731635	45	9746018	5
9721733	28	9731659	45	9746031	5
9721745	7	9732860	45	9746043	5
9721757	7	9733050	14	9746055	5
9721769	12,15,18,19	9733905	40	9746067	5
9721964	25	9734144	12,17	9746079	5
9722087	43	9737170	23	9746080	5
9722191	42	9737194	23	9746092	5
9722233	42	9737613	5	9746109	5
9722300	45	9739981	44	9746110	4
9722415	42	9740200	29	9746122	4
9724140	27	9740582	29	9746134	4
9724151	27	9740867	29	9746146	4
9724382	14	9741008	28	9746158	4
9724394	23	9741021	28	9746160	4
9724412	14	9741045	28	9746183	5
9724436	14	9741008	27	9746201	5

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

9746213	4	9771189	29	9809995	9
9746225	5	9771657	7	9810158	20
9746602	37	9771670	7	9810183	18
9747059	25	9771736	7	9810985	20
9747140	31	9771943	16	9811060	26
9747321	31	9771955	13	9811230	41
9752006	27	9772169	13	9811436	20
9752020	27	9772170	13	9813135	21
9752158	38	9772182	13	9813380	43
9752249	38	9772212	13	9813421	39
9753047	27	9772236	13	9813809	27
9753084	28	9772261	13	9813895	41
9753217	44	9772637	37	9814097	42
9753400	28	9772686	28	9814425	42
9754490	36	9772698	28	9814437	42
9755585	39	9772704	28	9814802	28
9756164	25	9772868	1	9815284	44
9756383	24	9772870	1	9817190	20
9757600	24	9775717	12,23	9817219	20
9757752	25	9776345	28	9818170	35
9759165	7	9776357	27	9818248	36
9759542	1	9777970	1	9818431	2,20
9759554	1	9778044	24	9818443	11,15,18
9759566	1	9779164	32	9820541	29
9760593	23	9779334	24	9820565	29
9763302	24	9780180	33	9820851	29
9763545	13	9780774	11	9820966	37
9763636	41	9781456	45	9821284	29
9763673	41	9781808	44	9822185	42
9764185	24	9781870	31	9822264	43
9764951	31	9782102	35	9822628	3
9766169	33	9783295	26	9822630	3
9766212	17	9783398	26	9822641	3
9767356	16	9787768	40	9822653	3
9767812	28	9791012	26	9822665	3
9767824	28	9791061	26	9822677	3
9767836	27	9791619	26	9822689	3
9768117	17	9794359	32	9822690	15,19,20
9768257	28	9800955	38	9822707	20
9768269	27	9801042	34	9822719	19
9768439	24	9801224	34	9822800	11
9768695	39	9801352	34	9822811	11
9768981	25	9801443	38	9822823	11
9768993	27	9801704	37	9822835	11
9769018	28	9802400	34	9822847	11
9769020	28	9802988	26	9822859	11
9769043	28	9804134	44	9822860	40
9769092	31	9805266	39,40	9822872	11
9769729	39	9806349	11	9822884	11
9769870	25	9806945	36	9822902	11
9770124	25	9808279	39	9822914	11
9770800	29	9809892	10	9822938	11



9822940	11	9832968	41	9847730	41
9822963	11	9833423	10	9850909	37
9823360	43	9833778	43	9851276	15,19
9824418	45	9834059	45	9851288	15,18
9824900	45	9834060	45	9851331	36
9824911	42	9834151	45	9852037	44
9824935	38	9834217	45	9852049	44
9824947	38	9834400	36	9852220	11
9825575	40	9834412	36	9852256	11
9825617	13	9834503	3	9852268	11
9825629	13	9834515	3	9852943	44
9825630	13	9834527	3	9853110	31
9825642	13	9834539	3	9853510	32
9825654	13	9834540	3	9853522	26
9825666	13	9834552	3	9853534	26
9825678	13	9834564	3	9853546	26
9825680	13	9835659	45	9853558	26
9825710	13	9835878	12	9853560	26
9825721	13	9836676	28	9853583	43
9825733	13	9837243	31	9853595	43
9825745	13	9837346	31	9854897	32
9825757	13	9837700	40	9854903	32
9825769	13	9838302	33,38	9855221	44
9825770	13	9838340	38	9855233	44
9825782	13	9838351	36	9855245	44
9825794	13	9838466	34,35	9855257	44
9825812	13	9838533	38	9855269	44
9825824	13	9838820	37	9856018	39
9825873	13	9838910	40	9856250	24
9825885	13	9839446	31	9856286	26
9825903	13	9839793	27	9857072	35
9825964	13	9839823	40	9859536	1
9825976	13	9840473	24	9859597	4
9826038	11	9840485	44	9859640	25
9826099	1	9840497	44	9859731	4
9826191	1	9840515	44	9859779	4
9826221	7	9840795	41	9859792	4
9826294	13	9841246	32	9859998	42
9826300	13	9841313	44	9860095	27
9826543	45	9841325	44	9860496	27
9828217	29	9841441	43	9860794	27
9830054	32	9841453	44	9861336	29
9830169	22	9841544	43	9863552	16
9830285	33	9842068	43	9863862	38
9830595	13	9842081	18	9863898	38
9831447	16	9844107	32	9864295	33,38
9831824	33	9844284	13	9865044	34,35
9831873	33	9844508	40	9865056	35
9832336	12,17,18,19	9845781	33,36	9866383	40
9832427	26	9845811	40	9866395	40
9832774	33	9846955	36	9866401	40
9832877	41	9847054	28	9866670	36

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

9868227	45	9883400	10	9893684	21
9868331	45	9883435	10	9893696	21
9870556	42	9883447	10	9893702	21
9870593	41	9883459	10	9893714	21
9870600	41	9883460	10	9893726	21
9871184	30	9883710	10	9893738	21
9871196	30	9883721	10	9893740	21
9871317	42	9884063	11	9893751	21
9871925	23	9884075	20	9893763	21
9871937	22	9884336	44	9893775	21
9872309	33	9886667	24	9893787	21
9873958	36	9888688	42	9893799	21
9873971	36	9889474	42	9893805	21
9874136	36	9889486	42	9893817	21
9874586	36	9891717	15,18	9893829	21
9875219	34	9891742	36	9893830	21
9875256	35	9892916	34,35	9893842	21
9875268	35	9893015	9	9893854	21
9875438	41	9893027	9	9893880	21
9876686	37	9893039	9	9893891	21
9879675	32	9893040	9	9893908	21
9879810	32	9893052	9	9893910	21
9880239	13	9893064	9	9893921	21
9880574	41	9893076	9	9893933	21
9881980	35	9893088	9	9897926	45
9882753	22	9893090	9	9903781	29
9882765	22	9893106	10	9903811	29
9882777	22	9893118	10	9951854	26
9883010	10	9893120	10	9951982	27
9883022	10	9893131	9	9953048	26
9883034	10	9893143	9	9953784	27
9883046	10	9893155	9	997	30
9883058	10	9893167	9		
9883060	10	9893179	9		
9883071	10	9893180	9		
9883083	10	9893192	9		
9883095	10	9893209	15,18,20		
9883101	10	9893337	9		
9883113	10	9893349	9		
9883125	10	9893350	9		
9883137	10	9893362	9		
9883149	10	9893374	10		
9883150	10	9893386	10		
9883162	10	9893398	9		
9883174	10	9893404	10		
9883186	10	9893416	9		
9883332	10	9893428	9		
9883344	10	9893430	9		
9883356	10	9893441	10		
9883368	10	9893507	9		
9883381	10	9893519	9		
9883393	10	9893520	9		

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



G-KT	2	NH	4
HAMC	10	OP-10-5LH	6
HAMC-N	10	OP-10-5RH	6
HH-1-2E	4	OP-12-2D-1	5
HH-3-6B	6	OP-12-2D-2	5
HH-3-6K	6	OP-12-2E	5
HH-3-6LH	6	OP-12-2F	5
HH-3-6RH	6	OP-12-3	5
INT-1-10	2	OP-20-0001N	6
INT-1-11LH	1	OP-20-1	6
INT-1-11RH	1	OP-20-2	6
INT-1-15LH	5	OP-21-1C	6
INT-1-15RH	5	OP-21-1LH	6
INT-1-1LH	3	OP-21-1RH	6
INT-1-1RH	3	OP-30-2	7
INT-1-4 RH/LH	1	OP-30-3L	7
INT-1-5	1	OP-3-3LW	7
INT-1-9-1RH	1	OP-32-2	7
INT-2-18	2	OP-32-3	7
INT-2-23	2	OP-33-2	7
INT-2-6	1	RRB-1	10
INT-5-16	2	RRB-2	11
INT-6-LH	7	RRB-3	11
INT-6-RH	7	RRW-1	10
LC-16-18	8	SE-5-6	4
LC-16-22	8	SE-5-7	4
LC-16-23	8	SRB-1	10
LC-25-7	8	SRB-2	11
LC-25-8	8	SRB-3	11
LC-28-10	9	SRW-1	10
LC-28-17	8	SW-1-15	5
LC-28-2	9	SW-1-4	2
LC-28-3	9	SW-1-5	2
LC-28-4	9	SW-1-G-1	5
LC-28-5	9	VP	11
LC-28-6	9		
LC-28-8	9		
LC-28-9	9		
LC-8.1-60	8		
LC-8.1-62	8		
LC-8.1-63	8		
LC-8.1-64	8		
LC-8.1-65	8		
LC-8.1-70	8		
M-14-21-2	7		
M-14-5	7		
M-6410	4		
MO-KT-L	3		
MO-KT-R	3		
MOCP	2		
MOCP-KT-L	3		
MOCP-KT-R	3		

16602	4	3-23015-02	3	3-36102-11	2
17548	12	3-23015-03	3	3-36102-13	2
19486	12	3-23015-04	3	3-36213-12	2
19487	12	3-23015-05	3	3-36354-00	1
20386	13	3-23015-06	3	3-40000-41	14
20429	13	3-23015-07	3	3-40000-42	14
21003	13	3-23015-08	3	3-40007-63	5
23023A	3	3-23015-09	3	3-40007-65	5
23023C	3	3-23015-10	3	3-40007-66	5
23036	3	3-23015-11	3	3-40007-82	5
23036A	3	3-23015-15	3	3-40008-47	10,11
28764	12	3-23015-16	3	3-40008-48	3,10,11
3-06522-00	5	3-23015-17	3	3-40008-61	10,11
3-06522-01	5	3-23015-19	3	3-40008-67	14
3-06522-02	5	3-23015-20	3	3-40008-75	14
3-06522-03	5	3-23015-21	3	3-40025-75	14
3-06522-04	5	3-23015-22	3	3-40031-88	3
3-06522-05	5	3-23015-23	3	3-40092-30	14
3-06522-06	5	3-23015-24	3	3-40092-31	14
3-06522-07	5	3-26103-00	1	3-40092-32	14
3-06522-08	5	3-26103-01	1	3-40092-33	14
3-06522-09	5	3-26103-02	1	3-40092-34	14
3-06522-10	5	3-26103-03	1	3-40092-35	14
3-10062-13	13	3-26103-04	1	3-40106-41	6
3-16487-03	7	3-26103-05	1	3-40113-96	3
3-16497-00	6	3-26103-06	1	3-40118-32	2
3-16562-08	13	3-26103-07	1	3-40118-34	2
3-16847-01	7	3-26103-08	1	3-40121-78	2
3-17548-06	12	3-26103-09	1	3-40123-12	2
3-17592-02	13	3-26103-10	1	3-40130-77	7
3-18266-01	13	3-26103-11	1	3-40130-79	4,7
3-18266-02	13	3-26103-12	1	3-40130-80	4
3-19487-03	13	3-26103-13	1	3-40130-81	4
3-19538-03	6	3-28763-01	12	3-40131-03	4
3-20310-01	13	3-28763-02	13	3-40132-68	6
3-20345-02	13	3-28764-02	13	3-40132-72	6
3-20386-02	13	3-36102-01	2	3-40132-81	6
3-20387-02	13	3-36102-02	2	3-40133-48	4
3-20397-00	13	3-36102-03	2	3-40133-49	4
3-20456-01	12	3-36102-04	2	3-40314-A75	7
3-20456-02	12	3-36102-05	2	3-40140-22	6
3-20696-01	12	3-36102-06	2	3-40140-45	6
3-20696-02	12	3-36102-07	2	3-40140-47	6
3-12015-01	3	3-36102-08	2	3-40143-00	15

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



3-40143-01	15	3-40258-34	3	35-1513-006	15
3-40143-02	15	3-40259-36	14	35-2551-006	6
3-40144-36	6	3-40341-73	14	35-2555-074	15
3-40147-25	4	3--40341-77	14	36102	2
3-40149-26	4	33-1025-009	1	36271A	3
3--40150-71	8	33-1025-016	1	36271B	3
3-40151-13	6	33-1025-019	1	43-1161-001	6
3-40151-14	6	33-1025-026	1	44-1032-003	2
3-40152-84	1	33-1094-003	2,10,11	44-1032-004	2
3-40153-79	15	33-1094-004	1	44-1032-005	2
3-40155-91	14	33-1094-006	2	44-1032-006	2
3-40155-92	15	33-1094-008	2	44-1032-007	2
3-40155-97	15	33-1099-008	1	44-1032-008	2
3-40156-88	14	33-1099-009	1	44-1032-009	2
3-40156-88-RK	14	33-1099-027	1	44-1032-010	2
3-40156-88-RPK	14	33-1099-029	1	44-1032-011	2
3-40156-89	14	33-1099-030	1	44-1032-012	2
3-40157-60	7	33-1099-031	1	HR-932	4
3-40157-63	7	33-1099-032	1	WL-100-D	9
3-40158-67	8	33-1099-033	1	WL-100-E	9
3-40162-05	14	33-1100-010	4	WL-100-F	9
3-40162-07	15	34-0725-005	13	WL-100-G	9
3-40162-12	14	34-1004-001	8	WL-100-H	9
3-40162-14	14	34-1032-001	3,10,11	WL-100-J	9
3-40162-22	15	34-1032-002	3	WL-100-S	9
3-40162-3	14	34-1032-013	3	WL-200-D	9
3-40163-04	1	34-1204-001	2	WL-200-E	9
3-40179-99	15	34-2168-003	15		
3-40181-58	15	34-2551-28	5		
3-40196-50	6	35-0539-003	11		
3-40196-74	8	35-0539-004	11		
3-40220-64	8	35-0539-005	11		
3-40221-95	14	35-0539-006	11		
3-40229-96	14	35-0539-007	11		
3-40230-10	14	35-0539-008	10		
3-40233-59	14	35-0539-009	10		
3-40233-63	14	35-0539-010	10		
3-40253-10	10	35-0539-011	10		
3-40255-11	10	35-1094-007	2		
3-40255-43	9	35-1135-001	5		
3-40255-44	9	35-1135-002	5		
3-40255-45	9	35-1159-002	8		
3-40255-71	9	35-1159-004	8		
3-40256-74	15	35-1229-03	7		

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

101142	8	35671	11	P-16264-00C	7
101229	8	35672	11	P-16553	5
101393	4	36244	2,5	P-16577	7
101724	8	40594	2	P-16578	7
10400	2	41782	1	P-1943-00C	7
10460	2	41893	6	P-22723	9
10615	7	41894	6	P-2654	6,9
11111	1	41898	6	P-2789	9
11265A	3	41900	6	P-28319-00C	7
14203	2	42844	2,5	P-28319-01C	7
14205	2	42984	7	P-2883-15	3
15660	3	43444	2	P-2883-16	3
15963	3	43697	3	P-2883-17	3
16272	3	43744	2	P-2883-18	3
16605	6,8	45270	6	P-2883-19	3
16607	8	45377	2	P-2883-20	3
16807	1	54416	2,5	P-2883-21	3
16910	1	46208	4	P-2883-22	3
16929	1	46344	2	P-2883-23	3
17040	3	47261	5	P-2883-24	3
17660	3	47262	5	P-2883-28	3
18992	3	47263	5	P-2883-3	3
19238	2	48283	6	P-2883-34	3
19240	2,4	48838-007	8	P-2883-4	3
19315	3	48873-001	8	P-2883-40	3
19501-21	8	58882	1	P-2883-41	3
19501-22	8	61214-016	8	P-2883-42	3
19510	3	61328-052	8	P-2883-5	3
19511	3	65115	4	P-2883-6	3
19911	3	A42860	11	P-2964	9
20267	8	A42861	11	P-31131	7
21339	2	A46208	4	P-31132	7
21340	2	MA1142	8	P-31341	7
23200	3	MA1204	8	P-31344	7
25270	3	P-1046-00C	7	P-31373	7
25271	3	P-1046-00D	7	P-31374	7
26120	2,4	P-12592	9	P-3174	9
28150	2	P-12861	6	P-5361	4
28383	2	P-12908	8	P-5362	4
28600	4	P-12926	7	P-5363	4
28601	4	P-12963	8,9	P-5985	9
28602	4	P-13347	7	P-7087	9
2881-148	1	P-1354-00C	7	P-7159	4
2881-149	1	P-13787	9	PR2678	2
2881-192	1	P-14426	5	PR2679	2
2881-99	6	P-14726-001	1	PR2680	2
28951	3	P-14726-003	1	PR2900	2
29784	3	P-14727-001	1		
29785	3	P-14727-002	1		
30074	3	P-14735-001	1		
32398	3	P-14735-002	1		
32399	3	P-14736	1		

101261	14	127L4	7	150C10	20
101277	14	127L5	7	150C13	37,40,42
101306	14	127VB52	7	150C14	37,40,42
101319	14	127VB56	7	150C2	46
101322	14	127VB83	7	150C3	46
102DA1	35,36,37,40,48	129BR1	37	150C7	45
1039	51	130190	50	150H10	47
103921	52	131AY1	40	150H2	54
103994	50	131BD1	37	150H4	45,54
1042	50	131BH1	35	150H6	45
1046	51	132027	11	150HA3	44
106182	49	132028	11	150P13	42
106569	50	132033	12	150P14	42
106578	50	132037	11	150P25	35,47,48
106671	49	132038	12	150P26	35,47,48
107075	49	13234	49,50	150P27	35,47,48
1072	51	132346	14	150P32	19
1073	50	132347	14	150P33	21
107430	49	132348	14	150P34	21
1077	51	132349	14	150P4	35,36,40,47,48
108492	49	133A1	37	150P43	19
1084MO-1	14	133A6	40,44	150P7	42
108713	49	13417	49,50	150P8	42
1088	50	1351	51	150R1	20
109578	49	1371	51	150W6	41
1129	52	1373	51	150Y2	38
114228	50	137726	50	150Y4	41,48
114255	52	137E5	35	150Y6	41,48
1144	52	138109	14	150Y7	40,41,42,48
1168	52	138142	33	150Y8	41,48
1173	52	1387	51	151076	12
1176	52	140233	11	151352	14
118	27	140391	10	151353	14
118348	49	140694	14	151354	14
1189	50	141245	12	151355	14
1191	50	141246	11	151357	14
1194	52	141436	49	151358	14
1197	52	141Y1	40	151359	14
1198	52	141Y2	37,38	152AV2	9
1203	52	143447	11	152AW2	9
1207	52	1436	51	152BE2	9,10
121014	49	14452	51	152BE4	9,10
1215MO-1	14	147451	11	1533	50
121787	49	147976	12	1539	50
121891	49	147986	12	153AE10	44
121919	14	1482	50	153AE11	45
121932	14	1489	50	153AG5	41
121992	52	1493	50	153AG6	38
122064	51	150AK2	38,48	153AG7	44
122236	14	150AK3	41,48	153B1	37,38,48
126223	49	150AL3	41,48	153D1	46
127686	49	150AY1	47	153H1	43

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

153T1	46	175A22	27	182A15	15
153W1	45	175A26	27	182A18	15
153Y1	45	175A33	27	182A2	15
153Z1	41,48	175A39	27	182A3	15
153Z4	41,40	175A5	27	182A4	15
1541	50	175AN2	27	182A5	15
154AA1	46	175AV1	28	182A6	15
154AB1	40,46,48	175H1	27	18742	14
154AB2	40,43	175J1	28	194AD6	6
154C1	37,46,48	175J150	37	194AD7	6
154C2	37,39	175J16	28	207Z4	2
154G1	46	175J2	28	209E1	7
1554	50	175J204	40	210AA1	14
1555	49,50	175J25	27,28	210AL1	65
1558	50	175J27	28	210BA1	14
1559	50	175J29	28	214SW11	49
1560	50	175J3	28	2213R1	6
1561	50	175J32	28	2220D16	6
156143	11	175J39	28	222CD1	33
156144	12	175J4	28	222CD2	33
156A6	21	175J5	28	222CD3	33
156A8	7	175J6	28,35,48	222CD4	33
156AV2	19	175J60	25,28	222CD5	33
156AX2	21	175J7	28	222CV1	32
156AX4	21	175J77	28	222CV2	32
156E3	19	175J8	28	222CV3	32
156F2	20	175J80	28	222CV4	32
156G4	20	175J88	40	222CV5	32
156H1	21	175J89	35,48	222CV6	32
156H2	22	175J9	28	222CV7	32
157385	14	175J90	35,48	222CV8	32
158446	49	176KA1	28	222CX1	30
158492	12	176KA10	28,37	222CX2	30
16005	65	176KA13	28,40	222CY1	29
16010	65	176KA14	28	222CY10	29
16420	65	176KA3	28	222CY11	29
16661	65	176KA4	28	222CY2	29
167594	13	176KA5	28	222CY3	29
169941	52	176KA6	28	222CY4	29
172DE9	7	176KA8	28	222CY5	29
174101	52	177855	11	222CY6	29
174AA1	28	177AH1	18	222CY7	29
174AB1	28	179AM1	40,41	222CY8	29
174AF1	28	179AR1	47	222CY9	29
174AK2	28	179AR2	47	222CZ1	30
175	27	179C1	49	222CZ2	30
175A1	27	179P3	37,38	222CZ3	30
175A11	27	181874	20	222CZ4	30
175A14	27	181892	22	222CZ5	30
175A17	27	181893	22	222CZ6	30
175A19	27	181894	22	222DE1	32
175A2	27	182A14	15	222EB1	31

222EB2	31	226W1	24	245Z1	35,36
222EB3	31	226W2	23	245Z2	35,36,48
222EB4	31	226W3	24	251BJ1	6
222EB5	31	232AA10	26	276B1	44
222EB6	31	232AA11	26	276H1	40,46
222F14	30	232AA12	26	287F2	53
222F15	30	232AA13	26	287F2A	54
222G17	30	232AA14	26	287F4	54
222G19	30	232AA15	26	287F6	54
222G20	30	232AA16	26	287F6A	54
222T4	33	232AA17	26	287F8	54
222T5	33	232AA18	26	288FA1	10
222T8	33	232B1	25	288LV1	10
222W10	31	232B10	25	290AJ2	4
222W11	31	232B11	25	290BP4	4
222W12	31	232B12	25	290BR2	4,65
222W13	31	232B13	25	290F1Y	4
222W14	31	232B14	25	297B1	16
222W15	31	232B15	25	297B2	16
222W16	31	232B16	25	297B3	16
222W17	31	232B17	25	297H2	25
222W18	31	232B18	25	298BV1	35
222W19	31	232B19	25	306BR1	40
222W2	31	232B20	25	306BR2	40,46
222W20	31	232B21	25	306CJ1	37,40
222W21	31	232B7	25	306CL1	37
222W3	31	232B8	25	306CL2/CL1	38
222W4	31	232B9	25	306CN1	35,36,47
222W5	31	232BA23/B23	26	306CZ1	35,36
222W6	31	232BA25/B25	26	306EF1	35,36
222W7	31	232BA28/B28	26	306FM1	5,8
222W8	31	232BA32/A32	26	306GD1	22
222W9	31	232BA33/B33	26	306GD2	22
222Z1	32	232BA34/B34	26	306GD3	22
222Z3	32	232E121	25	306GT1	22
222Z4	32	232E125	25	306JJ1	10
222Z5	32	232E126	25	306KH2	59
222Z8	32	232E127	25	307AE1	5,8
226C1	23	232E129	25	307AE2	5,8
226D1	23	232E130	25	311B1	59
226D2	23	232E131	25	311B2	59
226D3	23	232E133	25	311B3	59
226D4	23	232E134	25	311B4	59
226H1	24	232E135	25	311B6	59
226H11	24	232E137	25	320AY1	7
226H13	24	232E138	25	320P4	7
226H2	24	232E140	25	323AS2	57
226H3	23	232E141	25	323BH2	57
226H4	23	232E143	25	323BL2	57,59
226H5	23	232Y25	25	323BM2	57
226H7	24	237AR1	6	323BP1	56
226H9	24	237AR2	6	323DA1	59

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

327AZ1	13	456AK2	3	6839B1	16
327DE2	20	456BT1	5,8	6839B2	16
327FT2	20	456C1	5	6839B3	16
327GJ1	22	456C2	5,8	6839B4	16
327GS1	22	456C3	5,8	6839D3,D1	16
329J4	59	456C4	5	6839D4,D2	16
331AN2	10	456CC1	2	6839H1	17
331AP1	5	456CC1-P	2	6839J1	18
332AP1	21	456CL4	3	6839W1	18
336CM1	20	456CM4	3	6839Y1,Y3	19
340AA2	59	456CN4	3	6839Y2,Y4	19
340AA3	59	456CP1	1	6850F1	19
368203-907	2	456CP2	1	6850F2	19
384AR1	43	456CV4	3	6850F3	19
384EW1	37,39,43	456CX-4	2	6940AG2	10
384EW2	40,43	456DH2	2	6940B-CH-49800	8
384EW3	40	456DN1	3	6940B3	8
384FN1	36,48	456EW1	1	6940B4	8
384FS1	40,43	456W1	1	6940C1	8
384FX1	37,43	464BJ2	40,46	6940C2	8
389J2	9	464BJ3	37	7035A10	55
396PB1	58	499AD1	56	7035A11	55
396VB1	58	499AD3	56	7035A12	55
400AY1	35	499AE1	56	7035A14	55
400AY2	35	499AE3	56	7035A25	55
430AZ1	65	502G1	65	7035A28	55
430AZ2	65	502G2	65	7035A8	55
430FA2	13	6047A2	9	7035A9,A2	55
433AB1	37,39	6098D1	54	7042A1	18
433AG1	35	6098D3	54	7069AF1	58
453Y1	64	6098D5	54	7069AH	58
453Y13	64	6098D6	54	7069AK1	58
453Y2	64	6098E1	54	72CG1	59
453Y3	64	6098E10	54	77A1	5
453Y4	64	6098E11	54	77A2	5,8
453Y5	64	6098E12	54	77A3	5,8
453Y6	64	6098E2	54	77A4	5
453Y7	64	6098E5	54	77A5	5
453Y8	64	6098E6	54	77RK1	10
453Y9	64	6098E9	54	78C2	5
455AD1	65	6151B2	53	90AX1	63
455BA1	65	6168F1	6	90BB1	63
455CA1	65	6266A1	21	90BB15	60
455G1	64	6526A1	56	90BB19	60
455G2	64	6534B1	44	90BB3	60
455G3	64	6810A1	42	90BB8	37
455R1	65	6810A2	42	90CB6	63
455R2	65	6810A3	42	90DB4	37,60
455Z1	65	6810A5	42	90EB5	61
456AA1	1	6827C1	20	90HB9	8,62
456AA2	1	6839AA1	17	90KA2	60,63
456AJ2	3	6839AB1	16	90KA3	60

90KA5	60	A254AA1	37,39	A6164BP332CX1	29
90KA6	60	A245AE1	40	A6164BP340CX1	29
90KA8	60	A290AB1	4	A6164BP341CX1	29
90KB10	62	A306EB2	7	A6164BP623CZ5	29
90KC10	62	A306G6	53	A6164BP641CZ1	29
90LA10	60	A323AF1	58	A6164BP732CZ1	29
90LA11	60,63	A323BD1	57	A6164BP741CZ1	29
90LA4	60	A323BD2	57	A6482C2	18
90LA5	60	A323BD6	57	A6839E1	16
90LB3	62	A323BD7	57	A6839E2	16
90PA4	60	A325P1	9	A6839F2	16
90PA7	60	A332AS1	6	A6839F3	17
90TA3	60	A332AS2	6	A6839F4	17
90TA6	35,40,48,60	A332AS3	6	A6839F5	16
90VA15	40,61	A336BR1	40	A6839G1	17
90VA16	48,61	A336Z1	37,38	A6839G3	17
90VA8	61,63	A346MB4	53	A79AN1	35
90WE14	58,59,62	A374CP1	40	A8200AA1	58
90XB3	62	A374FM2	37,39	A92AG1	8
90YA15	61	A384FS1	40	A92AG2	8
90YA18	53,61	A385AV1	58	A96AJ1	62
90YA25	61	A433Z1	40	B152H2	21
90YA26	58,61	A456R2	1	B245AE1	40
91AE1	61	A456W1	1	B374CP1	40
91AG1	17	A477BH1	35	BB212	15
91B1	61	A477BJ1	35	BB213	15
91W2	62	A477BL1	40	BB501	15
92AG1	61	A477BP1	37	BB502	15
92AG2	61	A6098A1	53	GX6283E500	65
93A2	37,42,53	A6098B11	53	GX6283E504	65
93AD1	37,39,42	A6098B13	53	GX6283E505	65
93BM2	19	A6098B3	53	GX6283E506	65
93D2	35,36,40,47,48	A6098B5	53	GX6283F500	65
94FA1	59	A6164BP104CY1	29	GX6283F502	65
99G1	35,36,37,40,48	A6164BP111CY1	29	MT114289	57
99G2	37,40	A6164BP113CY1	29	N-415B	43
A151C2	18	A6164BP114CY1	29	RP-KIT-01	47
A179AK3	40	A6164BP114CY2	29	RP-KIT-02	47
A179AK5	40	A6164BP120CY1	29	RP-KIT-03	48
A222DB1	34	A6164BP122CY1	29	RP-KIT-04	48
A222DB2	34	A6164BP123CY2	29	RP-KIT-05	48
A222DB3	34	A6164BP131CY1	29	RP-KIT-06	48
A222DB4	34	A6164BP132CX1	29	RP-KIT-07	48
A222DB5	34	A6164BP132CY1	29	SA-18	43
A222DB6	34	A6164BP132CY10	29	SA-32	43
A222Y1	34	A6164BP132CY2	29	SP0011A1	17
A222Y2	33,34	A6164BP140CY1	29	VP728210	56
A222Y3	34	A6164BP141CX1	29		
A222Y4	34	A6164BP150CY1	29		
A222Y5	34	A6164BP150CY2	29		
A222Y6	34	A6164BP320CX1	29		
A237AJ2	6	A6164BP323CX1	29		

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

103D250G.....	22	324C083G03.....	1	7055C801.....	23
103D250H.....	22	324C083G04.....	1	864A963H01.....	7
103D251G.....	22	324C969G02.....	23	865A022G01.....	18
103D251H.....	22	324C969G04.....	10	866A348H01.....	27
103D252G.....	22	324C969G07.....	23	H3056G01.....	11
103D291G01.....	27	324C969G08.....	23	H3056G02.....	11
144A277G01.....	3	325C798G09.....	2	H3056G04.....	11
144A520G01.....	8	325C798G10.....	4	H3056G05.....	11
144A524H01.....	17	325C805G01.....	22	H3056G06.....	11
144A563H01.....	8	465D864G01.....	8	K-3412G3.....	16
144A563H02.....	8	466D034G01.....	16	K180.....	14
144A568G01.....	6,8	466D034G02.....	16	K181G2/G3.....	14
145A110H01.....	23	5061A04H02.....	26	K3125-G1.....	13
145A111H01.....	23	5063A04H03.....	26	K3125-G2.....	13
145A111H02.....	23	5194D85G01.....	7	K3125-G3.....	13
146A746H01.....	10	5194D85G02.....	7	K3125-G4.....	13
151B439G01.....	22	5204D59.....	22	K3244G01.....	5
151B439G02.....	22	569A803H01.....	23	K3268-V.....	2
151B440H01.....	22	569A803H02.....	23	K3412G1.....	16
151B671H01.....	8	576B535G04.....	4	K3412G2.....	16
151B931G01.....	18	576B535G98.....	3	K4277G01.....	12
152BO11G02.....	3	576B807G01.....	6	K4277G02.....	18
1727C81G02.....	26	576B812H01.....	6	K4278G01.....	15
195C928G01.....	18	626D315H02.....	24	K4278G02.....	15
196C117H04.....	27	626D315H03.....	24	K4495H01.....	14
196C269G01.....	26	626D315H04.....	24	K5801G01.....	19
196C271G01.....	25	626D315H05.....	24	K5801G02.....	19
196C523H01.....	7	626D315H06.....	24	K5801G03.....	19
196C527G01.....	7	626D686G01.....	5	K5801G04.....	19
196C527G02.....	7	626D686G02.....	5	K5802G01.....	19
196C921.....	22	626D075G01.....	6	K5802G02.....	19
197C534H01.....	7	626D184H01.....	24	K5802G03.....	19
197C534H03.....	7	628D184H02.....	24	K65831.....	5
215B687H01.....	6,8	628D184H03.....	24	K6738G1.....	19
215B690H01.....	17	628D184H04.....	24	K6738G2.....	19
216B509G04.....	25	630B424H01.....	7	K6995G01.....	18
216B711H01.....	14	681A790H01.....	22	K7028H01.....	5
216B711H04.....	14	682A226H01.....	7	K7305G01.....	12
216B713G01.....	23	682A227G01.....	7	K7307G01.....	13
216B713G02.....	23	682A244H01.....	7	K7307G02.....	13
216B812H01.....	5	682A245G01.....	7	K7310G01.....	13
217B203G01.....	23	682A302H01.....	7	M1230G20.....	12
217B203G02.....	23	691B759G02.....	25	M1230G23.....	12
217B235H07.....	25	691B785G01,03.....	25	M1230G4.....	15
2637C34H14.....	26	691B785G02,04.....	25	M1230G5.....	15
320C901G1.....	9	691B785G05,07.....	25	M1230G6.....	15
320C901G2.....	9	691B785G06,08.....	25	M3466G01.....	15
321C201G01.....	10	691B971H01.....	10	M3665G2.....	10
321C201G02.....	10	692B011H01.....	27	M4522G01.....	15
323C160G01.....	3	694B338H02.....	22	M4522G02.....	15
323C235G02.....	4	696668.....	19	M4522G04.....	15
323C235G03.....	3	7055C351.....	23	M4522G05.....	15



Index

Westinghouse

M5594G02	3	X19BBG11	21	X19CCG01	20
M5594G03	3	X19BBG12	21	X19CCG02	20
M6029G01	4	X19BBG13	21	X19CCG03	20
M7405G99-LH.	1	X19BBG14	21	X19EG19	20
M7405G99-RH	1	X19BBG15	21	X19EG22	20
P-1524-6	14	X19BBG16	19,21	X19EG23	20
P1534-1	14	X19BBG17	21	X19EG25	20
R5027H03	17	X19BBG18	21	X19GG01	21
R6952-10	5	X19BBG19	21	X19GG02	21
R7533H01	17	X19BBG20	21	X19GG03	21
R8026-V1	2	X19BBG21	21	X19GG04	21
R8026-V2	2	X19BBG22	21	X19GG05	21
R8636G01	4	X19BBG23	21	X19GG06	21
R8858G98	4,5	X19BBG24	21	X19GG07	21
R9822G04	20	X19BBG25	21	X19NG10	20
R9822G05	20	X19BBG26	21	X19NG11	20
R9822G06	20	X19BCG01	20	X19YG01	21
T1139H07	14	X19BCG02	20	X19YG02	21
T3534G8	15	X19BG-G01	12	X19YG03	21
T4483G19	10	X19BG-G02	12	X19YG04	21
T453-G04	13	X19BG-G03	12	X19YG05	21
T453-G08	13	X19BG-G04	12	X19YG06	21
T5409	2	X19BG-G05	12	X19YG07	21
T5411	2,5	X19BG-G06	12	X19YG08	21
T9165-G01	18	X19BG-G07	12	X19ZG4	19
T9165-G02	18	X19BG-G08	12	X19ZGR4	19
T9165-G04	18	X19BG01	21	X22G02	15
T9165-G05	18	X19BG02	21	X22G03	15
T9165G08	18	X19BG03	21	X24AS1G01	12
T9560G34	11	X19BG04	21	X24AS1G04	12
T9560G35	11	X19BG05	21	X24BS1G01	12
T9560G36	11	X19BG06	21	X24BS1G02	12
T9560G37	11	X19BG07	21	X28A-10	16
T9560G38	11	X19BG08	21	X28A-11	16
T9560G39	11	X19BG10	19	X28A-12	16
T9560G40	11	X19BG11	21	X28A-13	16
T9560G41	11	X19BG14	21	X28A-14	16
T9560G42	11	X19BG9	19	X28A-15	16
T96111	10	X19BH-G01	12	X28A-16	16
T96113G01	10	X19BHG10	20	X28A-17	16
X14B4	8	X19BKG01	20	X28A-18	16
X14B5	8	X19BKG02	20	X28A-21	16
X19BBG01	21	X19BVG01	20	X28A-22	16
X19BBG02	21	X19BVG02	20	X28A-24	16
X19BBG03	20	X19CA-G08	12	X28A-6	16
X19BBG04	21	X19CAG01	12	X28A-7	16
X19BBG05	21	X19CAG02	12	X28A-8	16
X19BBG06	21	X19CAG03	12	X28A-9	16
X19BBG07	19,21	X19CAG04	12	X28F-10	16
X19BBG08	21	X19CAG06	12	X28F-5	16
X19BBG09	21	X19CAG07	12	X28F-7	16
X19BBG10	21	X19CBG01	20	X30E12	17

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

X30E13	17
X30E15	17
X30E16	17
X38E14	17
X4WS1H03	26
X6BCS1H01	27
X6BDS1H04	27
X6ZS6H82.....	27
X9J18	8
X9J27	22
X9JS1H11.....	18
X9K1	8
X9KS1H02	7
Z19CA-G01.....	12



Index

Other Companies

ARMOR

10210-01	3
10312-01	5
10312-02	5
10313-01	5
10338-01	6
10349-01	7
10411-01	6
10419-01	5
10431-01	5
10470-01	1
10471-01	1
10472-01	1
10473-01	1
10474-01	1
10475-01	1
10476-01	1
10477-01	1
10478-01	1
10480-01	1
10501-01	1
10947-01	6
10978-02	7
11133	5
11134	5
11143-01	6
11143-02	6
11144-01	6
11144-02	6
11146-02	6
11150-01	3
11165-01	6
11166-01	6
11167-01	6
11168-01	6
11171-01	7
11172-01	7
11173-01	7
11181-01	3
11279-01	1
11280-01	1
11281-01	1
11282-01	1
11283-01	1
11285-01	1
11287-01	1
11288-01	1
11296-01	1
11298-01	1
11845-01	3
11858-01	3
11859-01	3

11864-01	5
11905-01	2
11907-01	2
11909-01	2
11921-01	2
11929-01	4
11929-03	4
11940-01	4
11942-01	4
11965-01	2
11966-01	2
11971-01	4
11995-01	3
11996-01	3
11997-01	3
12061-01	5
12076-01	1
12102-01	3
12103-01	4
12679-01	2
12680-01	2
13239-01	3
13626-01	3
13626-03	3
A-1580013-A	6
A4118-P2	1
B-37038	5
C-37297	5
C11S3BA1H11G	1
C16D9D1S12G	1
C25S10D1H11G	1
C6S10D1H12G	1

COURION

04-000100	15
04-009900	15
04-011700	15
04-011800	15
04-015600	15
04-015700	15
04-041601	15
04-300101	15
04-301202	15
04-326201	15
04-359600	15
04-601002	15
04-637600	15
07-200701	15
07-220303	15
07-228303	15
07-229700	15
07-251000	15

90-808000	15
90-808200	15
90-853500	15
90-868500	15
90-871700	15
900-871200	15
94-080020	15
95-002127	15
95-010005	15
95-010022	15
95-012009	15
95-012010	15
95-012265	15
95-016083	15
95-016150	15
95-031071	15
95-031205	15
95-034450	15

PEELLE

01475	8
01476	8
01506	10
01507	10
0179	7
01792	7
01794	7
01801	8
01806	8
01807	8
0238	8
0239	8
033036	10
03407	9
03411	9
03412	9
034171	9
03424	9
03425	9
0342L	9
0342R	9
03505	9
035719	10
05468	9
05933	10
06592	10
066921	10
06696	10
2511	10
25112	10
251125	10
2580	9

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444



25801 9
 258011 9
 258012 9
 258013 9
 258014 9
 258015 9

US ELEVATOR

100-00054-001 14
 100-00057-001 14
 100-00075-001 14
 100-00080-001 14
 114-00009-007 14
 114-00054-001 14
 146-00550-300 11
 154-05005-301 11
 154-05006-301 11
 167-02014-700 12
 167-03003-700 11
 167-03004-700 11
 167-03010-100 12
 167-03011-100 12
 167-03012-100 13
 167-03013-100 13
 167-03015-700 12
 167-03017-100 12
 467-00012-007 11
 467-00020-007 11
 467-00021-007 11
 467-00022-007 11
 467-00026-007 12
 467-00028-007 11
 467-01001-007 12
 467-01002-007 12
 467-01005-007 12
 467-01006-007 12
 467-05001-007 12
 467-05005-007 12
 467-05006-007 12
 920-36001-000 12
 930-02001-000 13
 930-27004-000 12
 930-35017-000 13
 930-35019-000 13
 930-35020-000 13
 930-35030-000 13
 930-35031-000 13
 930-35032-000 13
 930-35033-000 13
 930-35051-000 13
 930-35053-000 13
 930-35056-000 13

930-35056-001 13
 930-35056-002 13
 934-10054-000 14
 934-10055-000 14
 934-10056-000 14
 934-10057-000 14
 934-10060-000 14
 934-10061-000 11
 934-10062-000 14
 934-10063-000 14
 934-20206-000 14
 936-10027-000 14
 936-10032-000 14
 936-40003-000 14
 936-50004-000 14
 936-60022-000 14
 936-60042-000 14
 940-31001-000 12
 940-35011-000 13



Index

Miscellaneous

1	19	120MB	16	1835	17
10	19	120MB NE	16	1843	17
1002	20	120PSB	16	1847	17
1004	20	120PSB NE	16	1864	17
1006	20	124	14	1873	17
1008	20	125	14	1892	17
1044	20	126	14	194AD2	11
1045	20	12PSB	16	194AD6	11
10PA01-21	6	13	19	194AD7	11
10PA01-01	7	14	19	194AD8	10
10PA01-02	7	15	19	1A-080	3
10PA01-03	7	1502	20	1A074-01	3
10PA01-04	7	1504	20	1A074-02	3
10PA01-05	7	1506	20	1A074-03	3
10PA01-06	7	1508	20	1A074-04	3
10PA01-07	7	1555	9	1A074-05	3
10PA01-08	7	155PSB	16	1A074-06	3
10PA01-09	7	156	15	1A074-07	3
10PA01-10	7	1560	9	1A074-08	3
10PA01-11	7	1565	9	1A074-09	3
10PA01-12	7	15T6	17	1A074-10	3
10PA01-13	7	15T7-130V-CS	17	1A079	3
10PA01-14	7	16	19	1A084-01	3
10PA01-15	7	16435	1	1A084-02	3
10PA01-16	7	16440	1	1A084-03	3
10PA01-17	7	17	19	1A084-04	3
10PA01-18	7	1750	9	1A084-05	3
10PA01-19	7	1755	9	1A084-06	3
10PA01-20	6	18	19	1A084-07	3
10PA01-22	6	1815	17	1A084-08	3
10PA01-23	6	1820	17	1A084-09	3
10PA01-24	6	1822	17	1A084-10	2
10PA01-25	6	1828	17	1A085-01	4
10PA01-26	6	1829	17	1A085-02	4
10PA01-29	6	182A1	7	1A085-03	4
10PA01-30	6	182A10	7	1A085-04	4
10PA01-31	6	182A11	7	1A085-05	4
10PA01-32	6	182A12	7	1A085-06	4
10PA01-33	6	182A13	7	1A085-07	4
10PA01-34	8	182A14	7	1A085-08	4
11	19	182A15	7	1A085-09	4
11237	1	182A16	7	1A085-10	4
11280-01	29	182A17	7	1A085-11	4
11281-01	29	182A18	7	1A085-12	4
11282-01	29	182A19	7	1A091-01	2
11285-01	29	182A3	7	1A091-02	2
11296-01	29	182A4	7	1A091-03	2
11300-01	29	182A5	7	1A091-04	2
1165	9	182A6	7	1A091-05	2
119	14	182A7	7	1A091-06	2
12	19	182A8	7	1A091-07	2
120	14	182A9	7	1A091-08	2

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

1A104-01.....	5	1R096	8	3002	20
1A104-02.....	5	1R100	8	3004	20
1A104-03.....	5	1R100-6	6	3006	20
1A104-04.....	5	1R101	6	3008	20
1A104-05.....	5	1R103	6	3010	20
1A104-06.....	5	1RXX	8	3012	20
1A104-07.....	5	1RXXX	8	3033	20
1A104-08.....	5	2	19	3043	20
1A104-09.....	5	20	19	3044	20
1A104-10.....	5	21	19	3045	20
1A108-01.....	5	215B951H01	10	3046	20
1A108-02.....	5	22	19	3048	20
1A108-03.....	5	23	19	3073	20
1A108-04.....	5	230AG1	30	3074	20
1A108-05.....	5	230AJ1	30	3075	20
1A108-06.....	5	230AL1	30	3076	20
1A108-07.....	5	230AR1	30	3077	20
1B	20	230AR2	30	321CV1	9
1E-038.....	4	230AR3	30	327	16
1K004	8	230AV1	30	334	16
1K005	8	230AZ1	30	33AA1	8
1K006	8	230BJ1	30	33D20	8
1M057U	8	230BJ2	30	33D23	8
1M130U	8	230BJ3	30	33D26	8
1M139	8	230BJ4	30	33D27	8
1R002	6	230BJ5	30	33D29	8
1R004	8	238	17	33D31	8
1R005	8	24	19	33D5	8
1R006	8	24CSB	16	349	16
1R0105	8	24MB	16	380	16
1R019	8	24PSB	16	386TZ1-3	9
1R020	6,8	25	19	3B	20
1R021	8	253X	16	3E-029.....	3
1R022	8	26	19	3E-030.....	3
1R028	8	27	19	3E-039.....	3
1R031	8	28	19	3E-041.....	3
1R039N	7	288LS1	9	3E-042.....	3
1R043	6	2890C79H01	8	3E-063.....	4
1R047N	7	28MB	16	3E-206.....	3
1R048	6,8	28PSB	16	3E-208.....	3
1R049N	7	2900C27G02	8	3E-219.....	3
1R050	8	299ADP2	10	3EA023-01	3
1R064N	7	2B	20	3EA023-02	3
1R077	8	2EA003-01	2	3EA023-03	3
1R079	8	2EA003-02	2	3EA023-04	3
1R081	6	2EA003-03	2	3EA023-05	3
1R084	8	2EA003-04	2	3EA023-06	3
1R086N	7	2EA003-05	2	3EA023-07	3
1R091	8	2EA003-06	2	3EA023-08	3
1R093N	7	2EA003-07	2	3EA023-09	3
1R094N	7	2EA003-08	2	3EA023-11	2
1R095N	7	3	19	3EA023-13	2



Index

Miscellaneous

3EA023-14	2	6940AR1HD	10	6E227-SFSS	3
3EA023-21	2	6B	20	6E227-SS	3
3EA023-22	2	6E-001	6	6EA001-01	4
3EA026-11	3	6E-003	3	6EA001-02	4
3EA026-12	3	6E-007	2	6EA001-03	4
3EA026-13	3	6E-019	3	6EA001-04	4
3EA026-14	3	6E-029	3,4	6EA001-05	4
3EA026-15	3	6E-031	2	6EA001-06	4
3EA026-16	3	6E-032	3,2	6EA001-07	4
3EA026-17	3	6E-039	3	6EA001-08	4
3EA026-18	3	6E-051	3,4	6EA001-09	4
3EA026-19	3	6E-052	4	6EA001-10	4
3EA026-20	3	6E-053	4	6EA001-11	4
4	19	6E-054	4	6EA003-01	4
4000	19	6E-059	2	6EA003-02	4
4001	19	6E-062	3	6EA003-03	4
4002	19	6E-064	2,3	6EA003-04	4
4003	19	6E-068	2	6EA003-05	4
44	17	6E-069	2	6EA012-01	5
48MB	16	6E-114SF	5	6EA012-02	5
48PSB	16	6E-116SF	5	6EA012-03	5
4B	20	6E-128SF	5	6EA012-04	5
4E-002	2	6E-129SF	5	6EA012-05	5
4E-003	2	6E-130SF	5	6EA012-06	5
4E-004	2	6E-131SF	5	6EA012-07	5
4E-005	2	6E-132SF	5	6EA012-08	5
5	19	6E-133SF	5	6EA018-01	3
569A884H01	10	6E-145SF	5	6EA018-02	3
5B	20	6E-160FS	5	6EA025-01	6
5E004	6	6E-164SF	2	6EA025-02	6
5E005	6	6E-165SF	5	6EA025-03	6
5E006	6	6E-168SF	5	6EA025-04	6
6	19	6E-169SF	5	6EA025-05	6
6043	20	6E-172SF	5	6EA025-06	6
6044	20	6E-173SF	5	6EA025-07	6
6045	20	6E-174SF	5	6EA067-01	4
6046	20	6E-177SF	5	6EA067-02	4
6047	20	6E-205SF	4	6EA067-03	4
6048	20	6E-206SF	4	6EA067-04	4
6049	20	6E-208SF	4	6EA083-01	5
6050	20	6E-213SF	6	6EA083-02	5
6051	20	6E-216SF	6	6EA083-03	5
6073	20	6E-219SF	4	6EA083-04	5
6074	20	6E-221SF	2,3	6EA083-05	5
60MB	16	6E-223SF	6	6EA083-06	5
60PSB	16	6E-224SF	6	6EA083-07	5
62-0755	30	6E-231SF	6	6EA083-08	5
6917C89H01	8	6E089	3	6EA090-01	5
6917C91G02	8	6E171SF	5	6EA090-02	5
6918C44G02	8	6E207SF	4	6EA090-03	5
6918C45H01	8	6E215SF	6	6EA090-04	5
6940AR1	10	6E219SF	4	6EA090-05	5

14639 Short St. • Posen, Illinois 60469 U.S.A.

Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

6EA090-07	5	AGC-7	18	DPS24.....	13
6EA090-08	5	AGC-8	18	DPS30.....	13
6EA090-09	5	B-10.....	11	DPS36.....	13
6EA090-10	5	B-6.....	11	DPS36-HP.....	13
6MB.....	16	B-8.....	11	DPS48.....	13
6PSB.....	16	B-P	11	DPS48-HD	14
6T4.5-125V-CS-S	17	B-S	11	ECSR-30	17
7	19	BB115A.....	22	ECSR-40	17
755	17	BB25A.....	22	ECSR-60	17
756	17	BB40A.....	22	EP	9
757	17	BLPPH	24	F-1004-B-225	26
7B	20	BP25	24	F-1004-D-224	26
8	19	BPH5*.....	24	F-1004-FS.....	26
85	16	BPPH	24	F-1005.....	27
9	19	C11S10D1H11G.....	30	F-1005-AE.....	27
9096-005.....	7	C44S10D1H11G.....	30	F-1005-B-226	27
9096-008.....	7	C44S8D1H12G.....	30	F-1005-C	27
9096-017.....	7	C6S10HB1H11G.....	30	F-1005-G-O.....	27
9096-021.....	7	C966	30	F-1005-W	27
9096-024.....	7	CA100.....	22	F-1005B	27
9096-029.....	7	CF34	15	F-1080.....	29
9096-046.....	7	CF34B.....	15	F-1102.....	29
9096-047.....	7	CF46	15	F-1104.....	29
90MB.....	16	CF46B.....	15	F-1105.....	29
9727346	6	CF48	15	F-1106.....	29
9752122	6	CF69	15	F-1107.....	29
9752146	6	CF69B.....	15	F-1108.....	29
9767897	6	CF810	15	F-1109.....	29
9808644	6	CF810B.....	15	F-200.....	27
9808760	6	CP	25	F-201.....	27
9824479	6	CP101	22	F-225.....	28
9825514	6	D21	20	F-235.....	28
9825526	6	D22	20	F-243.....	28
AB12.....	22	D23	20	F-244 BLK.....	28
AB120	22	DG-A	21	F-245.....	28
AB120-4	22	DG-B	21	F-246.....	28
AB6	22	DG-C	21	F-248.....	28
AB61	22	DG-D	21	F-249.....	28
AGC-.25	18	DG-E	21	F-250.....	27
AGC-.3	18	DG-F	21	F-251.....	27
AGC-.5	18	DGC-100.....	21	F-699-CN	28
AGC-.75	18	DGC-113.....	21	F-699-LA	28
AGC-1	18	DGC-125.....	21	F-699-U-86	28
AGC-1.5	18	DGC-875.....	21	J100	26
AGC-10	18	DP	25	J125	26
AGC-15	18	DP-36-HD	14	J138	26
AGC-2	18	DPG-100	12	J1382	26
AGC-20	18	DPS-18-HD	14	J13828	26
AGC-3	18	DPS-24-HD	14	J1825	26
AGC-4	18	DPS-30	13	J200	25
AGC-5	18	DPS-30-HD	14	J325	26
AGC-6	18	DPS18.....	13	J332	25



Index

Miscellaneous

J335	25	PS100	15
J342	25	R7311H17	8
J352	25	R7311H23	8
J432BL*	25	R7311H25	8
J442	25	RB21	20
J442BL*	25	RB22	20
J780	26	RB23	20
JR25	26	RDB242	13
JR38	26	RDB251	13
JR452	25	RDB8023	13
KON-1	18	RDB8716	13
KON-10	18	REO444US	38,39
KON-12	18	RES44US	38,39
KON-15	18	S-1	12
KON-2	18	S-10	12
KON-20	18	S-11	12
KON-25	18	S-2	12
KON-3	18	S-3	12
KON-30	18	S-4	12
KON-35	18	S-5	12
KON-4	18	S-6	12
KON-5	18	S-7	12
KON-6	18	S-8	12
KON-7	18	S-9	12
KON-8	18	S7E-007U	5
KOS-1	18	S7E-008U	5
KOS-10	18	S7E-009U	5
KOS-12	18	S7E-010U	5
KOS-15	18	S7E-011U	5
KOS-2	18	S7E-012U	5
KOS-20	18	S7E-013U	5
KOS-25	18	S7E-014U	5
KOS-3	18	S7E-015U	5
KOS-30	18	S7E-016U	5
KOS-35	18	SD	11
KOS-4	18	SD-10DLX	11
KOS-5	18	SD-DO	11
KOS-6	18	SESO-BLK	23
KOS-7	18	SPH25	24
KOS-8	18	SPH5*	24
M3550	10	SPPH	24
MOL-1	18	WE-L	9
MOL-1.5	18	WE-T	9
MOL-10	18	X30ES1H09	8
MOL-15	18	X30ES1H12	8
MOL-2	18	X30ES1H13	8
MOL-3	18	X30ES1H14	8
MOL-30	18	X30ES1H15	8
MOL-5	18	X30ES1H18	8
MOL-6	18	X30ES1H19	8
MTH-1153	1	X30ES1H20	8
MTH-1160	1	Z7858	30

14639 Short St. • Posen, Illinois 60469 U.S.A.


Direct Dial (708) 371-2444 • FAX (708) 371-2477 • National (800) 598-2444

240AA1	33	GE-229	35	OE-26	34
240AA2	33	GE-406	35	OE-289	33
240F11	33	GE-486	35	OE-300	33
240F12	33	GE-519	35	OE-356	33
240F13	33	GE-520	35	OE-363	33
240F19	33	GE-80	35	OE-385	33
240F23	33	GE-83	35	OE-402	33
240F25	33	GEL-45	32	OE-91	33
240F26	33	IMP-32.....	32	OWC-7	35
240F27	33	IMP-33.....	32	SGE-1	32
240J1	33	IMP-34.....	32,33,37	TES-5	32
240J2	33	IMP-35.....	32	USE-2	32
240P2	33	IMP-39	32,34	WEL-103	37
240R3	33	IMP-44.....	32	WEL-104	36
240R4	33	IMP-61.....	33	WEL-106	36,37
240W1	33	LRS-1	34	WEL-107	37
BAX-14	36	LRS-12	34	WEL-108	37
BLL-16.....	32	LRS-2	34	WEL-109	37
BLL-17.....	32	LRS-20	34	WEL-18	37
BLL-19.....	32	LRS-21	34	WEL-187	37
BLL-2.....	32	LRS-22	34	WEL-200	37
BLL-6.....	32	LRS-25	34	WEL-214	37
BWE-6.....	32	LRS-26	34	WEL-22	36
CMW-2	33,34	LRS-29	34	WEL-225	36
COA-22	35	LRS-7	34	WEL-227	37
CTN-3	34	LRS-8	34	WEL-235	37
DVE-129	31	LRS-82	34	WEL-241	36
DVE-132	31	LRS-83	34	WEL-245	37
DVE-151	31	LRS-85	34	WEL-246	37
DVE-190	31	LRS-90	34	WEL-249	37
DVE-198	31	LRS-92	34	WEL-25	36
DVE-3A	31	MGE-104.....	32	WEL-254	36
DVE-4	31	MGE-25.....	32	WEL-257	36
DVE-7	35	MGE-47.....	36	WEL-261	37
DVE-70	31	MGE-51.....	32,33,34	WEL-263	37
DVE-82	31	MGE-56	36,37	WEL-267	37
DVE-87	31	MGE-58.....	33	WEL-274	37
DVE-9	35	MGE-92.....	32	WEL-275	36
DVE-92	34	MML-172	31,35	WEL-276	37
ED-10.....	33,34	MML-89.....	36	WEL-280	36
ED-2	34	MML-93.....	36	WEL-293	36
ED-23	34	OE-105	33	WEL-32	36
ED-3	34	OE-107	33	WEL-36	36
ED-6	34	OE-113	36	WEL-37	37
ELN-4	34	OE-114	36	WEL-44	36
GE-121	35	OE-119	33	WEL-94	37
GE-123	35	OE-127	33	X38A12	37
GE-125.....	33,35	OE-162	33	X38A16	36
GE-127	35	OE-167	33	X38A16	37
GE-139	35	OE-175	33	X38A39	36
GE-144	35	OE-190	33	X38A5	36
GE-212	35	OE-191	36	X38A64	36

X38A67	37
X38A80	37
X38A82	37
X38A9	36
X38B28	36
X38C10	37
X38C14	37
X38C15	37
X38C16	37,36
X38C17	37
X38C18	37,36
X38C2	37
X38C24	36,37
X38C29	37
X38C4	37,36
X38K5	37
X38K8	37
X38L1	36
X38L10	36
X38L2	36
X38L9	36
X38M10	37
X38M12	36
X38M3	36
X38Q14	36,37
X38Q17	36
X38Q3	36
X38Q51	36
X38Q9	36
X38R11	36
X38R14	36
X38R16	36
X38R21	36
X38R36	37
X38R4	36
X38R5	36
X38R57	36

New WRC-2000 XC-EDGE

U.S. PATENT 5,386,882

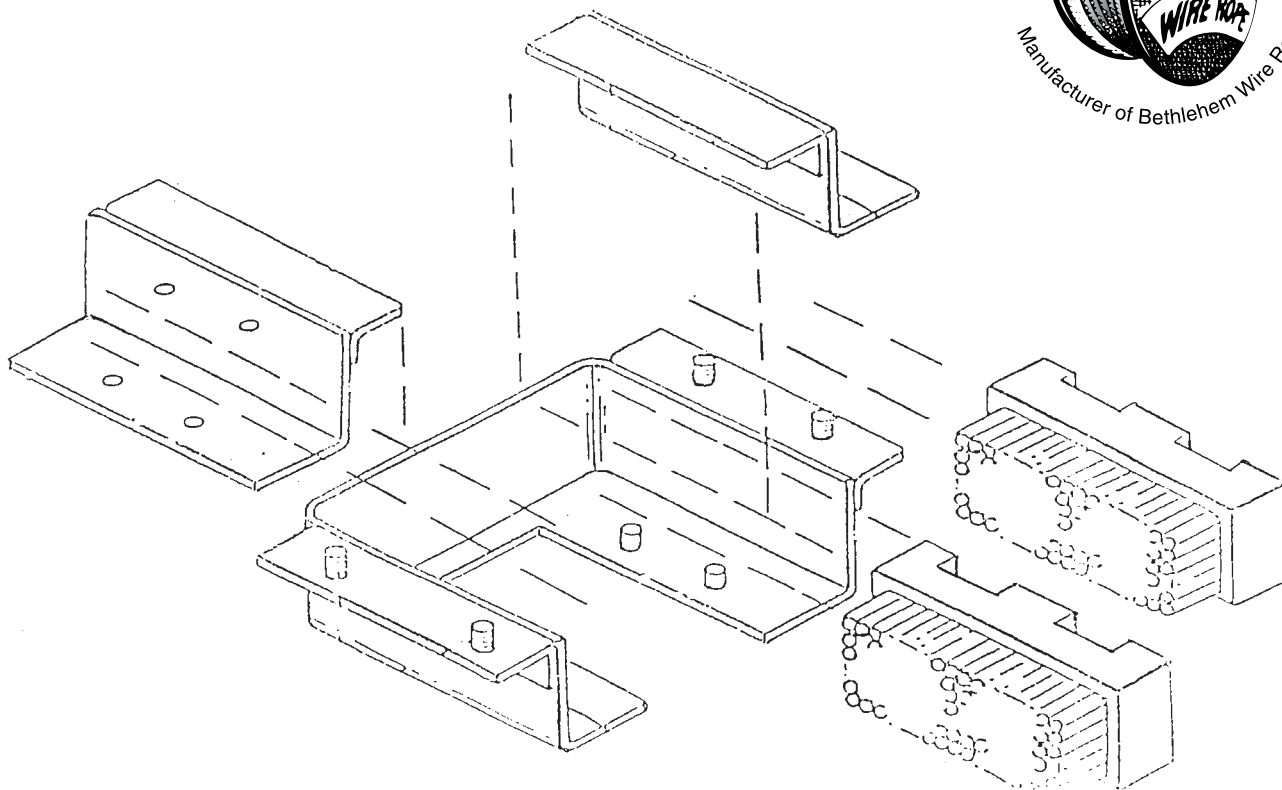

You now get the edge with extra cleaning capabilities.
New cap plates with holding pins are designed to double
the cleaning area of elevator wire rope.

Call for Details (800)598-2444

Fax (708)371-2477

Email partspec@flash.net






Replacement Parts & Equipment ELEVATOR & ESCALATOR

**NEW
IMPROVED
MODEL!**

WRC-2000 XC Wire Rope Cleaner

With Lubricator

**Eliminates The Need To Clean And
Lubricate Wire Ropes Manually Saving
Labor Costs And Down Time Of Equipment.**

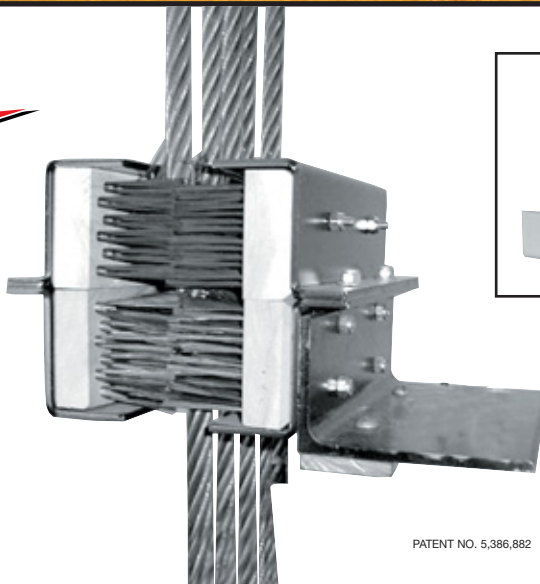

PATENT NO. 5,386,882

Provider Of The Ultimate In Vandal Resistant Telephone Systems!



Lincoln

**100%
ADA
Compliant**

LC-8 FEATURES:

- Auto answering of inbound calls
- Connect up to eight emergency phones
- Touch Tone Transferring
- Built in talk battery for service phones
- Programmable prank call direction
- Call waiting notice
- Page feature
- Fire floor plan connection
- Service phone access
- Fully functional battery back up
- Non-Volatile E2 memory for all programmable features

**Now 8 Elevator
Phones Share
One Phone Line!**



VRT-1500



VRT-1000

The Series "1000" Elevator Telephone

**Built in automatic dialer with 2 number capabilities,
Voice Message, Remote programmable, emits a digital ID code,
stainless steel enclosure, powered entirely by phone line.**

**Direct Dial (708) 371-2444 • FAX (708) 371-2477
National (800) 598-2444**