PAULSTRADYN ®
STAINLESS STEEL PAULSTRADYN ®

Natural frequency : (1)
- axial : 7 Hz
- radial : 3 to 5,5 Hz




ADVANTAGES

- Better than 90% isolation at 1.500 rpm (25 Hz).
- Constant height over wide load range.
- Stabilised characteristics during Service Life.
- Simple to fit.
- 500 hours protection against salt spray*.
- Design.

*When mounted according to the recommendations given in the catalogue.

Resilient Element = SILTECH
- Low increase of stiffness with frequency
- Low creep

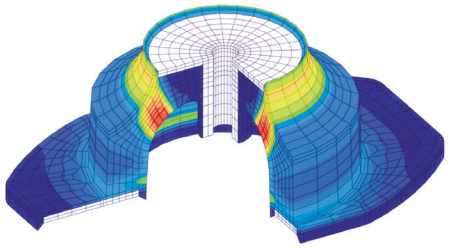

Finite element modeling (FEM) was used when designing the Paulstradyn® series resulting in the lowest possible elastomer stresses and most efficient performance for a high deflection mount of this type.


APPLICATIONS

Antivibration isolation for static equipment :
- rotating machinery such as fans, air-conditioning, pumps, compressors, generator sets;
- pipeworks, ceilings, transformers, electrical enclosures.


1) the indicated natural frequency, are valid for the maxi loads of the ranges of use quoted in the paragraph : TECHNICAL CHARACTERISTICS.


DIMENSIONS CHARACTERISTICS

Shape 1

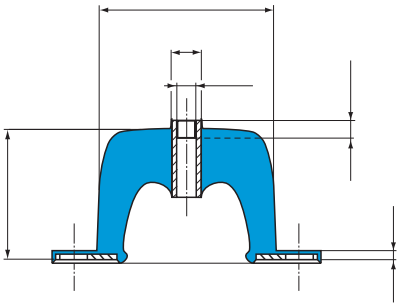

Shape 2

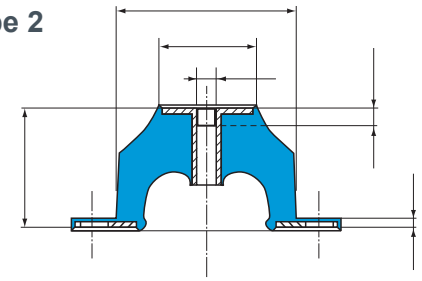


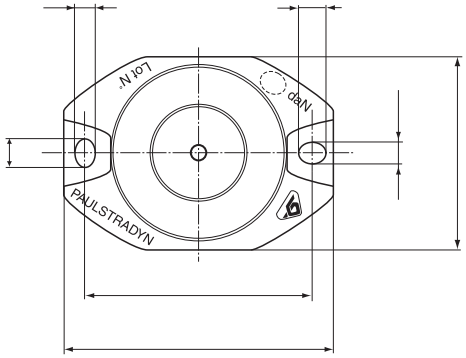

Designation	Ref.	Nominal Load NL (daN)	Shape	Dimensions (mm)										
				Ø A	B*	C	D	E	F	G	H	Ø I	J	N
Paulstradyn® 4	**533701**	4	1	40	40	M6	52	6,2	64	6,2	44	12	2,5	6
7	**533702**	7												
12	**533703**	12												
Paulstradyn® 20	**533704**	20	2	60	40	M6	76	6,2	90	8,2	64	31	2,5	6
30	**533705**	30												
50	**533706**	50												
50	**53370611**	50												
Paulstradyn® 70	**533707**	70	2	80	40	M8	100	8,2	122	12,2	84	48	2,5	12
100	**533708**	100												
130	**533709**	130												
Paulstradyn® 160	**533710**	160	2	100	40	M10	124	10,2	152	16,2	104	68	3	10
200	**533711**	200												
260	**533712**	260												
Paulstradyn® 325	**533713**	325	2	150	40	M12	182	12,2	214	20,2	154	116	4,5	10
400	**533714**	400												
500	**533715**	500												
Paulstradyn® 640	**533716**	640	2	200	40	M16	240	14,2	280	24,2	204	159	5,5	20
820	**533717**	820												
1050	**533718**	1050												
1350	**533719**	1350												

* Height, unloaded 40 mm, under load 32 mm (see Technical Characteristics).
NL : Nominal static load with mounting under axial compression.

316L STAINLESS STEEL PAULSTRADYN

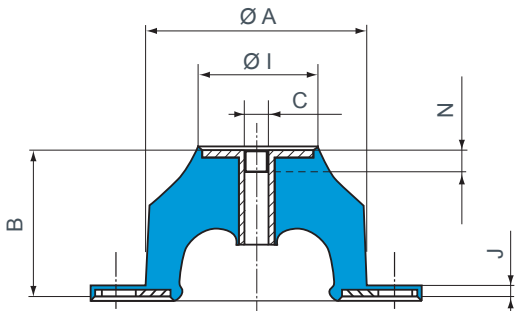

Reference	Max Load (daN)	Dimensions (mm)					
		Ø A	B	C	Ø I	J	N
53370611	50	60	40	M6	31	2,5	6

TECHNICAL CHARACTERISTICS


The vibration attenuation and height characteristics under nominal loads are **stabilised after one month under a load at 20°C.**

General characteristics


- Natural axial frequency : 7 Hz, with nominal load.
- Natural radial frequency : 3 to 5.5 Hz.
- Maximum displacement :
  - axial : 12 mm
  - radial : ± 10 mm.

Vibration attenuation

$\frac{AL}{NL}$ = Ratio $\frac{\text{actual load}}{\text{nominal load}}$

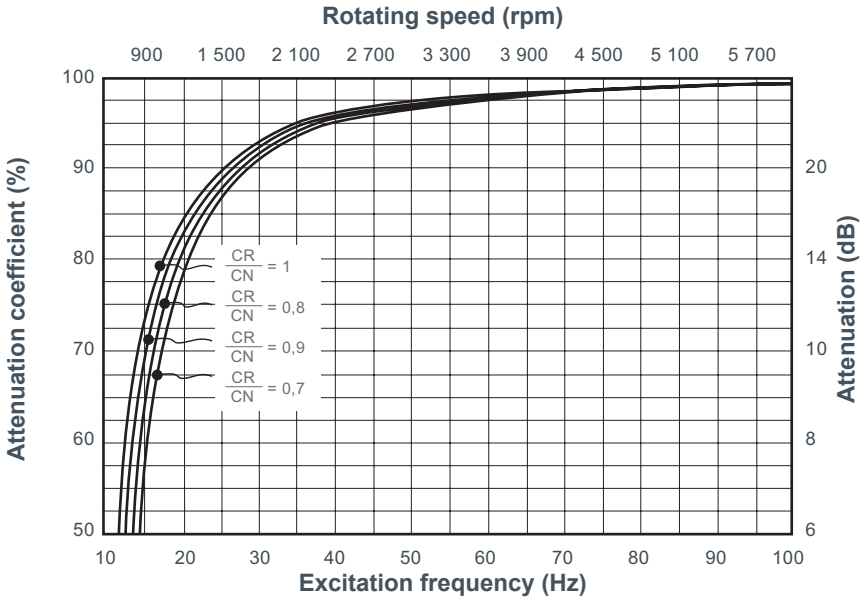

Height under load

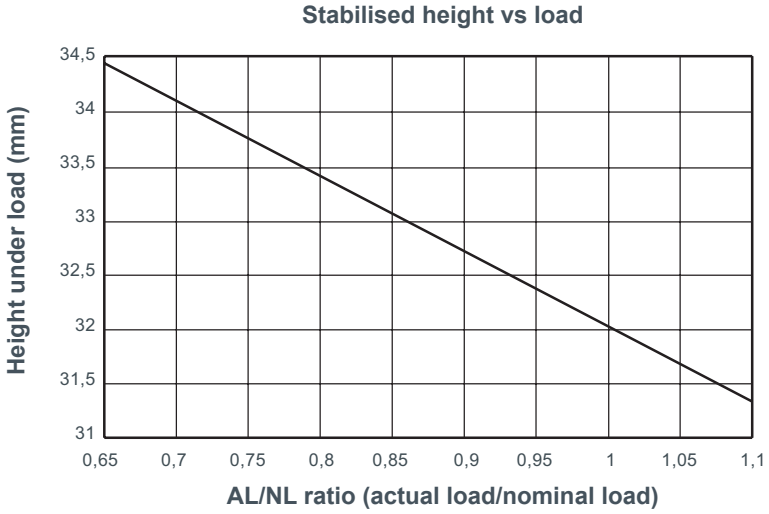

Temperature	Operating temperature : - 20 °C to + 70 °C.
Other characteristics*	Good dynamic performance at high frequency Withstand fatigue and shocks. Reduced creep.

* Detailed Technical Characteristics can be sent on request. Ask us for details.

MOUNTING

Standard Mounting

❶machine base or foot dimensions > Ø M*


❷supporting structure (floor) dimensions > base of mounting F*

❸screw Ø C**

❹screw HM Ø K, a washer is required between the screw head and the PAULSTRADYN®**

❺screw Ø K, a washer is required between the screw head and the PAULSTRADYN®**

* to ditribute the load and resist corrosion.
** nuts and screws grade 4.6 minimum.

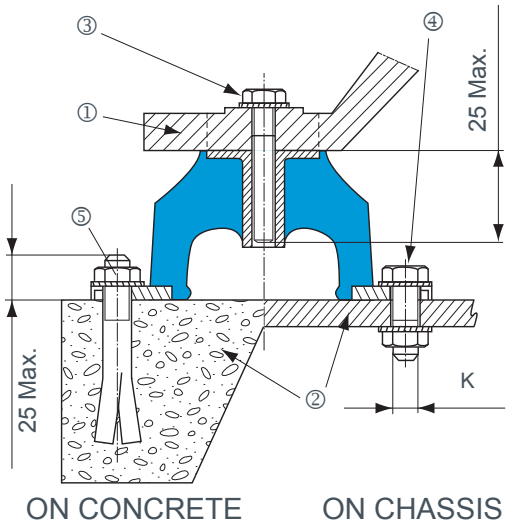


Shape 1

Recommanded torque

Diameter K (mm)	M6	M8	M10	M12	M16
Torque N.m	2	5	12	20	70

Note : Do not paint the mountings after fitting.

Alternative mounting

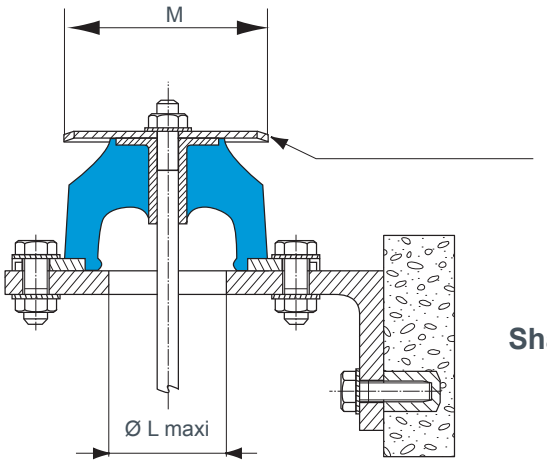

Shape 2

Mounting and cap references

Paulstradyn® references	Dimensions (mm)			Protective cap reference (optional)
	K Shape 1	L max. shape 2	M min. shape 2	
533701, 533702, 533703,	M5	27	14	**342919**
533704, 533705, 533706	M5	40	34	**342356**
533707, 533708, 533709	M6	46	50	**342733**
533710, 533711, 533712	M8	47	70	**342734**
533713, 533714, 533715	M10	99	118	**342353**
533716, 533717, 533718	M12	127	162	**342354**
533719				