


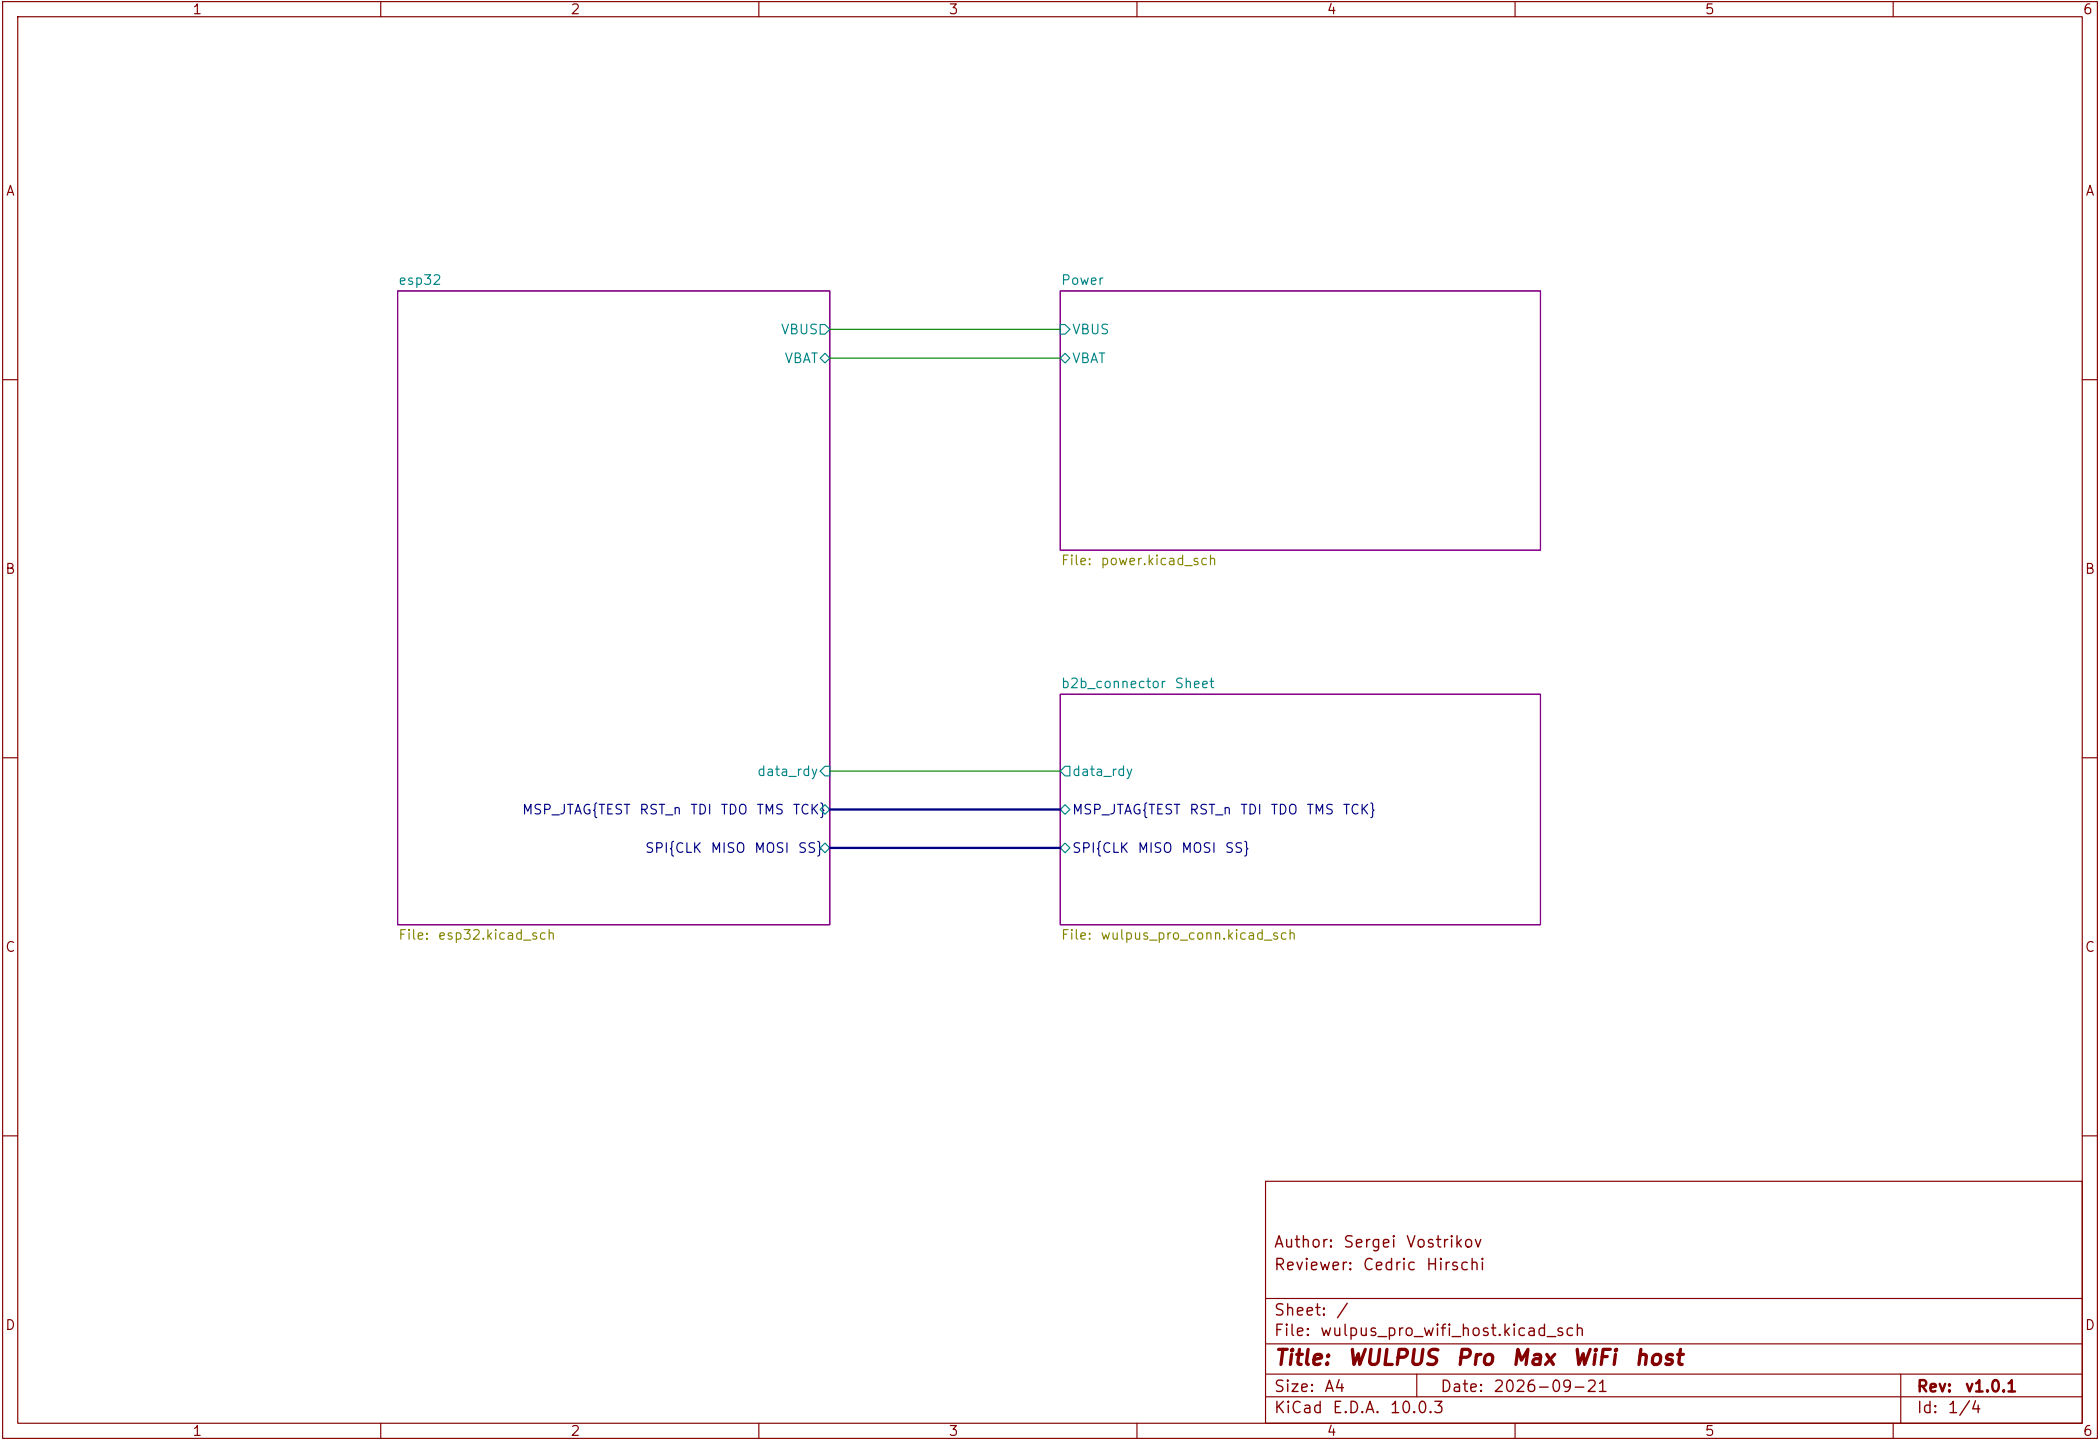


Author: Sergei Vostrikov
Reviewer: Cedric Hirschi


Sheet: /
File: wulpus_pro_wifi_host.kicad_sch

Title: WULPUS Pro Max WiFi host



Size: A4	Date: 2026-09-21	Rev: v1.0.1
KiCad E.D.A. 10.0.3		Id: 1/4

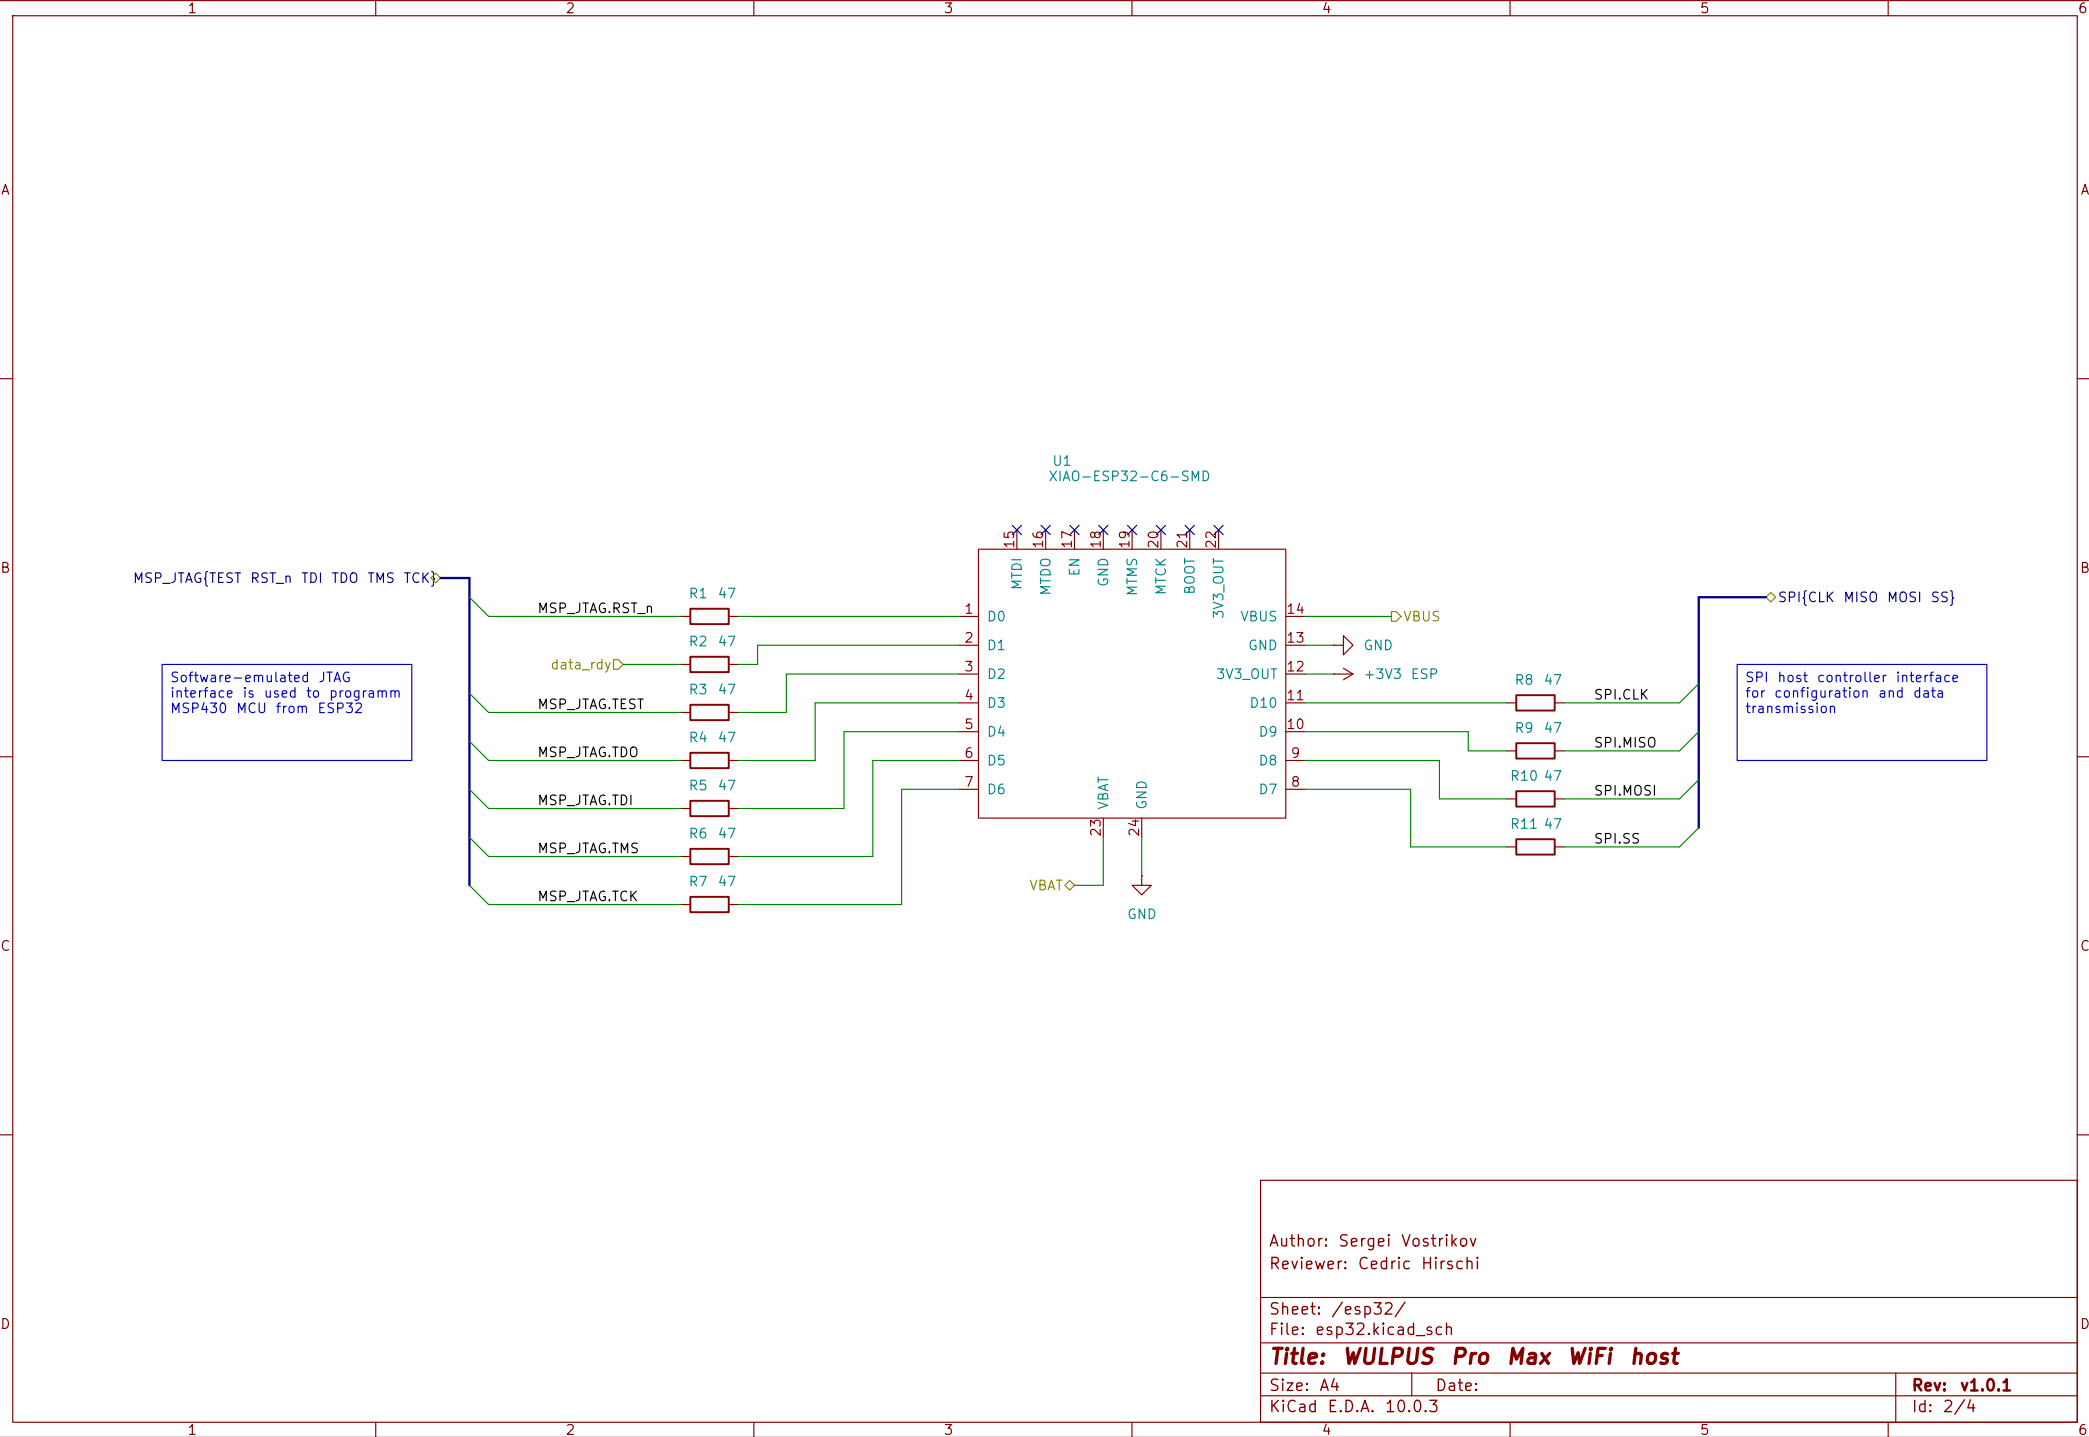


+3v3 and +5V0 DC-DC converters

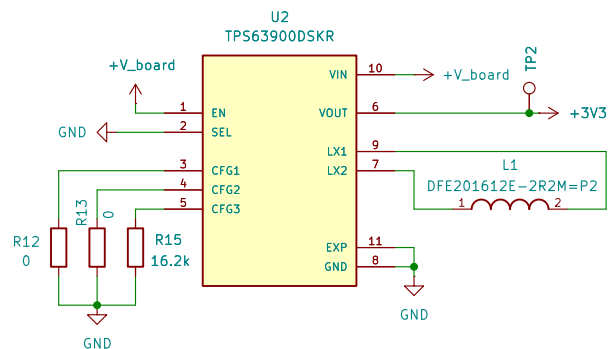


With SEL = LOW,
CFG3 = 16.2 kΩ
selects 3.3 V
(unlimited current).
1% Resistors

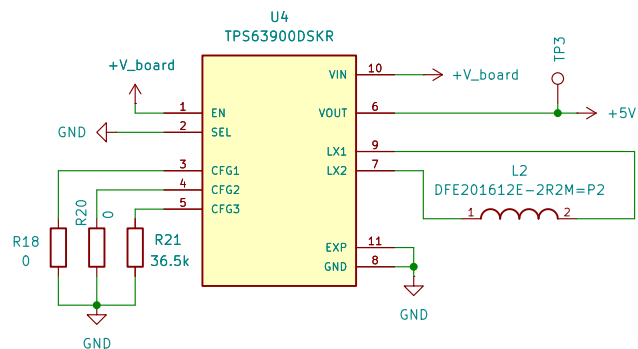

With SEL = LOW,
CFG3 = 36.5 kΩ
selects 5.0 V
(unlimited current).
1% Resistors




USB/Battery Power OR Switch

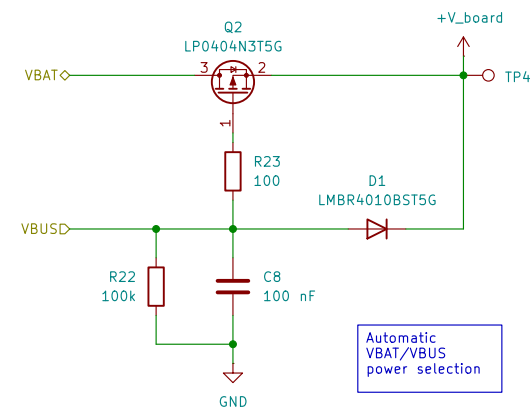

Automatic
VBAT/VBUS
power selection

Battery Protection

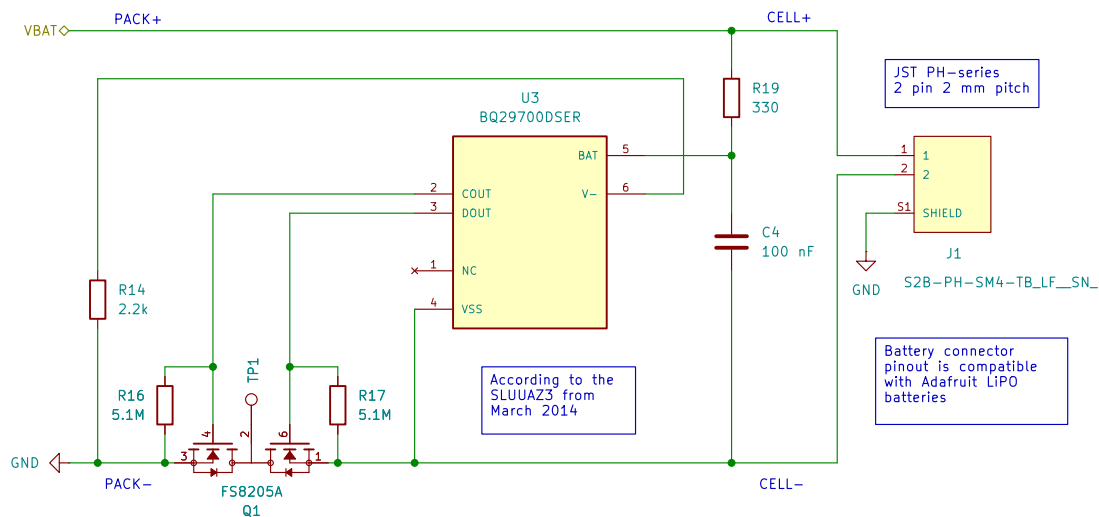

According to the
SLUUAZ3 from
March 2014

Battery connector
pinout is compatible
with Adafruit LiPO
batteries

Author: Sergei Vostrikov
Reviewer: Cedric Hirschi

Sheet: /Power/
File: power.kicad_sch

Title: WULPUS Pro Max WiFi host

Size: A4


Date:

KiCad E.D.A. 10.0.3


Rev: v1.0.1

Id: 3/4


JTAG and SPI buses

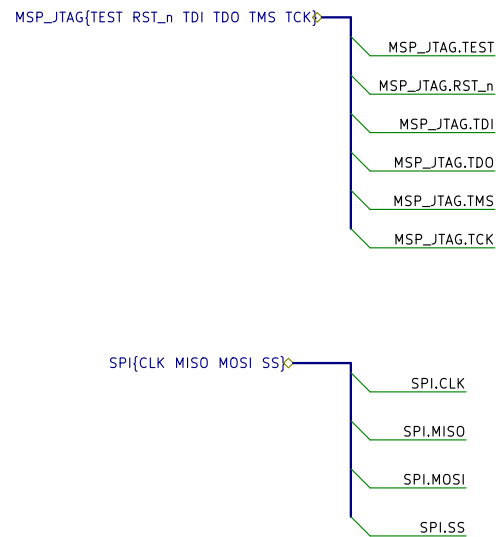

Board 2 Board Connector

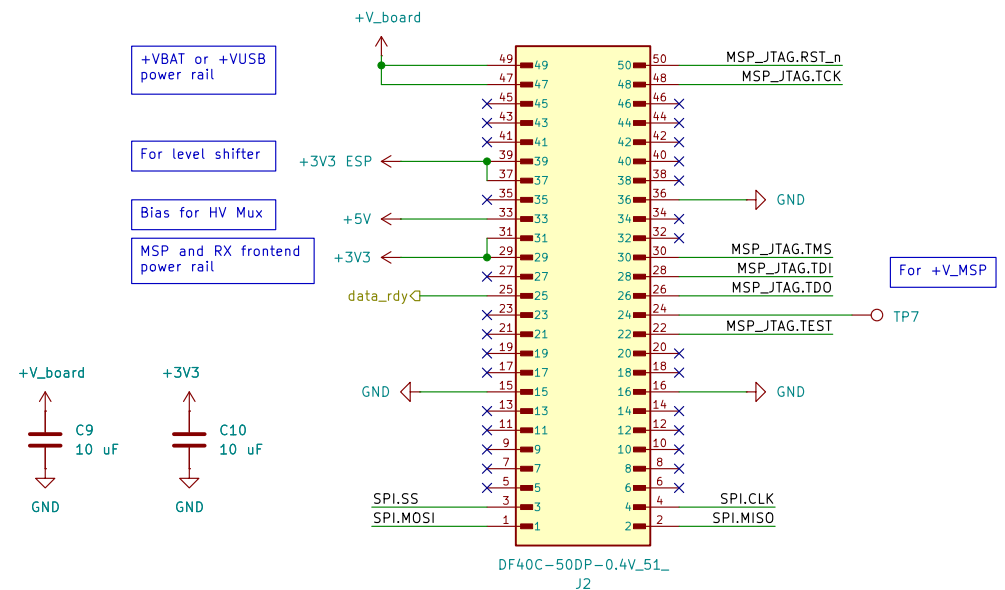

GND Test Points



Author: Sergei Vostrikov
Reviewer: Cedric Hirschi

Sheet: /b2b_connector Sheet/
File: wulpus_pro_conn.kicad_sch

Title: WULPUS Pro Max WiFi host

Size: A4

Date:

Rev: v1.0.1

KiCad E.D.A. 10.0.3

Id: 4/4