





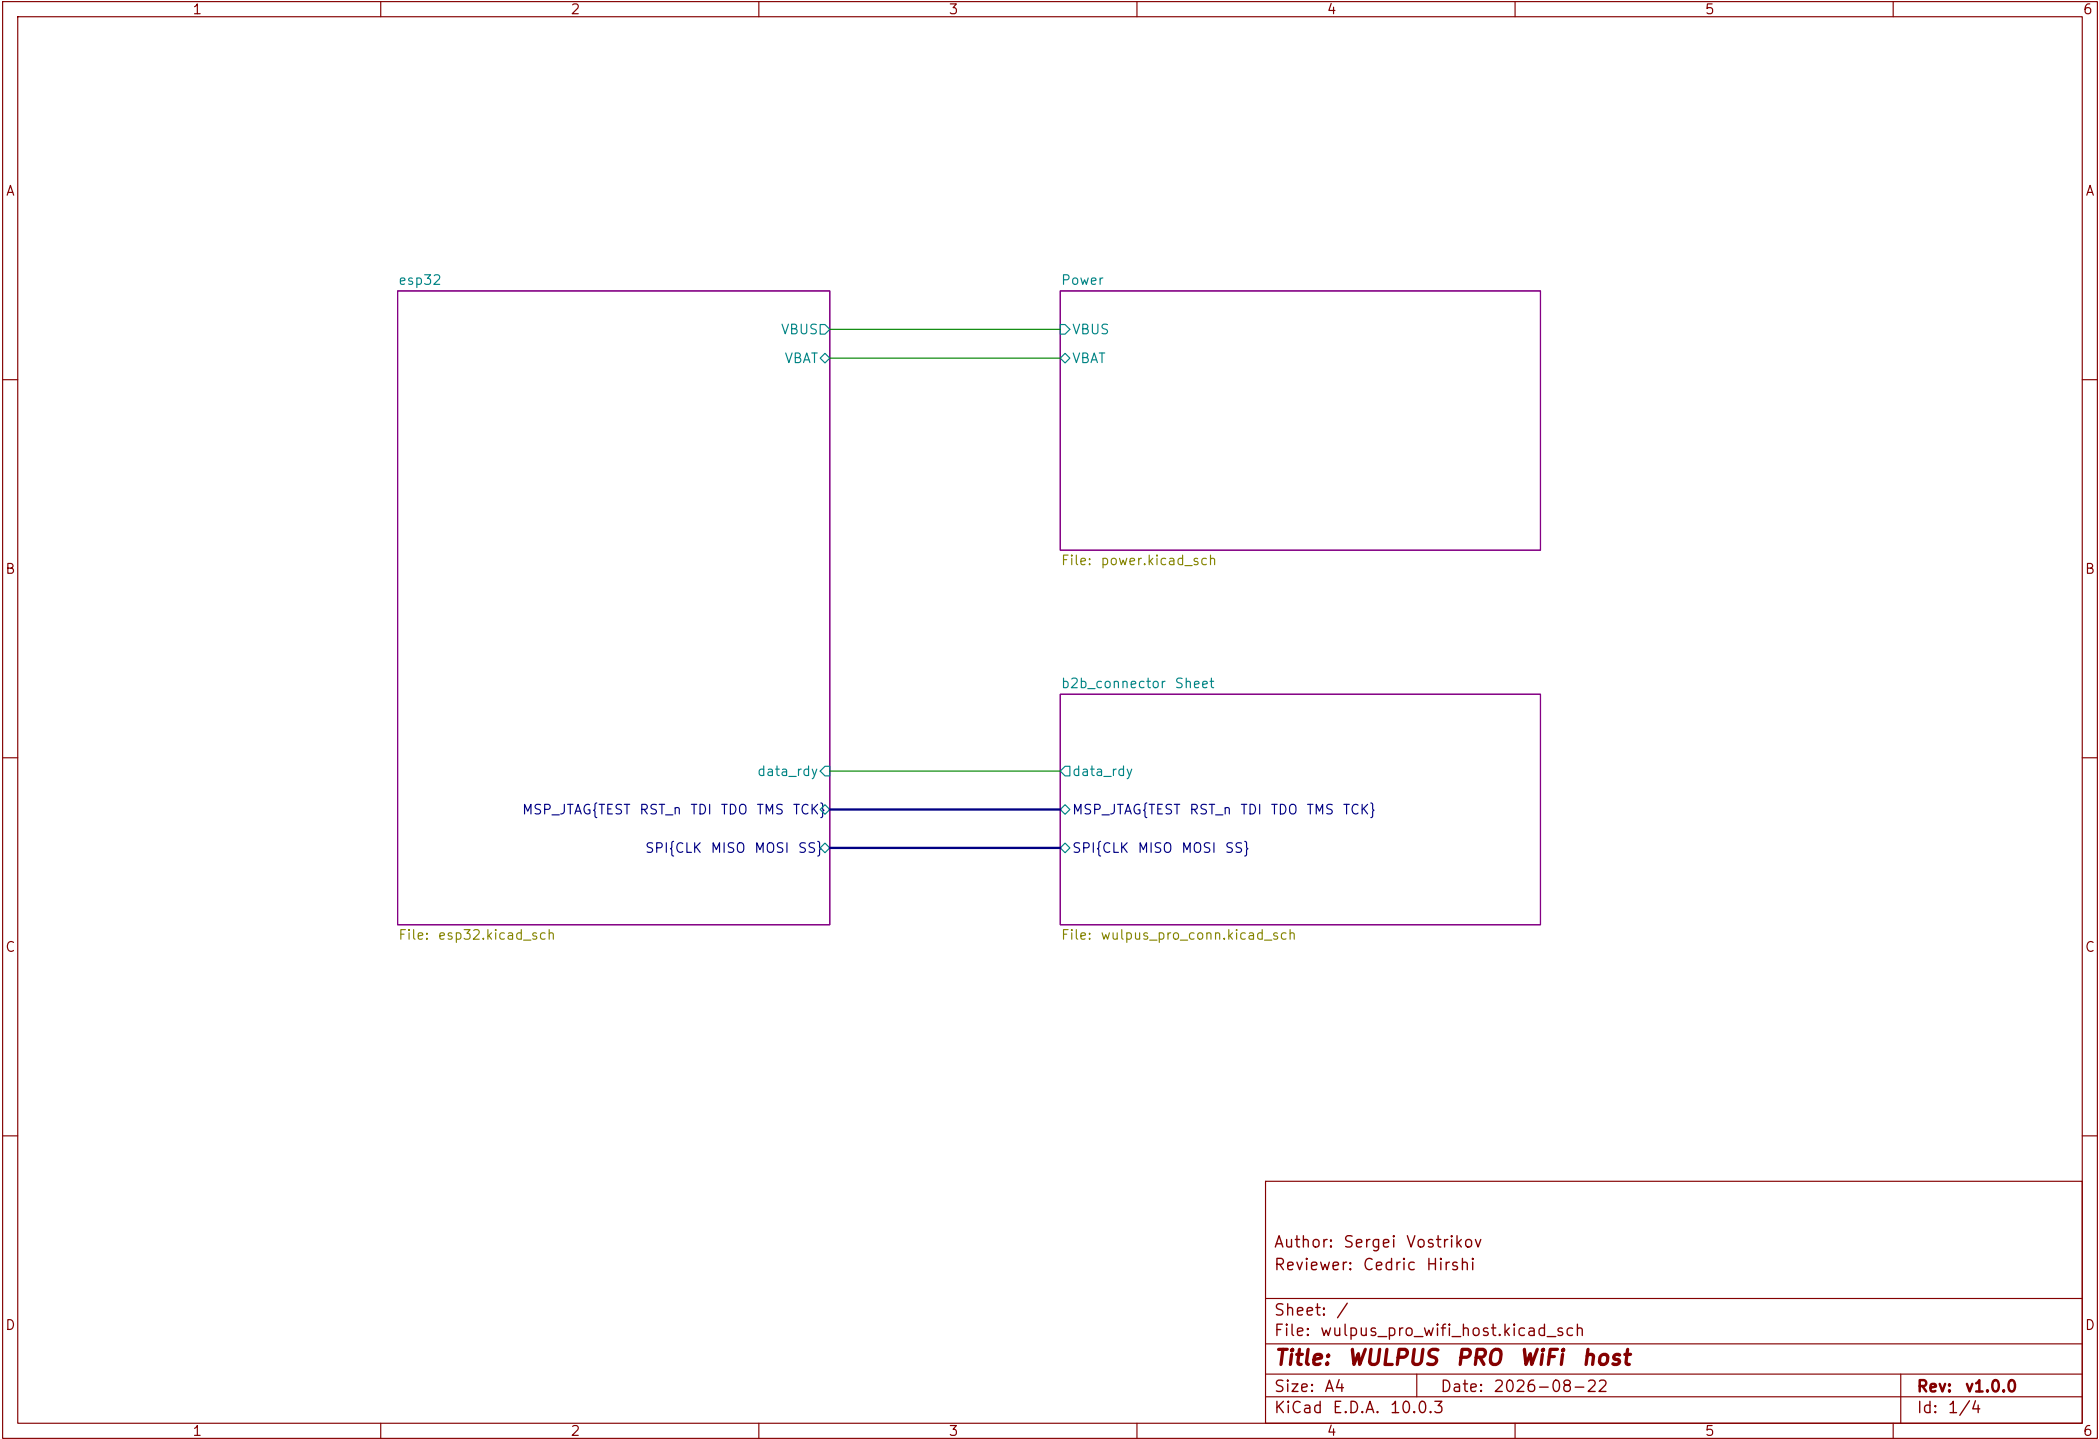


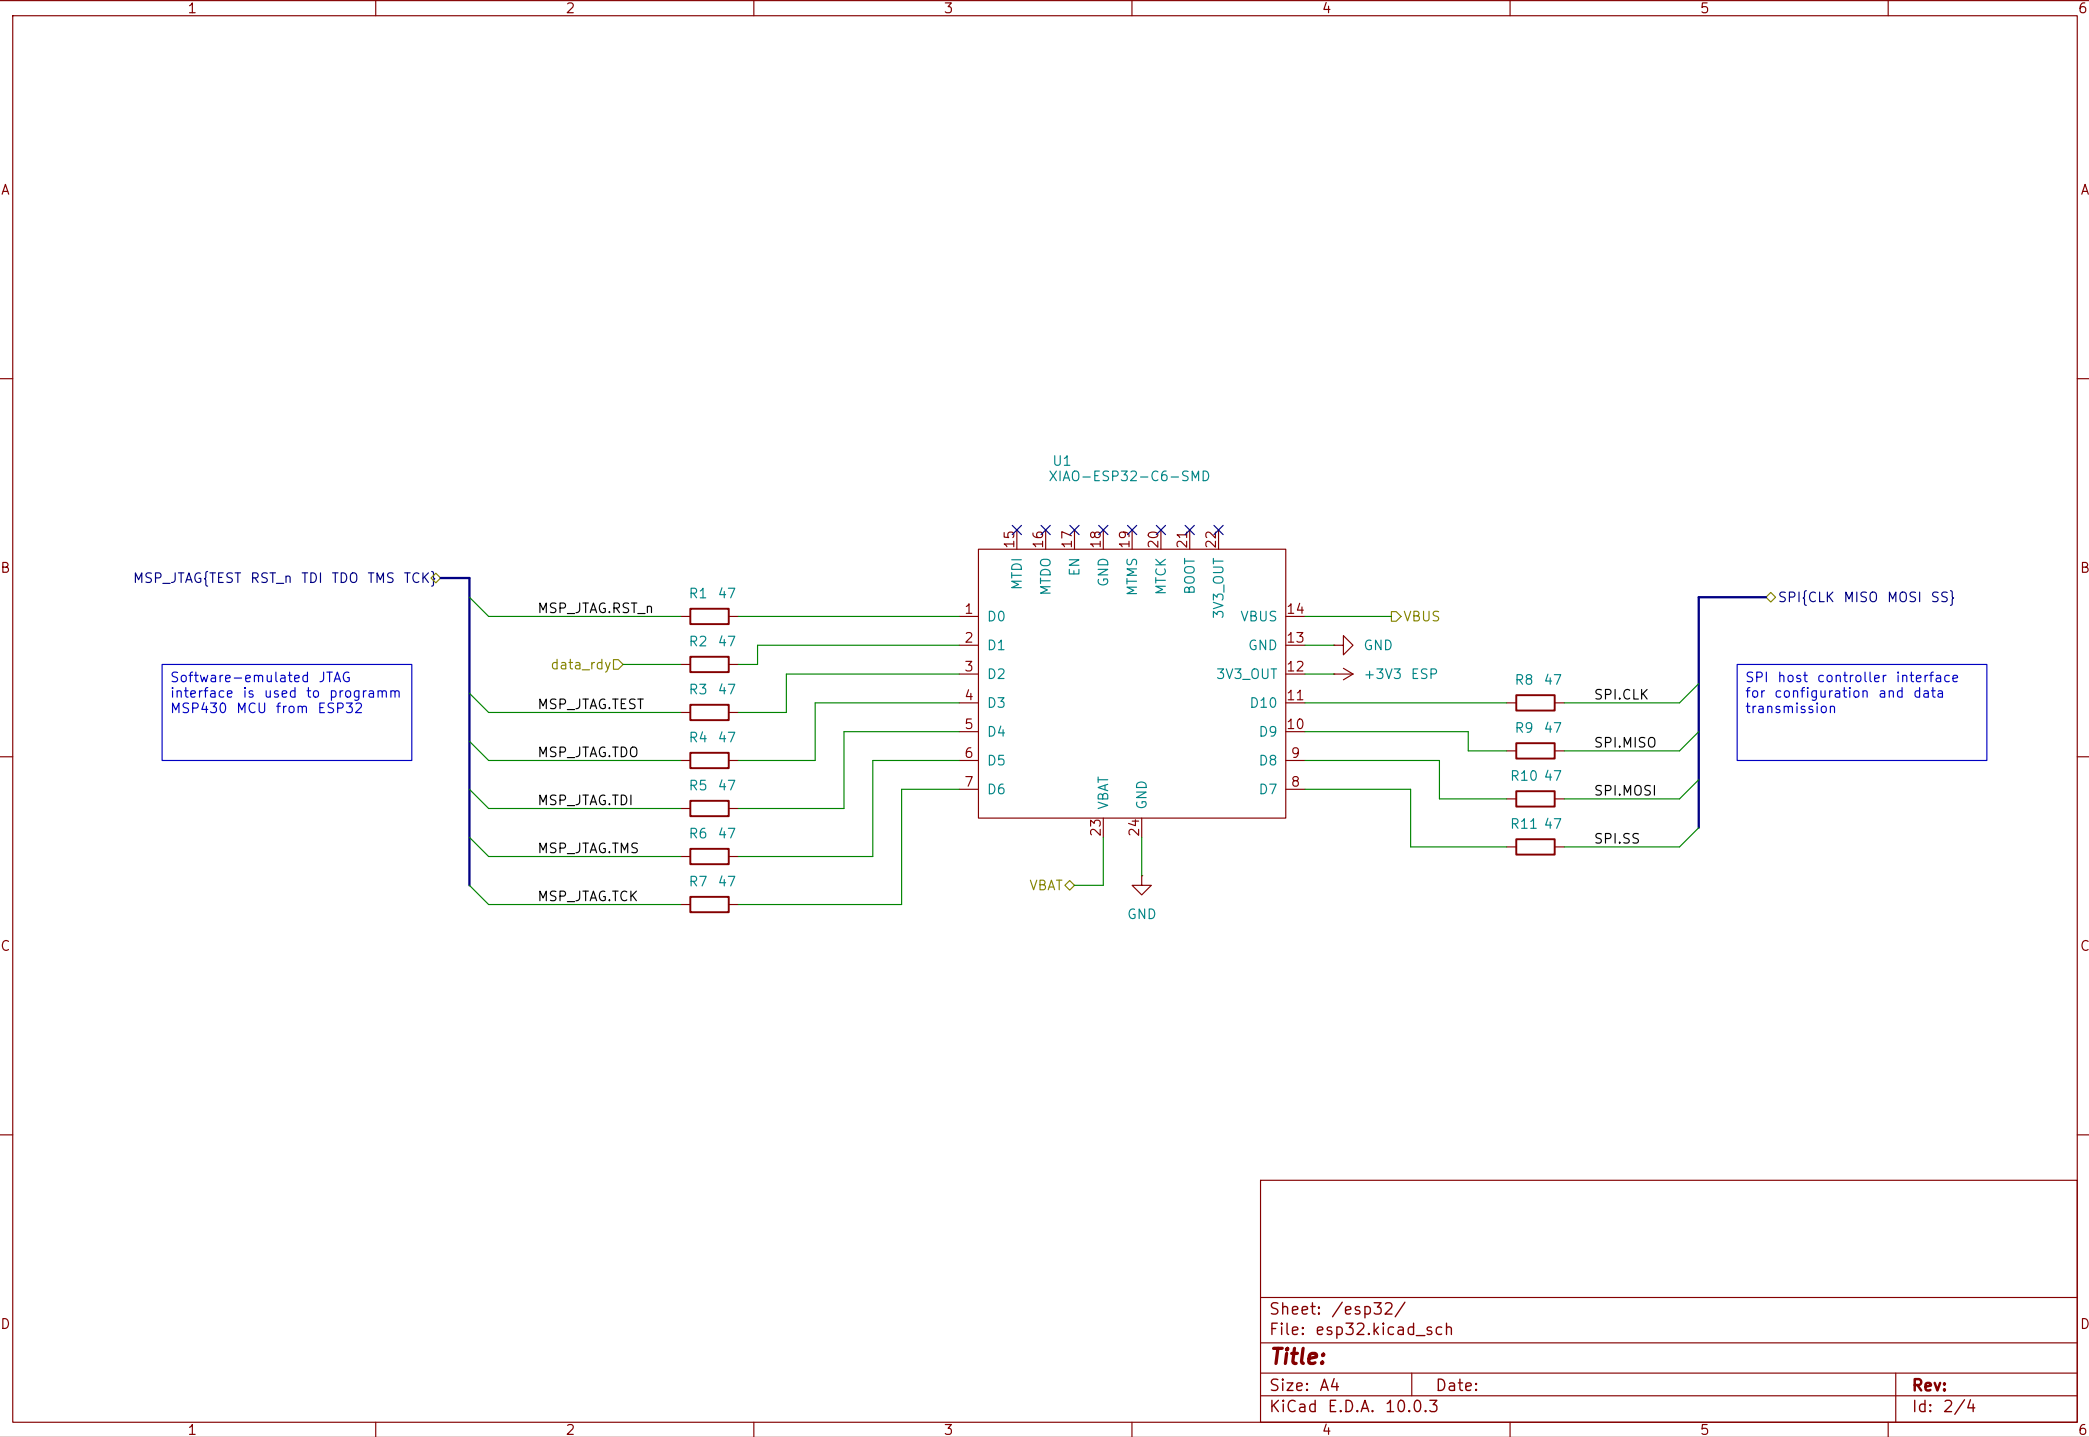


## +3v3 and +5V0 DC-DC converters

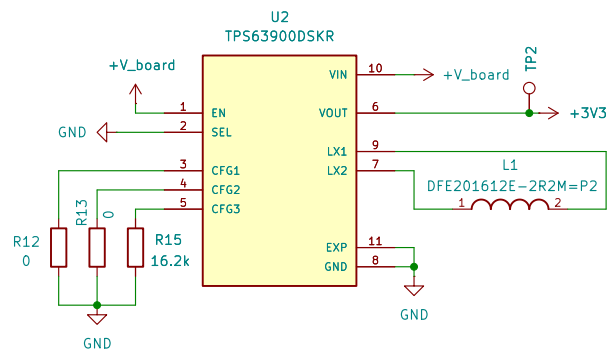


With SEL = LOW,  
CFG3 = 16.2 kΩ  
selects 3.3 V  
(unlimited current).  
1% Resistors

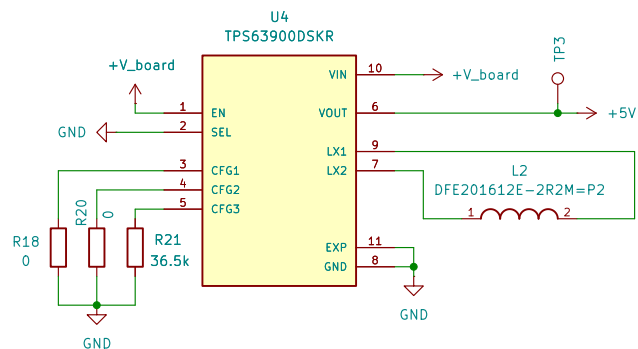

With SEL = LOW,  
CFG3 = 36.5 kΩ  
selects 5.0 V  
(unlimited current).  
1% Resistors




## USB/Battery Power OR Switch

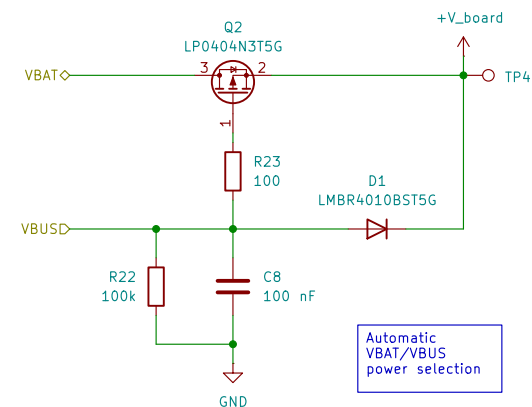

Automatic  
VBAT/VBUS  
power selection

## Battery Protection

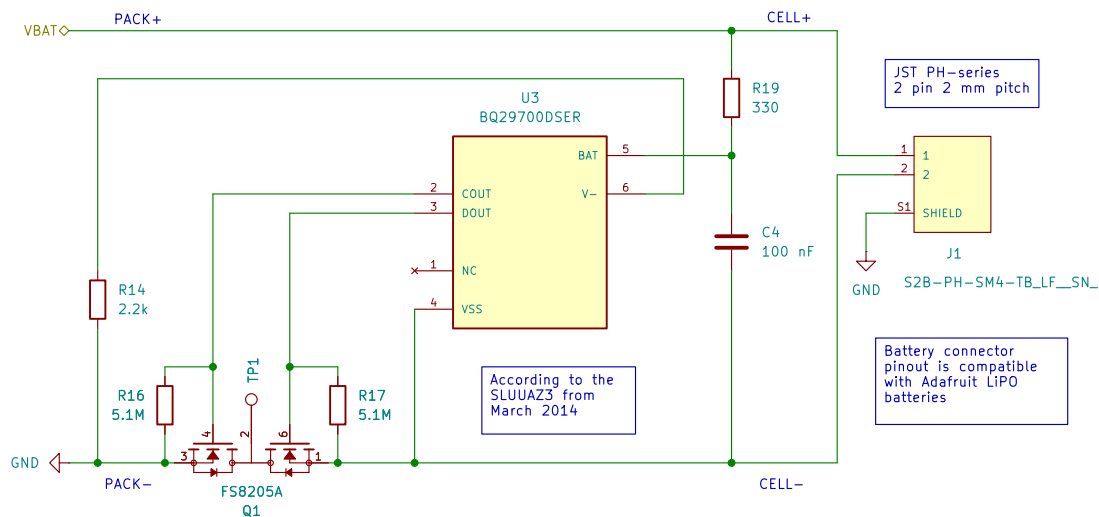

According to the  
SLUUAZ3 from  
March 2014

JST PH-series  
2 pin 2 mm pitch

Battery connector  
pinout is compatible  
with Adafruit LiPO  
batteries

Sheet: /Power/  
File: power.kicad\_sch


**Title:**

Size: A4  
KiCad E.D.A. 10.0.3


Date:

**Rev:**  
Id: 3/4


## JTAG and SPI buses

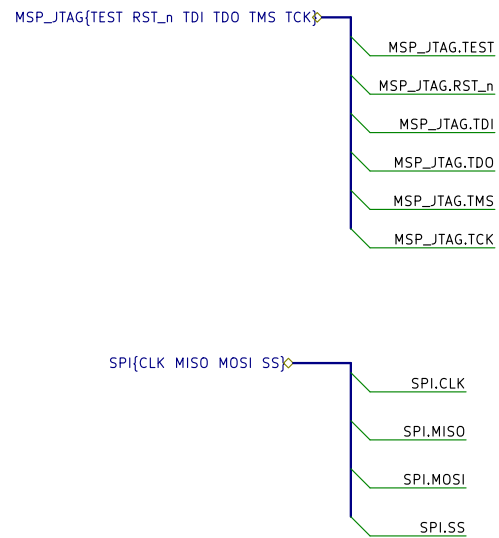

## Board 2 Board Connector

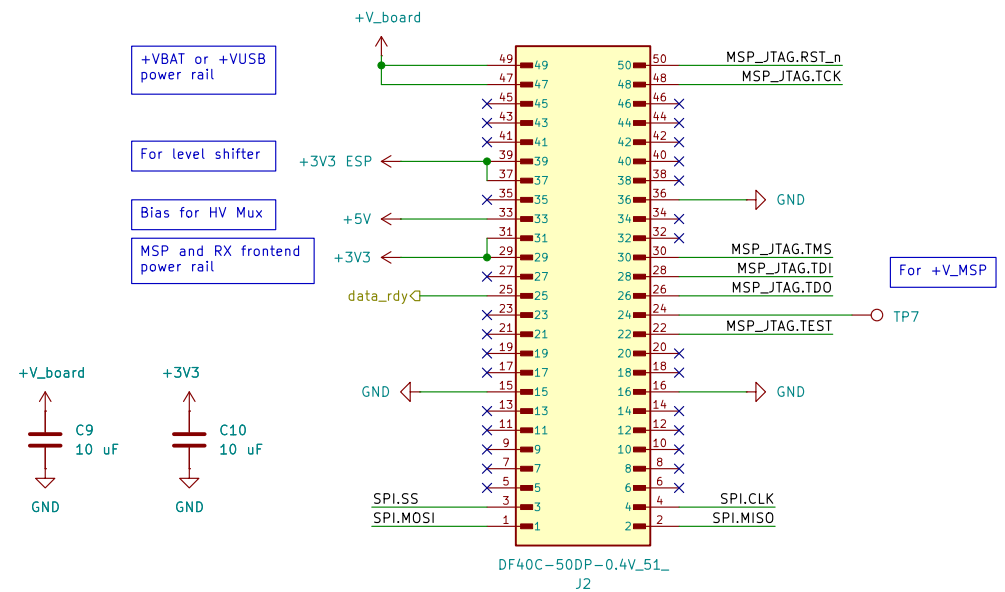

## GND Test Points



Sheet: /b2b\_connector Sheet/  
File: wulpus\_pro\_conn.kicad\_sch

### Title:

Size: A4

Date:

KiCad E.D.A. 10.0.3

Rev:

Id: 4/4