





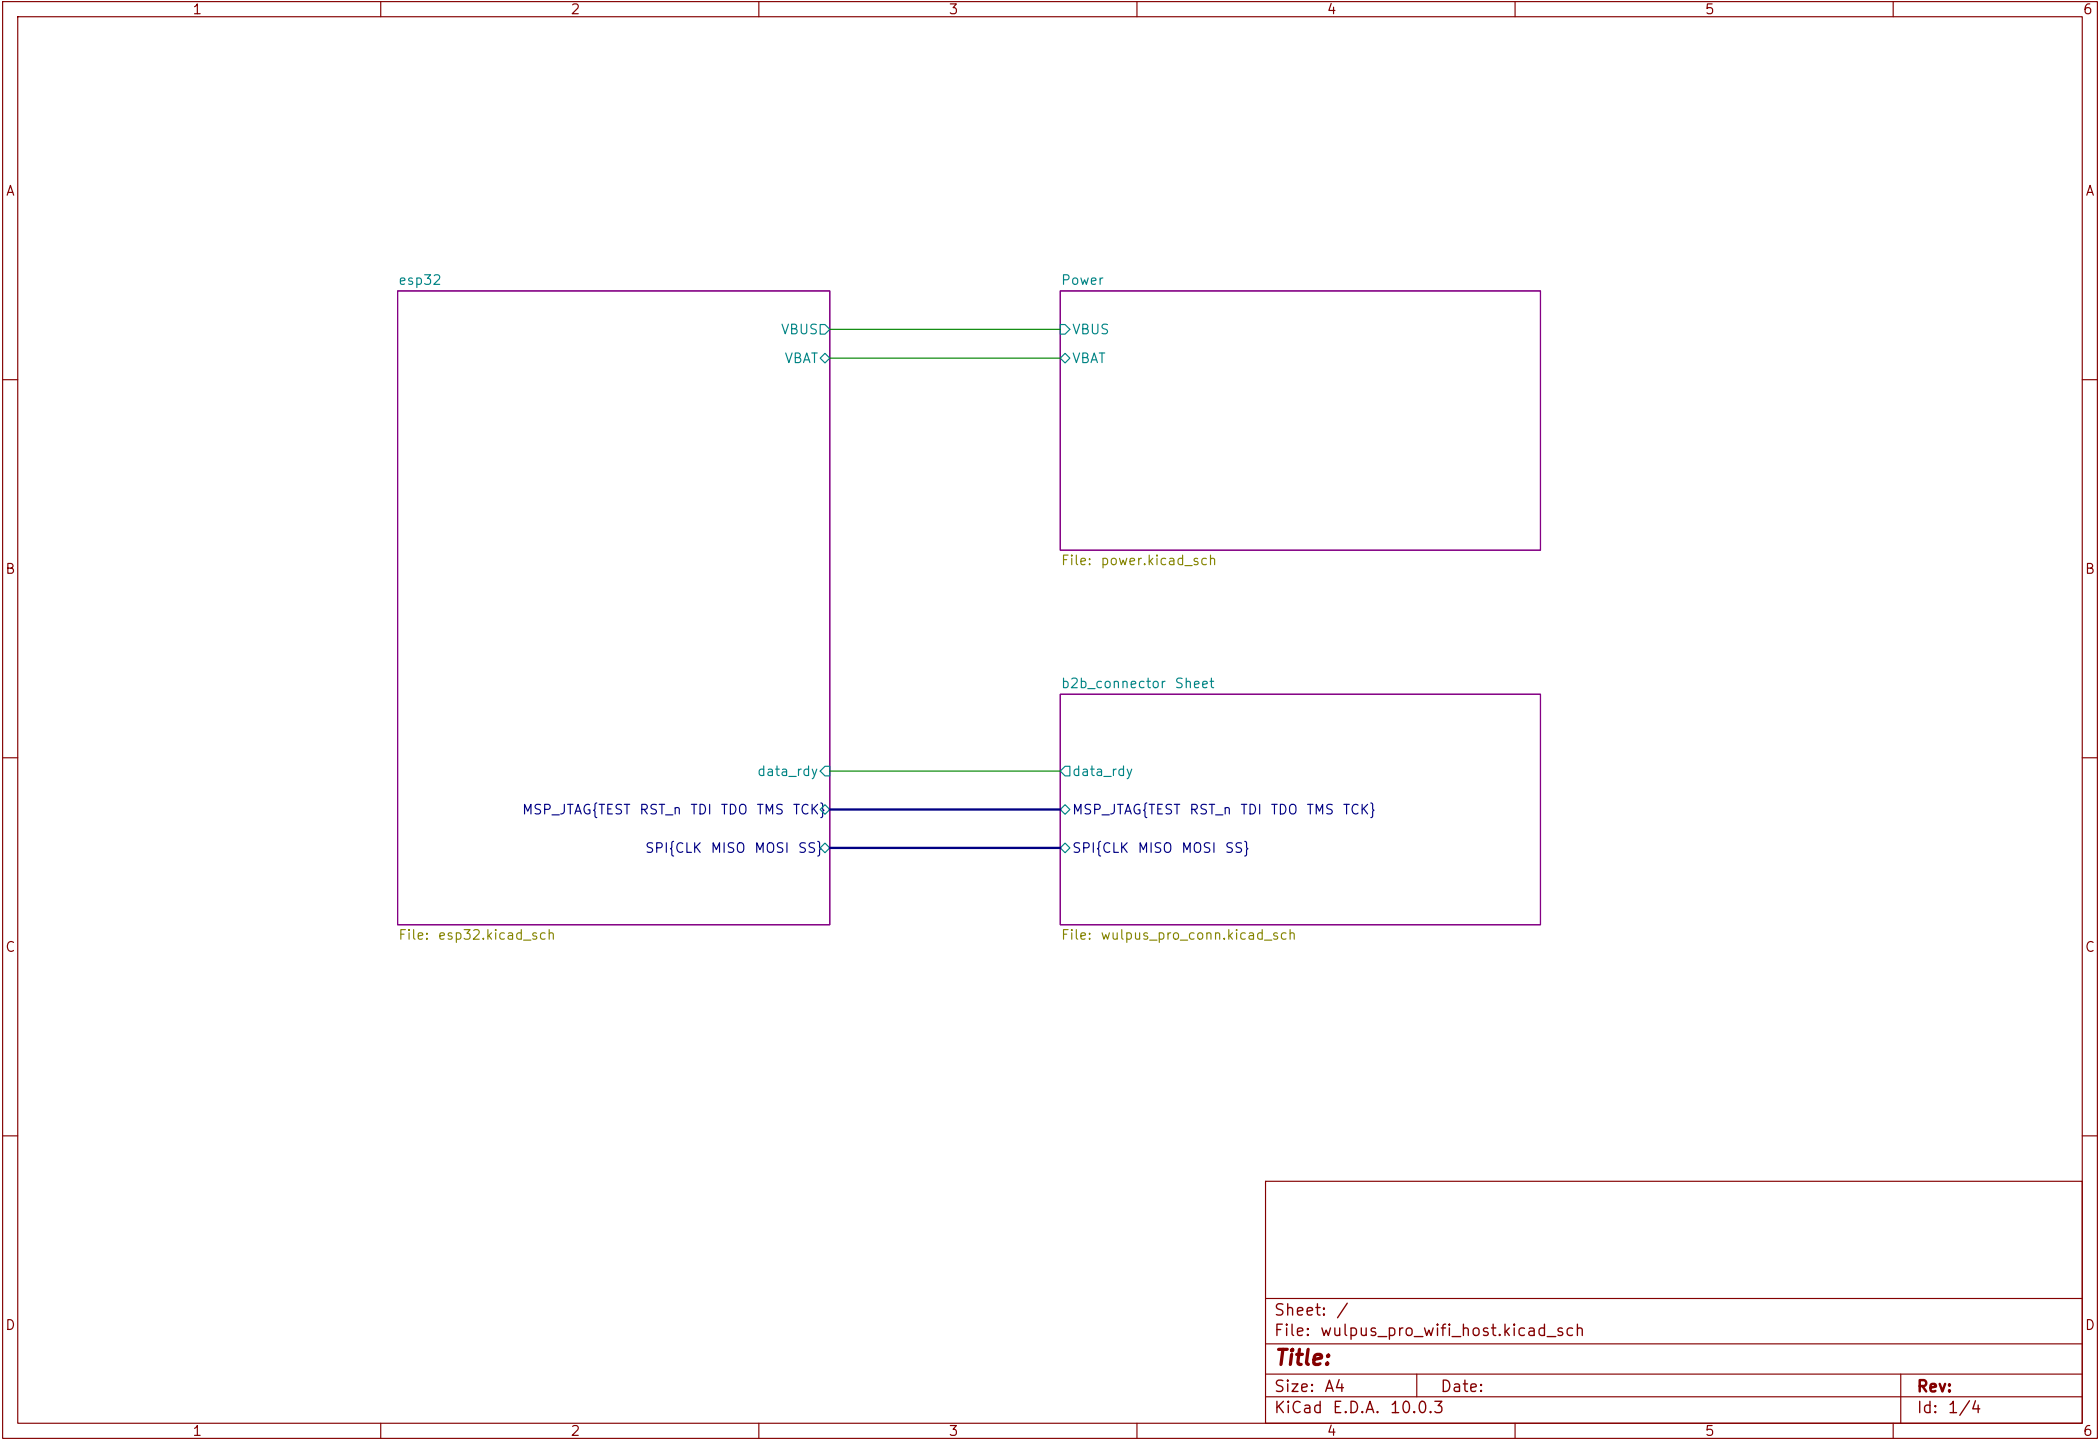


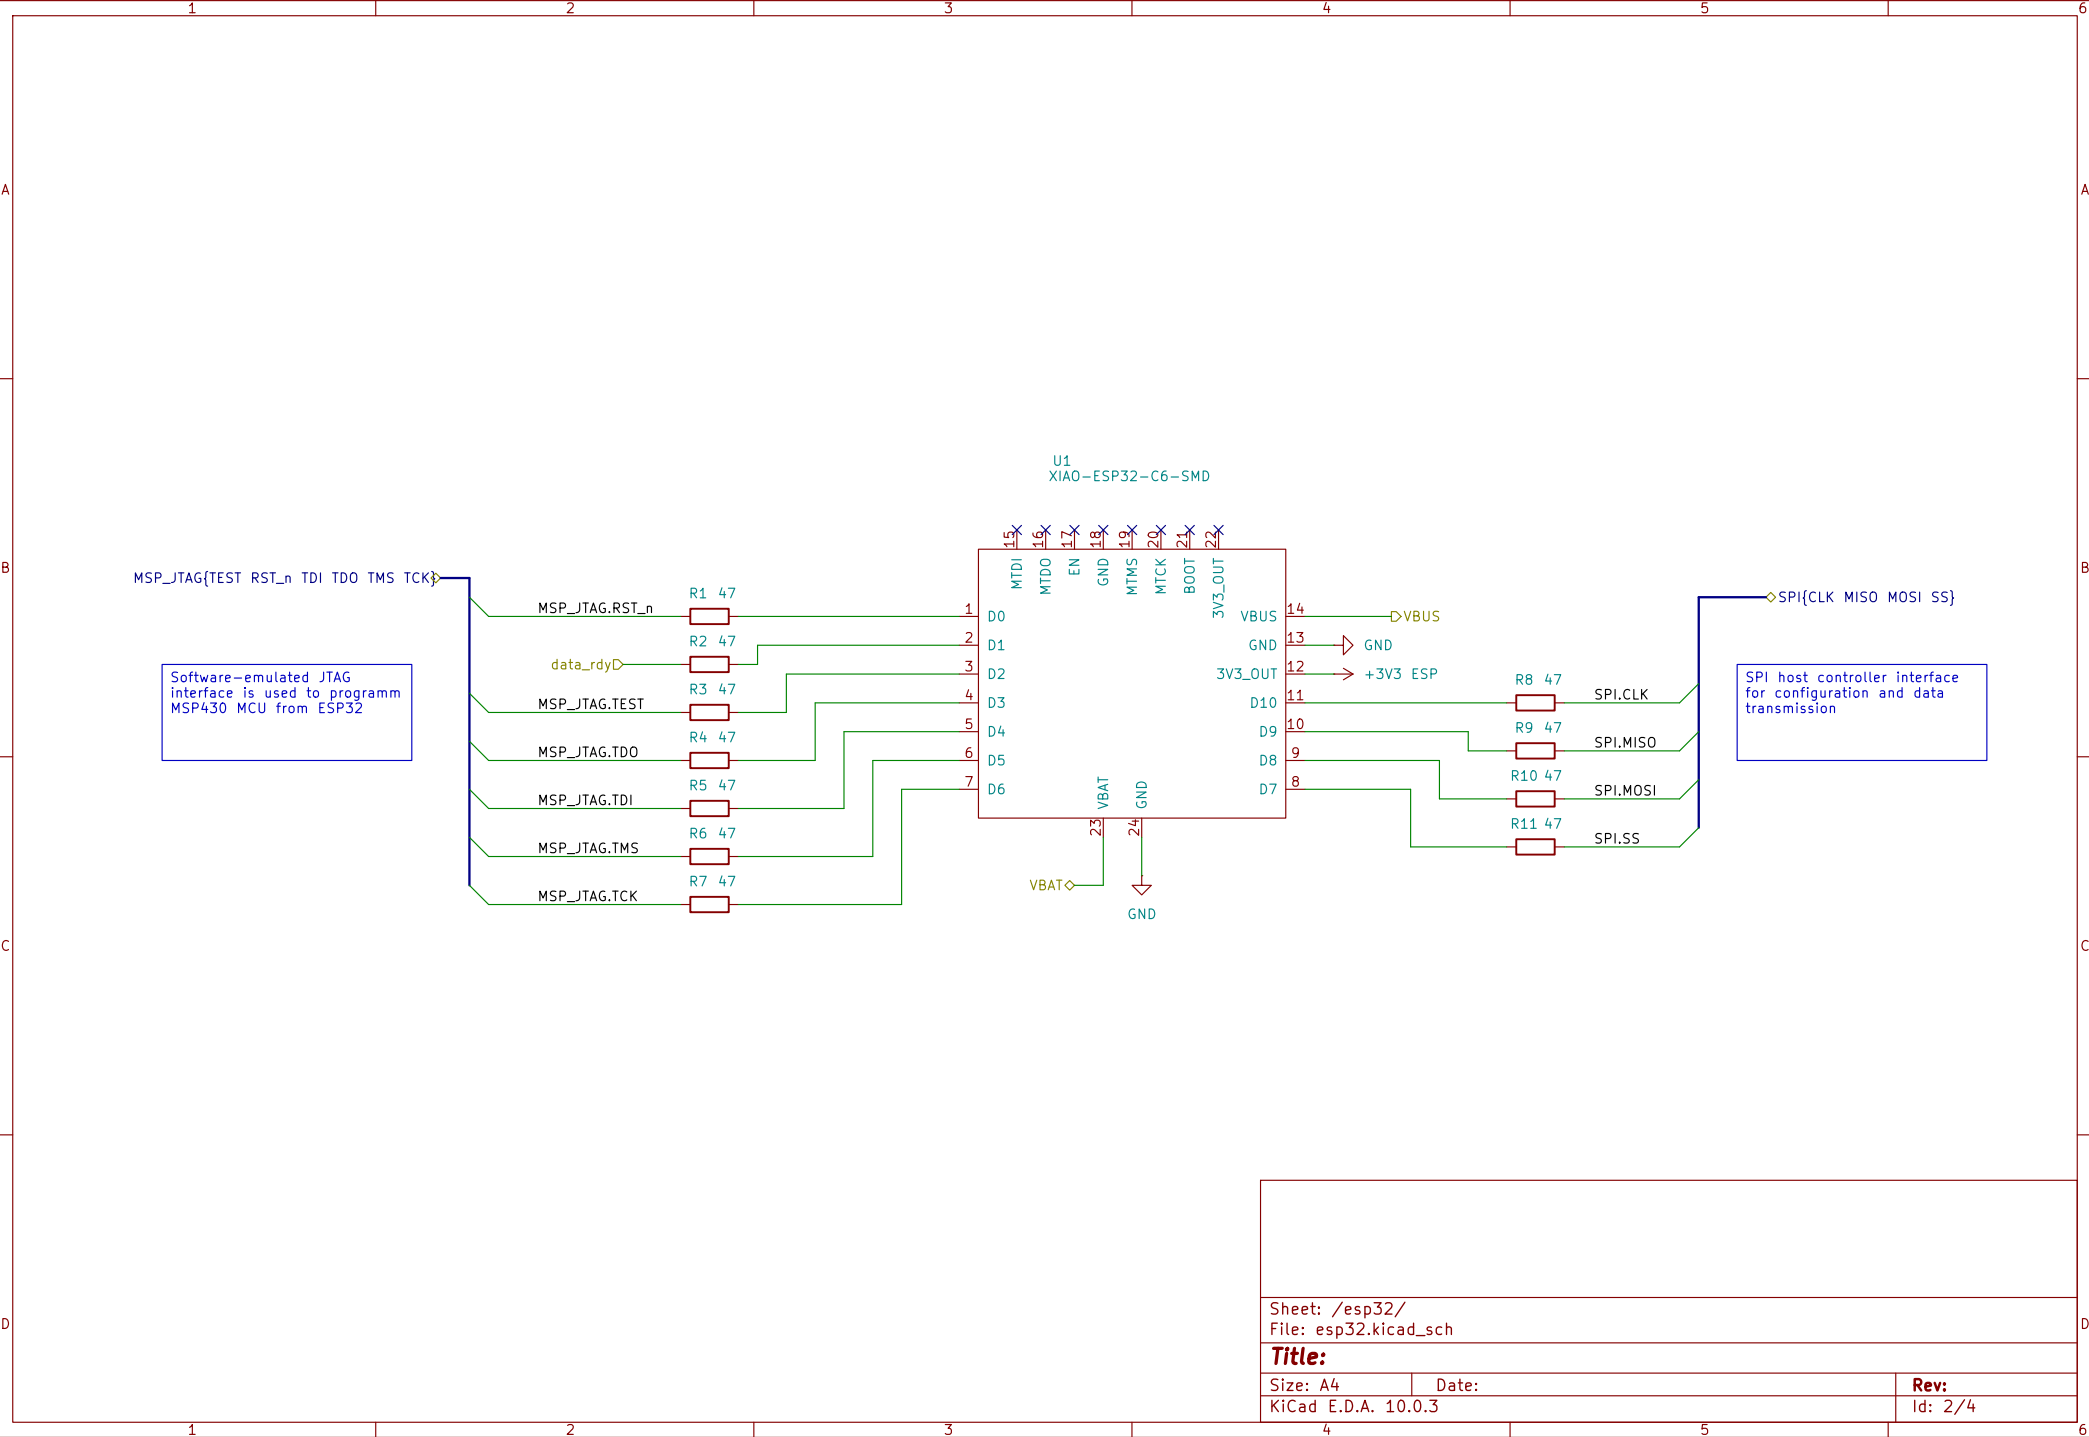


+3v3 and +5V0 DC-DC converters

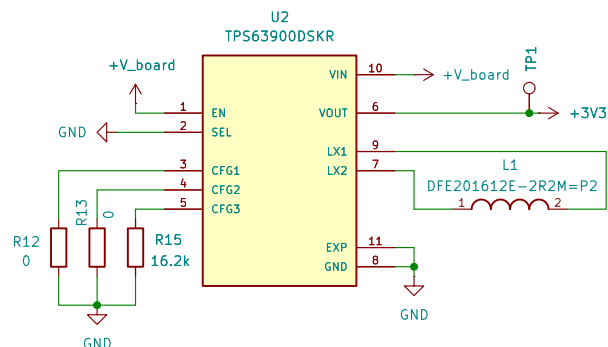


With SEL = LOW,
CFG3 = 16.2 kΩ
selects 3.3 V
(unlimited current).
1% Resistors

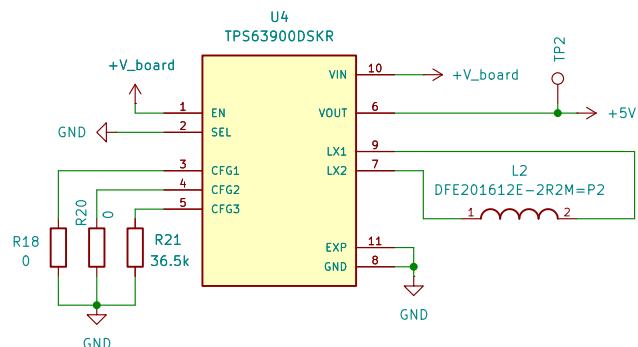


With SEL = LOW,
CFG3 = 36.5 kΩ
selects 5.0 V
(unlimited current).
1% Resistors



USB/Battery Power OR Switch

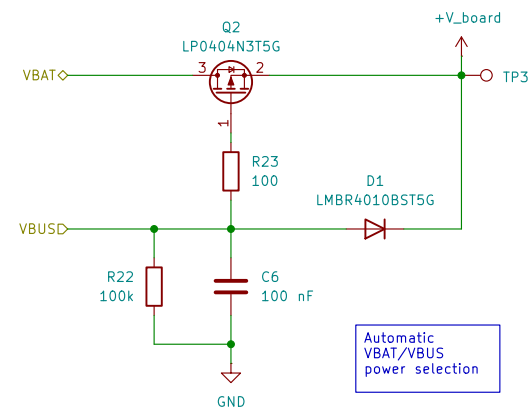

Battery Protection

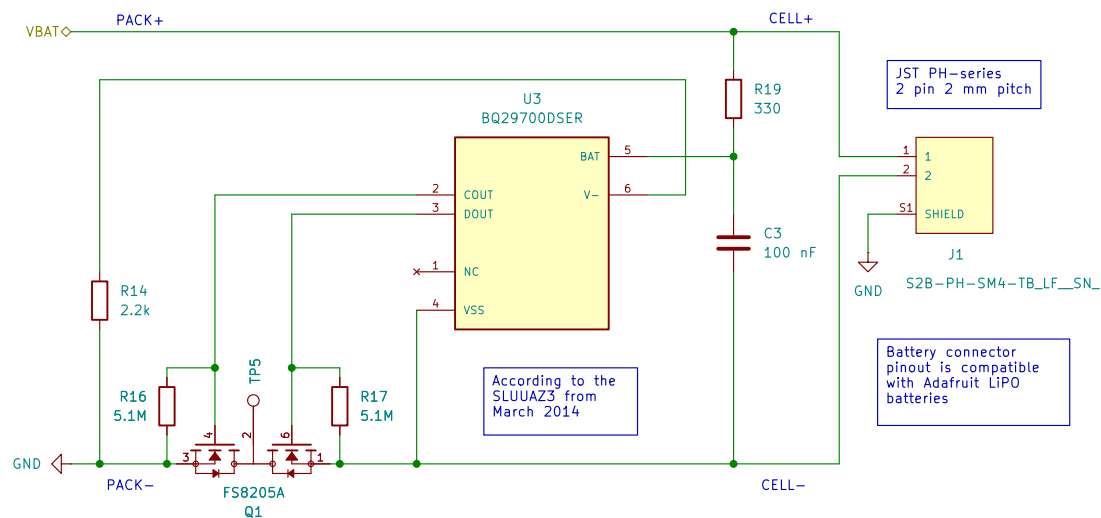

Sheet: /Power/
File: power.kicad_sch


Title:

Size: A4
KiCad E.D.A. 10.0.3


Date:

Rev:
Id: 3/4


JTAG and SPI buses

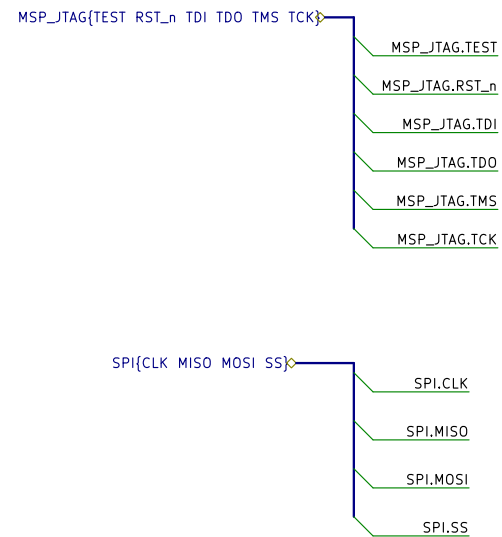

Board 2 Board Connector

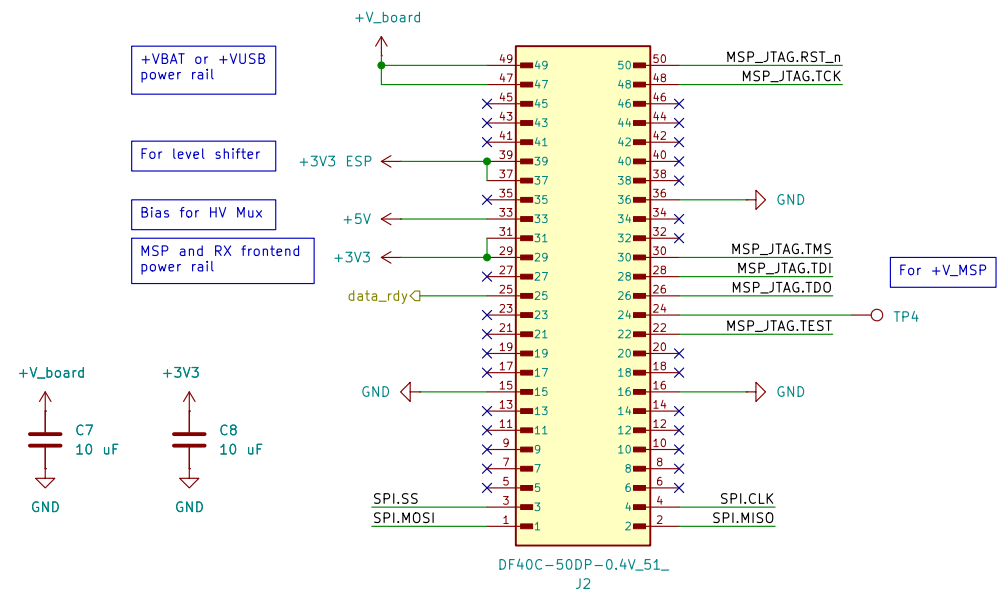

GND Test Points



Sheet: /b2b_connector Sheet/
File: wulpus_pro_conn.kicad_sch

Title:

Size: A4	Date:
KiCad E.D.A. 10.0.3	

Date:

Rev:
Id: 4/4