



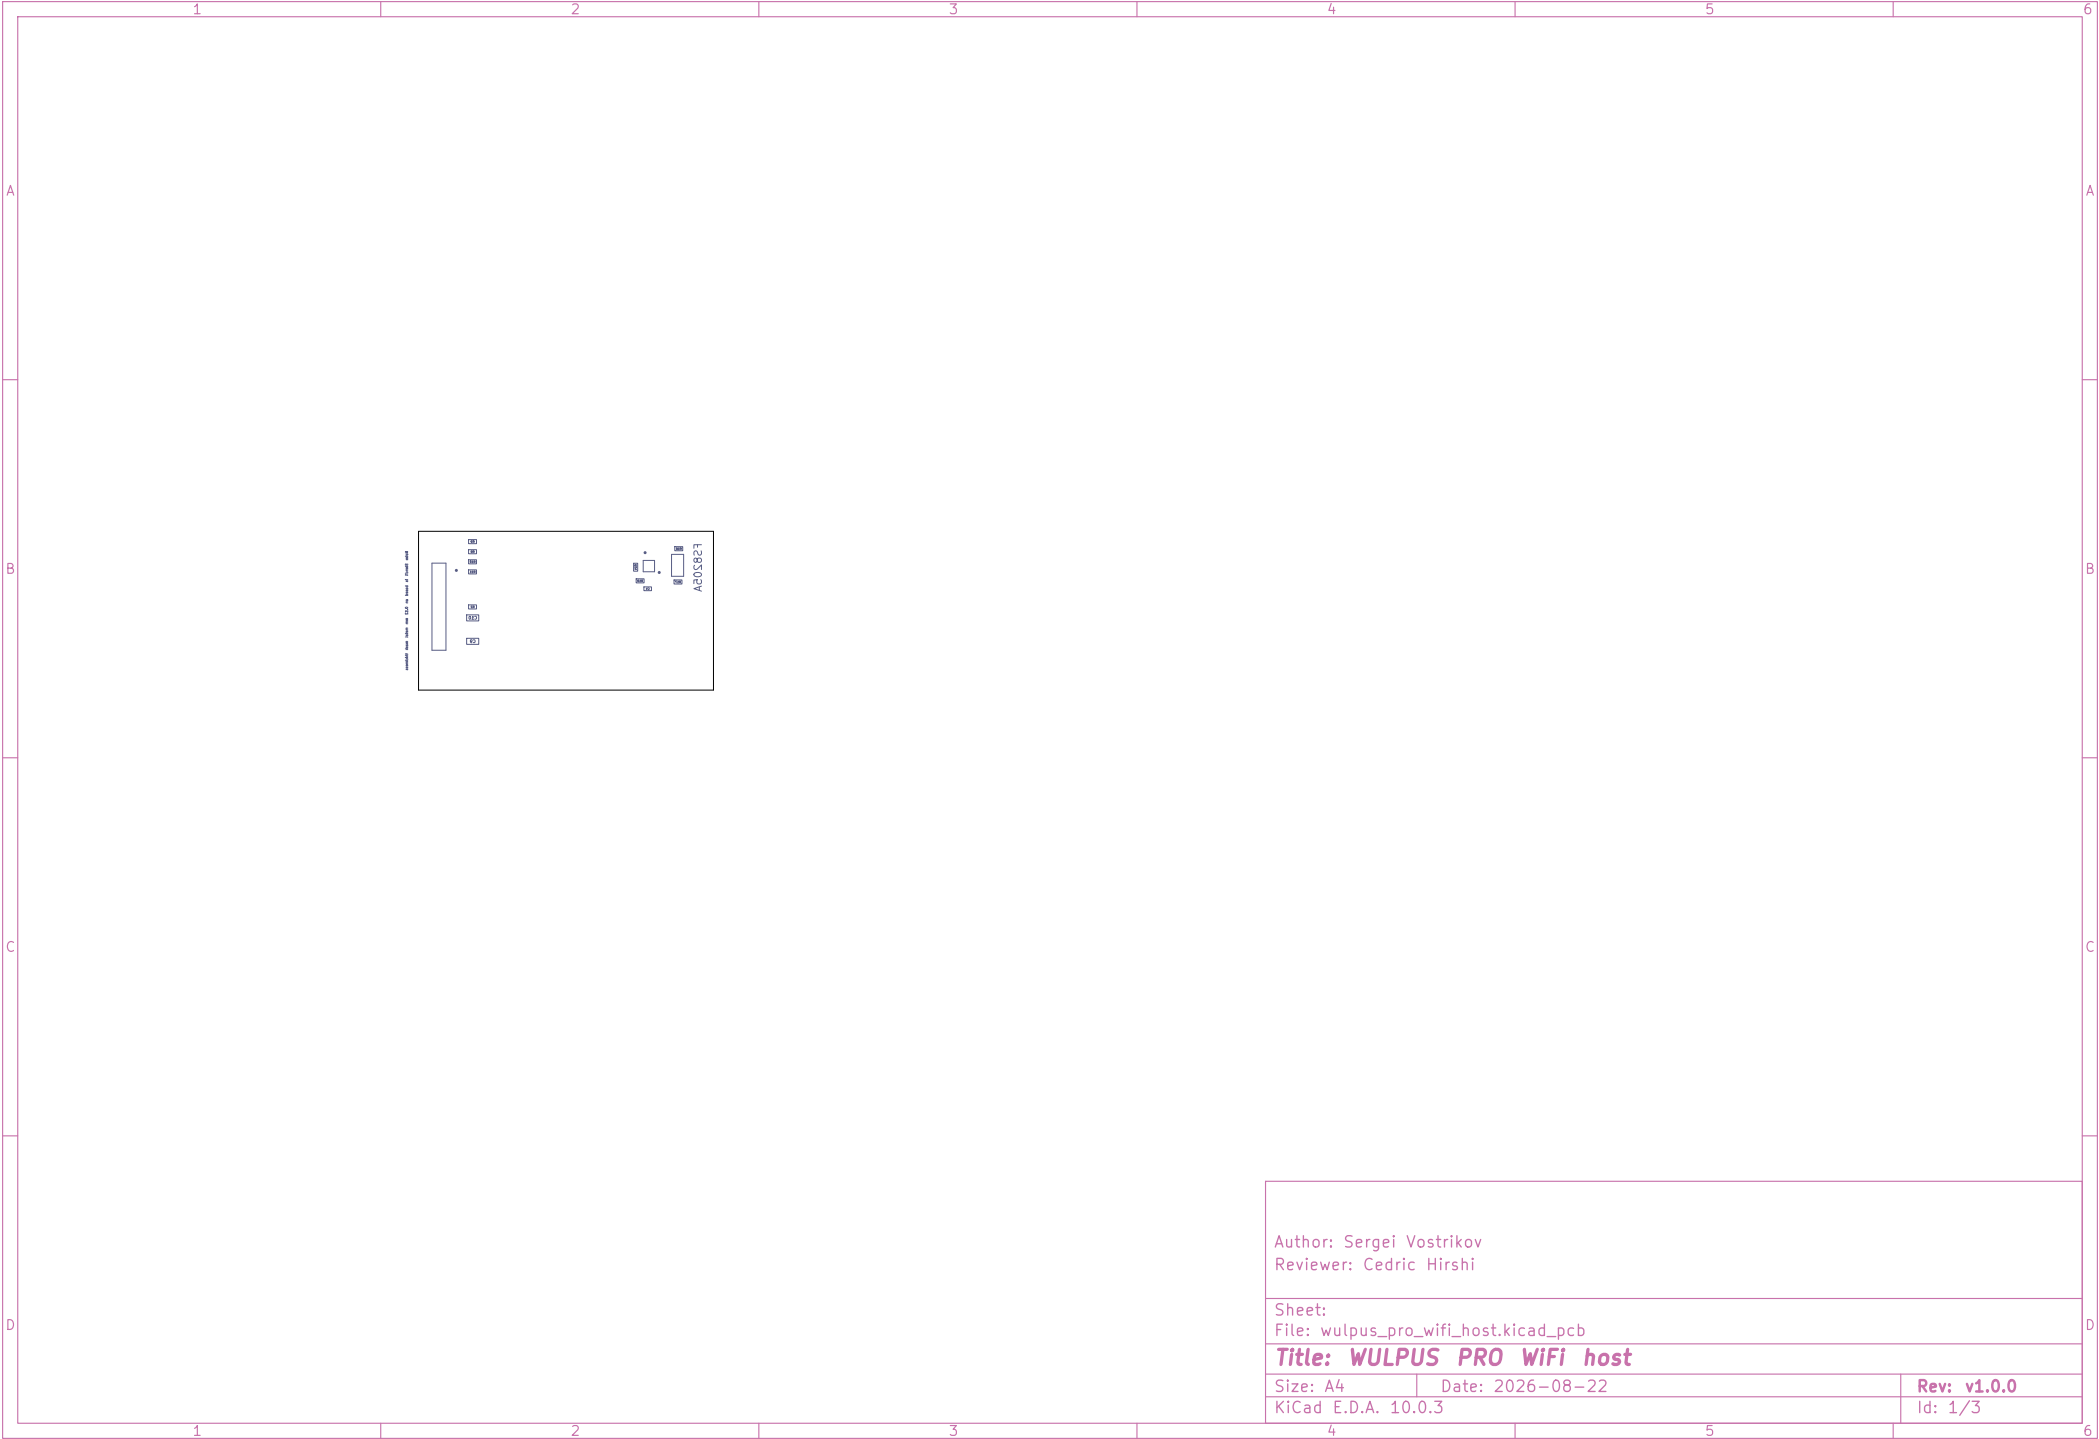

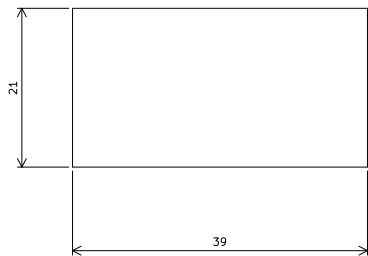

BOARD CHARACTERISTICS

Copper layer count:	4	Board thickness:	0.9820 mm
Board overall dimensions:	39.0000 mm x 21.0000 mm		
Min track/spacing:	0.2000 mm / 0.1400 mm	Min hole diameter:	0.3000 mm
Copper finish:	None	Impedance control:	No
Castellated pads:	No	Press-fit pads:	No
Plated board edge:	No	Edge card connectors:	No

Layer Name	Type	Material	Thickness	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top silk screen	Not specified	Not specified	White	1	0
F.Paste	Top solder paste		Not specified		1	0
F.Mask	Top solder mask	Not specified	0.01 mm	Black	3.3	0
F.Cu	Copper		0.035 mm		1	0
Dielectric 1	Prepreg	S1000HB	0.196 mm	Not specified	4.74	0.02
In1.Cu	Copper		0.035 mm		1	0
Dielectric 2	Core	S1000H	0.43 mm	Not specified	4.6	0.02
In2.Cu	Copper		0.035 mm		1	0
Dielectric 3	Prepreg	S1000HB	0.196 mm	Not specified	4.74	0.02
B.Cu	Copper		0.035 mm		1	0
B.Mask	Bottom solder mask	Not specified	0.01 mm	Black	3.3	0
B.Paste	Bottom solder paste		Not specified		1	0
B.Silkscreen	Bottom silk screen	Not specified	Not specified	White	1	0

Author: Sergei Vostrikov
Reviewer: Cedric Hirshi

Sheet:
File: wulpus_pro_wifi_host.kicad_pcb

Title: **WULPUS PRO WiFi host**

Size: A4	Date: 2026-08-22	Rev: v1.0.0
KiCad E.D.A. 10.0.3		Id: 3/3