



3.3V Regulator

Max. 200mA @ 3V3

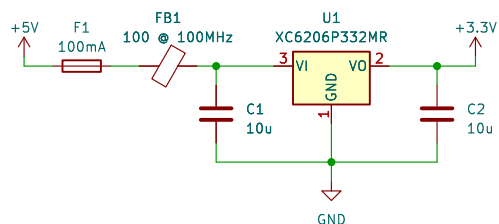


STM32 requires 3V3.
Not reverse polarity protected, however since only power source is via USB connector. We can hope that the polarity will be correct

USB Connector and ESD Protection

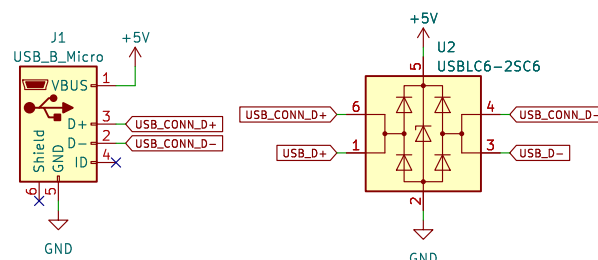


MCU

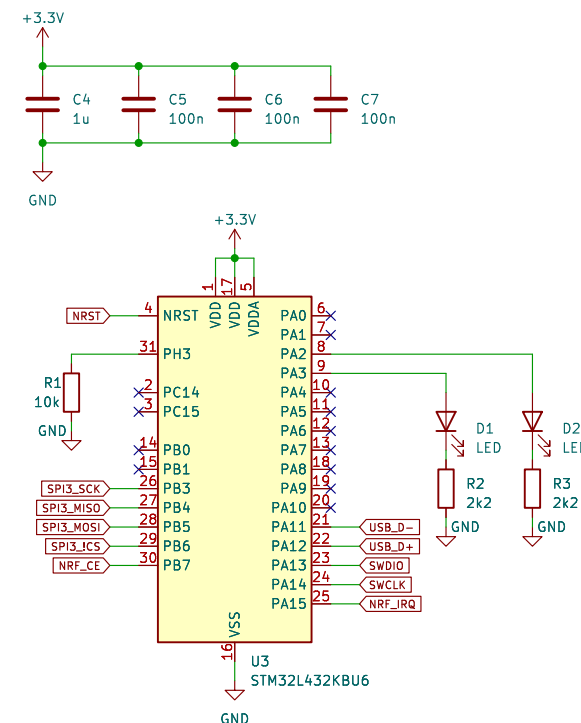


Differential Pairs MUST be labelled with +/- as last characters for differential routing

NRF24 Transceiver

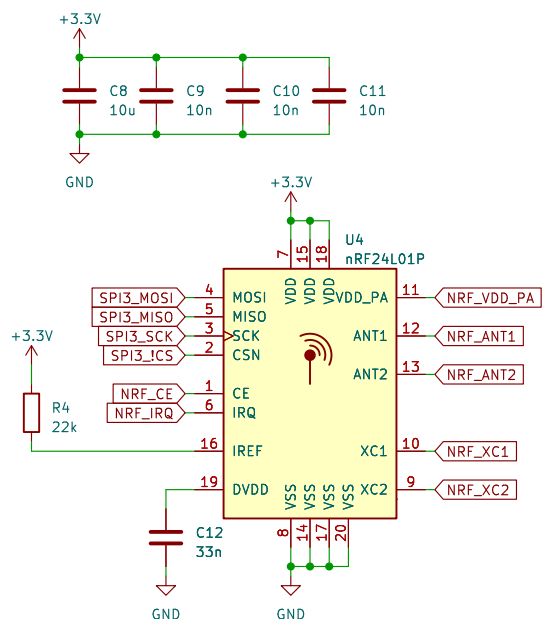


Antenna Impedance Matching and SMA Connector

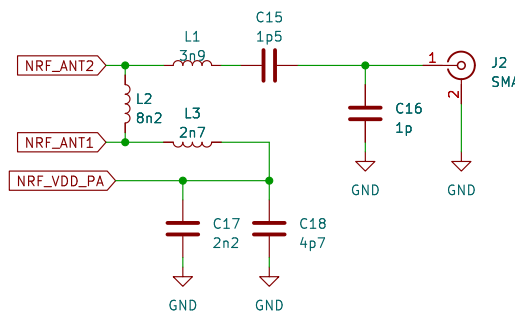


Route as 50 Ohm controlled impedance traces
Passive Antenna

Transceiver Crystal

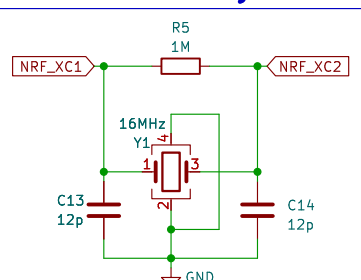

Load Caps: $C = 2 * (C_{load} - C_{stray})$

SWD Connector

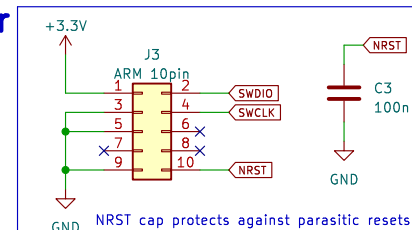

Sheet: /
File: STM32+RF+USB.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 1/1