CONDENSER

Condenser-Allure FNF



MODEL: FNF - 0.6 / 2.0

- Heat Exchange Area(m^2)
- Nominal capacity at 50 **Hz(Kw)**
- Series name

Feature

- It is professional design with rich experience to work with freon: R404A
- Adopting high-efficiency aluminum fins and copper tube with diameter 9.52mm (7mm optional).
- Standard working conditions:

  Inlet air temperature: +35°C

  Condensing temperature: +50°C *(15KTD)*

  Fin space: 2.5mm
- Optional: Two sides with plate cover to protect copper tube, full painting for two sides copper tube and fins.

Advantages


- Copper pipeline is optimized re-design for high heat exchange efficiency.
- U-bent welded by rich experienced workers, less leakage and nice looking.
- Shell metal is made by high-quality steel sheet: high strength, excellent shock resistance. Also spray-treated to be more resistant to corrosion.
- Wave type fins to increase heat exchange area, Hydrophilic aluminum (blue fins) or gold epoxy aluminum (gold fins) as optional.
- Adopting high quality axial fan motor: Top efficiency, large air flow and low noise.

--

Specification

Model	Capacity		Heat exchang Area	Copper tube	Fan Motor		Connection Pipe Diameter		Overall Dimension			Installing Dimension	
					Air Flow	Diameter	Inlet	Outlet	L	W	H	E	F
	KW@50HZ	BTU@60HZ	M2	Rows•Pcs	m³/h	mm	mm	mm	mm	mm	mm	mm	mm
FNF-0.6/2.0	0.60	2211	2	2x8	530	200	10	10	320	100	230	280	70
FNF-0.9/3.4	0.90	3316	3.4	3x8	530	200	10	10	320	100	230	280	70
FNF-1.4/4.4	1.40	5159	4.4	3x10	730	250	10	10	370	120	280	330	70
FNF-1.9/5.7	1.87	6891	5.7	4x10	730	250	10	10	370	120	280	330	90
FNF-2.6/6.2	2.62	9655	6.2	3x12	1664	300	12	12	440	120	330	390	70
FNF-3.7/8.2	3.72	13708	8.2	4x12	1664	300	12	12	440	120	330	390	90
FNF-4.7/10	4.69	17282	10	3x16	2270	350	16	12	515	150	430	455	95
FNF-5.6/13.3	5.57	20525	13.3	4x16	2270	350	16	12	515	170	430	455	145
FNF-5.8/15	5.76	21225	15	4x18	2270	350	16	12	515	170	430	455	145
FNF-7.4/18	7.35	27084	18.0	3x16	3328	2x300	16	12	840	180	430	780	145
FNF-8.4/18.5	8.43	31064	18.5	4x20	3541	400	19	16	565	180	530	505	145
FNF-9/21	9.02	33238	21.0	4x20	3541	400	19	16	615	180	530	555	145
FNF-10.3/24.5	10.30	37955	24.5	5x20	3541	400	19	16	590	200	530	530	145
FNF-13/25	12.70	46799	25.0	4x16	4540	2x350	19	16	900	180	430	840	145
FNF-14.2/30	14.16	52179	30	3x23	7082	2x400	22	16	1000	180	615	936	145
FNF-14.1/35	14.13	52068	35.0	5x18	4540	2x350	19	16	900	200	480	840	165
FNF-18/39	17.95	66145	39	4x22	7082	2x400	22	16	1000	180	580	940	125
FNF-21/49	20.89	76979	49.0	5x22	7082	2x400	22	16	1000	200	580	940	145
FNF-22/53	21.74	80111	53	5x24	7082	2x400	22	16	1000	200	630	940	150
FNF-24.2/63	24.21	89213	63.0	6x24	7082	2x400	22	16	1000	220	630	940	170
FNF-27.4/70	27.38	100894	70	4x32	9080	4x350	22	19	1230	200	830	1170	165
FNF-28.6/80	28.56	105242	80.0	4x36	9080	4x350	22	19	1230	200	930	1170	165
FNF-40/88	39.93	147140	88	5x40	14164	4x400	25	19	1000	220	1030	940	150
FNF-40.3/100	40.31	148541	100.0	4x44	14164	4x400	25	22	1230	200	1130	1170	165
FNF-49.5/105	49.47	182295	105	6x40	14164	4x400	25	22	1000	220	1030	940	170
FNF-44.3/130	44.31	163281	130.0	4x54	14164	4x400	25	22	1230	220	1380	1170	165
FNF-55.4/150	55.41	204184	150	5x52	17180	4x450	25	22	1230	250	1330	1170	215
FNF-78/180	78.04	287574	180.0	6x52	25680	4x500	28	25	1230	270	1330	1186	235
FNF-78.1/220	78.12	287869	220	6x48	21246	6x400	32	25	1720	255	1230	1656	220
FNF-93.1/260	93.12	343143	260.0	6x52	25680	6x450	32	25	1840	270	1330	1776	235
FNF-129/320	129.06	475581	320	6x52	38520	6x500	38	28	2200	270	1330	2136	235

Dimension Chart

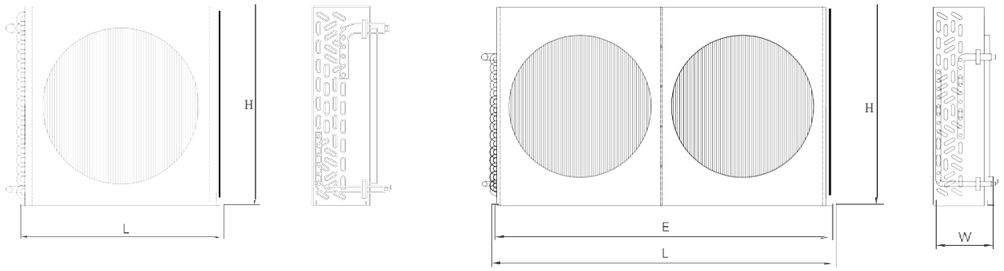

CONDENSER

Condenser-Huge FNV/W



FNW



FNV

MODEL: FNV - 500 2 - 123

- 123 — Heat Exchange Area(m^2)
- 2 — Quantity Two Fan
- 500 — Fan Diameter 500 Series
- FNV — name

Feature

- Adopts a high-efficiency heat exchange coil with aluminum fins, keeping the interior of the copper tubes clean and dry.
- The aluminum fin punching features an extended "L" -row flap, ensuring very high heat exchange efficiency after expansion.
- The overall shell receives spray treatment for corrosion resistance. Supported by a multi-flanging design, it provides excellent vibration resistance.
- The axial fan motor can be chosen from EBM or leading Chinese brands: high efficiency, low noise, and large air volume.

Specification

Model	Capacity		Heat exchange Area	Copper tube	Fan Motor		Connection Pipe Diameter		Overall Dimension			Installing Dimension	
					Air Flow	Diameter	Inlet	Outlet	L	W	H	E	F
	KW@50HZ	BTU@60HZ	M2	Rows•Pcs	m^3/h	mm	mm	mm	mm	mm	mm	mm	mm
FNV-5002-123	47.74	175920	123	4x24	2x6500	2x500	2x22	2x25	1582	1000	775	1370	980
FNV-5003-219	76.51	281936	219	4x32	3x6500	3x500	2x19	2x28	2011	1030	971	1970	980
FNV-5503-256	95.47	351803	256	4x32	3x8400	3x550	2x19	2x28	2311	1030	971	2130	980
FNV-6002-188	77.93	287169	188	4x32	2x11000	2x600	2x22	2x28	1784	1030	1055	1580	980
FNV-6303-386	146.70	540584	386	5x36	3x12500	3x630	2x22	2x35	2484	1100	1146	2280	1050
FNV-6304-518	196.62	724537	518	5x36	4x12500	4x630	2x28	2x42	3254	1100	1146	3050	1050
FNV-6305-650	246.36	907827	650	5x36	5x12500	5x630	2x28	2x42	4024	1100	1146	3820	1050
FNV-8002-414	138.39	509962	414	5x42	2x16600	2x800	2x35	2x54	2270	1300	1280	2090	1250
FNV-8003-624	208.14	766988	624	5x42	3x16600	3x800	2x35	2x54	3320	1300	1280	3140	1250
FNV-8004-834	278.67	1026888	834	5x42	4x16600	4x800	2x54	2x76	4370	1300	1280	4190	1250
FNV-8005-1044	349.02	1286125	1044	5x42	5x16600	5x800	2x54	2x76	5420	1300	1280	5240	1250
FNV-8006-1254	419.03	1544109	1254	5x42	6x16600	6x800	2x54	2x76	6470	1300	1280	6290	1250

Model	Capacity		Heat exchange Area	Copper tube	Fan Motor		Connection Pipe Diameter		Overall Dimension			Installing Dimension	
					Air Flow	Diameter	Inlet	Outlet	L	W	H	E	F
	KW@50HZ	BTU@60HZ	M2	Rows•Pcs	m^3/h	mm	mm	mm	mm	mm	mm	mm	mm
FNW-6306-1000	331.64	1222080	1000	16x20	73205	6x630	2x35	2x54	3381	2200	1245	3120	2160
FNW-6306-1100	339.85	1252334	1100	16x20	73205	6x630	2x35	2x54	3681	2200	1245	3420	2160
FNW-6308-1300	439.42	1619245	1300	16x20	97606	8x630	2x35	2x54	4291	2200	1245	4030	2160
FNW-6308-1400	448.66	1653294	1400	16x20	97606	8x630	2x35	2x54	4611	2200	1245	4350	2160
FNW-8008-1500	656.12	2417776	1500	16x20	159724	8x800	2x35	2x54	4791	2200	1245	4530	2160
FNW-8008-1800	681.86	2512627	1800	16x20	159724	8x800	2x35	2x54	5491	2200	1245	5230	2160

Dimension Chart

