AIR COOLER/EVAPORATORS

Air Cooler-Compact ZL





MODEL: ZLM - 2.8 I 15

Series Name

Nominal Capacity (Kw) Heat

Exchange Area(m^2)

Feature

- It is a professional design with rich experience to work with Freon: R404A
- Adopting high-efficiency aluminum fins and copper tubes with diameters of 9.52 and 14.5 mm.

- *ZLM* for refrigerating storage *with* temperature at *-18°C.*

Advantages


- Copper pipeline is optimized and re-designed for high heat exchange efficiency.
- Two sides end plates and drain pans are designed as open type for convenient maintenance.
- Shell metal is made of high-quality steel sheet: high strength, excellent shock resistance. It is also spray-treated to be more resistant to corrosion.
- The front shell has an inner concave design that looks very nice; the overall shell uses a multi-folded design for high strength and reduced vibration.
- Adopting a high-quality axial fan motor: top efficiency, large airflow and low noise.

Specification


Fin Space(6mm) Rt: -18°C Refrigerant R404A

Model	Capacity		Exchange Area	Volume	Connection		Fan Motor				Electric Defrost	
	te=-28°C DT=10K	te=-25°C DT=7K	2	3	Liquid	Gas	Quantity	Diameter	Power	Air Flow	Coil	Drain pan
					mm	mm					kw	
CEM-2.2/12	2200	1000	12	3.04	12	16	2	350	2x190	2x2400	2x0.9	1x0.9
ZLM-2.8/15	2800	1600	15	3.04	12	16	2	350	2x190	2x2400	2x0.9	1x0.9
ZLM-3.7/22	3700	2800	22	4.46	12	16	3	350	3x190	3x2400	2x1.2	1x1.2
ZLM-5.6/30	5600	4000	30	5.95	16	25	2	400	2x227	2x3500	2x1.5	1x1.5
ZLM-7.5/40	7500	6000	40	7.93	16	25	2	400	2x227	2x3250	2x1.5	1x1.5
ZLM-11.2/60	11200	9000	60	11.74	19	32	2	500	2x448	2x6000	5x1.5	1x1.5
ZLM-14.9/80	14900	9700	80	14.67	19	38	2	500	2x448	2x6000	5x1.5	1x1.5
ZLM-18.7/100	18700	12000	100	19.1	19	38	3	500	3x448	3x6000	5x1.9	1x1.9
ZLM-22.4/120	22400	15000	120	22.98	19	38	3	500	3x448	3x6000	5x2.4	1x2.4
ZLM-26.2/140	26200	19000	140	26.68	25	50	4	500	4x448	4x6500	5x2.6	1x2.6
ZLM-30.0/160	30000	23000	160	30.37	25	50	4	500	4x448	4x6000	5x2.8	1x2.8


ZL Air Coolers Installation Dimension Chart (mm)

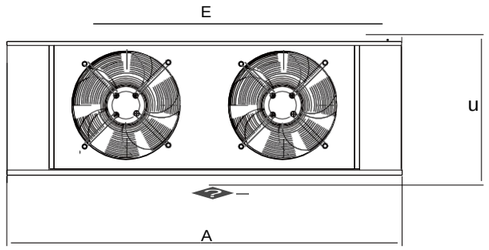

Model:
CEM: 2.2/12 2.8/15 5.6/30 7.5/40 11.2/60 14.9/80

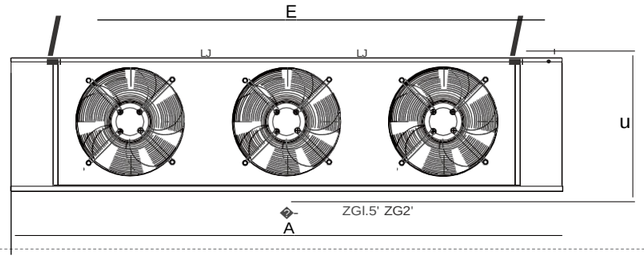

Model:
ZLM: 3.7/22 18.7/100 22.4/120

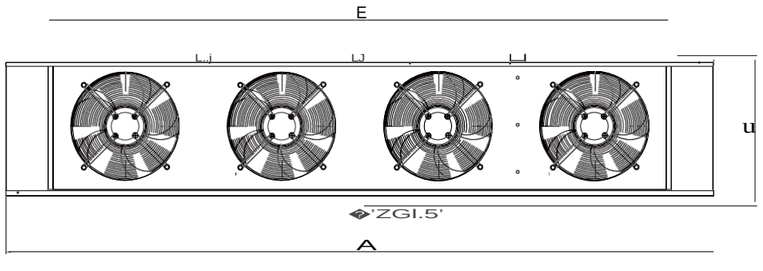

Model:
ZLM: 26.2/40 30.0/160


Model	Overall Size(mm)			Installation Size(mm)	
	A	B	C	D	E
CEM-2.2/12 ZLM-2.8/15	1165	430	480	355	940
ZLM-3.7/22	1610	430	480	355	1385
ZLM-5.6/30	1590	530	560	445	1255
ZLM-7.5/40	1590	530	560	445	1255
ZLM-11.2/60	1890	530	660	505	1555
ZLM-14.9/80	1890	590	660	505	1555
ZLM-18.7/100	2370	590	660	505	2035
ZLM-22.4/120	2790	590	660	505	2455
ZLM-26.2/140	3190	590	660	505	2855
ZLM-30.0/160	3590	590	660	505	3255

AIR COOLER/EVAPORATORS

Air Cooler-Classic D



MODEL: DJ

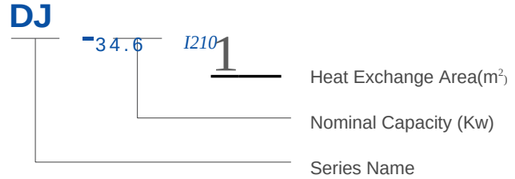

Feature

D-Series Air Coolers are advanced cooling units designed for Freon-based refrigeration systems. Utilizing high-efficiency fins and premium 9.52/14.5 copper tubes.

• *DJ* for freezing storage *with* temperature *at* -25°C.

Advantages

• **Robust Housing**
Constructed from high-grade steel or embossed aluminum panels, offering excellent strength and vibration resistance. A powder-coated finish provides enhanced corrosion protection.

• **High-Efficiency Coils**
Tubes are arranged in a staggered pattern and expanded mechanically to ensure a tight bond with the aluminum fins, maximizing heat transfer.

• **Effective Defrosting**
Equipped with high-quality, evenly distributed heating elements for uniform and efficient defrosting.


• **Multi-Layer Drain Pan**
Designed with integrated, evenly spaced electric heaters for faster, more uniform frost removal and effective prevention of secondary ice formation.

· **Flexible Air Delivery**
Compatible with long-distance air ducts to accommodate various cooling requirements

Fin Space(9mm) Rt -25°C Refrigerant R404A

Model	Capacity		Exchange Area	Tube Volume	Connection		Fan Motor				Electric Defrost	
	te=-35°C DT=10K	te=-32°C DT=7K					Quantity	Diameter	Power	Air Flow	Coil	Drain pan
	w	w	M2	Dm3	mm	mm	pcs	mm	w	m^3/h	kw	kw
DJ-34.6/210	34600	29000	210	56.7	25	54	4	600	4x820	4x9100	8x2.8	1x2.8
DJ-41.2/250	39000	34000	250	69.54	28	67	4	630	4x937	4x11000	8x3.0	1x3.0

D Air Coolers Installation Dimension Chart (mm)

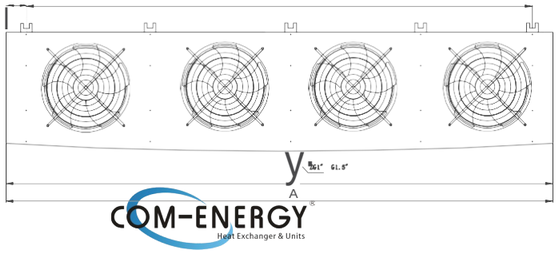

Model:
DJ: 34.6/210 41.2/250

AIR COOLER/EVAPORATORS

Air Cooler-Cosy DH



MODEL: DH - D 10

Heat Exchange Area(m^2)

Series Name

Feature

The DH Double-Side Air Supply Cooler is designed for processing rooms, providing gentle and even cooling from both sides.

- *DH-D: Ideal for cold storage rooms (Rt : -18°C)*

Advantages

- **Uniform Dual-Side Air Supply**
  A scientifically designed dual-side airflow system ensures even and gentle distribution of cold air throughout space.

- **High-Efficiency, Low-Noise Fan Motor**
  All coolers are equipped with a new generation of fan motors, offering high efficiency, low noise, and built-in thermal protection for reliable operation.


- **Durable & Corrosion-Resistant Construction**
  The housing is made of high-quality steel plates with a painted finish, providing excellent corrosion resistance, high strength, and good shock resistance.


- **Rapid and Even Defrosting**
  The drain pan is fitted with a defrosting plate, enabling faster and more uniform frost removal.


Specification


Fin Space(6mm) Rt -18°C Refrigerant R404A


Model	Capacity	Heat Ex.	Tube Volume	Connection		Fan Motor				Electric Defrost
	te= -28°C DT=10K	Area		Liquid	Gas	Quantity	Diameter	Power	Air Flow	
	w	m2	dm_3	mm	mm	pcs	mm	w	m^3/h	w
DH-D7	1300	7	2.44	15.5	19	1	300	1x108	1x800	2x500
DH-D15	2800	15	4.18	15.5	19	2	300	2x108	2x800	2x800
DH-D22	3700	22	5.86	15.5	19	3	300	2x108	3x800	2x1200
DH-D30	5600	30	6.03	15.5	25	2	400	2x227	2x3500	2x1200
DH-D40	7500	40	7.80	15.5	25	2	400	2x227	2x3500	2x1500
DH-D60	11200	60	11.74	19	38	2	450	2x278	2x4200	2x1700
DH-D80	14900	80	15.06	19	38	3	450	2x278	3x4200	2x2000

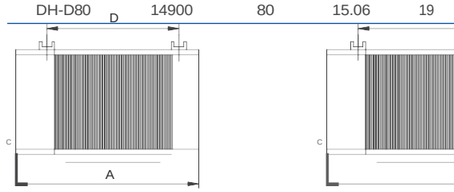





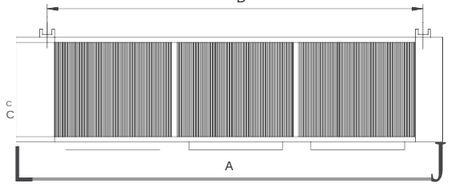

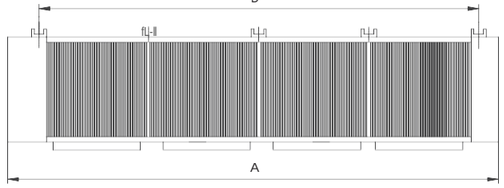

Model	Overall Size(mm)		
	A	B	C
DH-D7	600	350	720
DH-D15	1040	350	720
DH-D22	1460	350	720
DH-D30	1280	350	930
DH-D40	1600	350	930
DH-D60	1780	350	1100
DH-D80	2230	350	1100

AIR COOLER/EVAPORATORS

Evaporator-Peak DE



MODEL: DE - 1.35 / 7.5

- Heat Exchange Area(m^2)
- Nominal Capacity(kw)
- Series Name

Feature

The DE Series Air Cooler is designed for small-scale display cabinets. Compatible with various compressor units, it features a compact and aesthetically pleasing design for easy installation.

Advantages

- The unit features a white painted sheet metal surface, offering high corrosion resistance, structural strength, and excellent vibration resistance.

· **Secure & Reliable Motor**
Equipped with high-quality shaded pole motors that meet stringent safety standards and are mounted using a robust, secure installation method.

· **Efficient & Uniform Airflow**
An optimized air supply design ensures rapid cabinet cooling with even temperature distribution throughout.


· **Rapid & Uniform Defrosting**
High-quality stainless steel heating tubes are evenly distributed across the coil for fast and thorough defrosting.


Specification

Fin Space(6mm) Rt -18°C Refrigerant R404A

Model	Capacity te= -28°C DT=10K	Heat Exchange Area	Tube Volume	Connection		Fan Motor				Electric Defrost
				Liquid	Gas	Quantity	Diameter	Power	Air Flow	
	w	m2	dm^3	mm	mm	pcs	mm	w	m^3/h	w
DE-1.35/7.5	1350	7.5	6.43	12	16	3	200	3x40	3x400	1500
DE-1.8/10.0	1800	10	8.33	12	16	4	200	4x40	4x400	2000

Diagrams for Overall sizes



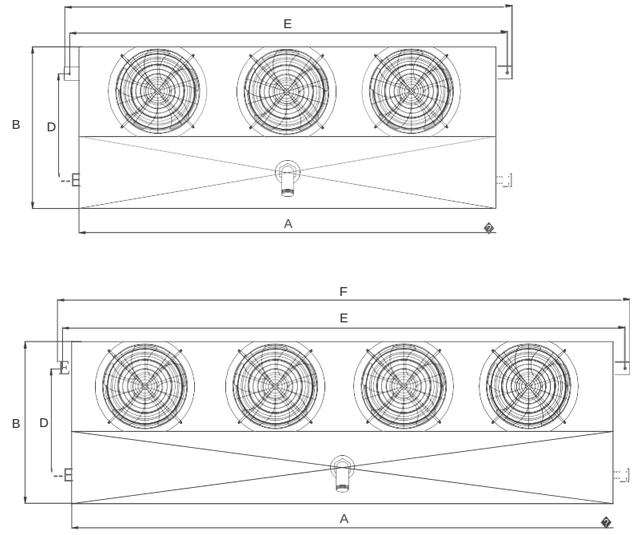

Model	Size(mm)					
	A	B	C	D	E	F
DE-1.35/7 .5	1055	390	150	265	1125	1145
DE-1.8/10.0	1365	390	150	265	1435	1455