

## GUI variable edits: Firewall

The steps below are for a stand-alone NGFW platform without Panorama.

### Device tab edits


The following edits are found under the **Device** tab



From here the following edits can be made:


### Hostname

1. Go to Device -> Setup -> Management
2. Click the **gear** icon to edit the hostname

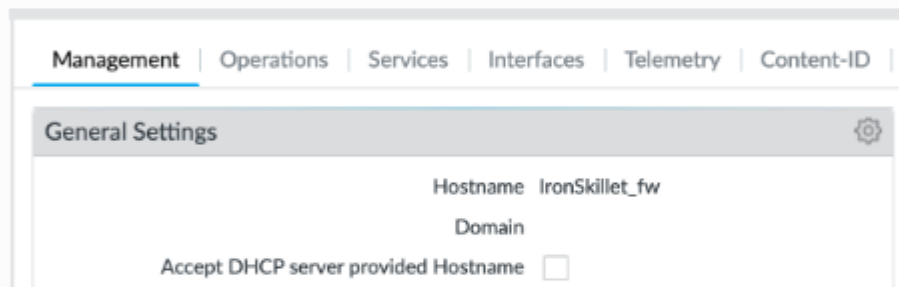

### DNS and NTP servers

1. Go to Device -> Setup -> Services
2. Click the **gear** icon to edit the server values
3. Choose the Services (DNS) and NTP tabs accordingly

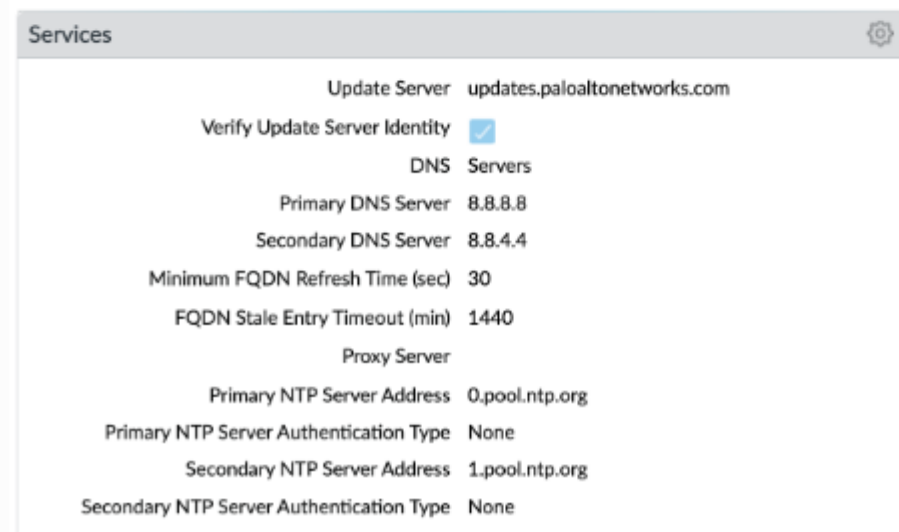

## Static Management Interface

For a static management interface configuration, edit the IP address, subnet mask, default gateway.

1. Go to Device -> Setup -> Interfaces
2. Click on the [Management](#) link
3. Edit the management interface attributes

Management	Operations	Services	Interfaces
INTERFACE NAME		ENABLED	
<a href="#">Management</a>		<input checked="" type="checkbox"/>	

## Superuser Administrator

The sample configuration uses the default admin/admin username and password setting. It is recommended to remove this user and add a new superuser or at a minimum change the admin user password.

1. Go to Device -> Administrators
2. Select and delete the [admin](#) user account
3. Choose to [Add](#) a new user entering the username and password in the pop-up window

<input type="checkbox"/>	NAME	ROLE
<input type="checkbox"/>	<a href="#">admin</a>	Superuser

## Syslog IP Address

Syslog is used to send traffic, threat and other log updates to an external system.

1. Go to Device -> Server Profiles -> Syslog
2. Click on the [Sample\\_Syslog\\_Profile](#) link and edit the IP address

<input type="checkbox"/>	NAME	LOCATION	NAME	SYSLOG SERVER
<input type="checkbox"/>	<a href="#">Sample_Syslog_Profile</a>		Sample_Syslog	192.0.2.2

