


Filter: T5K02

Color: Clear
Material: Glass
VLT: 70%



Optical Density (OD):

OD 3+ @850 - 900 nm
OD 4+ @900 - 950 nm
OD 5+ @950 - 1000 nm
OD 7+ @1000 - 1600 nm
OD 5+ @1600 - 2400 nm
OD 5+ @2900 - 10600 nm

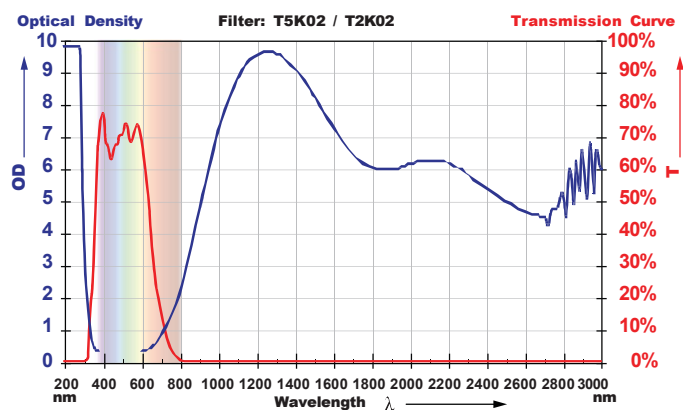

Available Frames

F01.T5K02.5000



F02.T5K02.5000



F07.T5K02.5000



F09.T5K02.5000



F12.T5K02.5000



F14.T5K02.5000



F19.T5K02.5000



F20.T5K02.5000



F21.T5K02.5000



F24.T5K02.5000



F35.T5K02.5000



F36.T5K02.5000



F37.T5K02.5000



F38.T5K02.5000



F39.T5K02.5000



F45.T5K02.5000



F49.T5K02.5000

R10.T5K02.5000



鐳射護目鏡與防護板

提供鐳射與強光防護，符合安全標準，佩戴舒適耐用。

適用對象

- 鐳射、焊接、X光操作人員
- 長期暴露於強光、紫外線者

防護範圍

紫外、准分子、鈹玻璃、半導體、CO₂、紅寶石等鐳射

產品圖片	型號 Model	防護波長 Typical Wavelength(nm)	雷射器 Laser	光密度 OD	可見光透過率 V.L.T.(%)
	LSR-G01	532*1064	倍頻 Nd:YAG 雷射	6	60
	LSR-G02	1064	Nd:YAG 雷射 紅外雷射	6	85
	LSR-G03	10600	CO2 雷射	6	70
	LSR-G04	200-540 900-1700	四倍頻 Nd:YAG 雷射 266	5	60
			準分子雷射 He-Cd 441,6	5	60
			YAG 雷射 1064 ND YAG 532	4	60
			半導體雷射 904 908 1510, 1530, 1610	5	60
	LSR-G05	200-450 800-2000	四倍頻 Nd:YAG 雷射 266	5	60
			準分子雷射 He-Cd441.6	4	60
			YAG 雷射 1064	5	60
			半導體雷射 808 810 904	4	60
	LSR-G06	180-532	四倍頻 Nd:YAG 雷射 266	5	60
			藍光雷射 450	6	60
			綠光雷射 532	6	60
	LSR-G07	808	綠光雷射	4	60
	LSR-G08	980	綠光雷射	4	60
	LSR-G09	590-760	He-Ne 雷射 紅光雷射	5	50
	LSR-G10	532	綠光雷射	4	5



	LSR-G11	1064	Nd:YAG 雷射 紅外雷射	6	80
	LSR-G12	2940	鉬 YAG 雷射	4	30
	LSR-G13	190-380 600-760	紅光雷射	4	40
	LSR-G15	190-420 850-1700		4	50
	LSR-G16	520-590	綠光雷射	2.5	60
	LSR-G19	190-400 560-640	四倍頻 Nd:YAG 雷射 266	4	60
			UV 雷射 355;365;400	4	60
			黃光雷射 560-590	4	60
			橘(橙)光雷射 590-635	4	60
	LSR-G25	600-1100 (寬光譜防護)	635 655 694 755 808 980 1064 1070 紅光雷射及紅外雷射	6	75
	LSR-G26	980-2500	980 1064 1070 1510 1530 1550 紅外雷射	5	80
	LSR-G29	180-540 800-2000	四倍頻 Nd:YAG 雷射 266	5	60
			準分子雷射 He-Cd 441,6	5	60
			YAG 雷射 1064 ND YAG 532	4	60
			半導體雷射 904 908 1510 1530 1610	5	60
	LSR-G30	200-380 600-760	四倍頻 Nd: YAG 雷射器 266	5	60
			He-Ne 雷射器 632.8	4	60
			紅寶石鐳射 (ruby laser) 694	4	60
			紫翠玉寶石鐳射 (alexandrite laser) 755	4	60



	LSR-G11	1064	Nd:YAG 雷射 紅外雷射	6	80
	LSR-G12	2940	鉬 YAG 雷射	4	30
	LSR-G13	190-380 600-760	紅光雷射	4	40
	LSR-G15	190-420 850-1700		4	50
	LSR-G16	520-590	綠光雷射	2.5	60
	LSR-G19	190-400 560-640	四倍頻 Nd:YAG 雷射 266	4	60
			UV 雷射 355;365;400	4	60
			黃光雷射 560-590	4	60
			橘(橙)光雷射 590-635	4	60
	LSR-G25	600-1100 (寬光譜防護)	635 655 694 755 808 980 1064 1070 紅光雷射及紅外雷射	6	75
	LSR-G26	980-2500	980 1064 1070 1510 1530 1550 紅外雷射	5	80
	LSR-G29	180-540 800-2000	四倍頻 Nd:YAG 雷射 266	5	60
			準分子雷射 He-Cd 441,6	5	60
			YAG 雷射 1064 ND YAG 532	4	60
			半導體雷射 904 908 1510 1530 1610	5	60
	LSR-G30	200-380 600-760	四倍頻 Nd: YAG 雷射器 266	5	60
			He-Ne 雷射器 632.8	4	60
			紅寶石鐳射 (ruby laser) 694	4	60
			紫翠玉寶石鐳射 (alexandrite laser) 755	4	60



	LSR-G31	10600	CO ₂ 雷射器 10600	6	80
	LSR-G32	10600	CO ₂ 雷射器 10600	5	80
	LSR-G33	190-540 900-1700	四倍頻 Nd:YAG 雷射 266	5	60
			準分子雷射 He-Cd 441,6	5	60
			YAG 雷射 1064 ND YAG 532	5	60
			半導體雷射 904 908 1510, 1530, 1610	5	60
			1070 光纖雷射	5	60
	LSR-G34	190-470 800-1700	四倍頻 Nd:YAG 雷射 266	5	60
			準分子雷射 He-Cd441.6	5	60
			YAG 雷射 1064	5	60
			半導體雷射 808 810 904	5	60
			1070 光纖雷射	5	60
	LSR-G35	2940	鉕 YAG 雷射 2780 2940 DI LB3	6	80
IPL 及紫外線照射機 HI POWER LED 護目鏡					
	IPL-4	190-504	光子(鐳射、強光) 美容安全鏡 190-504(紫外線高效防護鏡)		
	IPL-3	200-2000	光子(鐳射、強光)美容安全鏡 200-450 和 800-2000 (紫外線和紅外線高效防護鏡)		
	IPL-2	290-1700	達到美國 Glendale 的技術要求		
	IPL-1	2780 & 2940	防強脈衝紅、橙色等可見光		



	眼罩	200-2000	光子(鐳射、強光)美容客人用防護眼罩 200-2000
--	----	----------	-----------------------------

