


ZB0878



WIFI access point

WIRELESS BOLT

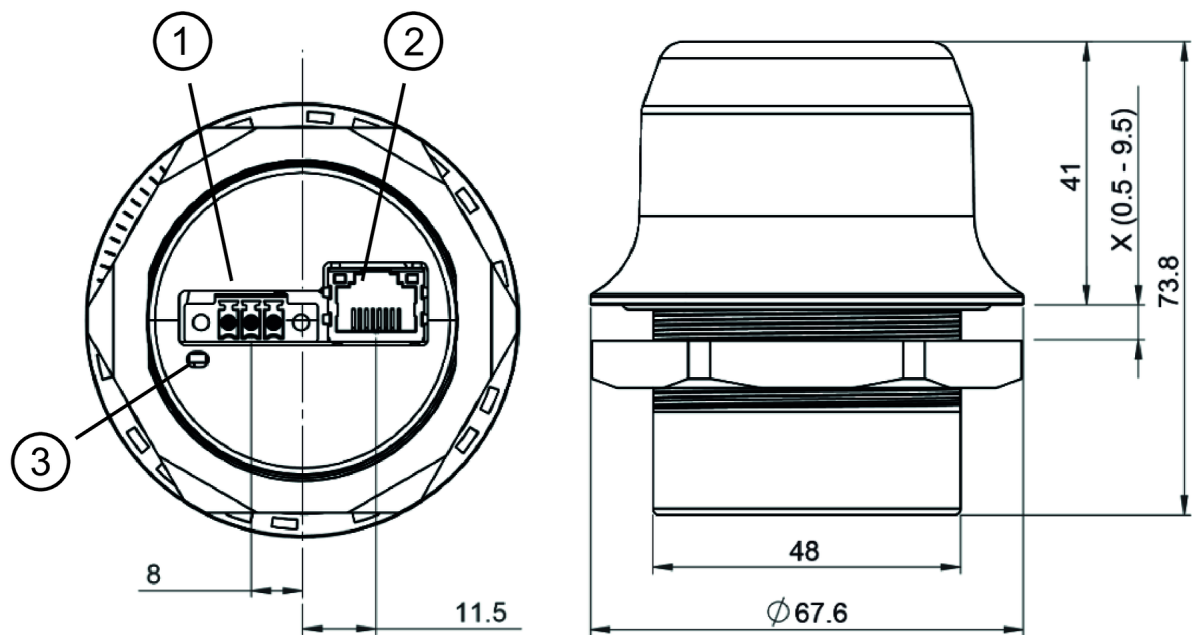

- 1 voltage supply
- 2 Ethernet
- 3 reset



Electrical data		
Operating voltage	[V]	19...36 DC
Current consumption	[mA]	54; (24 V)
Interfaces		
Communication interface	Ethernet; WLAN	
Ethernet		
Number of Ethernet interfaces	1	
Connector type	RJ45	
Protocol	TCP/IP; UDP; HTTP; LLDP; ARP; DHCP	
Factory settings	IP address: 192.168.0.99	
	subnet mask: 255.255.255.0	
	gateway IP address: 192.168.0.99	
Function	Power over Ethernet (PoE) - IEEE 802.3a DTE Type 1; Domain Name System (DNS)	
WLAN		
Factory settings	Client mode	

ZB0878



WIFI access point

WIRELESS BOLT

Operating conditions		
Ambient temperature	[°C]	-40...65
Note on ambient temperature		direct sunlight: < 45 °C
Storage temperature	[°C]	-40...85
Protection		IP 67
Protection rating terminals		IP 21
Tests / approvals		
Shock resistance	IEC 60068-2-6	
Vibration resistance	IEC 60068-2-27	
Damp heat	EN 60068-2-78	
Mechanical data		
Weight	[g]	195.5
Dimensions	[mm]	Ø 68 / L = 74
Materials		Housing: PBT / PC
Displays / operating elements		
Display	operation	1 LED
	status	1 LED
Operating elements	pushbutton	reset
Remarks		
Pack quantity		1 pcs.