


SAFFIER YACHTS

Standard specifications SE 28 Leopard

Length with bowsprit	9.20 meter
Length hull	8.40 meter
Beam	2.70 meter
Draft	1.30 / 1.70 meter
Height mast from waterline	12.80 meter
Total weight	2.200 kg
Ballast weight	775 / 750 kg
Mainsail	26 m ²
Selftacking jib	14 m ²
110% Jib	16 m ²
Code Zero	46 m ²
Gennaker	69 m ²

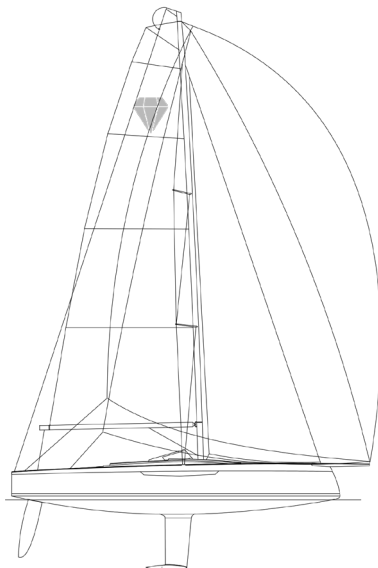

Hull

Vacuum iso fiberglass with 15 mm hard core foam. Fiberglass around the keel section reinforced with roving to 22 mm thickness. 4 ribs laminated in the keel section to transfer forces of keel loads. Water- and covelines laminated in gelcoat. Standard color: White, water- and coveline black.

Deck

The deck is built according to the sandwich principle with 15 mm hard core foam. Anti-slip structure is laminated into the deck and cockpit floor. The anchor well is incorporated in the foredeck. The rail for the self-tacking jib has been incorporated in front of the mast. The furling system of the self-tacking jib is placed underneath the deck, ensuring the foot of the jib runs smoothly over the deck. The deck is equipped with four foldable cleats to securely moor your Saffier.

Keel

- Solid lead keel with 4 x 22 mm bolts and nuts
- The keel is a NACA profile for maximum performance
- Standard draft is 1.70 m
- A shallow draft keel of 1.30 m*

Cockpit

The large cockpit of the Saffier SE 28 Leopard accommodates up to 8 people. All sheets, trimlines and control lines run under deck to the helmsman's position for easy sail handling when sailing alone. All ropes are stored in the rope lockers in the benches on each side, keeping sheets, halyards and control lines logical and organized.

The large sundeck provides a great lounge area. There is a spacious storage compartment underneath the sundeck for fenders, swimming ladder and a fridge. The seating height and high backrest ensure you sit comfortably on the Saffier SE 28 Leopard. A stowaway table can be installed to enjoy lunch or dinner in the cockpit.

Interior

There is a V-berth in the front. Dimensions: 2.20 m x 1.65 m (shoulder width). Two seats or berths with backrest in the saloon. Dimensions: 2.65 m x 0.70 m. Interior fitted with cushions on V-berth and berth/backrest in saloon. 1 light in saloon. Underneath all berths is sufficient storage space. A refrigerator* or a toilet* is optional.

Engine

The Saffier SE 28 Leopard is standard equipped with a Yanmar 2YM15 diesel engine or a Mitek Electric 7.5 kW – 48V motor with Lithium batteries 48V – 100Ah (4800W).

Rudder

The deep balanced spade rudder (Jefa), fitted in needle bearings with carbon tiller and tiller extension, delivers the right grip in the water and a sensitive feel while steering. Two pedestals* with double steering wheels can be installed for even more steering comfort. An autopilot* fitted under deck will help the boat for you while you are trimming the sheets or relaxing on board under sail or engine.

Hardware deck and cockpit

- Winches, travelers, organizers and blocks all by Selden
- 2x Selden E40REV self-tailing winches
- Traveler for mainsail
- Track for self-tacking jib
- 2x 5-rope cleats (Antal)
- 4x folding pad eyes on toerail to attach fenders
- 4 folding mooring cleats (2x optional midship cleats)
- Navigation lights

Rigging

The standard mast, spreaders and boom are made of aluminum by Selden.

Mast is equipped with:

- Halyards: main, jib, gennaker/code zero – all Dyneema with shackles
- Backstay Dyneema
- Through-deck furler for jib (Furlex 104TD)
- 2 spreaders
- All shrouds, fittings, shackles and turnbuckles made of high-quality 316 stainless steel
- Tri-colour navigation light and engine light standard mounted on the mast**
- Can be stepped and unstepped on deck by 2 to 3 experienced persons

Boom is equipped with:

- 2 reefing lines or single-line reefing* on both reefs
- Outhaul
- Boom strap or rod-kicker*

Optional: fully carbon mast from Selden* featuring:

- High gloss finish
- Extended top to accommodate fathead main, rail on mast and cars on sail
- ROD rigging
- Gibb turnbuckles

Instruments on mast

A mast bracket* for displays with speed*, depth*, wind speed* and angle* can be installed on the mast.

Technical equipment

All valves, skin fittings and venting valves are made of high-quality brass. All hoses and wires comply with ISO standards.

Sails

All sails are made by North Sails and can be either NPC Cross-Cut Dacron* or 3DI ENDURANCE EDGE*. Downwind sails* are made by North Sails in Norlon fabric.

Antifouling*

- 2 layers of black hard top antifouling approved by Dutch law

Accessories and safety

- Hand-held bilge pump, 4 fenders, 4 mooring lines
- 1 fire extinguisher
- 3 stainless steel folding pad eyes to clip on your lifeline in cockpit
- 1 owner's manual
- 1 emergency tiller* (only with steering wheel system)

CE Category

Category C

* Optional

** Service battery 12V/100Ah including battery charger is a mandatory option to use the navigation lights or any other electronics.

*** Time and distance on electric propulsion may vary depending on weather conditions, weed growth underneath the boat, or other unforeseen circumstances.

This brochure is not contractual. All descriptions, illustrations etc. are indicative. Saffier Yachts B.V. reserves the right to modify or improve specifications without prior notice.