

B.2.1 SPECIFICATIONS

Model Name				Indoor Unit	SEZ-M25DA(L)2	SEZ-M35DA(L)2	SEZ-M50DA(L)2	SEZ-M60DA(L)2	SEZ-M71DA(L)2
				Outdoor Unit	SUZ-M25VA	SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA
Refrigerant					R32				
Power Supply				Source	Outdoor power supply				
	Out			V	230	230	230	230	230
				Phase	Single	Single	Single	Single	Single
				Hz	50	50	50	50	50
	In			V	—	—	—	—	—
				Phase	—	—	—	—	—
				Hz	—	—	—	—	—
Cooling	Capacity	Rated	kW		2.5	3.5	5.0	6.1	7.1
		Min.	kW		1.4	0.7	1.1	1.6	2.2
		Max.	kW		3.2	3.9	5.6	6.3	8.1
	SHF	Rated			0.82	0.78	0.76	0.75	0.74
	Total Input	Rated	kW		0.714	1.000	1.547	1.848	2.151
	EER				3.50	3.50	3.23	3.30	3.30
	Annual Electricity Consumption		kWh/a		146	202	290	385	451
	SEER				6.0	6.0	6.0	5.5	5.5
		Energy efficiency class			A+	A+	A+	A	A
Heating	Capacity	Rated	kW		2.9	4.2	6.0	7.4	8.0
		Min.	kW		1.3	1.1	1.5	1.6	2.0
		Max.	kW		4.2	5.0	7.2	8.0	10.2
	Total Input	Rated	kW		0.803	1.076	1.617	2.049	2.285
	COP				3.61	3.90	3.71	3.61	3.50
	Annual Electricity Consumption		kWh/a		769	878	1501	1516	2030
	SCOP				4.0	4.1	4.0	4.2	3.9
		Energy efficiency class			A+	A+	A+	A+	A
Operating Current(max)				A	7.4	9.2	14.3	15.7	15.8
Indoor Unit	Input	Cooling/Heating	Rated	kW	0.043	0.047	0.077	0.084	0.102
	Operating Current(max)			A	0.62	0.65	0.82	0.88	1.00
	Dimensions	H × W × D	mm		200 - 790 - 700	200 - 990 - 700	200 - 990 - 700	200 - 1190 - 700	200 - 1190 - 700
	Weight		kg		18	22	22	25.5	25.5
	Air Volume	Lo-Mid-Hi	m³/min.		5.5 - 7 - 9	7 - 9 - 11	10 - 12.5 - 15	12 - 15 - 18	12 - 16 - 20
	External Static Pressure		Pa		<5> - 25 - <35> - <50>				
	Sound Level (SPL)	Lo-Mid-Hi	dB(A)		23 - 26 - 30	23 - 27 - 31	30 - 34 - 37	30 - 34 - 38	30 - 35 - 40
	Sound Level (PWL)	Cooling			50	51	57	58	60
	Outdoor Unit	Dimensions	H × W × D	mm	550-800-285	550-800-285	714-800-285	880-840-330	880-840-330
		Weight		kg	30	35	41	54	55
		Air Volume	Cooling	Rated	m³/min.	36.3	34.3	45.8	50.1
		Heating	Rated	m³/min.	34.6	32.7	43.7	50.1	50.1
Ext. Piping	Sound Level (SPL)	Cooling	Rated	dB(A)	45	48	48	49	49
		Silent		dB(A)	—	—	—	—	—
	Heating	Rated	dB(A)		46	48	49	51	51
	Sound Level (PWL)	Cooling		dB(A)	59	59	64	65	66
	Operating Current(max)		A		6.8	8.5	13.5	14.8	14.8
	Breaker Size		A		10	10	20	20	20
	Diameter (*2)	Liquid	mm		6.35	6.35	6.35	6.35	9.52
		Gas	mm		9.52	9.52	12.7	15.88	15.88
	Max. Length	Out-In	m		20	20	30	30	30
Guranteed Operation Range	Max. Height	Out-In	m		12	12	30	30	30
	Out	Cooling (*1)	Lower Limit.	°C	-10	-10	-15	-15	-15
			Upper Limit.	°C	+46	+46	+46	+46	+46
	Heating	Lower Limit.	°C		-10	-10	-10	-10	-10
		Upper Limit.	°C		+24	+24	+24	+24	+24

(*1)Optional air protection guide is required where ambient temperature is lower than -5°C .

(*2)Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.


B.2.2 OUTLINES AND DIMENSIONS

B.2.2.1 INDOOR UNIT

SEZ-M25DA2
SEZ-M25DAL2
SEZ-M35DA2
SEZ-M35DAL2
SEZ-M50DA2
SEZ-M50DAL2

SEZ-M60DA2
SEZ-M60DAL2
SEZ-M71DA2
SEZ-M71DAL2

Unit : mm

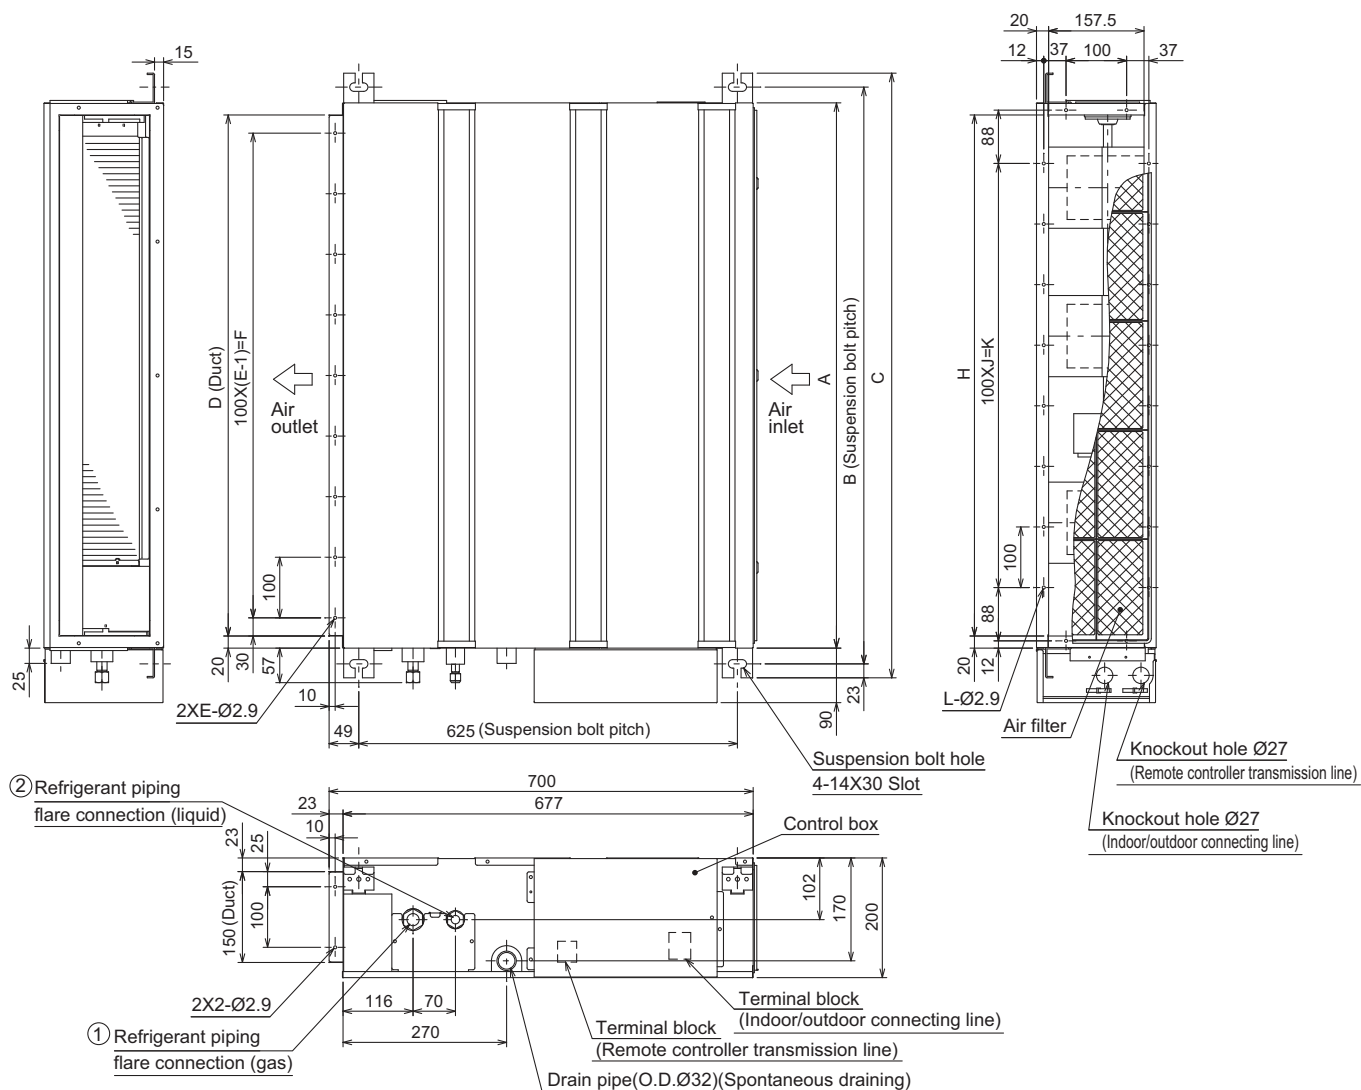

Model	A	B	C	D	E	F	G	H	J	K	L	① Gas pipe	② Liquid pipe
SEZ-M25DA(L)2	700	752	798	660	7	600	800	660	5	500	16	Ø9.52	Ø6.35
SEZ-M35DA(L)2	900	952	998	860	9	800	1000	860	7	700	20	Ø12.7	
SEZ-M50DA(L)2	1100	1152	1198	1060	11	1000	1200	1060	9	900	24	Ø15.88	
SEZ-M60DA(L)2													Ø6.35
SEZ-M71DA(L)2													Ø9.52

- Note1. Use M10 screw for the suspension bolt (field supply).
 2. Keep the service space for the maintenance at the bottom.
 3. This chart indicates for SEZ-M35, 50DA(L)2 models, which have 3 fans.
 SEZ-M25DA(L)2 models have 2 fans.
 SEZ-M60, 71DA(L)2 models have 4 fans.
 4. In case an inlet duct is used, remove the air filter (supply with the unit), then install the filter (field supply) at suction side.