





Screw Terminal:



Pin Header:





Pin Header:

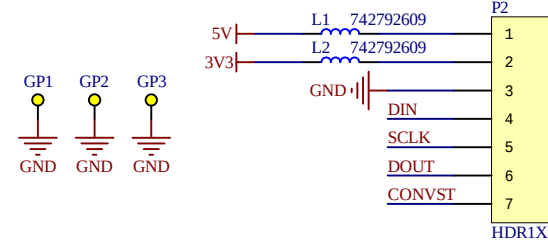


$G=0.1$ Diff Amp

$$V_{OUT} = 0.1 * (V_{IN+} - V_{IN-}) + 2.048V$$

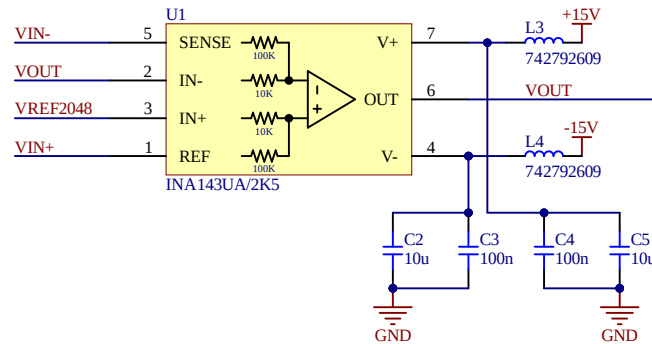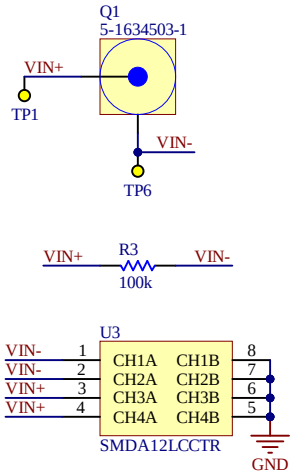

16-bit Diff ADC

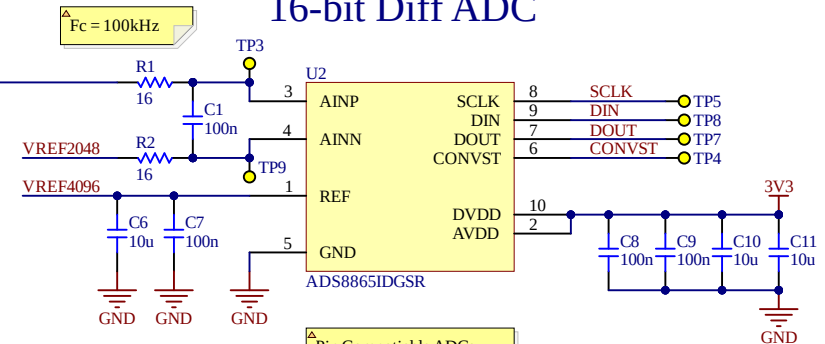


Pin Compatible ADCs

- 100 kSPS: ADS8867
- > 400 kSPS: ADS8865
- 680 kSPS: ADS8863
- 1000 kSPS: ADS8861




2.048V REF

25mA max

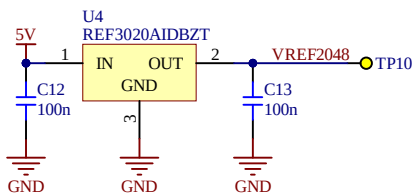

4.096V REF

25mA max

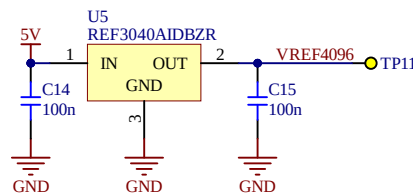

Title: Low Voltage Card - SensorCard		Severson Group WEMPEC UW-Madison	
File: AnalogSensorBoard.SchDoc	Sheet: 1 of 1		
Revision: A	Time: 1:46:38 PM	Date: 5/20/2025	Engineer: Nathan Petersen