

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.

"Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

H8S, H8/300 Series High-Performance Embedded Workshop 3

Tutorial

Renesas Microcomputer Development Environment System

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.
Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors.
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.

Preface

This tutorial will introduce you to the basic usage of the High-Performance Embedded Workshop 3 (hereafter referred to as *HEW*). The tutorial describes a series of usage such as how to invoke the HEW, how to create and modify a project, how to build a program, and how to invoke a simulator/debugger from the HEW. For details on the HEW, the C/C++ compiler, assembler, optimizing linkage editor, and simulator/debugger, refer to the following manuals.

- H8S, H8/300 Series High-Performance Embedded Workshop 3 User's Manual
- H8S, H8/300 Series C/C++ Compiler, Cross Assembler, or Optimizing Linkage Editor User's Manual

For details on the H8S, H8/300 Series CPU, refer to a programming manual or a hardware manual of the corresponding CPU.

Microsoft®, Windows®, Windows® 98, Windows Me®, Windows NT®, Windows 2000® and Windows® XP are registered trademarks of Microsoft Corporation in the United States and/or in other countries.

All other brand or product names used in this manual are trademarks or registered trademarks of their respective companies or organizations.

This tutorial is written assuming that all the tools included in H8S, H8/300 Series C/C++ compiler Package are installed.

If “->” is written inside [and], the left hand side of “->” means the menu title and the right hand side of “->” means a menu option of the menu. For example, in figure 1, the menu option [Exit] in the [File] menu is described as [File->Exit].

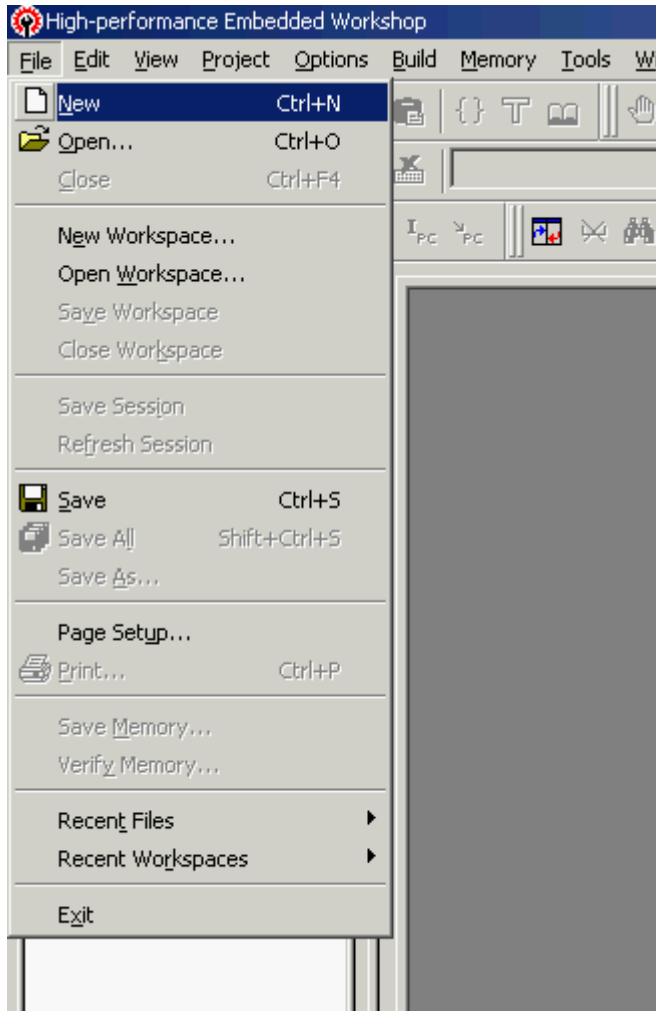


Figure 1 A Menu of the HEW

Contents

| | | |
|-----------|---|----|
| Section 1 | Invoking the HEW | 5 |
| Section 2 | Creating a Project..... | 7 |
| 2.1 | Creating a New Workspace..... | 7 |
| 2.2 | Selecting the Target CPU | 8 |
| 2.3 | Option Setting | 10 |
| 2.4 | Setting the Contents of Files to be Generated | 11 |
| 2.5 | Setting the Standard Library | 13 |
| 2.6 | Setting the Stack Area..... | 14 |
| 2.7 | Setting the Vector..... | 15 |
| 2.8 | Setting the Target System for Debugging | 16 |
| 2.9 | Setting the Debugger Options | 17 |
| 2.10 | Changing the File Names to be Created..... | 18 |
| 2.11 | Confirming Settings (Summary Dialog Box)..... | 19 |
| Section 3 | Modifying the Project | 23 |
| 3.1 | Editing and Creating a Source Program File..... | 23 |
| 3.2 | Adding/Removing a File To/From a Project..... | 25 |
| 3.3 | File Groups Used in a Project | 28 |
| 3.4 | Customizing the Workspace Window | 30 |
| Section 4 | Building a Project | 33 |
| 4.1 | Build Overview | 33 |
| 4.2 | Setting Options..... | 33 |
| 4.3 | Customizing the Configuration | 35 |
| 4.4 | Excluding a Project File from Build | 36 |
| 4.5 | Correcting Errors in a Build..... | 37 |
| 4.6 | Customizing the Session | 38 |
| Section 5 | Debugging..... | 39 |
| 5.1 | Preparation | 39 |
| 5.1.1 | Sample Program..... | 39 |
| 5.1.2 | Creating the Sample Program | 39 |
| 5.2 | Settings for Debugging | 40 |
| 5.2.1 | Allocating the Memory Resource | 40 |
| 5.2.2 | Downloading the Sample Program | 41 |
| 5.2.3 | Displaying the Source Program | 42 |
| 5.2.4 | Setting a PC Breakpoint..... | 43 |
| 5.2.5 | Setting the Profiler | 44 |

| | | |
|-----------|--|----|
| 5.2.6 | Setting the Simulated I/O | 45 |
| 5.2.7 | Setting the Trace Information Acquisition Conditions | 46 |
| 5.2.8 | Setting the Stack Pointer and Program Counter | 46 |
| 5.3 | Start Debugging | 47 |
| 5.3.1 | Executing a Program | 47 |
| 5.3.2 | Using the Trace Buffer | 49 |
| 5.3.3 | Performing Trace Search | 50 |
| 5.3.4 | Checking Simulated I/O | 51 |
| 5.3.5 | Checking the Breakpoints | 51 |
| 5.3.6 | Watching Variables | 52 |
| 5.3.7 | Executing the Program in Single Steps | 53 |
| 5.3.8 | Checking Profile Information | 57 |
| Section 6 | Exiting from the HEW | 61 |

Section 1 Invoking the HEW

After the installation of the HEW, the installer creates a folder whose name is [Renesas High-Performance Embedded Workshop] in the [Program] folder of the [Start] menu of the Windows®. In the [Renesas High-Performance Embedded Workshop] folder, short cuts of the HEW support files will be registered.

If you click [High-Performance Embedded Workshop 3] from the menu, the HEW will be invoked and the [Welcome!] dialog box (figure 1.1) will be displayed. You can open the project promptly without the [Welcome!] dialog box if you change the setting via [Tools->Options]. For details of this setting, refer to chapter 6, “Customizing the Environment”, of the High-Performance Embedded Workshop 3 User’s Manual.

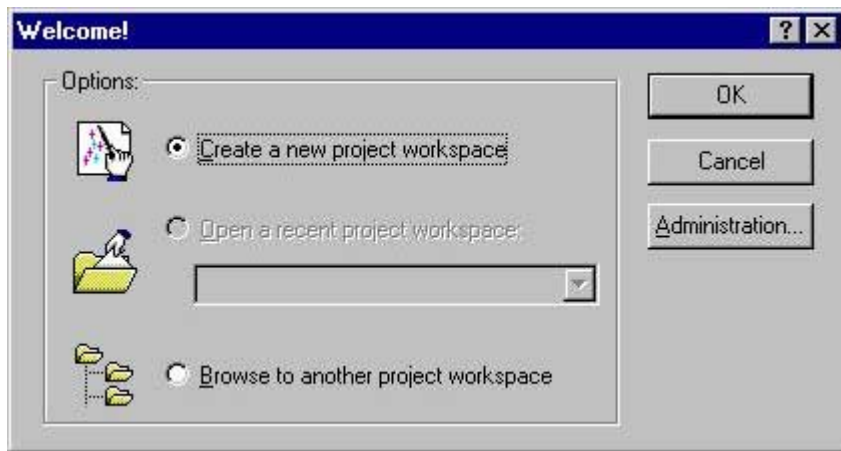


Figure 1.1 Welcome! Dialog Box

If you use the HEW for the first time or if you want to work on a new project, select the [Create a new project workspace] radio button and click [OK]. If you want to work on an existing project, select the [Open a recent project workspace] or [Browse to another project workspace] radio button and click [OK].

In this tutorial, select the [Create a new project workspace] radio button and click [OK].

Section 2 Creating a Project

2.1 Creating a New Workspace

When you have selected the [Create a new project workspace] radio button and clicked [OK] on the [Welcome!] dialog box, the [New Project Workspace] dialog box (figure 2.1), which is used to create a new workspace and project, will be launched. You will specify a workspace name (When a new workspace is created, the project name is the same as the default), a CPU family, a project type, and so on, on this dialog box.

Enter “tutorial”, for example, in the [Workspace Name] field, then the [Project Name] field will show “tutorial” and the [Directory] field will show “C:\Hew3\tutorial”. If you want to change the project name, enter a new project name manually in the [Project Name] field. If you want to change the directory used for the new workspace, click the [Browse...] button and specify a directory, or enter a directory path manually in the [Directory] field.

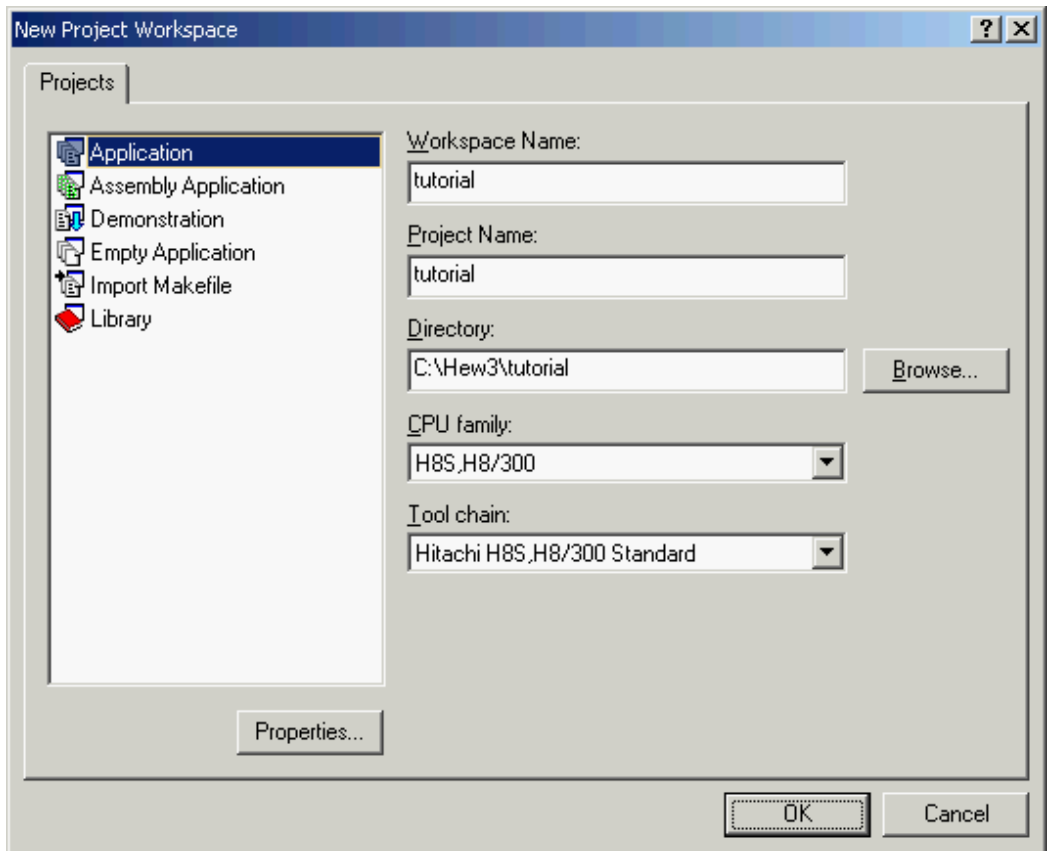


Figure 2.1 New Project Workspace Dialog Box

Table 2.1 **Items of [Project type:]**

| Items of [Project type:] | Description |
|---------------------------------|---|
| Application | This project is used to create a program that includes the initial routine files written in C/C++ or assembly language. |
| Assembly Application | This project is used to create a program that includes the initial routine files written in assembly language. |
| Demonstration | This project is used to create the program for demonstration written in C/C++ or assembly language. |
| Empty Application | This project is used to set up the toolchain (no file is to be generated). |
| Library | This project is used to create a library file (no file is to be generated). |

2.2 Selecting the Target CPU

When you click [OK] on the [New Project Workspace] dialog box, the project generator will be invoked. Start by selecting the CPU that you will be using. CPU types shown in the [CPU Type:] list are classified into the CPU series shown in the [CPU Series:] list.

The selected items in the [CPU Series:] list box and the [CPU Type:] list box specify the files to be generated. Select the CPU type of the program to be developed. If the CPU type which you want to select is not displayed in the [CPU Type:] list, select a CPU type with similar hardware specifications or select [Other].

Clicking [Next>] moves to the next display. Clicking [<Back] moves to the previous display or the previous dialog box. Clicking [Finish] opens the [Summary] dialog box. Clicking [Cancel] returns the display to the [New Project Workspace] dialog box. [<Back], [Next>], [Finish], and [Cancel] are common buttons of all the wizard dialog boxes.

In this tutorial, select [2600] in the [CPU Series:] list and select [2655] in the [CPU Type:] list (figure 2.2). Then click [Next >].

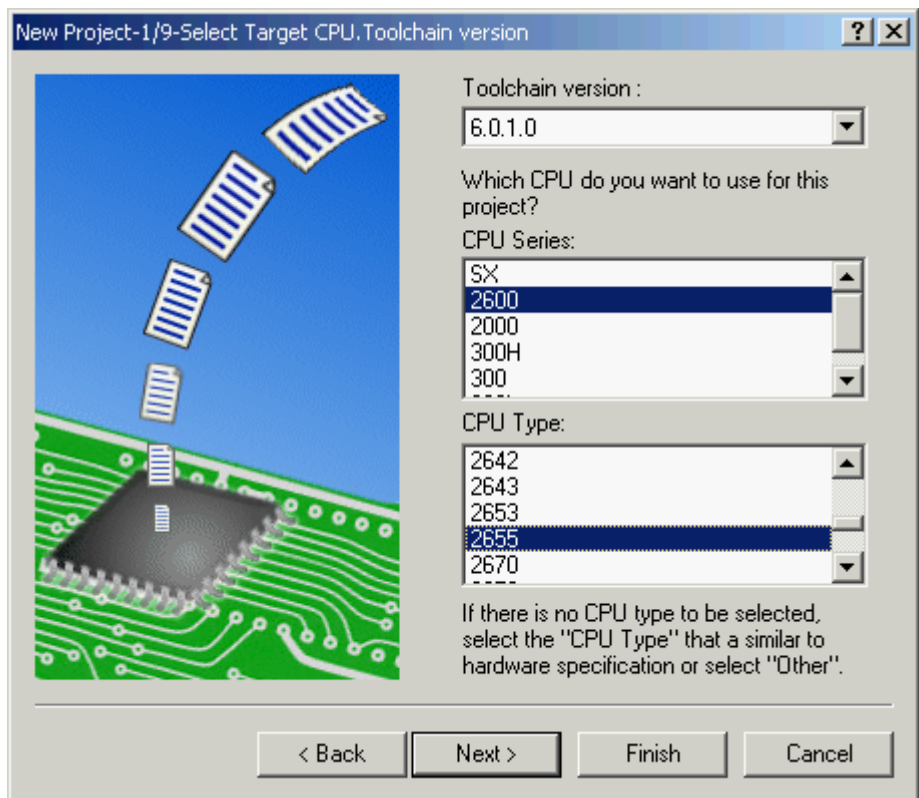


Figure 2.2 Selecting the Target CPU (Step 1)

2.3 Option Setting

Clicking the [Next>] button on the Step-1 screen opens the dialog box shown in figure 2.3.

On this screen, you can specify options common to all project files.

Settings for these options can be modified in correspondence with the CPU series selected in step 1 screen. To change the option settings after a project has been created, select the CPU page from the [Options -> H8S, H8/300 Standard Toolchain] menu item of the HEW window.

Click the [Next>] button without changing the setting. The Step-3 screen will be displayed.

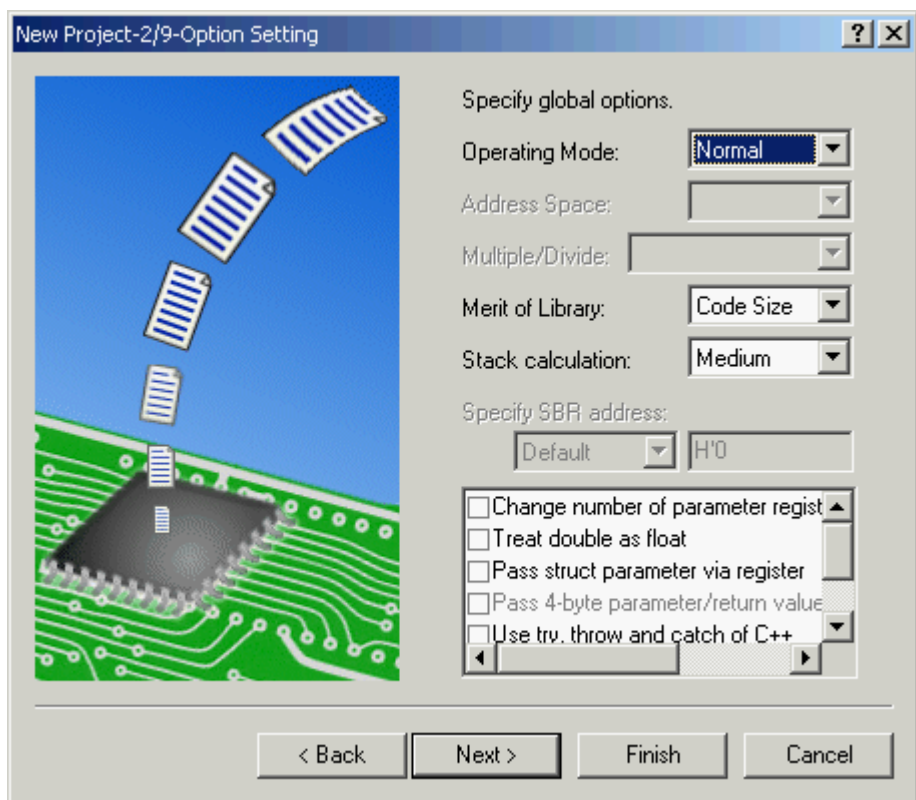


Figure 2.3 Option Setting (Step 2)

2.4 Setting the Contents of Files to be Generated

Click the [Next>] button on the Step-2 screen to display the screen shown in figure 2.4.

On this screen, specify information that is necessary to generate files.

If [Use I/O Library] is checked, the standard I/O library can be used. Specify the number of I/O streams to be used simultaneously in the [Number of I/O Streams] box.

If [Use Heap Memory] is checked, the function `sbrk()` for heap area management will be generated. Specify the number of bytes of the heap area in the [Heap Size:] edit box.

Select whether or not to generate a sample code for the main function from the [Generate main() Function] drop-down list.

If [I/O Register Definition Files] is checked, an I/O register definition file, which is written in C language, can be created. Then select whether or not to generate a sample code for the program that makes initial settings of the I/O registers from the [Generate Hardware Setup Function] drop-down list.

In this tutorial, check [Use I/O Library] and click [Next >].

NOTE

If you want to use an existing main function, uncheck [Generate main() Function], add the file of the function after generating the project. If the name of the function differs from main, change the caller of the function in `resetprg.c`. For the contents of such sample files as a vector table definition file or I/O register definition file that will be generated by the project generator, check the description in the hardware manual for the target CPU.

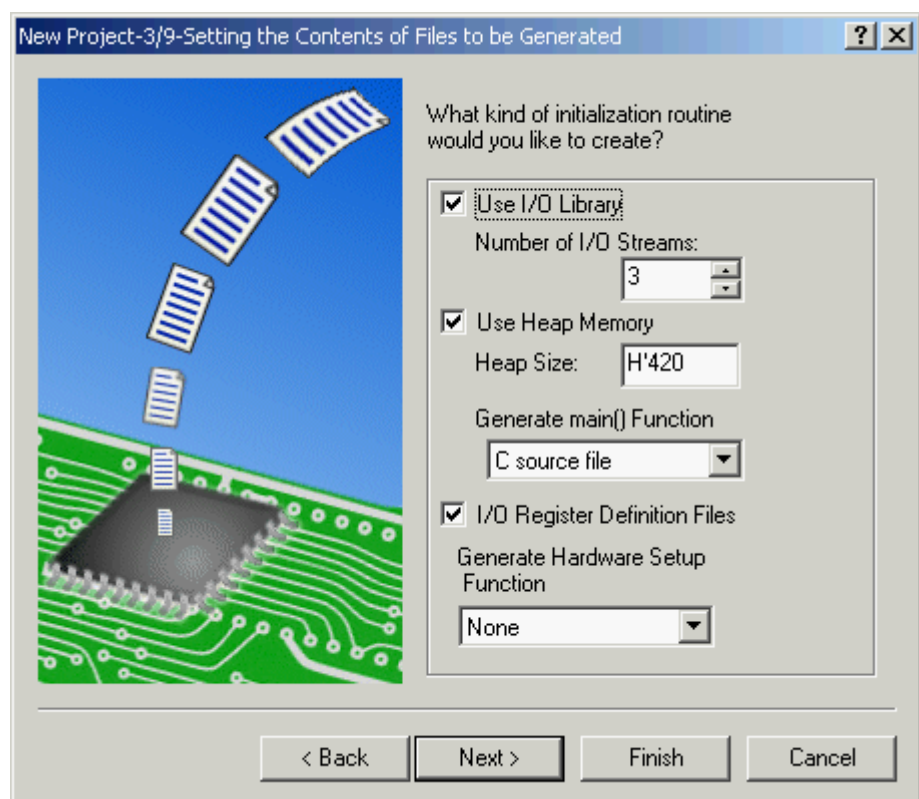


Figure 2.4 Setting the Contents of Files to be Generated (Step 3)

2.5 Setting the Standard Library

The screen shown in figure 2.5 is displayed when the [Next>] button is clicked in the Step-3 screen. This screen is used to set details of compilation by the C/C++ compiler. To change the standard library configuration after a project has been created, select the CPU page in [Options - > H8S, H8/300 Standard Toolchain] of the HEW. In this tutorial, click the [Next>] button without changing the settings.

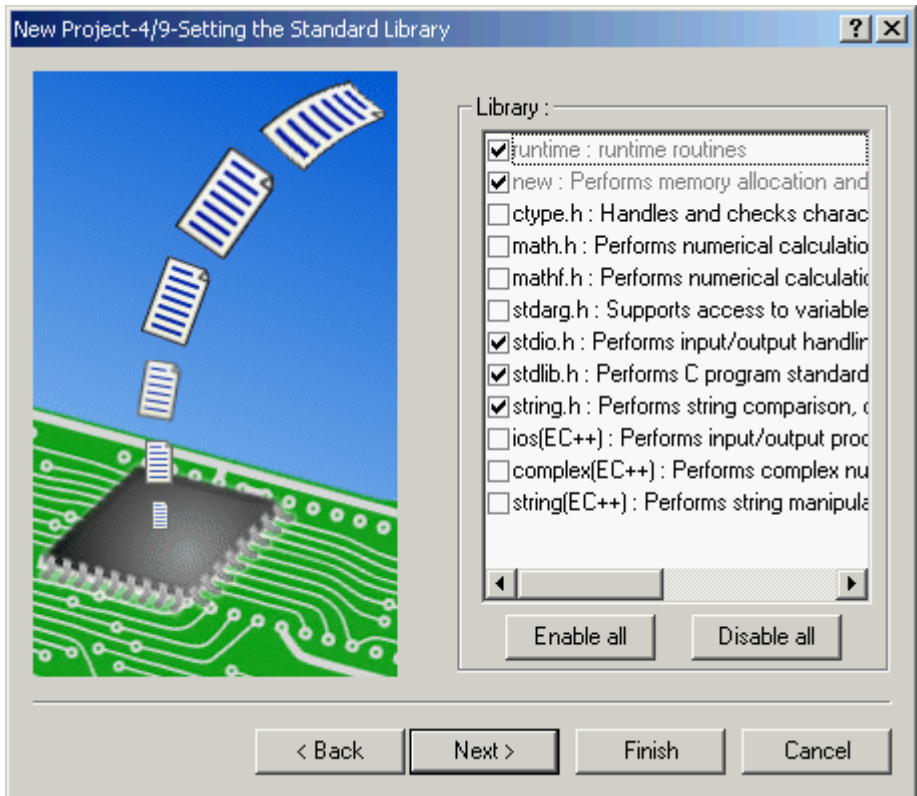


Figure 2.5 Setting the Standard Library (Step 4)

2.6 Setting the Stack Area

The screen shown in figure 2.6 is displayed when the [Next>] button is clicked in the Step-4 screen.

This screen is used to specify the stack area.

The initial value of the stack area differs depending on [CPU Type:] selected in the Step-1 screen. To change the stack size after a project has been created, select the [Project -> Edit Project Configuration] menu item of the HEW window. In this tutorial, since 2655 has been selected for [CPU Type:] in the Step-1 screen, [Stack Pointer Address:] is set to H'FBF0 and [Stack Size:] is set to H'200. In this tutorial, click the [Next>] button without changing the settings.

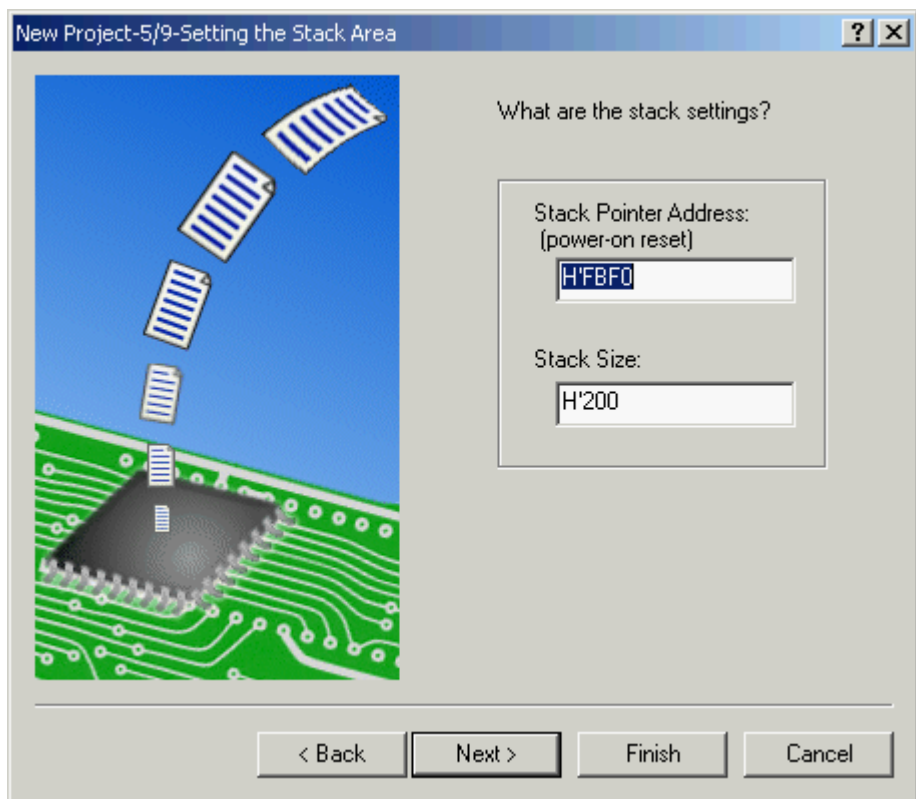


Figure 2.6 Setting the Stack Area (Step 5)

The stack area is defined in `stacksct.h` that is generated by the HEW. If `stacksct.h` has been edited in an editor, its modification after you have selected the [Project -> Edit Project Configuration] menu item of the HEW will not be available.

2.7 Setting the Vector

Clicking the [Next>] button in the Step-5 screen displays the screen shown in figure 2.7.

In this screen, a vector is specified.

If [Vector Table Definition Files] is checked, the HEW creates a vector table definition file.

The [Handler] column of [Vector Handlers:] displays the handler program name, and the [Vector] column displays the vector description. To change the handler program, click the name of the handler program to be changed, and enter a new name.

If the handler name in the [Vector Handlers:] list is changed, the HEW does not create the reset program (resetprg.c).

In this tutorial, click the [Next>] button without changing the settings.

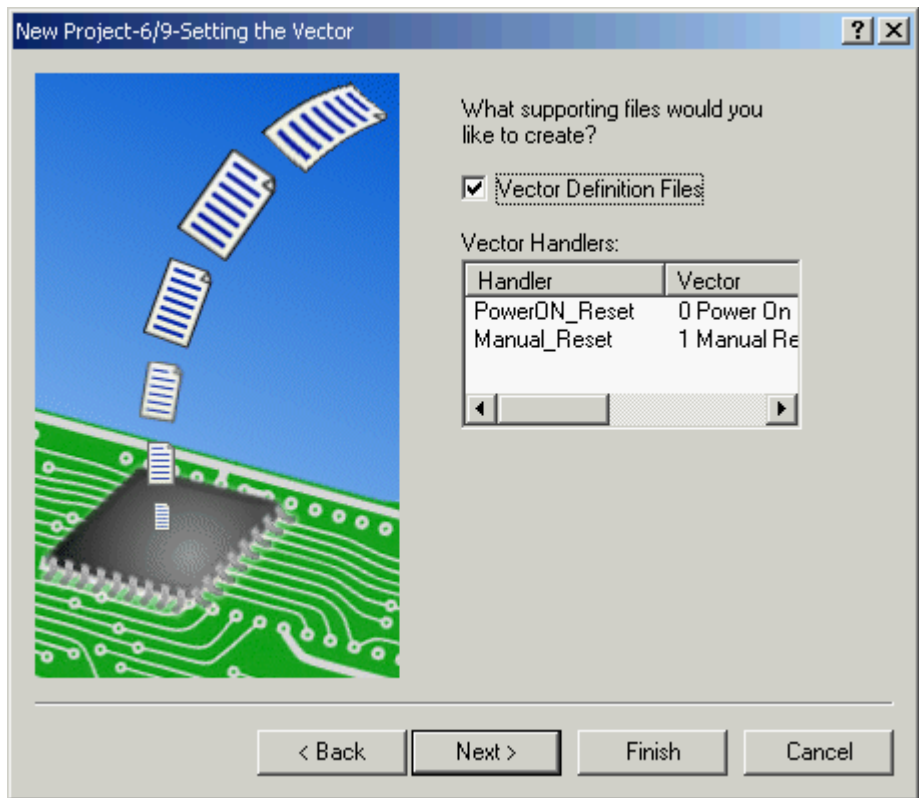


Figure 2.7 Setting the Vector (Step 6)

2.8 Setting the Target System for Debugging

When the [Next>] button is clicked in the Step-6 screen, the screen shown in figure 2.8 is displayed. This screen is used to specify the target system for debugging. Select (check) the target for debugging from the list under [Targets:]. Selection of no target or of multiple targets is allowed.

In this tutorial, select [H8S/2600N Simulator] and then click the [Next>] button.

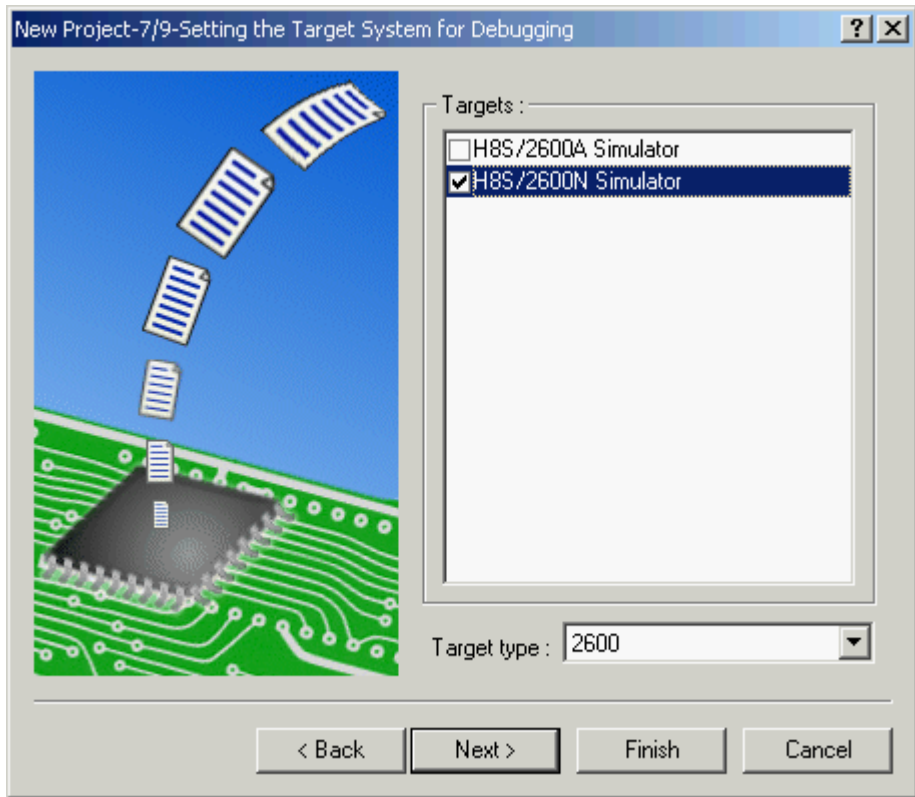


Figure 2.8 Setting the Target System for Debugging (Step 7)

If you change [Target type:], you can specify the other target system for debugging.

2.9 Setting the Debugger Options

When the [Next>] button is clicked in the Step-7 screen, the screen shown in figure 2.9 is displayed. This screen is used to specify the optional settings for the selected target for debugging.

By default, the HEW creates two configurations, [Release] and [Debug]. When a target for debugging is selected, the HEW creates another configuration (The name of the target is included). The name of the configuration can be modified in [Configuration name:]. Options to do with the target for debugging are displayed under [Detail options:]. To change the settings, select [Item] and then click [Modify]. When items for which modification is not possible are selected, [Modify] remains grayed even if [Item] is selected.

In this tutorial, click the [Next>] button without changing the settings.

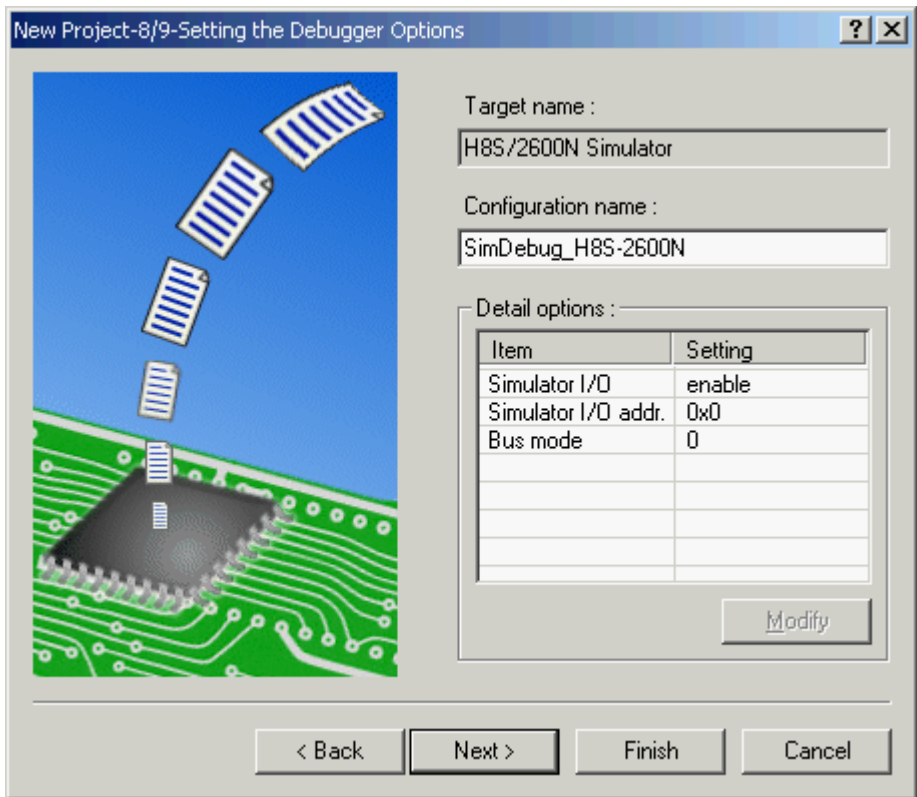


Figure 2.9 Setting the Debugger Options (Step 8)

2.10 Changing the File Names to be Created

When the [Next>] button is clicked in the Step-8 screen, the screen shown in figure 2.10 is displayed.

The screen displays a list of files created by HEW according to the previous settings. The [File Name] column in the list shows a file name, [Extension] shows an extension, and [Description] shows the description of a file. The file name can be changed. To change a file name, select it by clicking it and change it to a new file name.

In this tutorial, click the [Finish] button without changing the settings. When the button is clicked, the [Summary] dialog box will be displayed.

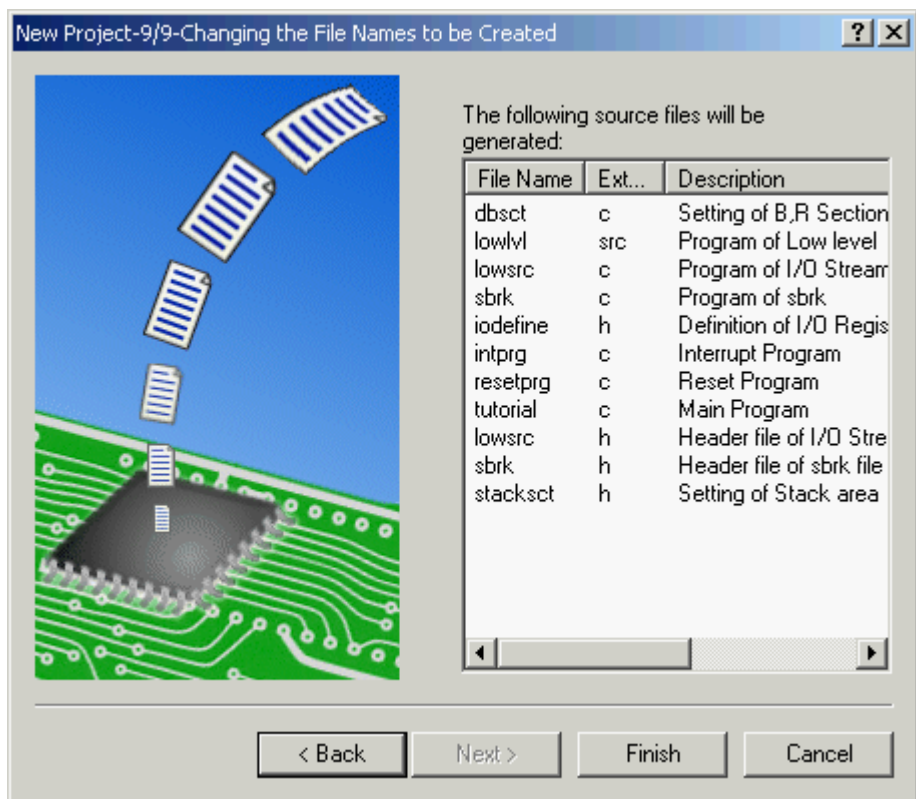


Figure 2.10 Changing the File Names to be Created (Step 9)

NOTE

A file with an extension “h” or “inc” (shown in the [Extension] column) is an include file. If you change the file name of an include file, the file name at the include directive have to be modified.

2.11 Confirming Settings (Summary Dialog Box)

The project generator shows a list of generated files on the [Summary] dialog box (figure 2.11). Confirm the contents of the dialog box and click [OK].

When [Generate Readme.txt as a summary file in the project directory] checkbox is checked, the project information displayed on the [Summary] dialog box will be stored in the project directory under the text file name "Readme.txt".

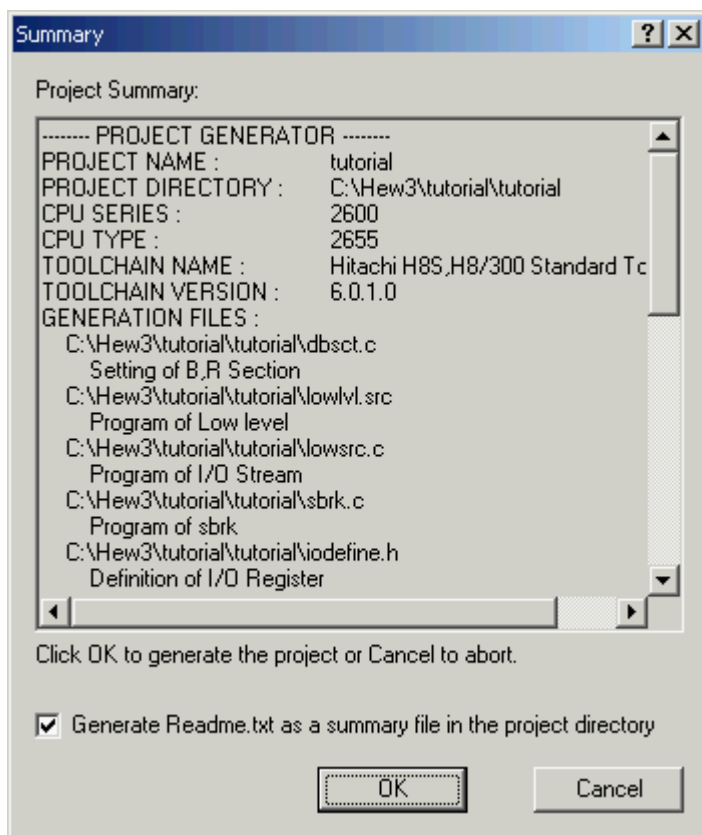


Figure 2.11 Summary Dialog Box

Then the HEW will open a project generated by the project generator.

By default, the HEW has:

The [Workspace] window (on the left hand side of the HEW), which shows the contents of the project, the [Output] window (on the lower side of the HEW), which shows outputs from a build or a string search, and the editor window (on the right hand side of the window), which is used to

edit text files. Refer to the High-Performance Embedded Workshop 3 User's Manual for how to change the state of the HEW and how to use each window such as the editor window.

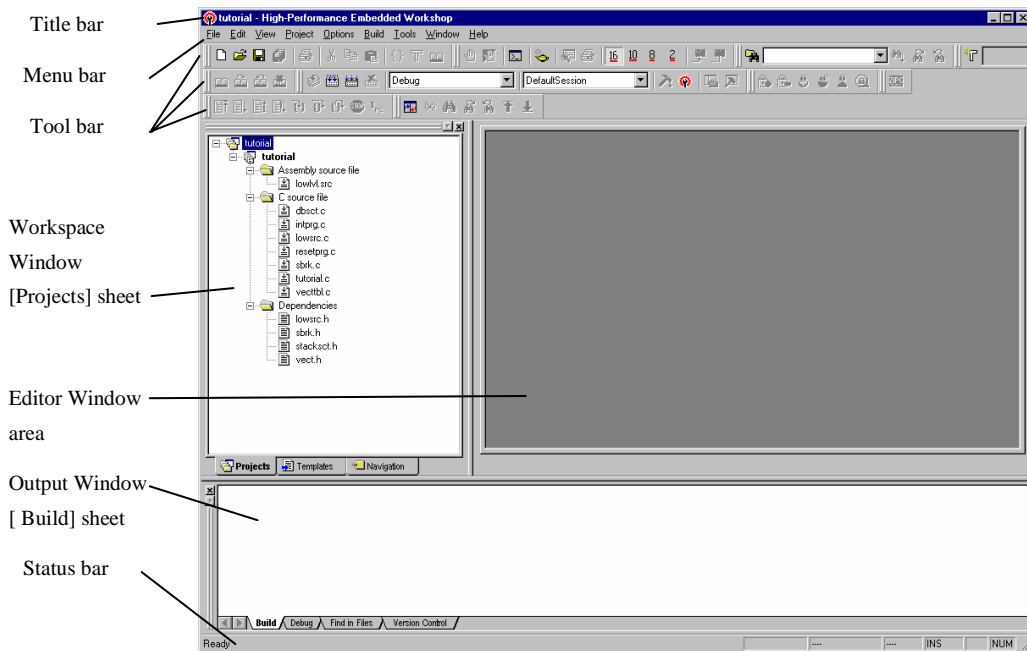


Figure 2.12 Sub-windows of the HEW

The project generated by the project generator includes minimum options for the C/C++ compiler, the assembler, the inter-module optimizer and the object converter. Thus you can build the project (figure 2.13) by selecting [Build->Build]. Selecting the button (shown below) on the toolbar works in the same way as selecting [Build->Build].



Those minimum options are set by default for each tool. When you add a new file to the project, the minimum options will automatically be added to the file. You do not have to specify options other than those that are specific to each such file.

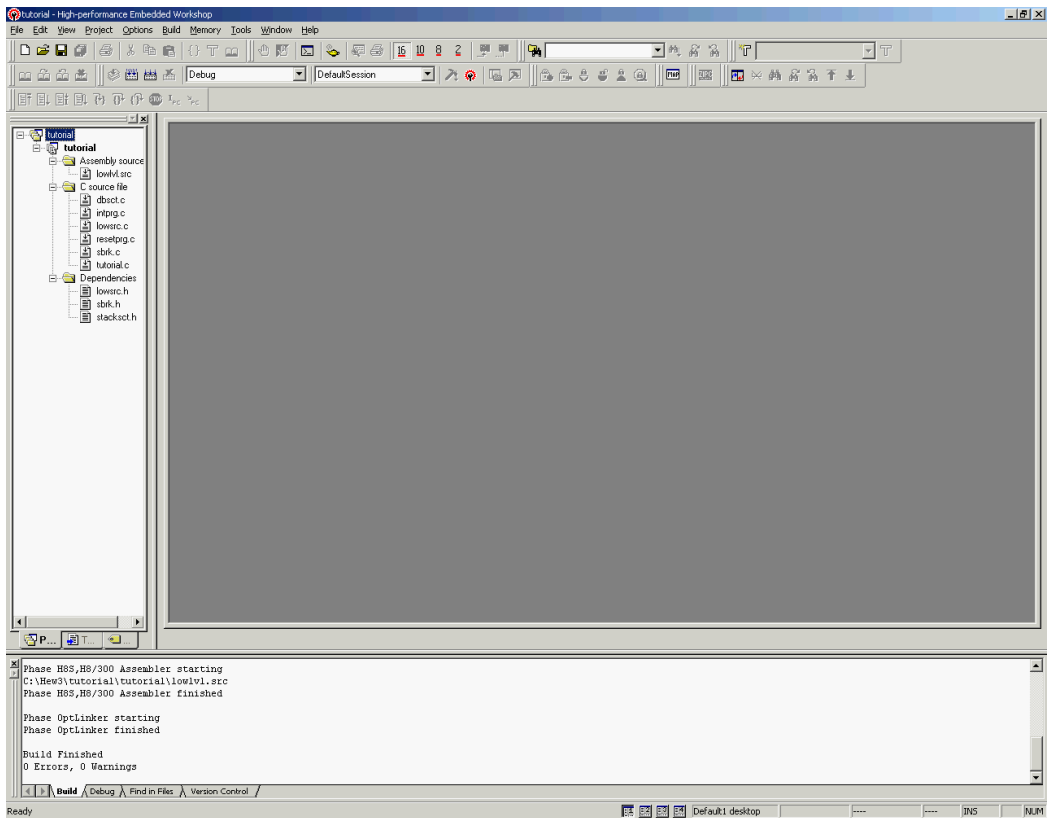


Figure 2.13 The HEW after Building a Project

Section 3 Modifying the Project

When you create a project using the project generator, basic program such as reset routine and initialization of RAM area will already be given in the project. This tutorial describes how to modify a file and how to add a file to the project.

3.1 Editing and Creating a Source Program File

To open and edit a file in the project, double click the file in the [Projects] sheet of the [Workspace] window. In this tutorial, double click “tutorial.c”. (figure 3.1)

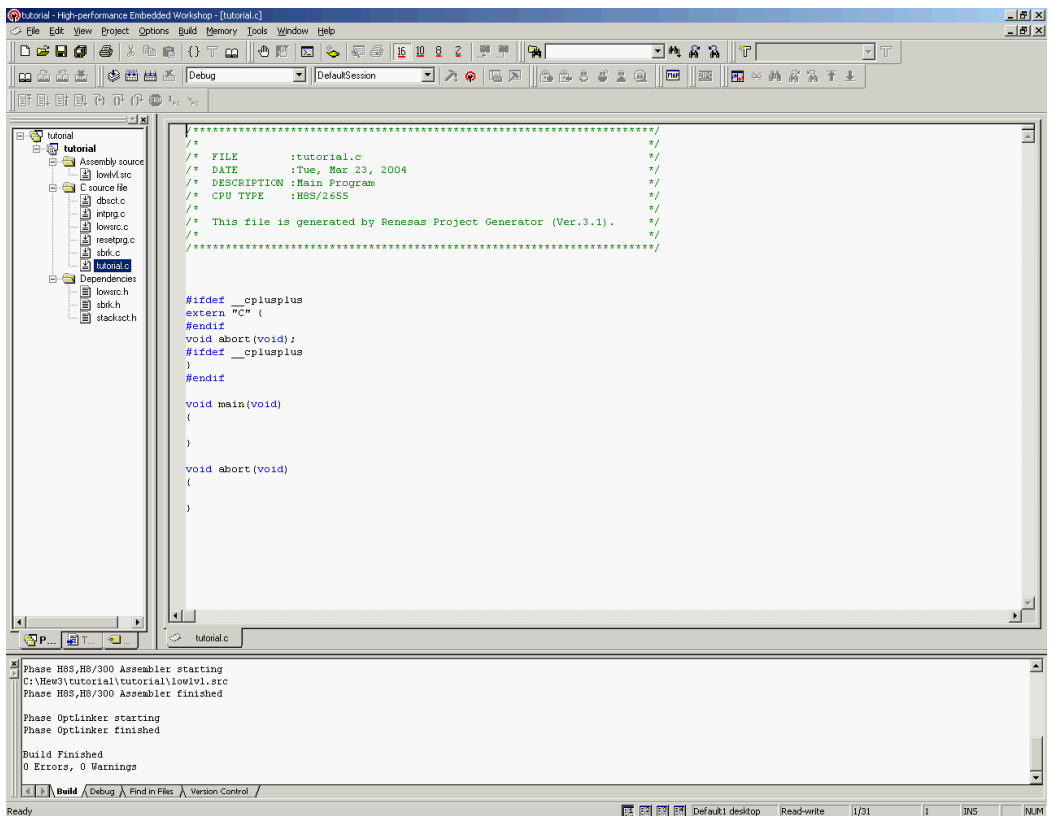


Figure 3.1 Opening a Project File

Then you can edit the file opened. If you edit the file, an asterisk (*) will be added to the file path shown on the title bar of the HEW (figure 3.2). If you save the file, the asterisk will disappear.

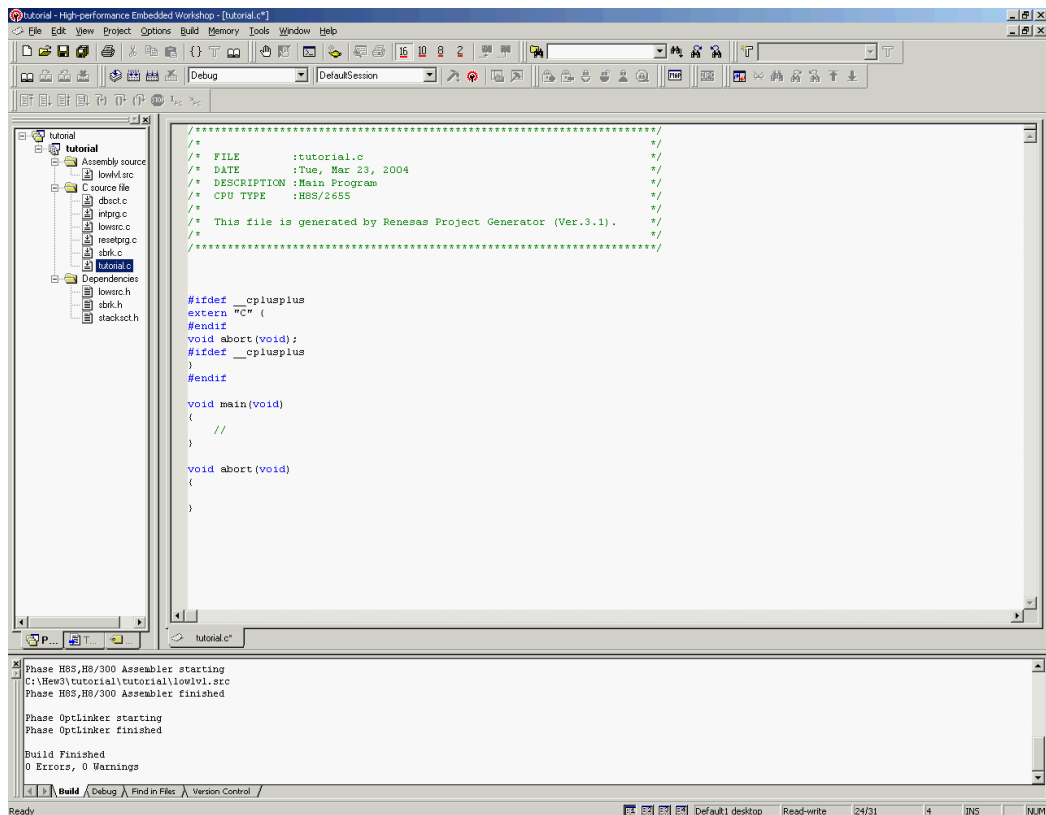


Figure 3.2 Editing a Project File

If you want to open an existing text file with the editor of the HEW, select [File->Open]. If you want to edit a new text file with the editor, select [File->New]. In this tutorial, select [File->New], input the three lines shown below, select [File->Save As...] and save the file as "newprog.c".

```

void NewProgram(void)
{
}

```

3.2 Adding/Removing a File To/From a Project

This section describes how to add a file to a project and how to delete a file from a project. In this tutorial, add the file, “newprog.c” created in the previous section to the project as follows. Select [Project->Add Files...], then the [Add File(s)] dialog box (figure 3.3) will be launched. Select a file, “newprog.c” in this example, to be added and click the [Add] button. Thus “newprog.c” will be added to the project.

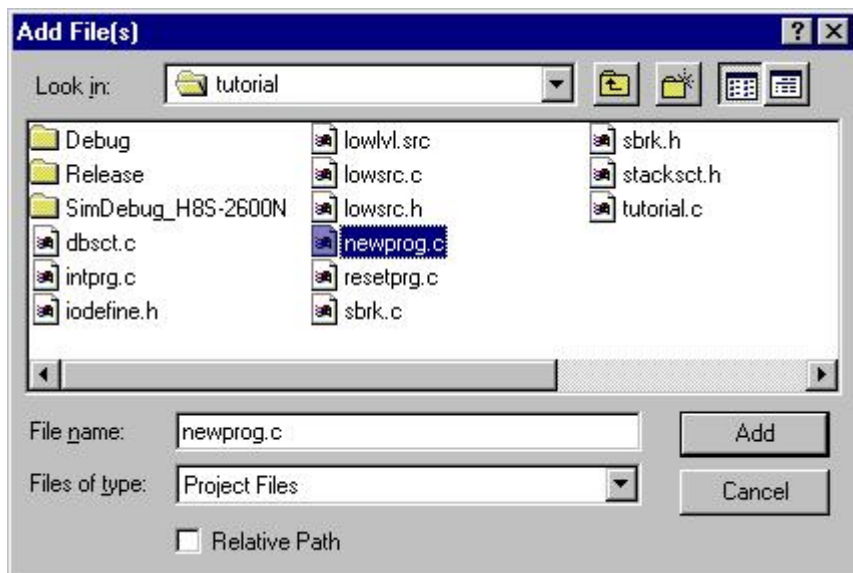


Figure 3.3 Adding a File To a Project

The added file will be displayed on the [Projects] sheet of the [Workspace] window as shown in figure 3.4.

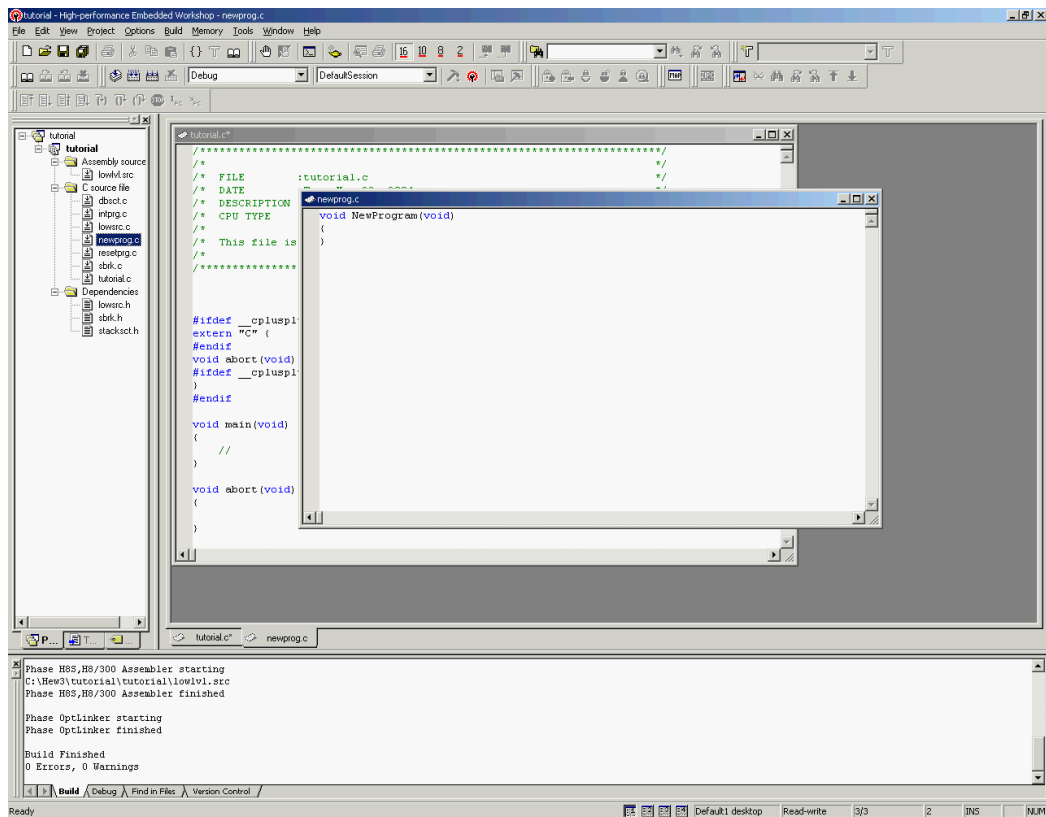


Figure 3.4 Project With a File Added

Next, how to delete a file from a project will be shown. Select [Project->Remove File...], then the [Remove Project Files] dialog box (figure 3.5) will be displayed. Select one or more project files on this dialog box and click the [Remove] button. Then the selected file(s) will disappear from the list of the dialog box. Clicking [OK] actually removes the file(s) from the project. Clicking [Cancel] instead will nullify the removal.

You have another way to delete a file from a project. Select the file in the [Projects] sheet of the [Workspace] window and press the [Delete] key. Then the file will be deleted from the project.

If you want to exclude a file from a build temporarily instead of removing the file from the project, refer to section 4.4, “Excluding a Project File from Build”.

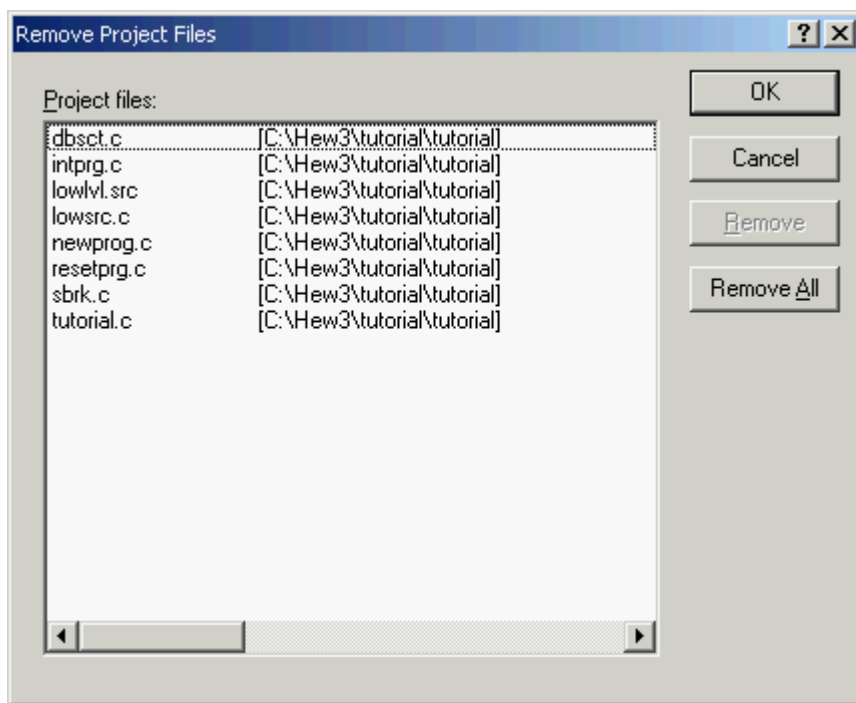


Figure 3.5 Remove Project Files Dialog Box

3.3 File Groups Used in a Project

In this section, a *file group* to which a file added to a project belongs is described. For example, the project generator adds a file described in C language or assembly language to the project. A file with a file extension “.c” belongs to the [C source file] group, and a file with a file extension “.src” belongs to the [Assembly source file] group.

The HEW identifies a group to which a file belongs by checking the file extension. Select [Project->File Extensions...], then the [File Extensions] dialog box (figure 3.6) will be displayed. File extensions used in the project are shown on this dialog box. Every file extension belongs to a file group. A file group can be associated to a tool in a build process.

If you want to use your own file extension in the project, define a new file extension by clicking the [Add...] button.

The icon displayed in the [Extension] column of the [File Extensions] dialog box can show a tool which opens the file. If the icon of a file extension is the same as the icon shown below, a file with that file extension can be opened by the editor of the HEW.

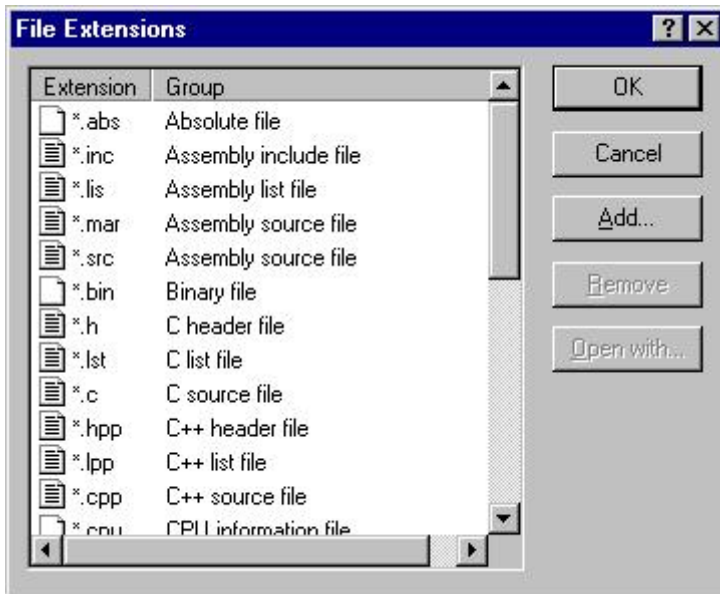


Figure 3.6 File Extensions Dialog Box (Initial Screen)

Click the [Add...] button on the [File Extensions] dialog box, then the [Add File Extension] dialog box (figure 3.7) will be launched. Enter a new file extension in the [File extension] field and specify the [File group] group box. If you want to add an extension to an existing file group, select the [Extension belongs to an existing group] radio button and select a file group from the drop-down list. If you want to create a new file group, select the [Extension belongs to a new group] radio button and enter the name of the file group in the edit field.

In this tutorial, enter “asm” in the [File extension] field, select “Assembly source file” from the drop-down list and click [OK]. Then a file with the extension, “*.asm”, will be treated as a file in the [Assembly source file] group (figure 3.8).

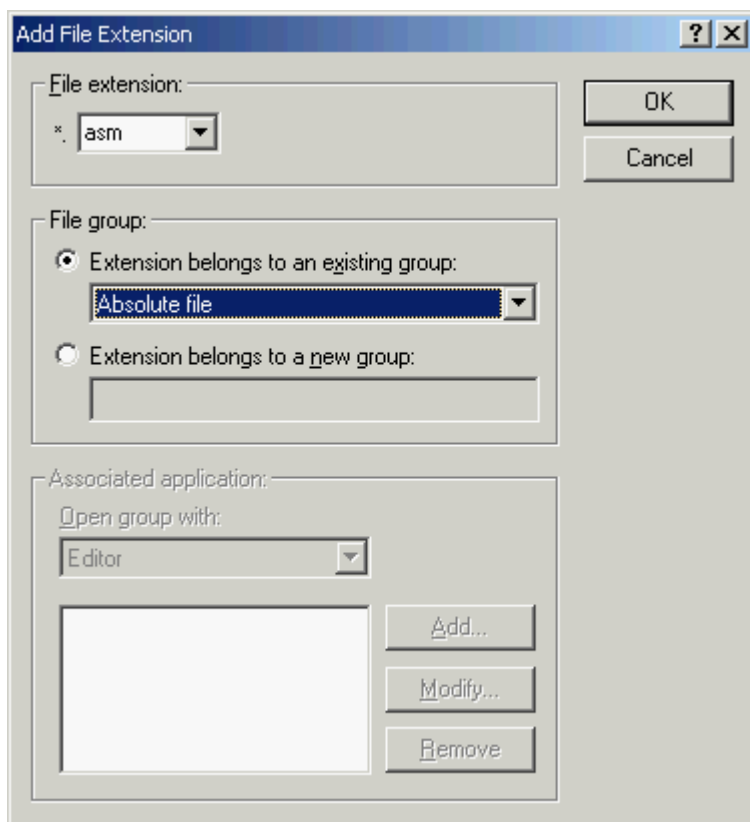


Figure 3.7 Add File Extension Dialog Box

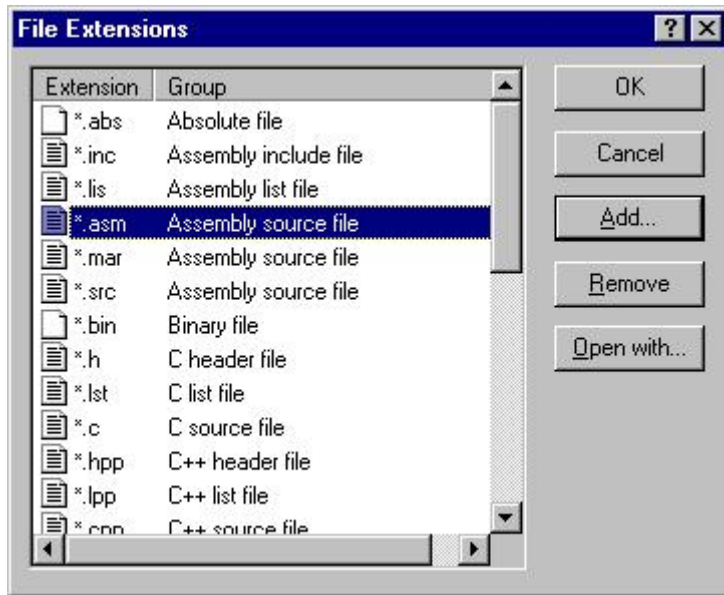


Figure 3.8 File Extension Dialog Box (After Adding an File Extension)

3.4 Customizing the Workspace Window

Click the right mouse button on the [Projects] sheet of the [Workspace] window, then a pop-up menu will be displayed. Select [Configure View...] on this menu, then [Configure View] dialog box (figure 3.9) will be launched. On this dialog box, you can specify whether the file dependencies are shown for each file or not, whether a file is shown in a file group folder (figure 3.10) or not, and so on.

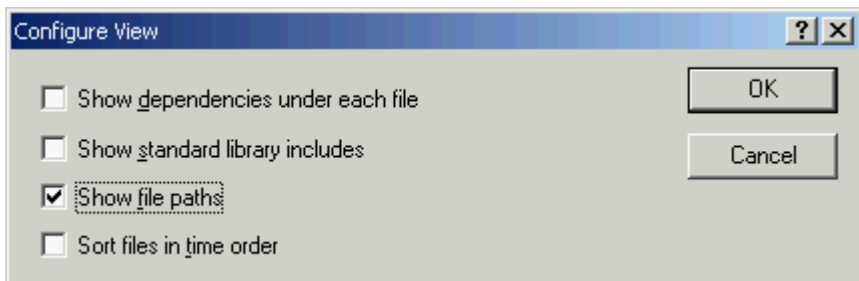


Figure 3.9 Configure View Dialog Box

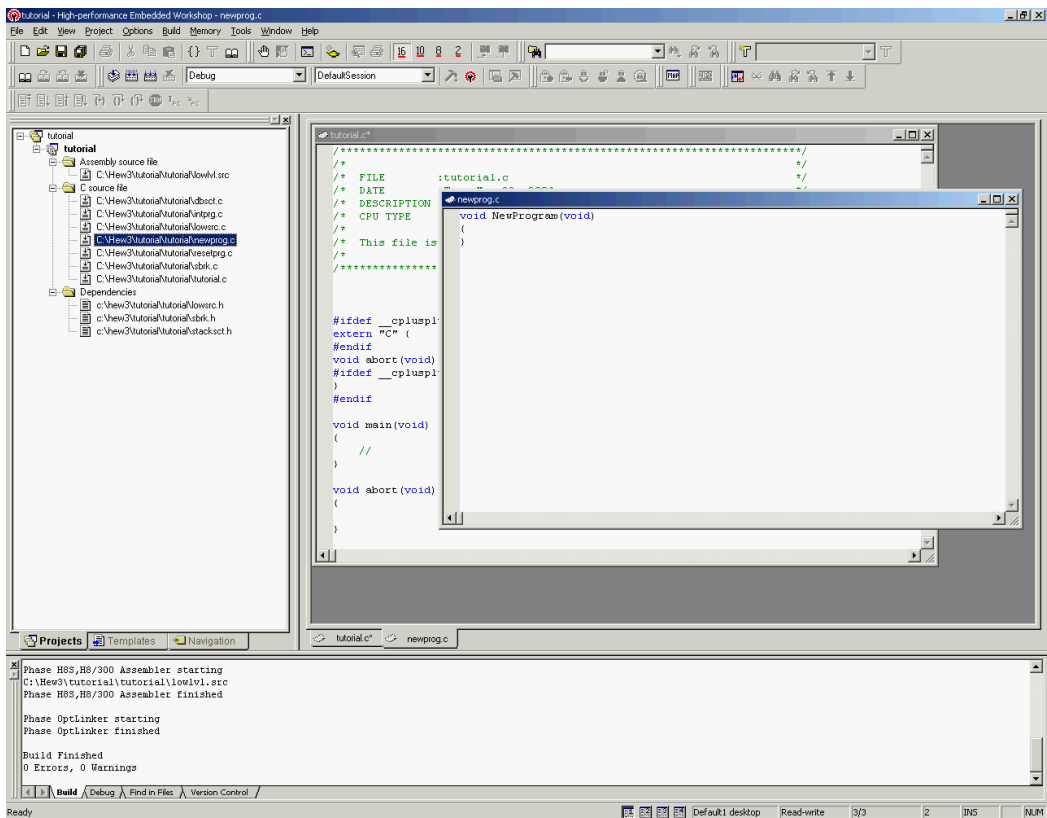


Figure 3.10 Configuration of the Workspace Window

Section 4 Building a Project

4.1 Build Overview

The HEW provides two ways of building a project.

1. “Build All” ([Build->Build All])

The series of tools including the compiler, assembler, and linkage editor are applied to all of the source program files.

2. “Build” [Build->Build]

The series of tools are applied to a source program file updated after the last build. (The update means not only the update of a source program file, but also an update of a file included by the source program file and an update of an option applied to the source program file.)

If you want to compile or assemble a single source program file, select the file on the [Projects] sheet of the [Workspace] window and select [Build->Build File].

If you want to execute “Build” or “Build All” for multiple programs or configurations, specify the target by selecting the [Build -> Build Multiple] menu item.

CAUTION ON BUILD

1. Depending of the setting of the editor window, a file being edited might be saved on executing a build. So close a file which you do NOT want to be saved beforehand. For details of customizing the editor, refer to the High-Performance Embedded Workshop 3 User’s Manual.
2. Do not save a file used in a project during the build because doing so might disturb the build process.

4.2 Setting Options

In this section, overview of the option setting is described.

When the project generator generates a project, the minimum options required for a build are already specified. If you want to modify the options, however, select [Options-> H8S, H8/300 Standard Toolchain] and set options on the option dialog box.

Figure 4.1 shows the option dialog box of a C/C++ compiler. On the left hand side of the dialog box is a file list, and on the right hand side are optional setting controls for each tool divided into some pages. If you select a file in the file list, you can specify options only to the selected file. If you select a file group folder in the file list, you can specify the same option to all the files in the file group. To specify the same options to specific files, select the files while pressing the [Ctrl] key or the [Shift] key.

If you select [Default Options] in a file group folder, you can specify initial options for the file group. The HEW automatically adds the options specified to the [Default Options] to a file of the corresponding file group of the corresponding file extension of the file. For example, if you add a file with an extension “C” (“*.C”) to the project, the settings of the [Default Options] of the [C source file] group will be added to the file automatically.

For the details of the options refer to the H8S, H8/300 Series C/C++ Compiler, Cross Assembler, or Optimizing Linkage Editor User’s Manual.

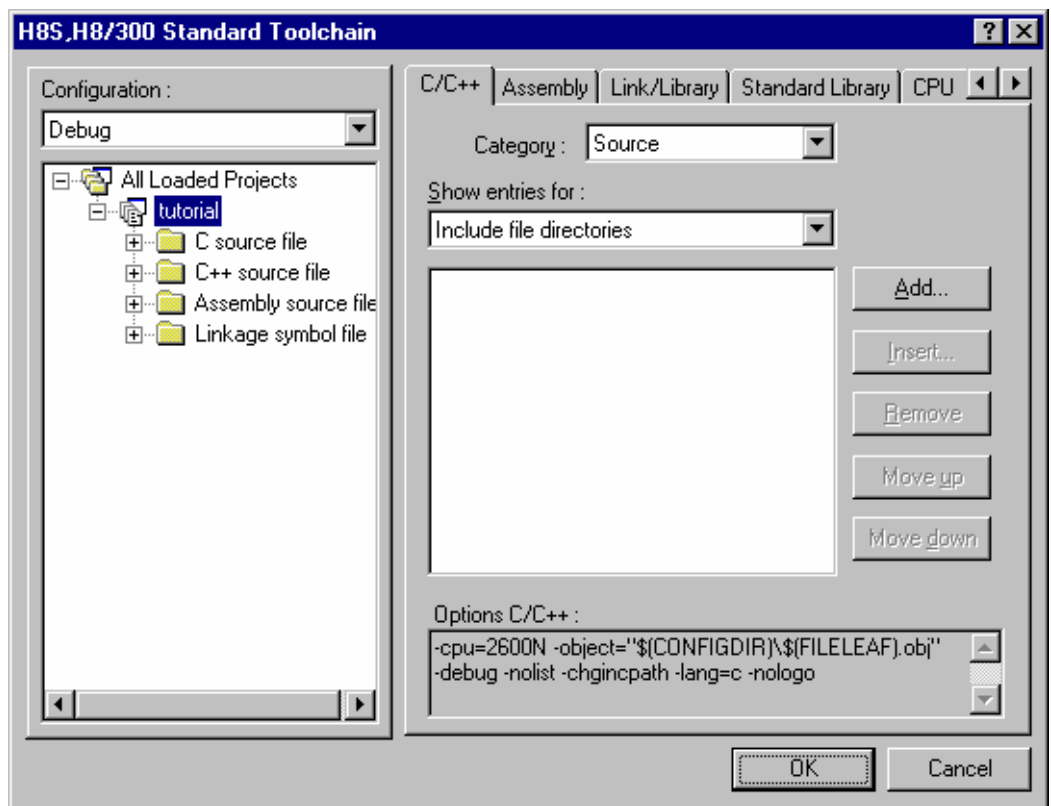


Figure 4.1 Option Dialog Box of C/C++ Compiler

4.3 Customizing the Configuration

In the previous section, how to set options to a project file is described. In this section, how to create more than one suite of option settings for a build will be described. A suite of option settings for a build is called a *configuration*.

The project generator creates two configurations, [Debug] and [Release]. Difference between them is only the setting of the debugging option. When a target for debugging is selected, the configuration for the target is also created. To switch the current configuration to another, launch the [Build Configurations] dialog box (figure 4.2) by selecting [Options->Build Configurations...], select a configuration from the [Current configuration] drop-down list, and click [OK]. You can also change the current configuration by selecting one from the drop-down list on the toolbar.

On the [Build Configurations] dialog box, you can create a new configuration or delete a configuration. For details, refer to chapter 2, “Build Basics”, of the High-Performance Embedded Workshop 3 User’s Manual.

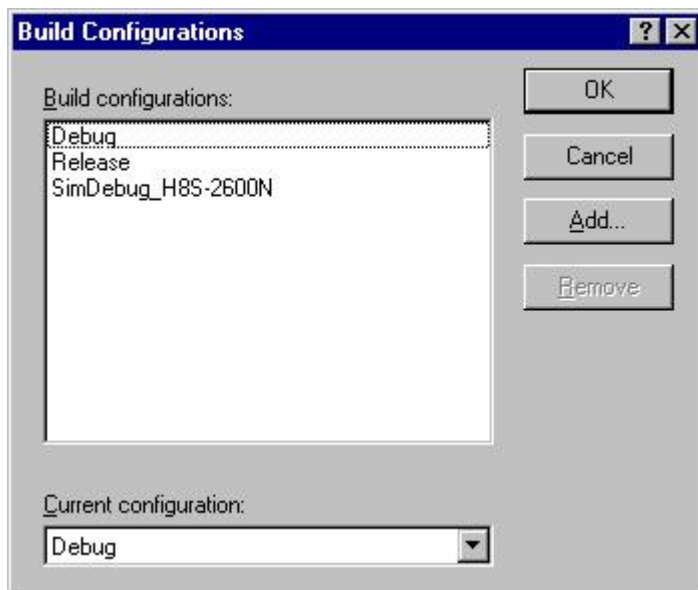


Figure 4.2 Build Configurations Dialog Box

4.4 Excluding a Project File from Build

In this section, how to exclude a project file from build will be described. Excluding a project file from build does not delete the file from a project, but exclude a project file from build in configuration by configuration basis.

Select a file on the [Projects] sheet of the [Workspace] window, click the right mouse button, and select [Exclude Build <file>] on the pop-up menu. Then a red cross will be added to the icon of this file as shown in figure 4.3. This file will be excluded from a build.

To include an excluded file into build, select the file on the [Projects] sheet of the [Workspace] window, click the right mouse button, and select [Include Build <file>] on the pop-up menu.

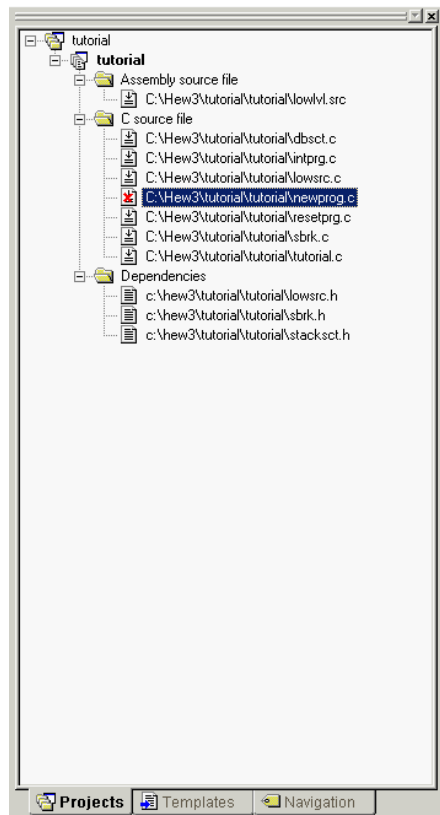


Figure 4.3 Excluding a Project File from Build

4.5 Correcting Errors in a Build

In this section, how to jump to a line of a file which caused an error in compiling or assembling will be described.

Figure 4.4 shows an example in which a compiler detected a syntax error in a source program file. When you build a project, messages, including error messages, from a tool in a build will be displayed on the [Output] window. If you double click the line of the error message on the [Build] sheet of the [Output] window, the file which caused the error will be opened and the cursor will be placed on the line which caused the error. (The cursor might not be placed on the line which caused the error if you have already edited the file.) Placing the cursor on the error line of the output window and pressing the [F1] key displays help of that error.

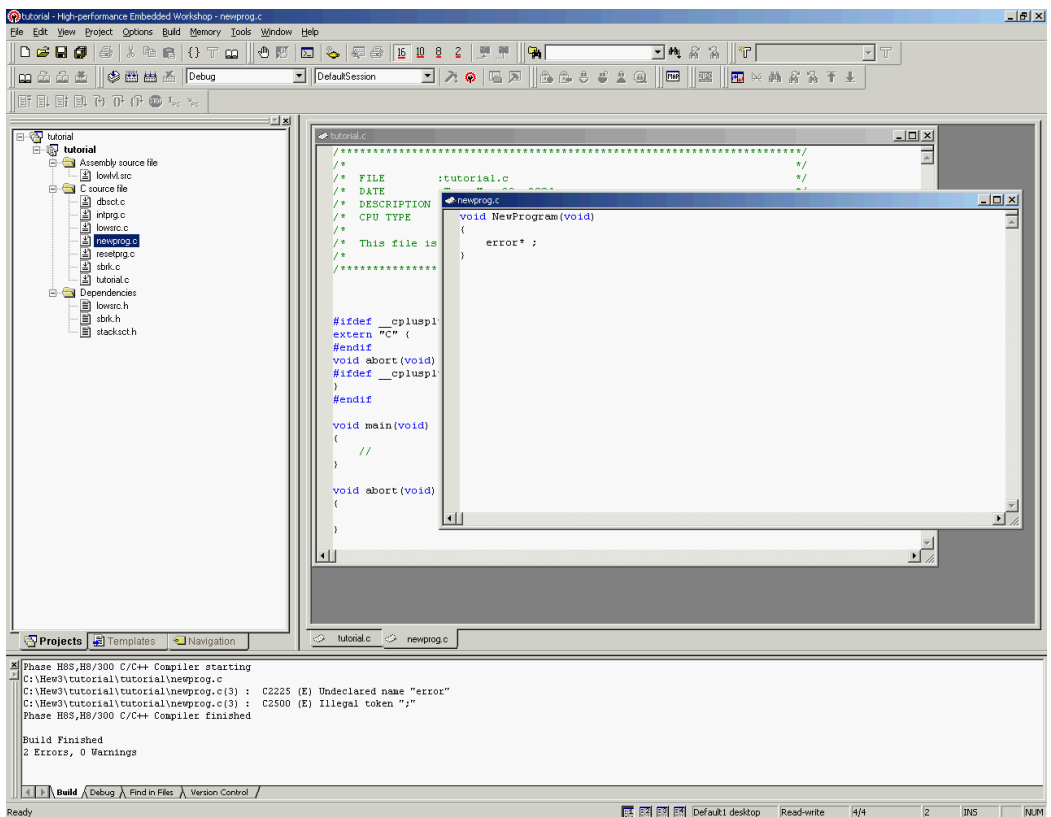


Figure 4.4 Correcting the Line which Caused an Error

4.6 Customizing the Session

You can save the options for debugger to the session file.

The project generator creates the session, [Default Session]. When a target for debugging is selected, the session for the target is also created. To use the a target, launch the [Debug Sessions] dialog box (figure 4.5) by selecting [Options->Debug Settings...], select a session [SimSessionH8S-2600N] from the [Current session] drop-down list, and click [OK]. You can also change the current session by selecting one from the drop-down list on the toolbar.

On the [Debug Sessions] dialog box, you can create a new session or delete a session. For details, refer to chapter 1.9, “Debugger Sessions”, of the High-Performance Embedded Workshop 3 User’s Manual Simulator/Debugger Part.

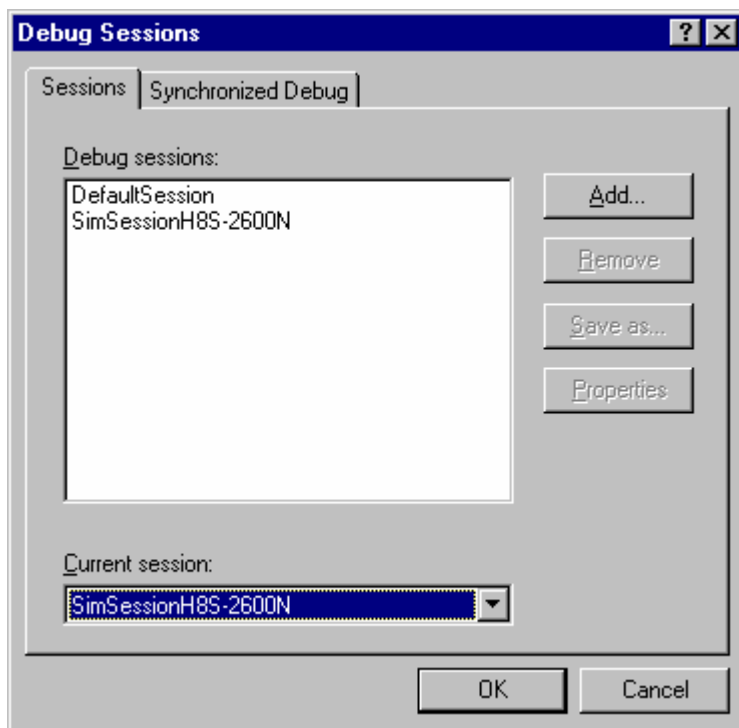


Figure 4.5 Debug Sessions Dialog Box

Section 5 Debugging

5.1 Preparation

The basic functions of the simulator/debugger will be described in this section using a sample program.

NOTE

Note that the contents of usage examples (figures) in this section will differ depending on the compiler version.



5.1.1 Sample Program

The HEW demonstration program is used for the sample program and is written in C language. It first sorts ten random data in the ascending order, and then in the descending order. The sample program:

- (1) Generates random data for sorting using the main function.
- (2) Inputs the array which stores the random data that is generated by the main function, then sorts the data in the ascending order using the sort function.
- (3) Inputs the array generated by the sort function, and sorts the data in the descending order using the change function.
- (4) Displays the random data and the sorted data using the printf function.

5.1.2 Creating the Sample Program

Create the HEW demonstration program by referring to sections 1 to 4, and note the following.

- Specify [Demonstration] for the [Project Type] in section 2.1, Creating a New Workspace.
- Specify [2600] for the [CPU Series:].
- Specify [H8S/2600N Simulator] for the [Target:].
- Specify [SimDebug_H8S-2600] for the configuration on the toolbar before building the project. 
- Specify [SimSession_H8S-2600] for the session on the toolbar. 

Since section 5 explains the debugging function, [Demonstration] has not been optimized. Do not change this setting.

5.2 Settings for Debugging

5.2.1 Allocating the Memory Resource

The allocation of the memory resource is necessary to run the application being developed. When using the demonstration project, the memory resource is allocated automatically, so check the setting.

- Select [Simulator->Memory Resource...] from the [Option] menu, and display the allocation of the current memory resource.

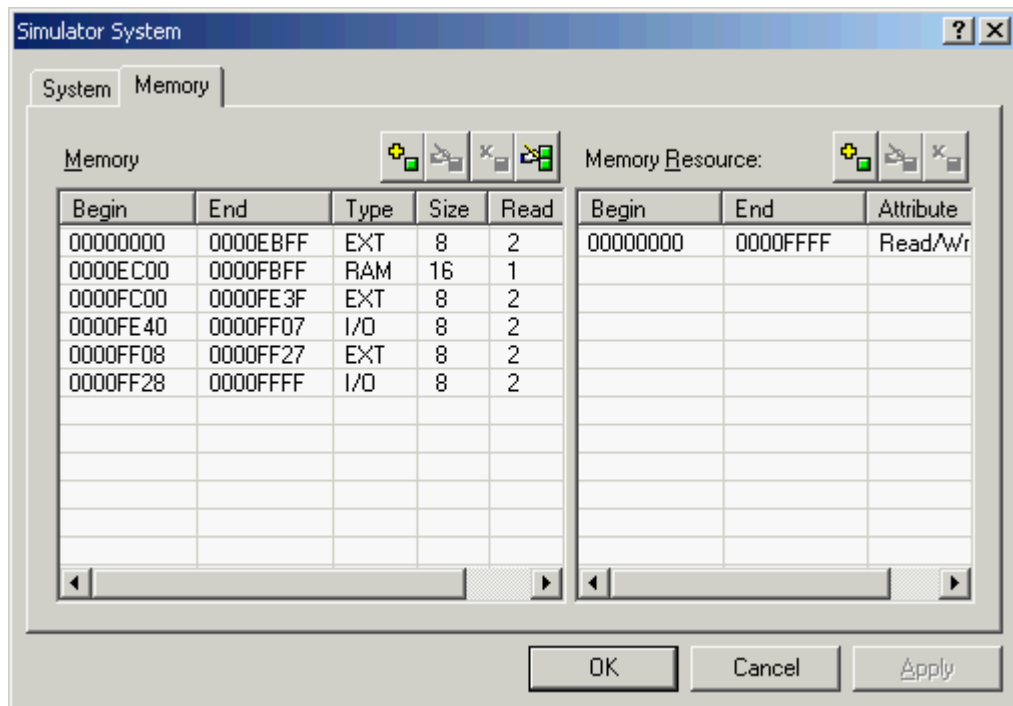


Figure 5.1 Simulator System Dialog Box (Memory page)

The program and stack areas are allocated to the addresses H'00000000 to H'0000FFFF, which can be read from or written to.

- Close the dialog box by clicking [OK].

The memory resource can also be referred to or modified by using the [Simulator] page on the [H8S,H8/300 Standard Toolchain] dialog box. Changes made in either of the dialog boxes are reflected.

5.2.2 Downloading the Sample Program

When using the demonstration project, the sample program to be downloaded is automatically set, so check the settings.

- Open the [Debug Setting] dialog box by selecting [Debug Settings...] on the [Option] menu.

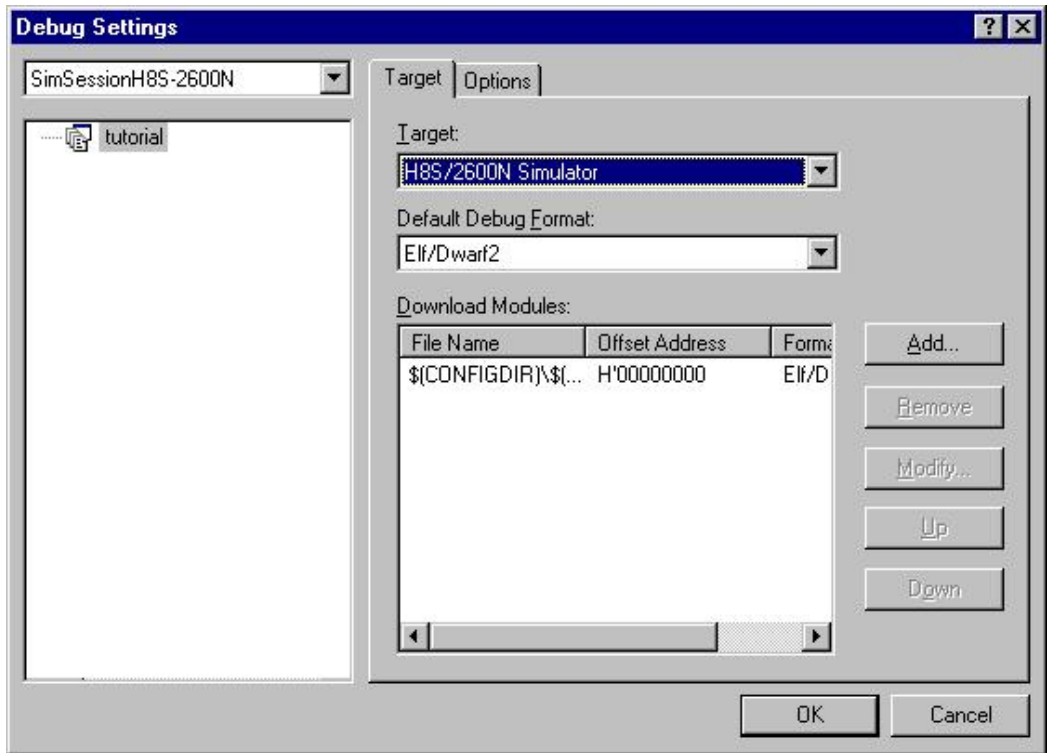



Figure 5.2 Debug Settings Dialog Box

- Files to be downloaded is set in [Download Modules].
- Close the [Debug Settings] dialog box by clicking the [OK] button.
- Download the sample program by selecting [Download Modules->All Download Modules] from the [Debug] menu.

5.2.3 Displaying the Source Program

The source-level debugging is supported by the HEW. Refer to section 3.1, Editing and Creating a Source Program File, and display the source file ("tutorial.c") in the [Source] window.

- Open the [Source] window by double-clicking tutorial.c on the [Workspace] window.

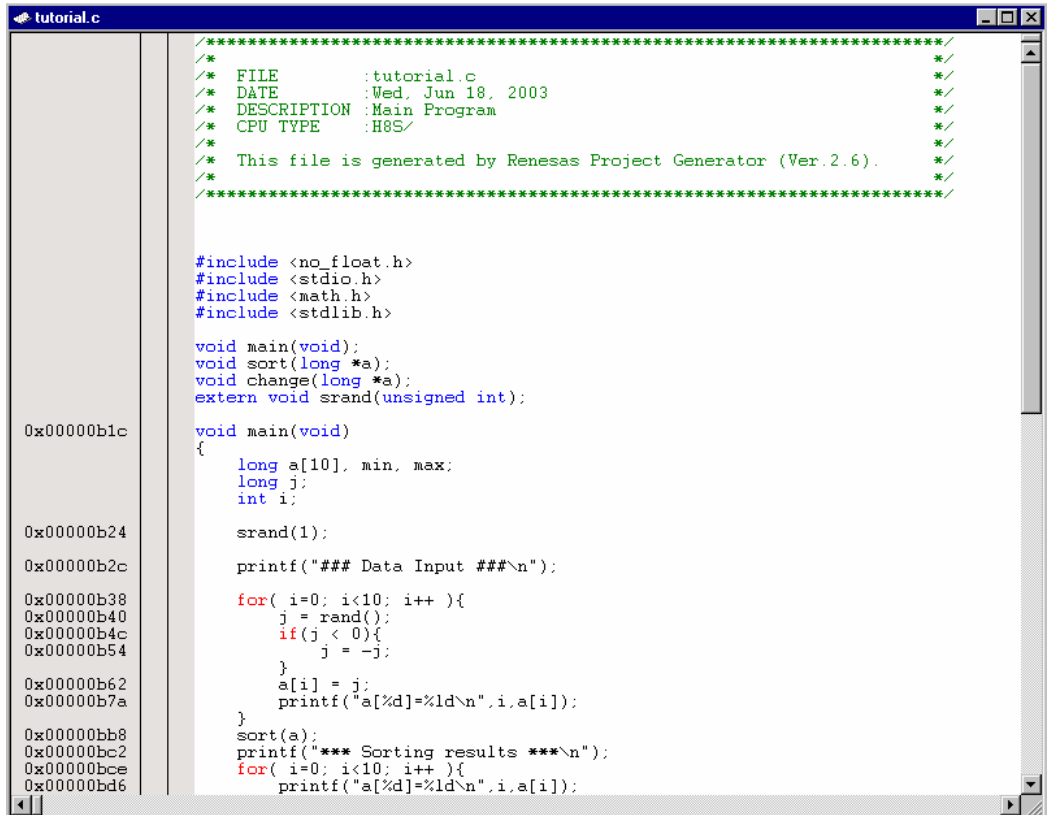

```
0x00000b1c  /* FILE      :tutorial.c */
0x00000b24  /* DATE       :Wed, Jun 18, 2003 */
0x00000b2c  /* DESCRIPTION :Main Program */
0x00000b38  /* CPU TYPE    :H8S/ */
0x00000b40  /* This file is generated by Renesas Project Generator (Ver.2.6). */
0x00000b4c  /* */
0x00000b54  /* */
0x00000b62  /* */
0x00000b7a  /* */
0x00000bb8  /* */
0x00000bc2  /* */
0x00000bce  /* */
0x00000bd6  /* */

#include <no_float.h>
#include <stdio.h>
#include <math.h>
#include <stdlib.h>

void main(void);
void sort(long *a);
void change(long *a);
extern void srand(unsigned int);

void main(void)
{
    long a[10], min, max;
    long j;
    int i;

    srand(1);

    printf("### Data Input ###\n");

    for( i=0; i<10; i++ ){
        j = rand();
        if(j < 0){
            j = -j;
        }
        a[i] = j;
        printf("a[%d]=%ld\n", i, a[i]);
    }
    sort(a);
    printf("*** Sorting results ***\n");
    for( i=0; i<10; i++ ){
        printf("a[%d]=%ld\n", i, a[i]);
    }
}
```

Figure 5.3 Source Window (Displaying the Source Program)

5.2.4 Setting a PC Breakpoint

Breakpoints can be set easily by the [Source] window. To set a breakpoint on a line that includes the sort function call:

- Place the cursor in the line that includes the sort function call and click the right mouse button to launch the pop-up menu, and select [Toggle Breakpoint] from the pop-up menu.

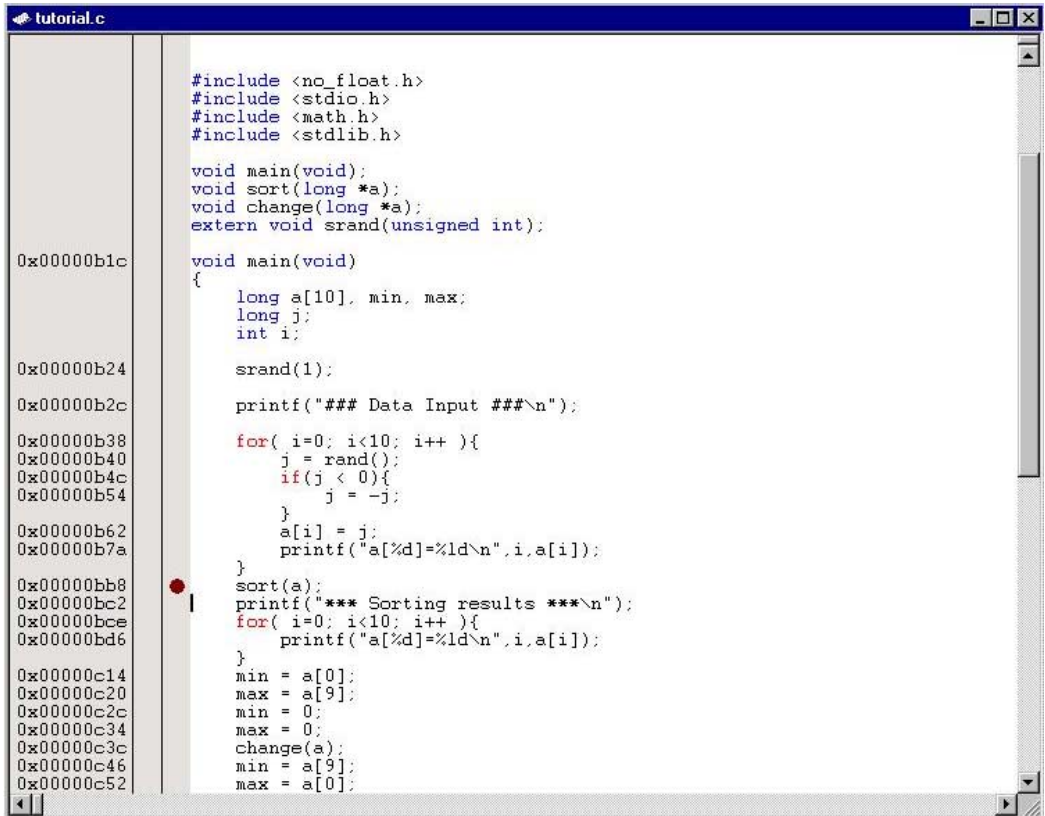


Figure 5.4 Source Window (Setting the Breakpoint)

A [•] is displayed at the line that includes the sort function call, indicating that the PC breakpoint is set at the address.

5.2.5 Setting the Profiler

- Open the [Profile] window by selecting [Profile] from the [View->Performance] menu.

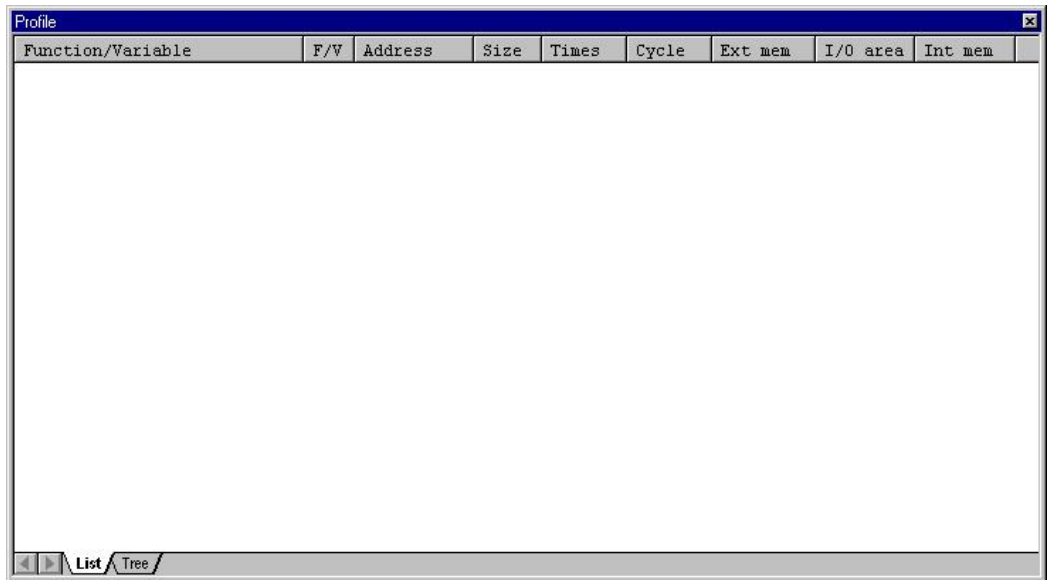


Figure 5.5 Profile Window

- Open the pop-up menu by right clicking the mouse on the [Profile] window, and select [Enable Profiler] to enable acquisition of the profile information.

5.2.6 Setting the Simulated I/O

When the demonstration project is used, the simulated I/O is automatically set, so check the setting.

- Open the [Simulator System] dialog box by selecting [Simulator->System] from the [Option] menu.

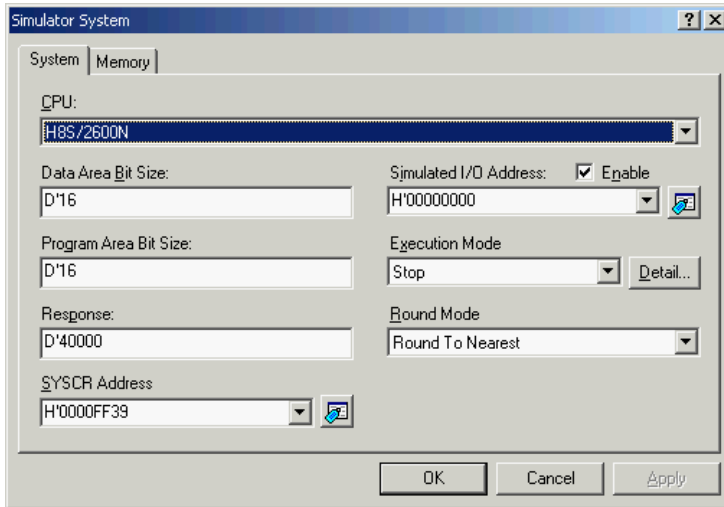


Figure 5.6 Simulator System Dialog Box (System page)

- Confirm that [Enable] in [System Call Address] is checked.
- Click the [OK] button to enable the Simulated I/O
- Select [Simulated I/O] from the [View->CPU] menu and open the [Simulated I/O] window. The Simulated I/O will not be enabled if the [Simulated I/O] window is not open.



Figure 5.7 Simulated I/O Window

5.2.7 Setting the Trace Information Acquisition Conditions

- Select [Trace] from the [View->Code] menu and open the [Trace] window. Open the pop-up menu by right clicking the mouse on the [Trace] window, and select [Acquisition...] from the pop-up menu.

The [Trace Acquisition] dialog box below will be displayed.



Figure 5.8 Trace Acquisition Dialog Box

- Set [Trace start/Stop] to [Enable] in the [Trace Acquisition] dialog box, and click the [OK] button to enable the acquisition of the trace information.

5.2.8 Setting the Stack Pointer and Program Counter

To execute the program, the program counter must be set from the location of the reset vector. In the reset vector of the sample program, the PC value H'400 is written.

- Select [Reset CPU] from the [Debug] menu, or click the [Reset CPU] button on the toolbar.

Set the program counter to H'400 from the reset vector.



Figure 5.9 Reset CPU Button

5.3 Start Debugging

5.3.1 Executing a Program

- Select [Go] from the [Debug] menu, or click the [Go] button on the toolbar.



Figure 5.10 Go Button

The program halts where a breakpoint is set. An arrow is displayed in the [Source] window, indicating the location the execution has stopped. As the termination cause, [PC Breakpoint] is displayed in the [Output] window.


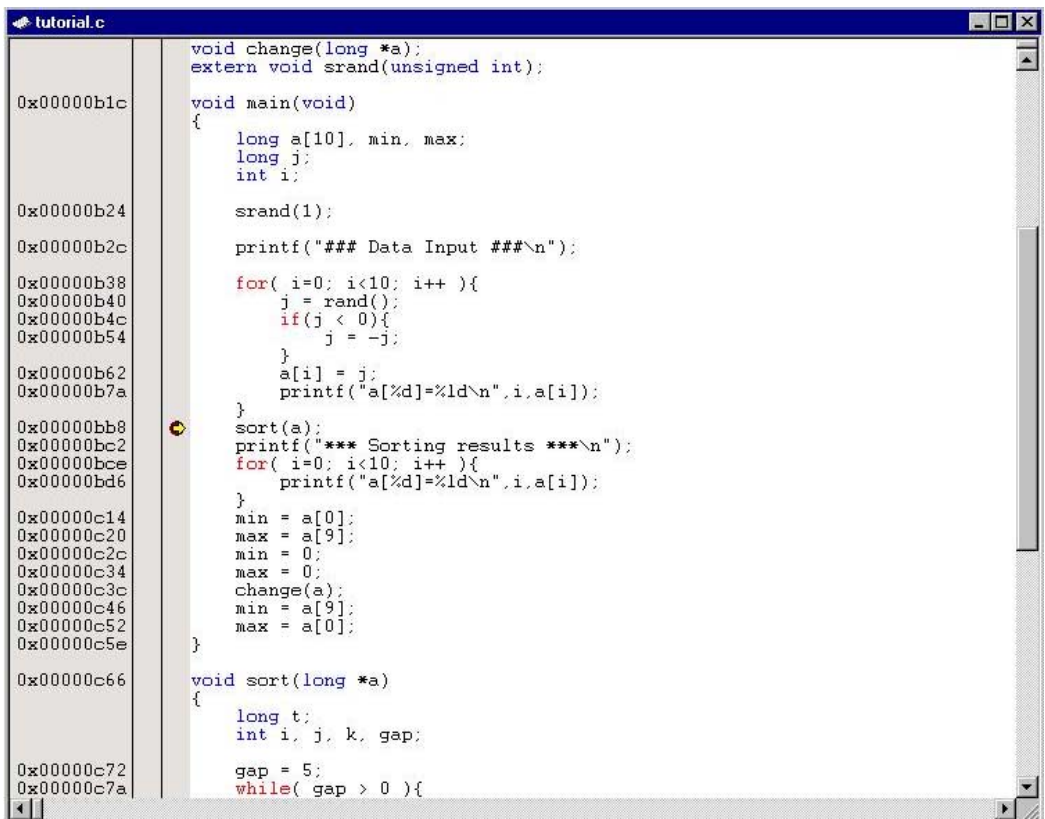


Figure 5.11 Source Window (Break Status)

The termination cause can be displayed in the [Status] window.

- Select [Status] from the [View->CPU] menu to open the [Status] window, and select the [Platform] sheet in the [Status] window.

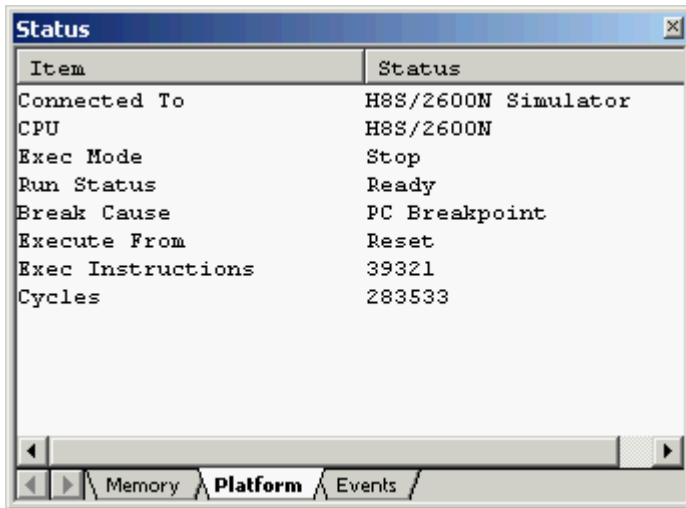

The screenshot shows a window titled "Status" with a table of execution details. The table has two columns: "Item" and "Status". The data rows are as follows:

| Item | Status |
|-------------------|---------------------|
| Connected To | H8S/2600N Simulator |
| CPU | H8S/2600N |
| Exec Mode | Stop |
| Run Status | Ready |
| Break Cause | PC Breakpoint |
| Execute From | Reset |
| Exec Instructions | 39321 |
| Cycles | 283533 |

At the bottom of the window, there is a tabbed interface with three tabs: "Memory", "Platform" (which is selected and highlighted), and "Events".


Figure 5.12 Status Window

The above status window indicates that:

- (1) The cause of break is a PC breakpoint
- (2) Execution is performed from the reset
- (3) The number of executed instructions by the GO command is 39,321
- (4) The executed number of cycles from the reset is 283,533

Register values can be checked in the [Register] window.

- Select [Registers] from the [View->CPU] menu.

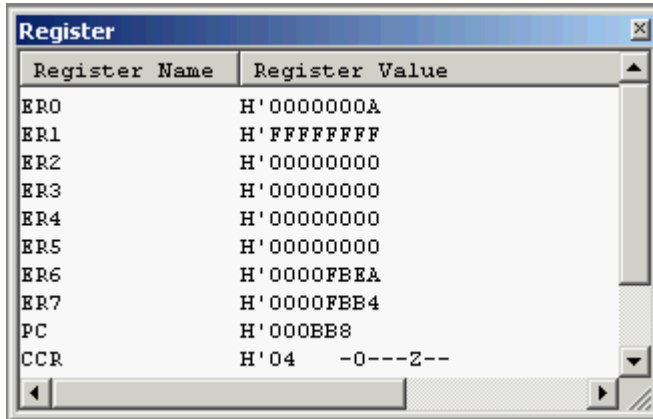

| Register Name | Register Value |
|---------------|------------------|
| ER0 | H'0000000A |
| ER1 | H'FFFFFFFF |
| ER2 | H'00000000 |
| ER3 | H'00000000 |
| ER4 | H'00000000 |
| ER5 | H'00000000 |
| ER6 | H'0000FBEA |
| ER7 | H'0000FBB4 |
| PC | H'000BB8 |
| CCR | H'04 -0---Z-- |


Figure 5.13 Register Window

Register values when the program is terminated can be checked.

5.3.2 Using the Trace Buffer

The trace buffer can be used to clarify the history of instruction execution.

- Select [Trace] from the [View->Code] menu and open the [Trace] window. Scroll up to the very top of the window.

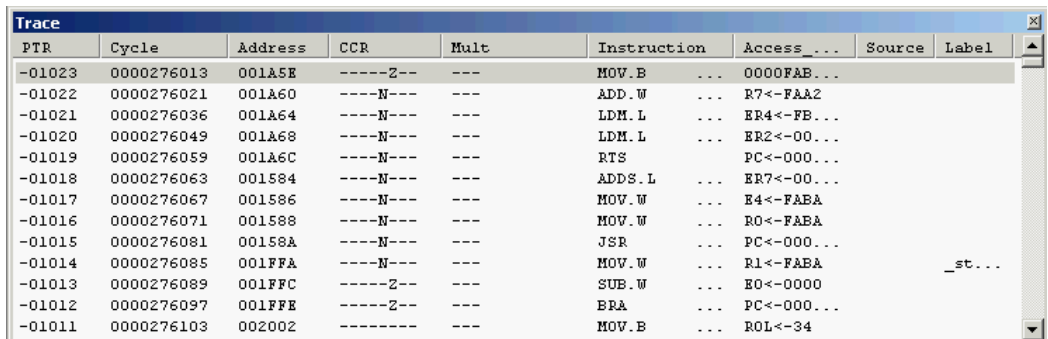

| PTR | Cycle | Address | CCR | Mult | Instruction | Access... | Source | Label |
|--------|------------|---------|----------|------|-------------|-----------|------------|--------|
| -01023 | 0000276013 | 001A5E | -----Z-- | --- | MOV.B | ... | 0000FAB... | |
| -01022 | 0000276021 | 001A60 | ----N--- | --- | ADD.W | ... | R7<-FAA2 | |
| -01021 | 0000276036 | 001A64 | ----N--- | --- | LDM.L | ... | ER4<-FB... | |
| -01020 | 0000276049 | 001A68 | ----N--- | --- | LDM.L | ... | ER2<-00... | |
| -01019 | 0000276059 | 001A6C | ----N--- | --- | RTS | ... | PC<-000... | |
| -01018 | 0000276063 | 001584 | ----N--- | --- | ADD.S.L | ... | ER7<-00... | |
| -01017 | 0000276067 | 001586 | ----N--- | --- | MOV.W | ... | E4<-FABA | |
| -01016 | 0000276071 | 001588 | ----N--- | --- | MOV.W | ... | R0<-FABA | |
| -01015 | 0000276081 | 00158A | ----N--- | --- | JSR | ... | PC<-000... | |
| -01014 | 0000276085 | 001FFA | ----N--- | --- | MOV.W | ... | R1<-FABA | _st... |
| -01013 | 0000276089 | 001FFC | -----Z-- | --- | SUB.W | ... | E0<-0000 | |
| -01012 | 0000276097 | 001FFE | -----Z-- | --- | BRA | ... | PC<-000... | |
| -01011 | 0000276103 | 002002 | ----- | --- | MOV.B | ... | R0L<-34 | |

Figure 5.14 Trace Window (Trace Information Display)

5.3.3 Performing Trace Search

Click the right mouse button on the [Trace] window to launch the pop-up menu, and select [Find...] to open the [Trace Search] dialog box.

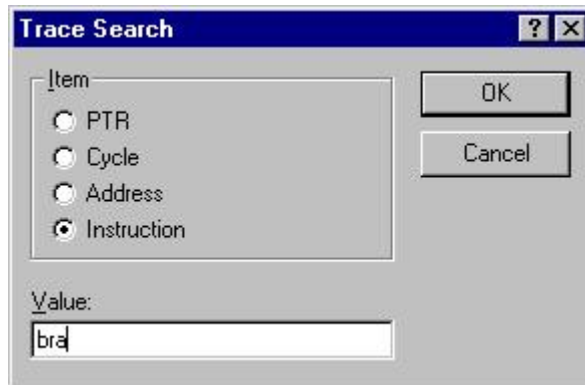


Figure 5.15 Trace Search Dialog Box

Setting the item to be searched to [Item] and the contents to be searched to [Value] and clicking the [OK] button begins the trace search. When the searched item is found, the first line is highlighted. To continue searching the same contents [Value], click the right mouse button in the [Trace] window to display the pop-up menu, and select [Find Next] from the pop-up menu. The next searched line is highlighted.

| Trace | | | | | | | | | |
|--------|------------|---------|----------|------|-------------|-------------|--------------|-------|--------|
| PTR | Cycle | Address | CCR | Mult | Instruction | Access Data | Source | Label | |
| -01023 | 0000276013 | 001A5E | -----Z-- | --- | MOV.B | ... | 0000FABE<-00 | | |
| -01022 | 0000276021 | 001A60 | ----N--- | --- | ADD.W | ... | R7<-FAA2 | | |
| -01021 | 0000276036 | 001A64 | ----N--- | --- | LDM.L | ... | ER4<-FBB0... | | |
| -01020 | 0000276049 | 001A68 | ----N--- | --- | LDM.L | ... | ER2<-0000... | | |
| -01019 | 0000276059 | 001A6C | ----N--- | --- | RTS | ... | PC<-00001584 | | |
| -01018 | 0000276063 | 001584 | ----N--- | --- | ADD.S.L | ... | ER7<-0000... | | |
| -01017 | 0000276067 | 001586 | ----N--- | --- | MOV.W | ... | E4<-FABA | | |
| -01016 | 0000276071 | 001588 | ----N--- | --- | MOV.W | ... | R0<-FABA | | |
| -01015 | 0000276081 | 00158A | ----N--- | --- | JSR | ... | PC<-00001FFA | | |
| -01014 | 0000276085 | 001FFA | ----N--- | --- | MOV.W | ... | R1<-FABA | | _st... |
| -01013 | 0000276089 | 001FFC | -----Z-- | --- | SUB.W | ... | R0<-0000 | | |
| -01012 | 0000276097 | 001FFE | -----Z-- | --- | BRA | ... | PC<-00002002 | | |

Figure 5.16 Trace Window (Searched Result)

5.3.4 Checking Simulated I/O

Random data that is displayed by the printf function can be checked in the [Simulated I/O] window.

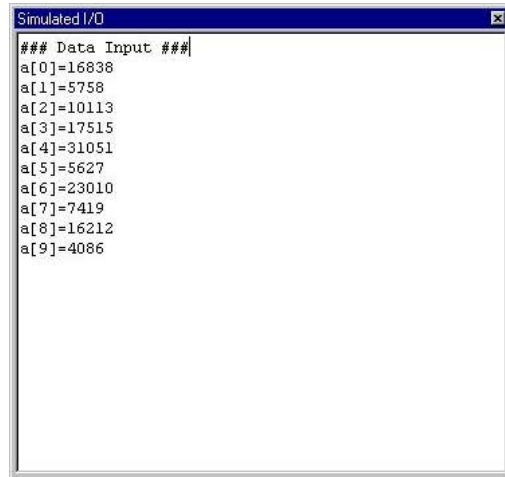


Figure 5.17 Simulated I/O Window

- Do not close the [Simulated I/O] window.

5.3.5 Checking the Breakpoints

A list of all the breakpoints that are set in the program can be checked in the [Event] window.

- Select [Eventpoints] from the [View -> Code] menu.

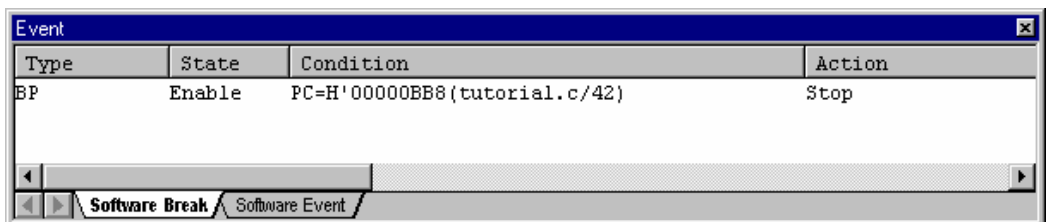


Figure 5.18 Event Window

A breakpoint can be set, a new breakpoint can be defined, and a breakpoint can be deleted using the [Event] window.

- Close the [Event] window.

5.3.6 Watching Variables

It is possible to watch the values of variables used in your program and to verify that they change in the way that you expected. For example, set a watch on the long-type array “a” declared at the beginning of the program, by using the following procedure:

- Select [Watch] from the [View -> Symbol] menu and open the [Watch] window. And click the right mouse button on the [Watch] window and choose [Add Watch...] from the pop-up menu.

The following dialog box will be displayed.

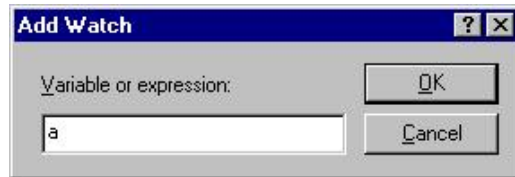


Figure 5.19 Add Watch Dialog Box

- Type array a and click the [OK] button.

The [Watch] window will show the long-type array a.

You can double-click the + symbol to the left of array “a” in the [Watch] window to expand the variable and show the individual elements in the array.

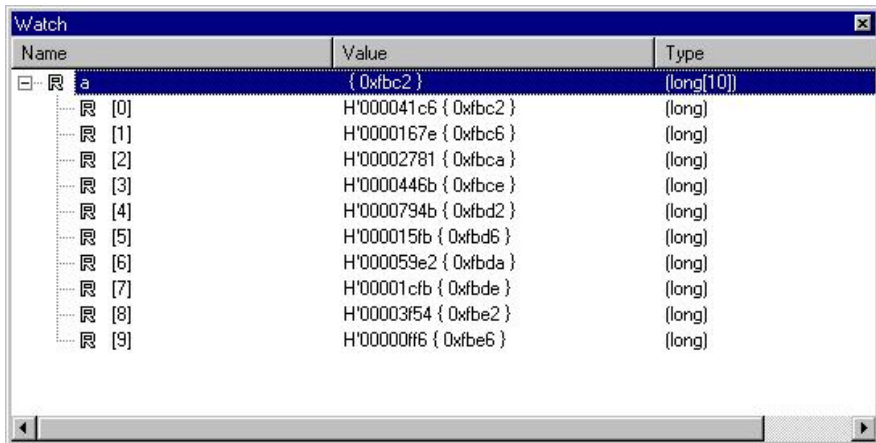


Figure 5.20 Watch Window

- Close the [Watch] window.

5.3.7 Executing the Program in Single Steps

The simulator/debugger has various stepping menus that are useful in debugging the program.

| Menu | Description |
|-----------|--|
| Step In | Executes each statement (includes statements within the function) |
| Step Over | Executes a function call in a single step |
| Step Out | Steps out of a function, and stops at the next statement of the program that called the function |
| Step... | Executes the specified number of steps at the specified speed |

[Step In]: Enters the called function and stops at the statement at the start of the called function.

- To step in the sort function, select [Step In] from the [Debug] menu, or click the [Step In] button on the toolbar.



Figure 5.21 Step In Button

```
0x00000b40      j = rand();
0x00000b4c      if(j < 0){
0x00000b54          j = -j;
0x00000b62      }
0x00000b7a      a[i] = j;
0x00000b88      printf("a[%d]=%ld\n", i, a[i]);
0x00000bc2      }
0x00000bce      sort(a);
0x00000bd6      printf("*** Sorting results ***\n");
0x00000c14      for( i=0; i<10; i++){
0x00000c20          printf("a[%d]=%ld\n", i, a[i]);
0x00000c2c      }
0x00000c34      min = a[0];
0x00000c3c      max = a[9];
0x00000c46      min = 0;
0x00000c52      max = 0;
0x00000c5e      change(a);
0x00000c66      min = a[9];
0x00000c72      max = a[0];
0x00000c7a      void sort(long *a)
0x00000c7e      {
0x00000c88      long t;
0x00000c9a      int i, j, k, gap;
0x00000cac      gap = 5;
0x00000cd0      while( gap > 0 ){
0x00000ce2          for( k=0; k<gap; k++){
0x00000d02              for( i=k+gap; i<10; i=i+gap ){
0x00000d1c                  for( j=i-gap; j>=k; j=j-gap){
0x00000d6c                      if(a[j]>a[j+gap]){
0x00000d7c                          t = a[j];
0x00000d8c                          a[j] = a[j+gap];
0x00000d9c                          a[j+gap] = t;
0x00000da2                      }
0x00000daa                      else
0x00000db2                          break;
0x00000dbc                  }
0x00000dc2              }
0x00000dc8          }
0x00000dd0          gap = gap/2;
0x00000dd8      }
```

Figure 5.22 Source Window (Step In)

- The PC location display (\Rightarrow) in the [Source] window moves to the statement at the start of the sort function.

[Step Out]: Steps out of the called function and stops at the next statement in the called program.

- Select [Step Out] from the [Debug] menu to exit the sort function, or click the [Step Out] button on the toolbar.



Figure 5.23 Step Out Button

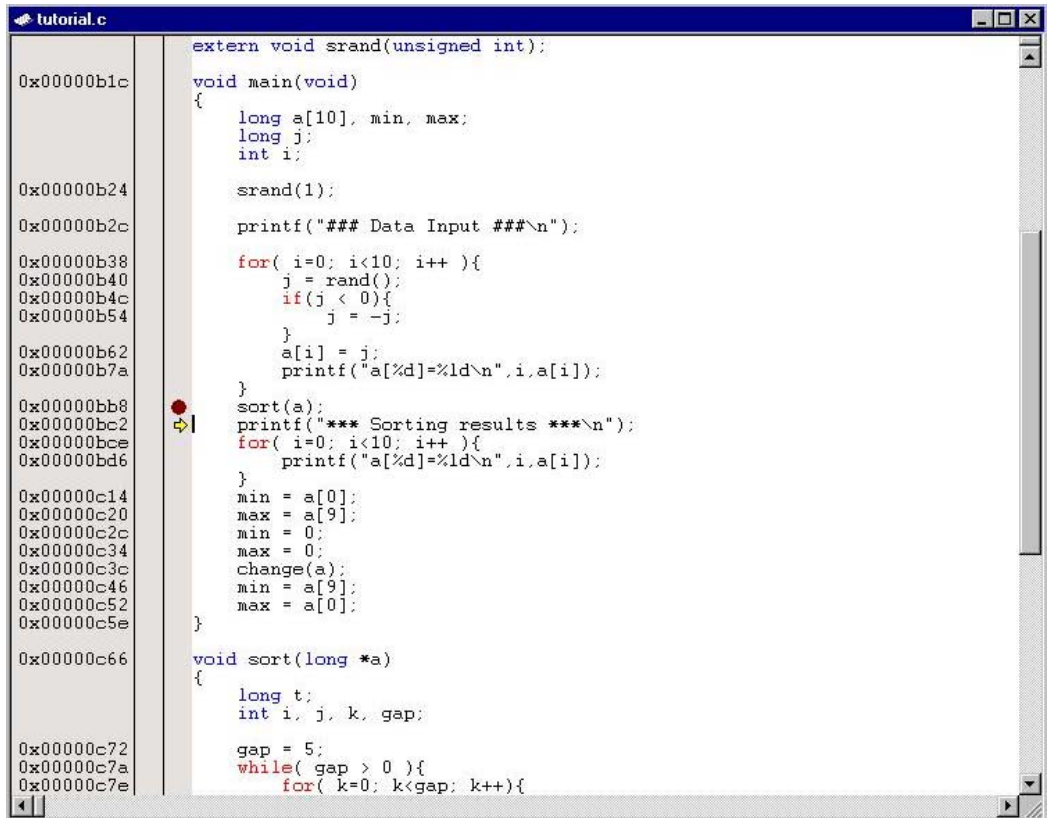


Figure 5.24 Source Window (Step Out)

[Step Over]: Executes a function call in a single step, and stops at the next statement in the main program.

Select [Step Over] from the [Debug] menu or click the [Step Over] button on the toolbar to step over the statements in the printf function.



Figure 5.25 Step Over Button

```
void main(void)
{
    long a[10], min, max;
    long j;
    int i;

    srand(1);

    printf("### Data Input ###\n");

    for( i=0; i<10; i++ ){
        j = rand();
        if(j < 0){
            j = -j;
        }
        a[i] = j;
        printf("a[%d]=%ld\n", i, a[i]);
    }
    sort(a);
    printf("*** Sorting results ***\n");
    for( i=0; i<10; i++ ){
        printf("a[%d]=%ld\n", i, a[i]);
    }
    min = a[0];
    max = a[9];
    min = 0;
    max = 0;
    change(a);
    min = a[9];
    max = a[0];
}

void sort(long *a)
{
    long t;
    int i, j, k, gap;

    gap = 5;
    while( gap > 0 ){
        for( k=0; k<gap; k++){
            for( i=k+gap; i<10; i=i+gap ){
```

Figure 5.26 Source Window (Step Over)

When the printf function has been executed, *** Sorting results *** will be displayed in the [Simulated I/O] window.


5.3.8 Checking Profile Information

The profile information can be checked in the [Profile] window.

- Clicking the [Go] button and continuing execution from the current PC executes the SLEEP instruction and stops.

[List] Sheet: Displays the profile information as a list.

- Open the [Profile] window by selecting [Profile] from the [View->Performance] menu. The [List] sheet will be displayed.

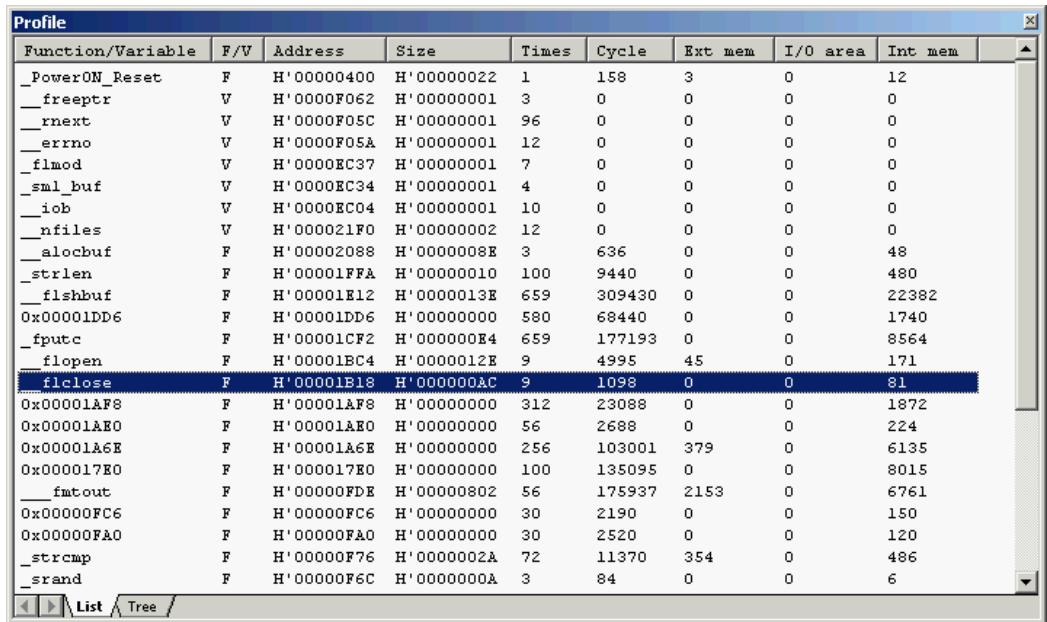

| Function/Variable | F/V | Address | Size | Times | Cycle | Ext mem | I/O area | Int mem |
|-------------------|-----|------------|------------|-------|--------|---------|----------|---------|
| _PowerON_Reset | F | H'00000400 | H'00000022 | 1 | 158 | 3 | 0 | 12 |
| __freeptr | V | H'0000F062 | H'00000001 | 3 | 0 | 0 | 0 | 0 |
| __rnext | V | H'0000F05C | H'00000001 | 96 | 0 | 0 | 0 | 0 |
| __errno | V | H'0000F05A | H'00000001 | 12 | 0 | 0 | 0 | 0 |
| __flmod | V | H'0000EC37 | H'00000001 | 7 | 0 | 0 | 0 | 0 |
| __sml_buf | V | H'0000EC34 | H'00000001 | 4 | 0 | 0 | 0 | 0 |
| __iob | V | H'0000EC04 | H'00000001 | 10 | 0 | 0 | 0 | 0 |
| __nfiles | V | H'000021F0 | H'00000002 | 12 | 0 | 0 | 0 | 0 |
| __alocbuf | F | H'00002088 | H'00000008 | 3 | 636 | 0 | 0 | 48 |
| __strlen | F | H'00001FFA | H'00000010 | 100 | 9440 | 0 | 0 | 480 |
| __flshbuf | F | H'00001E12 | H'0000013E | 659 | 309430 | 0 | 0 | 22382 |
| 0x00001DD6 | F | H'00001DD6 | H'00000000 | 580 | 68440 | 0 | 0 | 1740 |
| __fputc | F | H'00001CF2 | H'000000E4 | 659 | 177193 | 0 | 0 | 8564 |
| __flopen | F | H'00001BC4 | H'0000012E | 9 | 4995 | 45 | 0 | 171 |
| __fclose | F | H'00001B18 | H'000000AC | 9 | 1098 | 0 | 0 | 81 |
| 0x00001AF8 | F | H'00001AF8 | H'00000000 | 312 | 23088 | 0 | 0 | 1872 |
| 0x00001AE0 | F | H'00001AE0 | H'00000000 | 56 | 2688 | 0 | 0 | 224 |
| 0x00001AE | F | H'00001AE | H'00000000 | 256 | 103001 | 379 | 0 | 6135 |
| 0x000017E0 | F | H'000017E0 | H'00000000 | 100 | 135095 | 0 | 0 | 8015 |
| __fmtout | F | H'00000FDE | H'00000802 | 56 | 175937 | 2153 | 0 | 6761 |
| 0x00000FC6 | F | H'00000FC6 | H'00000000 | 30 | 2190 | 0 | 0 | 150 |
| 0x00000FA0 | F | H'00000FA0 | H'00000000 | 30 | 2520 | 0 | 0 | 120 |
| __strcmp | F | H'00000F76 | H'0000002A | 72 | 11370 | 354 | 0 | 486 |
| __srand | F | H'00000F6C | H'0000000A | 3 | 84 | 0 | 0 | 6 |


Figure 5.27 Profile Window (List Sheet)

In above figure, it can be found that the __fclose function was called six times, the execution cycle was 1182, and the internal memory was accessed 87 times.

It is possible to search for the critical path, such as a function that is called or accesses the memory many times, for the program performance.

[Tree] Sheet: Displays the profile information as a tree diagram.

- Select the [Tree] sheet. Double-clicking the function name in the [Profile] window expands or minimizes the tree structure.

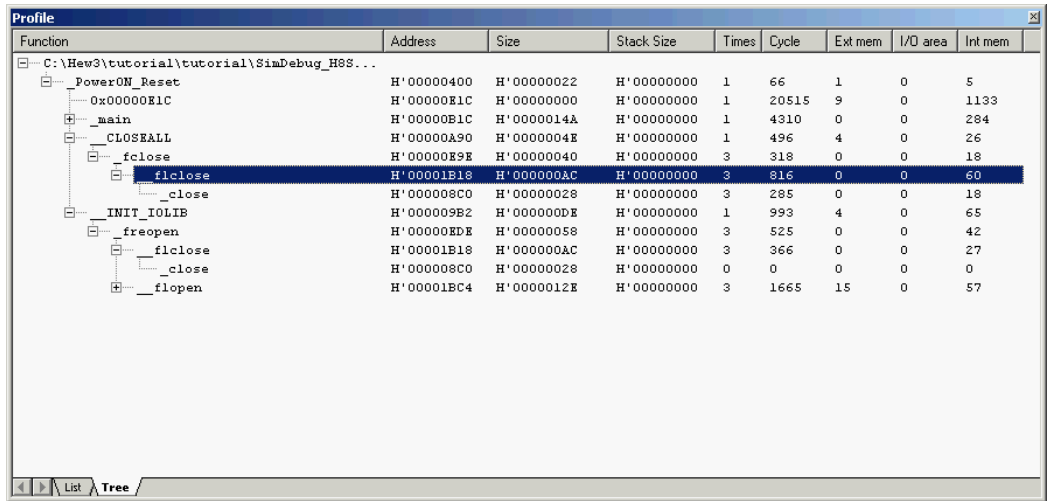

The screenshot shows a window titled "Profile" with a tab labeled "Tree". The window displays a hierarchical tree of functions and their execution statistics. The tree structure is as follows:

- C:\Hew3\tutorial\tutorial\SimDebug_H8S...
 - PowerON_Reset
 - 0x0000E1C
 - _main
 - CLOSEALL
 - _fclose
 - _fclose (highlighted)
 - INIT_IOLIB
 - _freopen
 - _fclose
 - _close
 - _fclose
 - _flopen

The table below shows the execution statistics for each function in the tree:

| Function | Address | Size | Stack Size | Times | Cycle | Ext mem | I/O area | Int mem |
|-----------------------|------------|------------|------------|-------|-------|---------|----------|---------|
| PowerON_Reset | H'00000400 | H'00000022 | H'00000000 | 1 | 66 | 1 | 0 | 5 |
| 0x0000E1C | H'00000E1C | H'00000000 | H'00000000 | 1 | 20515 | 9 | 0 | 1133 |
| _main | H'00000B1C | H'0000014A | H'00000000 | 1 | 4310 | 0 | 0 | 284 |
| CLOSEALL | H'00000A90 | H'0000004E | H'00000000 | 1 | 496 | 4 | 0 | 26 |
| _fclose | H'00000E9E | H'00000040 | H'00000000 | 3 | 318 | 0 | 0 | 18 |
| _fclose (highlighted) | H'00001B18 | H'000000AC | H'00000000 | 3 | 816 | 0 | 0 | 60 |
| _close | H'000008C0 | H'00000028 | H'00000000 | 3 | 285 | 0 | 0 | 18 |
| INIT_IOLIB | H'000009B2 | H'000000DE | H'00000000 | 1 | 993 | 4 | 0 | 65 |
| _freopen | H'00000EDE | H'00000058 | H'00000000 | 3 | 525 | 0 | 0 | 42 |
| _fclose | H'00001B18 | H'000000AC | H'00000000 | 3 | 366 | 0 | 0 | 27 |
| _close | H'000008C0 | H'00000028 | H'00000000 | 0 | 0 | 0 | 0 | 0 |
| _flopen | H'00001BC4 | H'0000012E | H'00000000 | 3 | 1665 | 15 | 0 | 57 |

Figure 5.28 Profile Window (Tree Sheet)

In above figure, it can be found that the `__fclose` function was called three times from the `_fclose` function, the execution cycle was 816, and the internal memory was accessed 60 times.

[Profile-Chart] Window: Displays the relation of calls for a specific function.

- Select the `__fclose` function on the [Profile] window. Open the pop-up menu by right clicking the mouse on the [Profile] window, and select [View Profile-Chart] to display the [Profile-Chart] window.

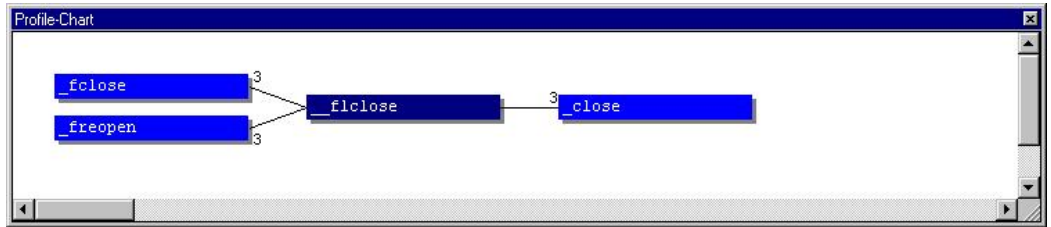


Figure 5.29 Profile-Chart Window

In above figure, it can be found that the `__fclose` function was called three times from the `_fclose` and `_freopen` functions, and the `_close` function was called three times.

This is the end of the tutorial using the simulator/debugger.

Section 6 Exiting from the HEW

Selecting [File->Exit] will close the HEW. Depending on the setting, the message box (figure 6.1) which asks you whether to save the session or not will be launched. Not only the setting like this regarding exiting from the HEW but also setting regarding initiation of the HEW can be specified via [Tools->Options...]. For details, refer to the High-Performance Embedded Workshop 3 User's Manual.

The other tools launched from the HEW will not be closed when the HEW is closed. Close the tools by yourself.

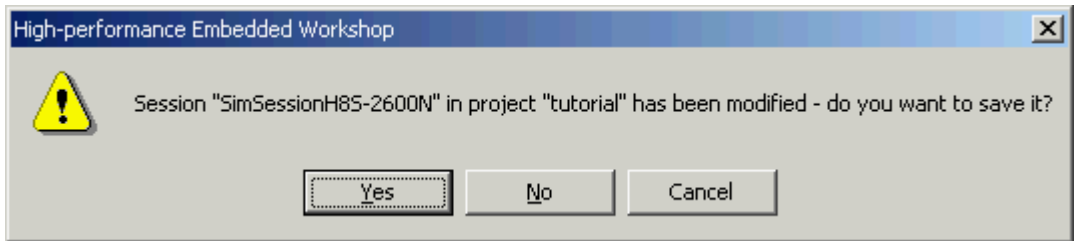


Figure 6.1 Confirmation Dialog Box for Saving Session on Exiting from the HEW

H8S, H8/300 Series

High-Performance Embedded Workshop 3

Tutorial

Publication Date: Rev.2.00, June 25, 2004

Published by: Sales Strategic Planning Div.
Renesas Technology Corp.

Edited by: Technical Documentation & Information Department
Renesas Kodaira Semiconductor Co., Ltd.

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan



RENESAS SALES OFFICES

<http://www.renesas.com>

Renesas Technology America, Inc.

450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500 Fax: <1> (408) 382-7501

Renesas Technology Europe Limited.

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, United Kingdom
Tel: <44> (1628) 585 100, Fax: <44> (1628) 585 900

Renesas Technology Europe GmbH

Dornacher Str. 3, D-85622 Feldkirchen, Germany
Tel: <49> (89) 380 70 0, Fax: <49> (89) 929 30 11

Renesas Technology Hong Kong Ltd.

7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2375-6836

Renesas Technology Taiwan Co., Ltd.

FL 10, #99, Fu-Hsing N. Rd., Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology (Shanghai) Co., Ltd.

26/F., Ruijin Building, No.205 Maoming Road (S), Shanghai 200020, China
Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

Renesas Technology Singapore Pte. Ltd.

1, Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001

H8S, H8/300 Series High-Performance Embedded Workshop 3 Tutorial



Renesas Electronics Corporation

1753, Shimonumabe, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8668 Japan

REJ10B0024-0200H