

EXPERIMENT-3

AIM: To study the packet tracer tool
Installation and user interface overview.

Analyse the behaviour of network devices
using CISCO Packet Tracer Simulator.

1. From the network component box, click
and drag-and-drop the below components:


- Generic PCs and One HUB
- Generic PCs and One Switch

2. Click on Connections:


a. Click on copper straight through cable

b. Select one of the PC and connect it to
HUB using the cable. The link LED
glow green indicating that the
link is up, similarly connect
remaining 3 PC's to the hub.

c. Similarly connect 4 PCs to the
switch using copper-straight-through
cable.

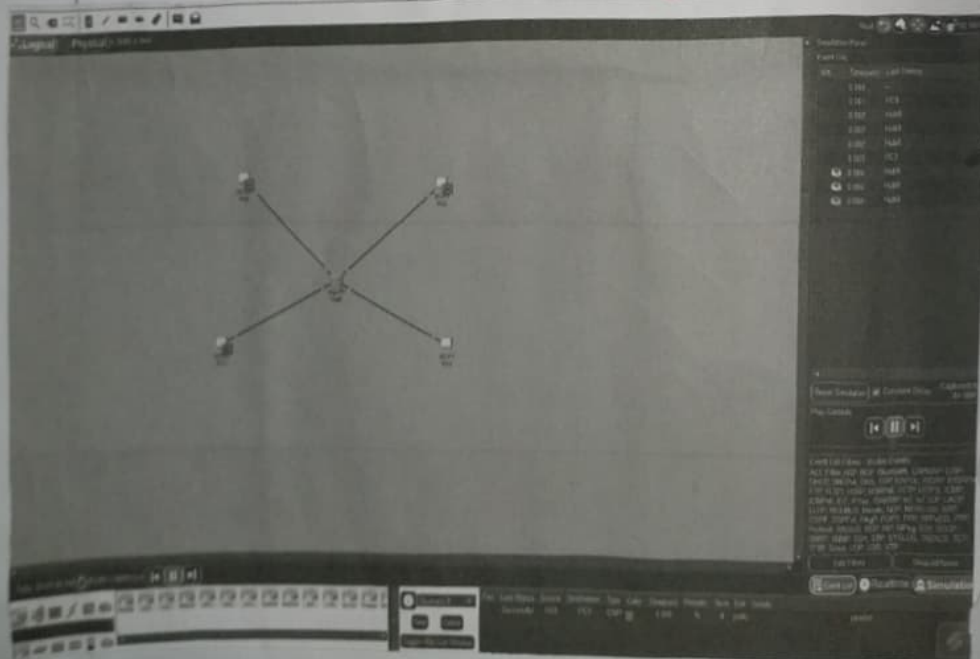

3. click on the PCs connected to hub, go to the Desktop tab, click on IP Configuration, and enter an IP address and subnet mask. Here, the default gateway and DNS server information is not needed as there are only one devices in the network.

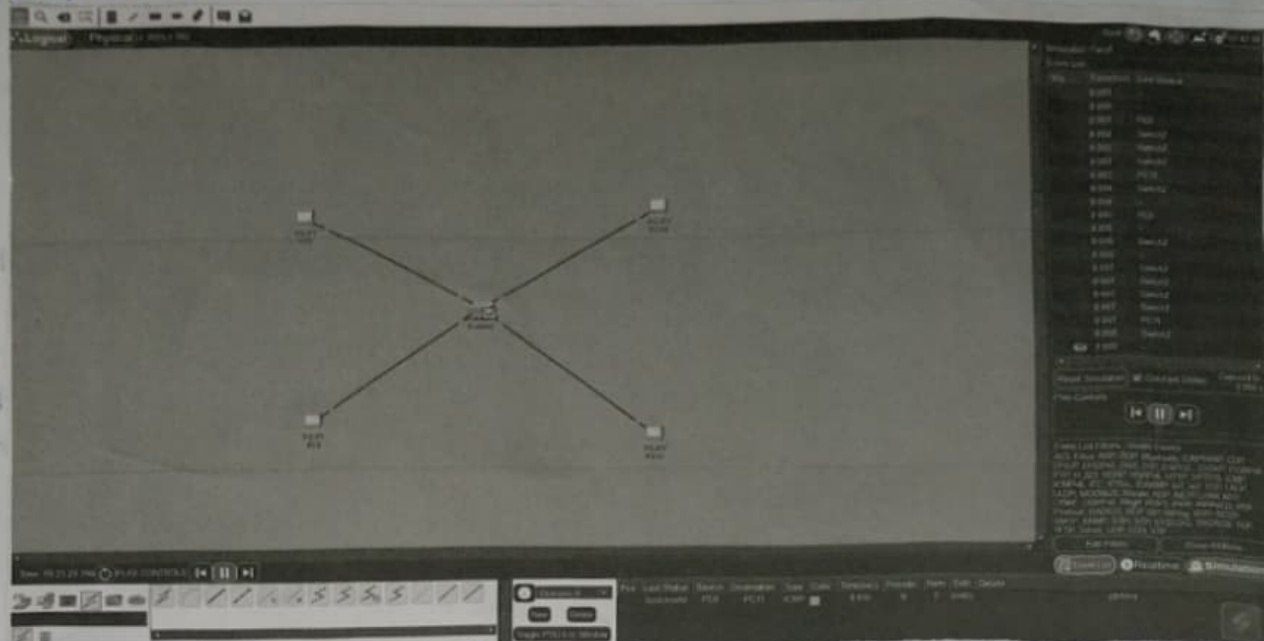

4. Drag and drop it on one of PC (source machine) and then drop it on another PC (destination machine) connected to the hub.

5. Observe the flow of PDU from source PC to destination PC by selecting the Realtime mode of simulation.

6. Repeat step #3 to step #5 for the PCs connected to the switch.

7. Observe how HUB and switch are forwarding the PDU and write your observation and conclusion about the behaviors of switch and HUB.

RESULT:

Thus, the study of packet tracer tool installation and user interface overview has been executed successfully.