EXPERIMENT-9

AIM:

Implementation of Subnetting in CISCO Packet tracer Simulator.

Creating a network topology:


To create a network topology in packet trace, select "New" button in top, then select network & generic.

Adding the devices:

To add a device, select the device from bottom left and drag it onto network topology.

Subnetting:

To subnet the network address of 192.168.1.0/24 to provide enough space for at least 5 address for end device, switch & router.

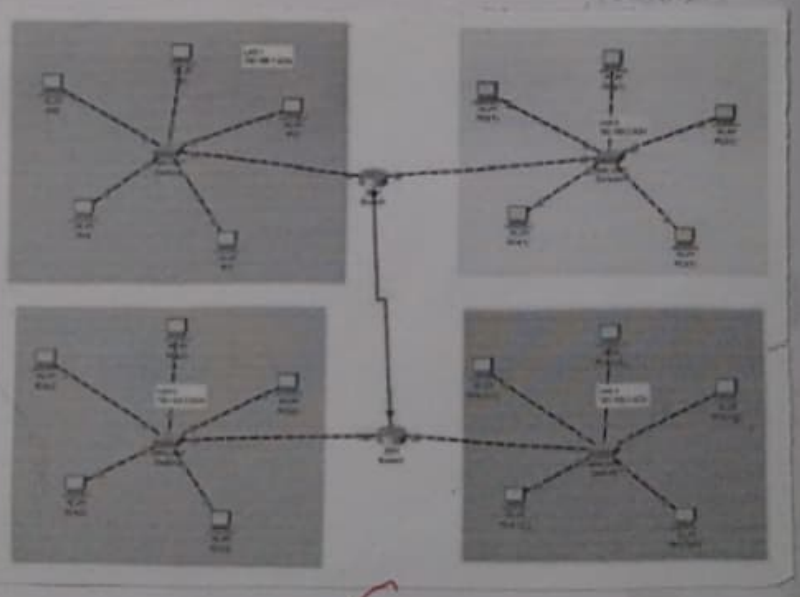

configuring the devices:

Right click on router and select "CLI". Will open by configuring the routers. Right click CLI enter following commands.

#enable
#configure terminal
Interface Fast Ethernet 0/0
#ip address {IP address} {Subnet mask}
#no shutdown
#exit

Interface Fast Ethernet 0/1
ip address {IP address} {subnet mask}
no shutdown
exit

TESTING THE NETWORK:

ire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num
	Successful	PC4(2)	Router2	ICMP		0.000	N	12
	Successful	PC4(2)	PC2(1)(1)	ICMP		0.000	N	13
	Successful	PC0	Router0	ICMP		0.000	N	14

RESULT:

The Implementation of subnetting in CISCO Packet tracer simulator was executed successfully.