EE 330
Lecture 10

IC Fabrication Technology

- Oxidation
- Epitaxy
- Polysilicon
- Planarization
- Contacts, Interconnect, and Metallization

IC Fabrication Technology

- Crystal Preparation
- Masking
- Photolithographic Process
- Deposition
- Ion Implantation
- Etching
- Diffusion
- Oxidation
- Epitaxy
- Polysilicon
- Contacts, Interconnect and Metalization
- Planarization

Oxidation

- SiO_2 is widely used as an insulator
  - Excellent insulator properties
- Used for gate dielectric
  - Gate oxide layers very thin
- Used to separate devices by raising threshold voltage
  - termed field oxide
  - field oxide layers very thick
- Methods of Oxidation
  - Thermal Growth (LOCOS)
    - Consumes host silicon
    - x units of SiO_2 consumes .47x units of Si
    - Undercutting of photoresist
    - Compromises planar surface for thick layers
    - Excellent quality
  - Chemical Vapor Deposition
    - Needed to put SiO_2 on materials other than Si

Oxidation

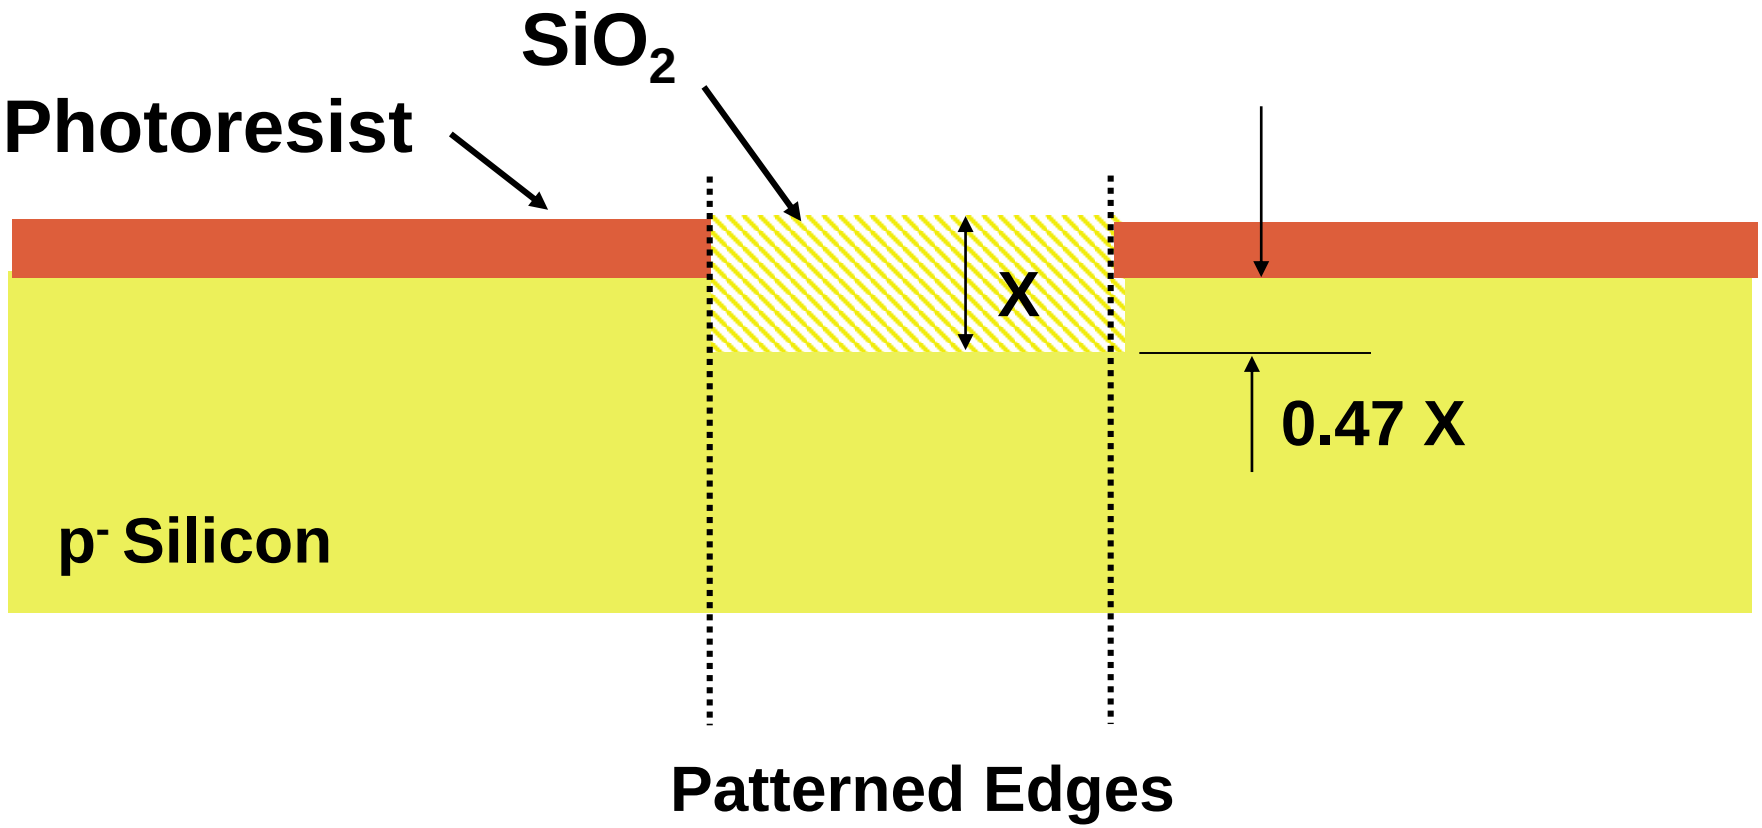

Thermally Grown SiO_2 - desired growth

Oxidation

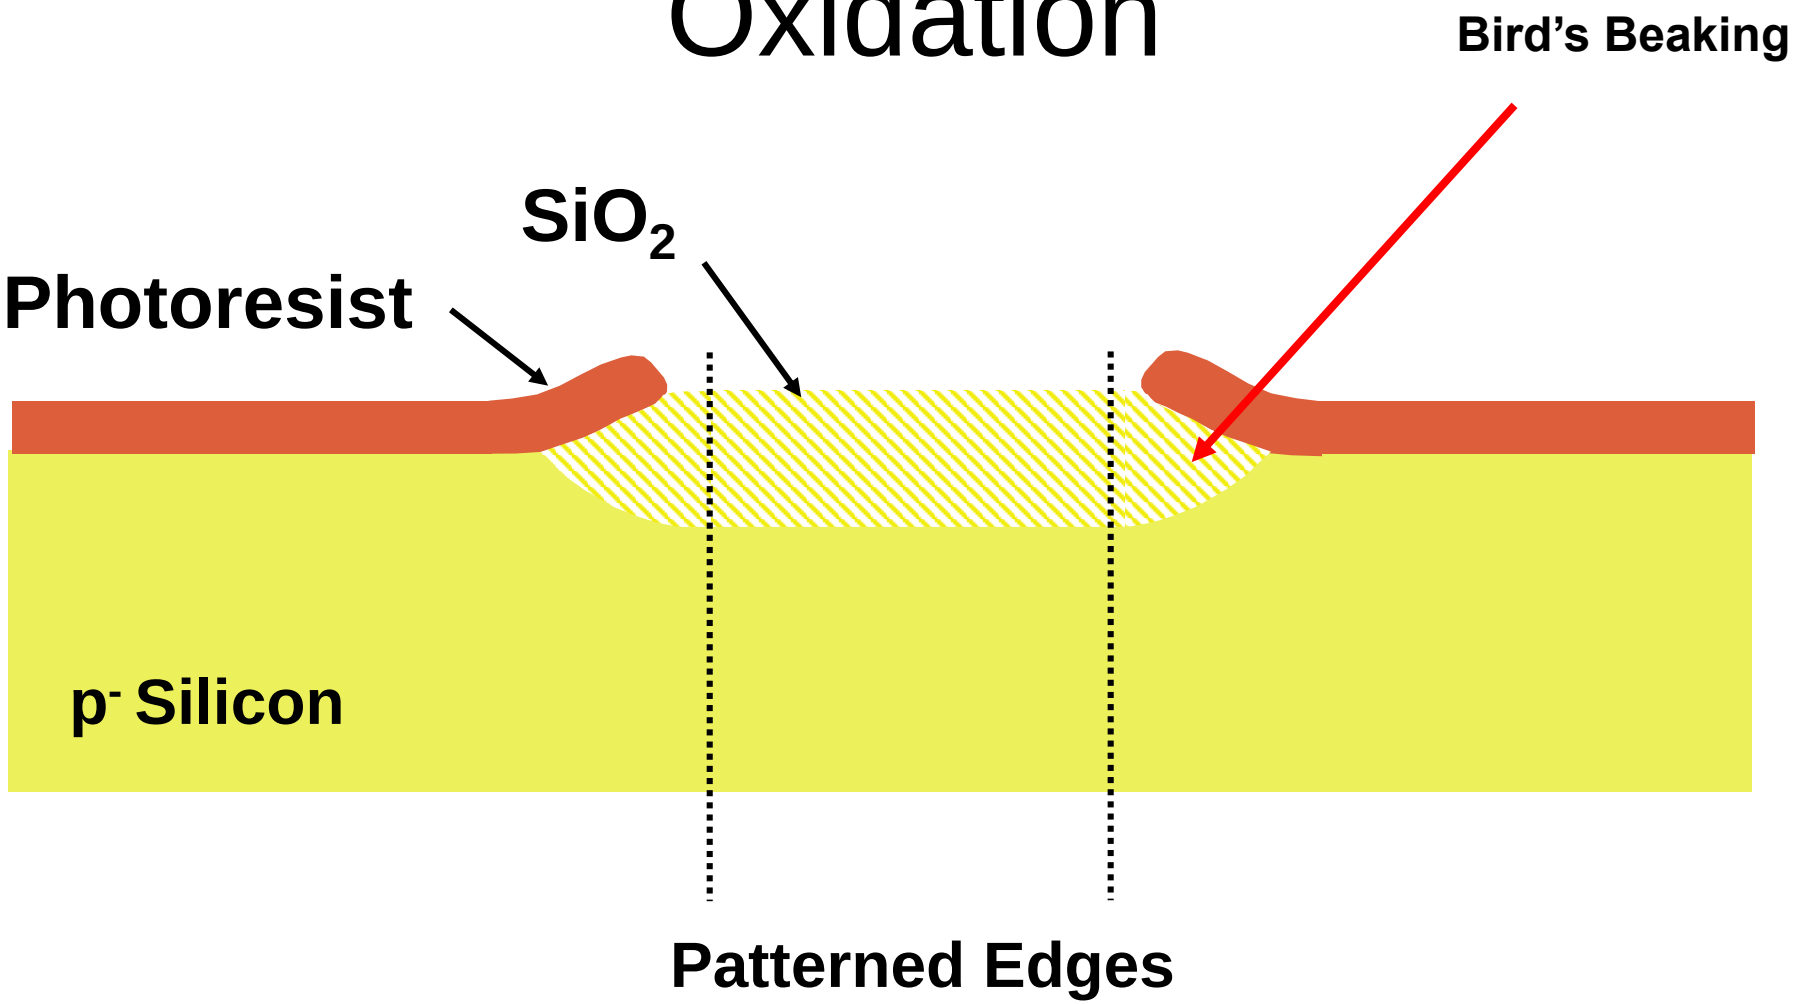

Thermally Grown SiO_2 - actual growth

Oxidation

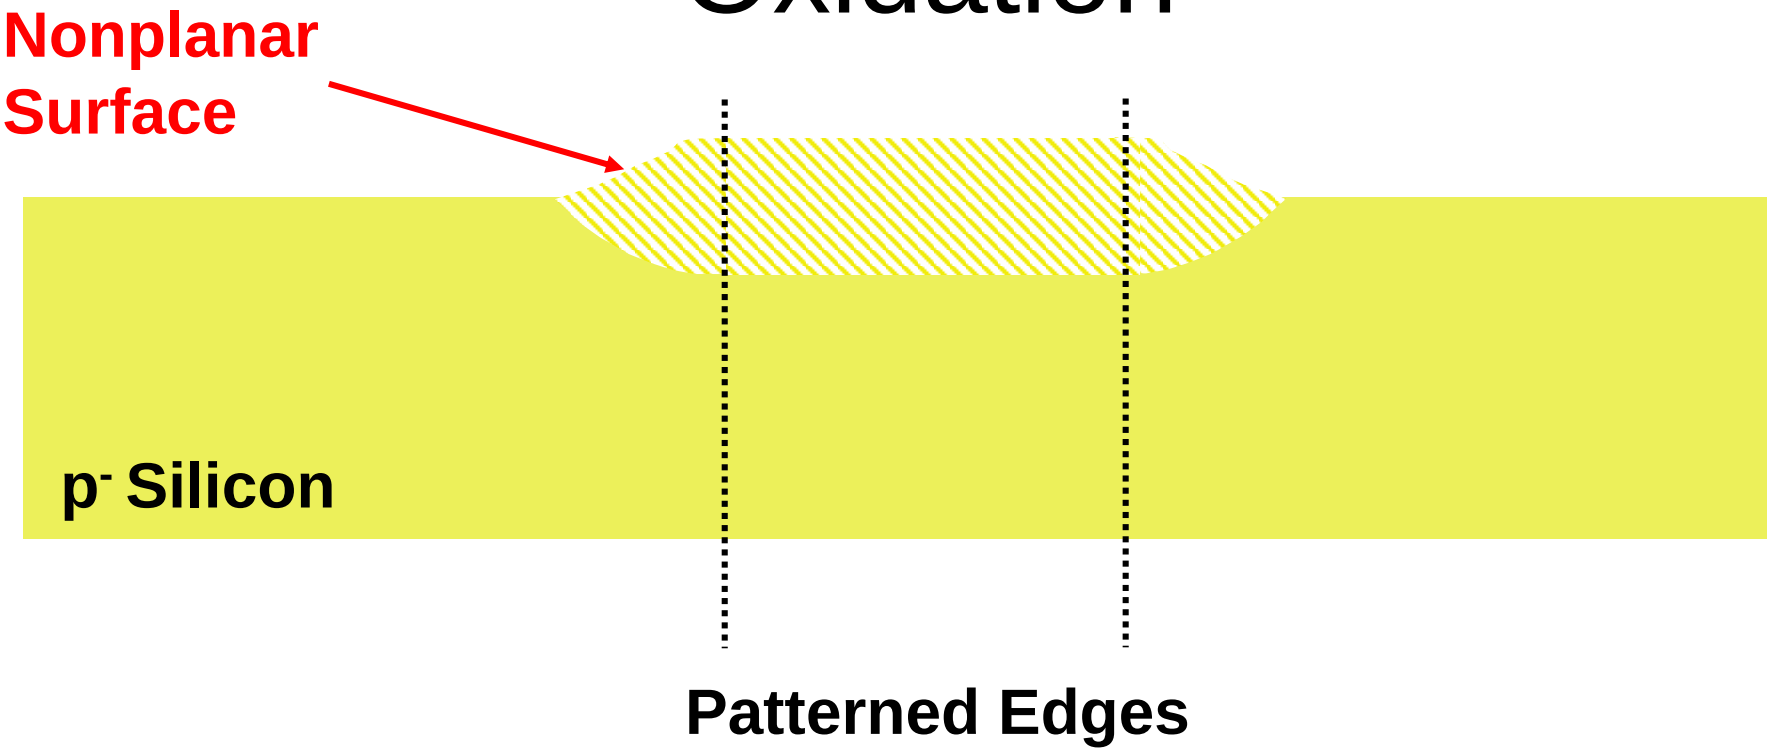

Thermally Grown SiO_2 - actual growth

Oxidation

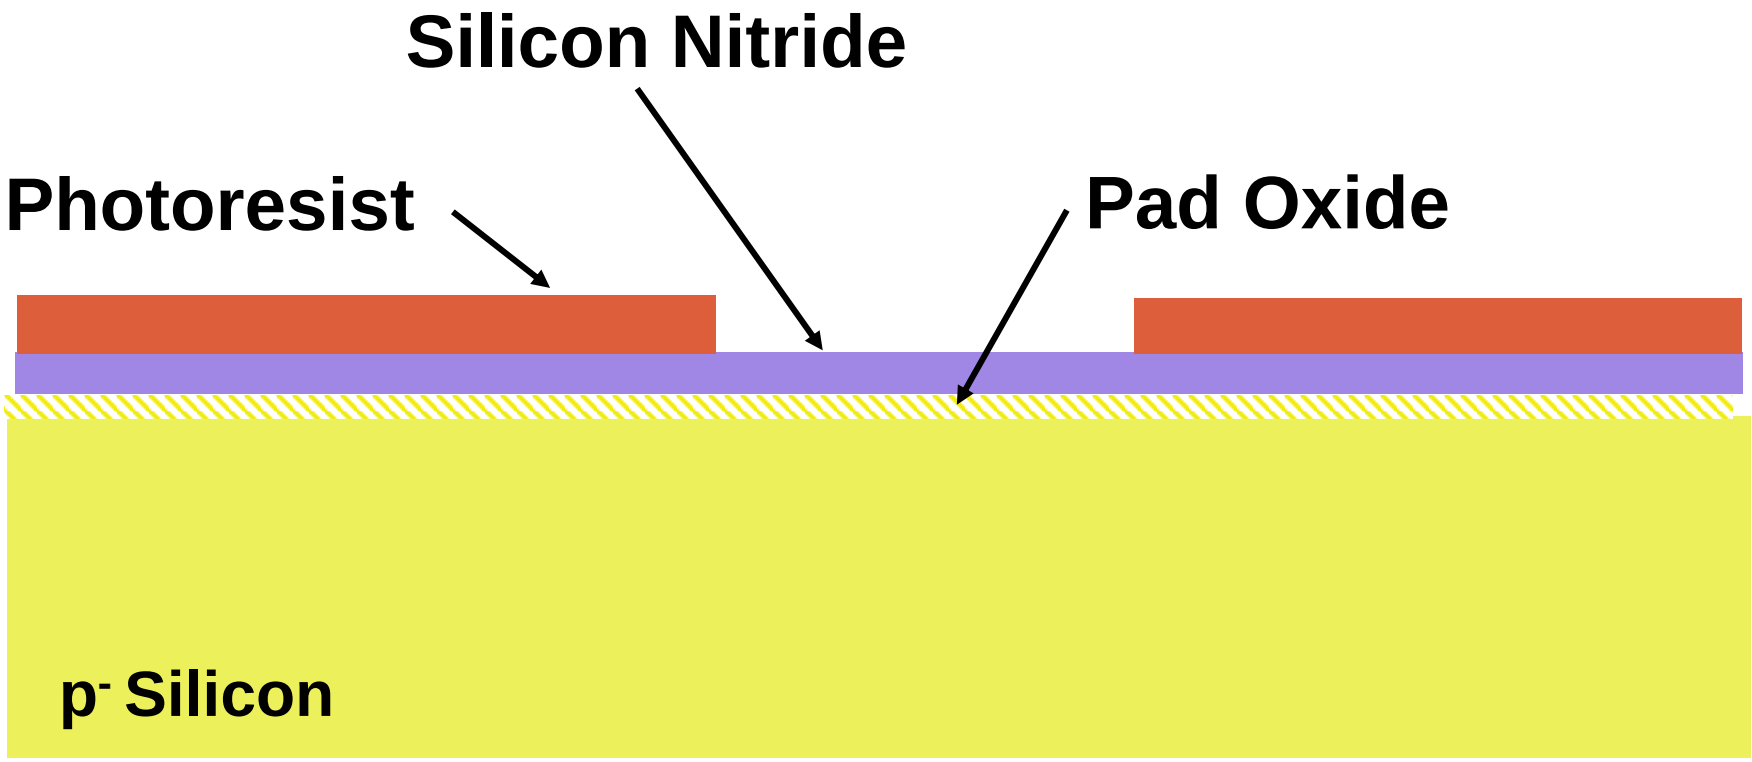

Shallow Trench Isolation (STI)

Oxidation

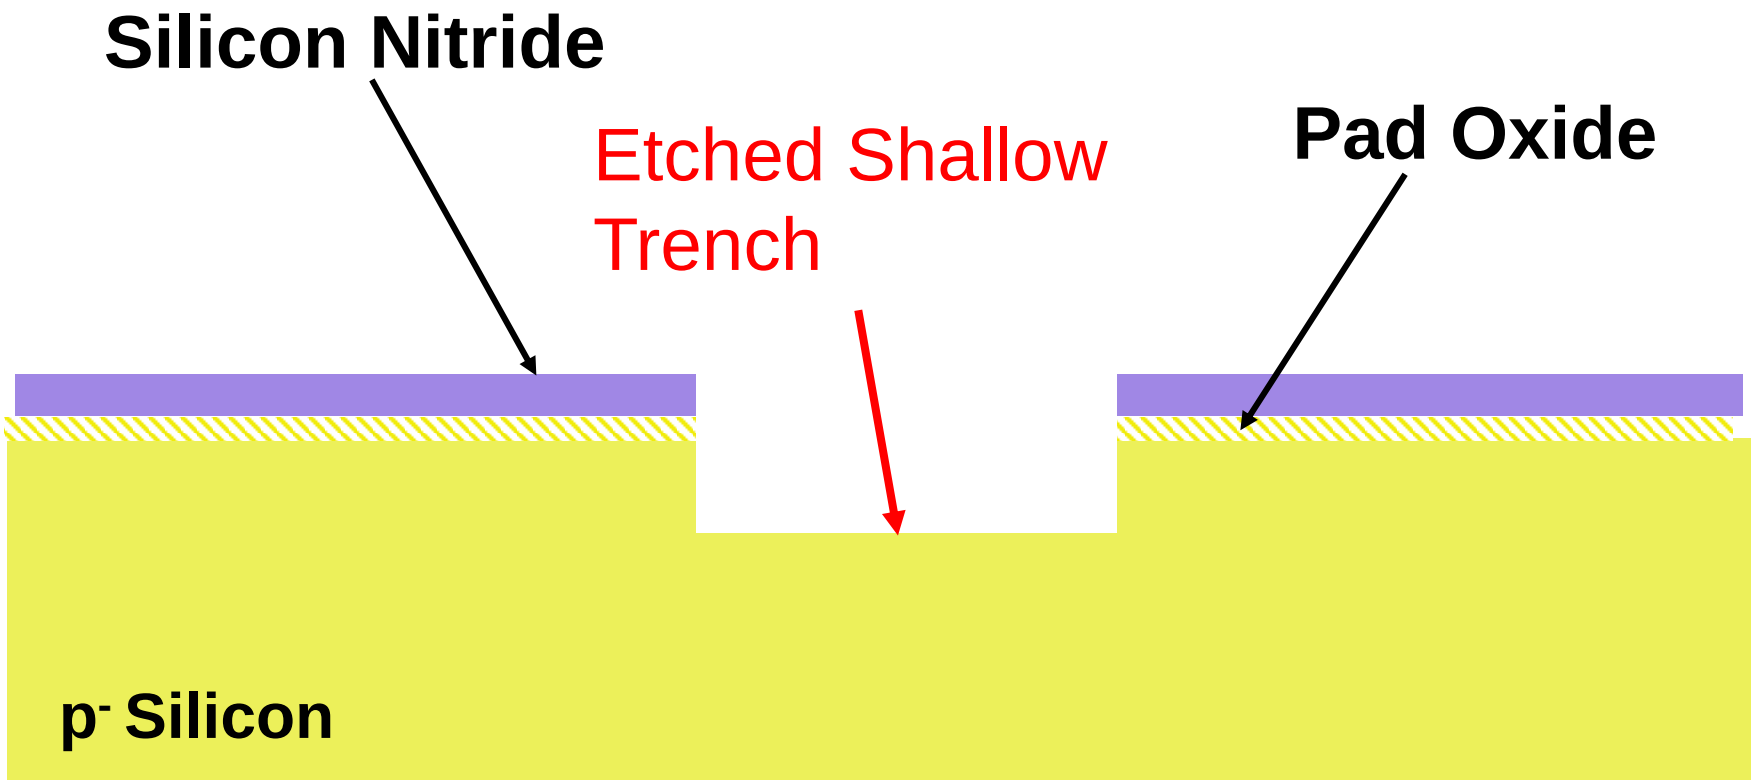

Shallow Trench Isolation (STI)

Oxidation

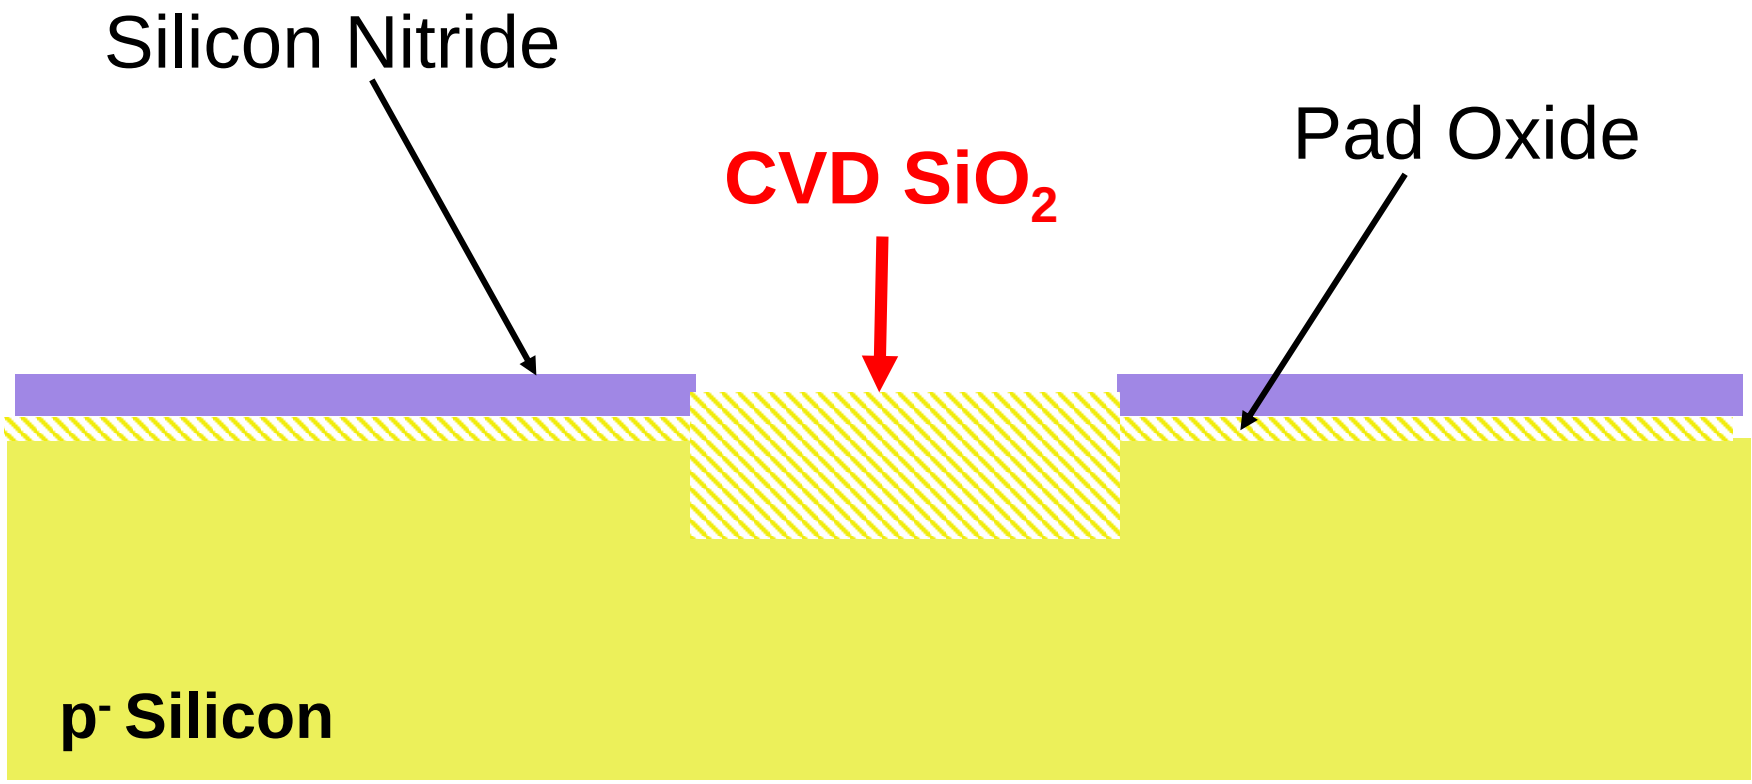

Shallow Trench Isolation (STI)

Oxidation

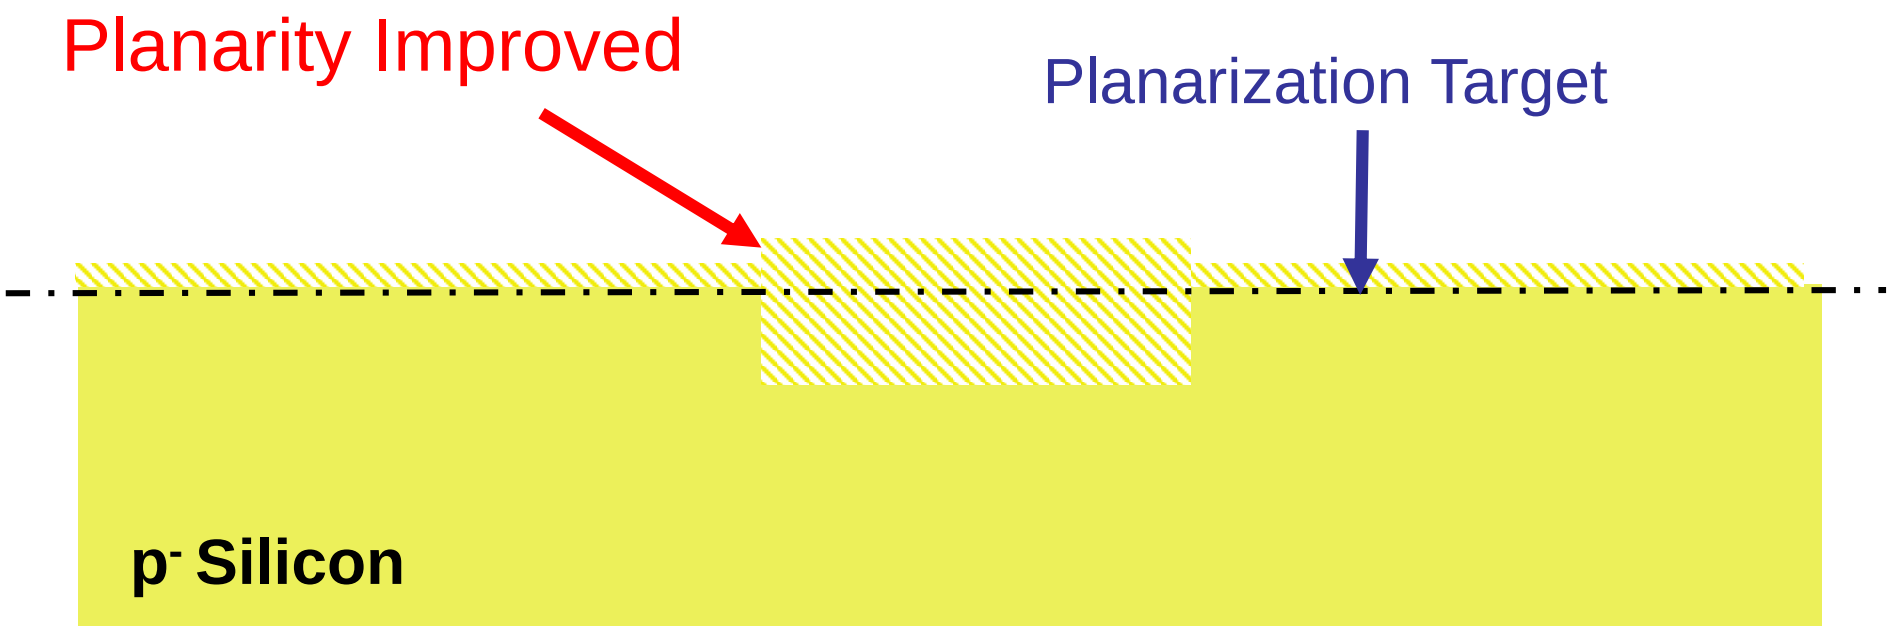

Shallow Trench Isolation (STI)

Oxidation

After Planarization

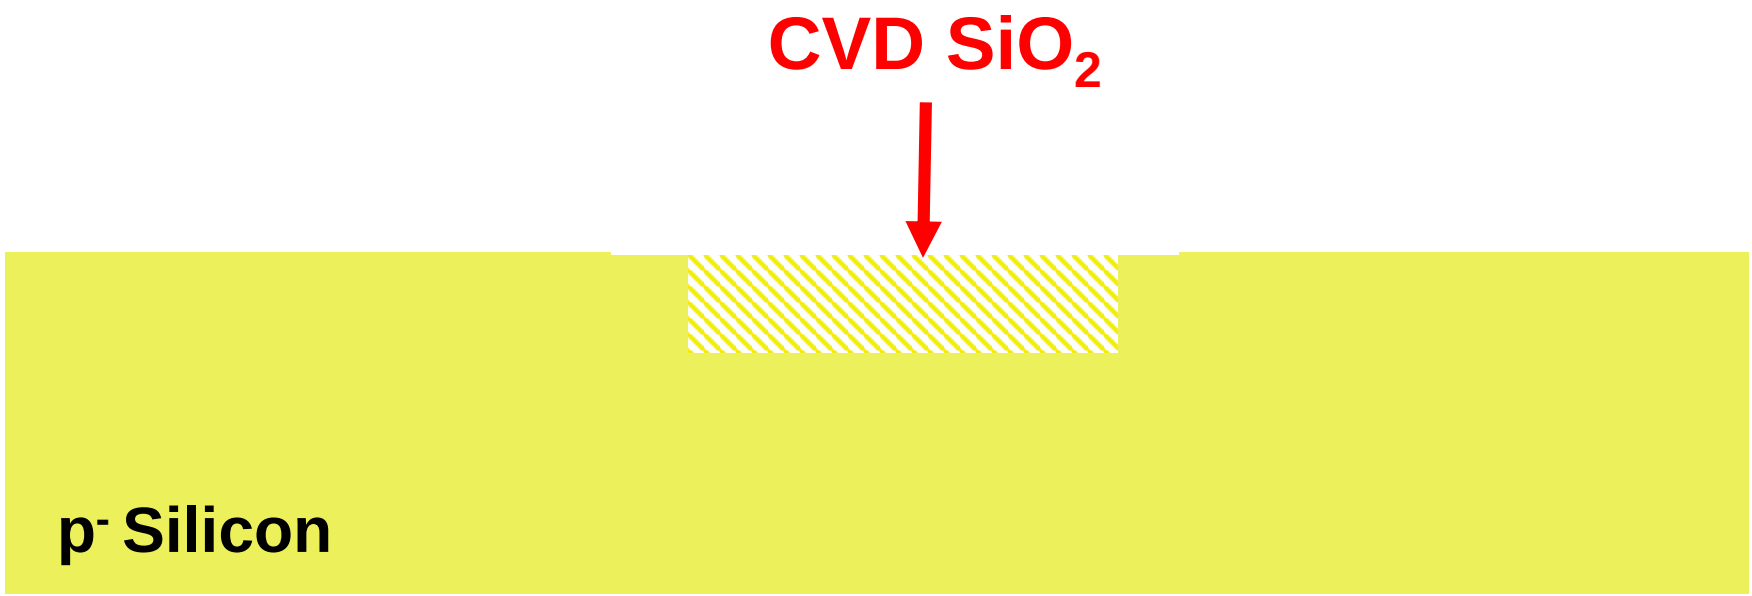

Shallow Trench Isolation (STI)

IC Fabrication Technology

- Crystal Preparation
- Masking
- Photolithographic Process
- Deposition
- Etching
- Diffusion
- Ion Implantation
- Oxidation
- Epitaxy
- Polysilicon
- Planarization
- Contacts, Interconnect and Metalization

Epitaxy

- Single Crystaline Extension of Substrate Crystal
  - Commonly used in bipolar processes
  - CVD techniques
  - Impurities often added during growth
  - Grows slowly to allow alignmnt with substrate

Epitaxy

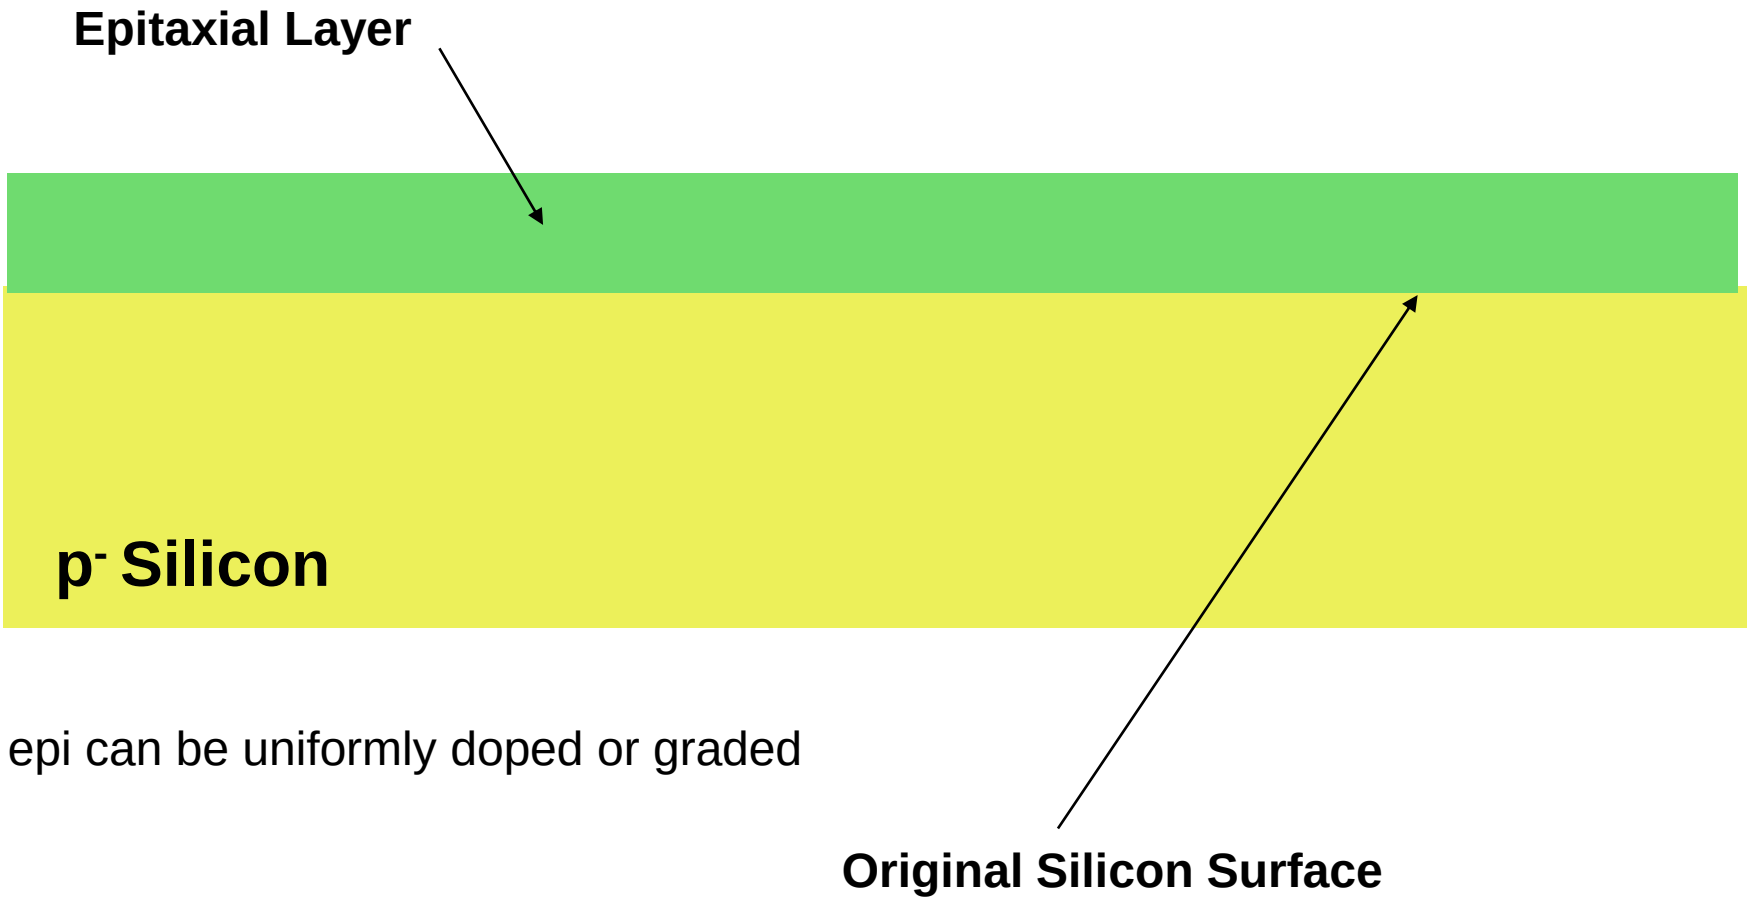

epi can be uniformly doped or graded

Question: Why can't a diffusion be used to create the same effect as an epi layer ?

IC Fabrication Technology

- Crystal Preparation
- Masking
- Photolithographic Process
- Deposition
- Etching
- Diffusion
- Ion Implantation
- Oxidation
- Epitaxy
- Polysilicon
- Planarization
- Contacts, Interconnect and Metalization

Polysilicon

- Elemental contents identical to that of single crystaline silicon
  - Electrical properties much different
  - If doped heavily makes good conductor
  - If doped moderately makes good resistor
  - Widely used for gates of MOS devices
  - Widely used to form resistors
  - Grows fast over non-crystaline surface
  - Patterned with Photoresist/Etch process
  - Silicide often used in regions where resistance must be small
    - Refractory metal used to form silicide
    - Designer must indicate where silicide is applied (or blocked)

Polysilicon

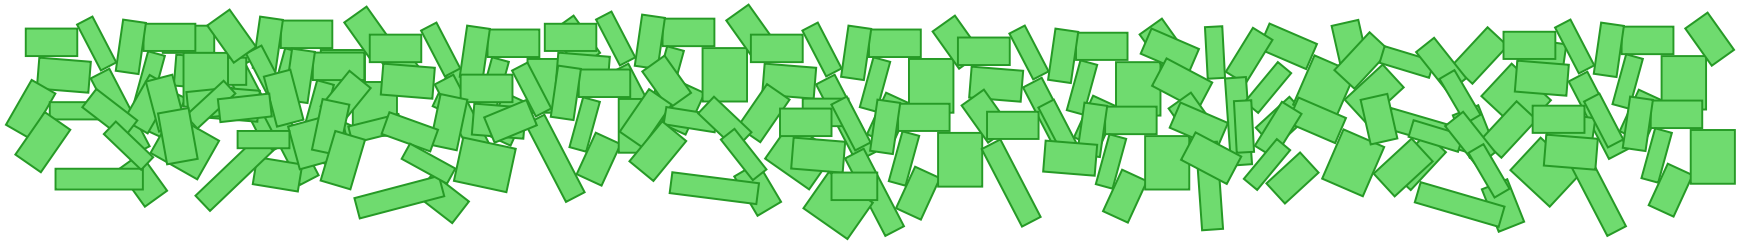

Polysilicon

Single-Crystaline Silicon

IC Fabrication Technology

- Crystal Preparation
- Masking
- Photolithographic Process
- Deposition
- Etching
- Diffusion
- Ion Implantation
- Oxidation
- Epitaxy
- Polysilicon
- Planarization
- Contacts, Interconnect and Metalization

Planarization

- Planarization used to keep surface planar during subsequent processing steps
  - Important for creating good quality layers in subsequent processing steps
  - Mechanically planarized

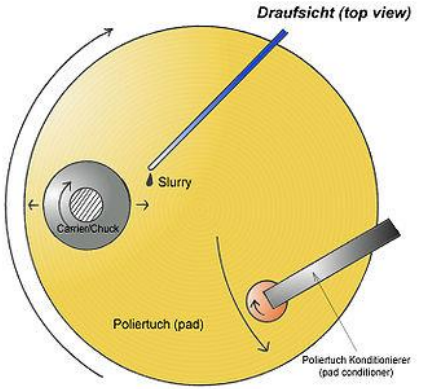

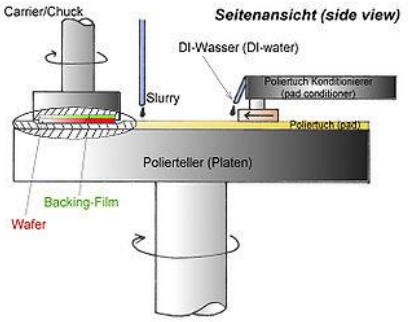

IC Fabrication Technology

- Crystal Preparation
- Masking
- Photolithographic Process
- Deposition
- Etching
- Diffusion
- Ion Implantation
- Oxidation
- Epitaxy
- Polysilicon
- Planarization
- Contacts, Interconnect and Metalization

Contacts, Interconnect and Metalization

- Contacts usually of a fixed size
  - All etches reach bottom at about the same time
  - Multiple contacts widely used
  - Contacts not allowed to Poly on thin oxide in most processes
  - Dog-bone often needed for minimum-length devices

Contacts

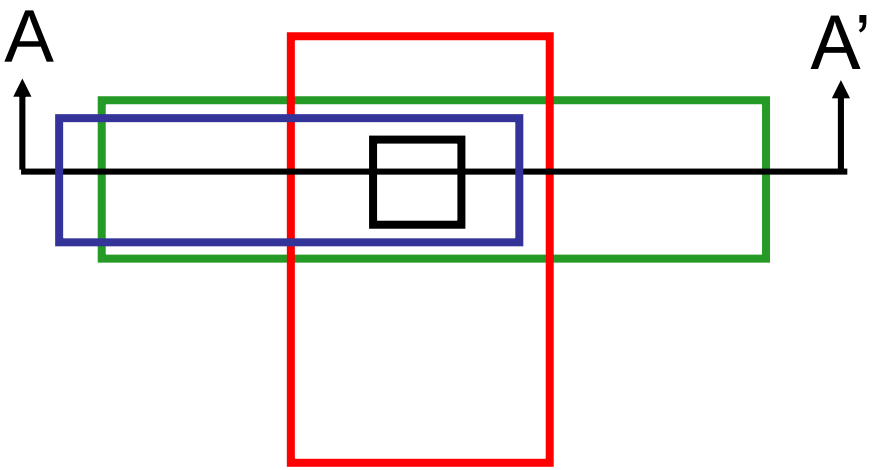

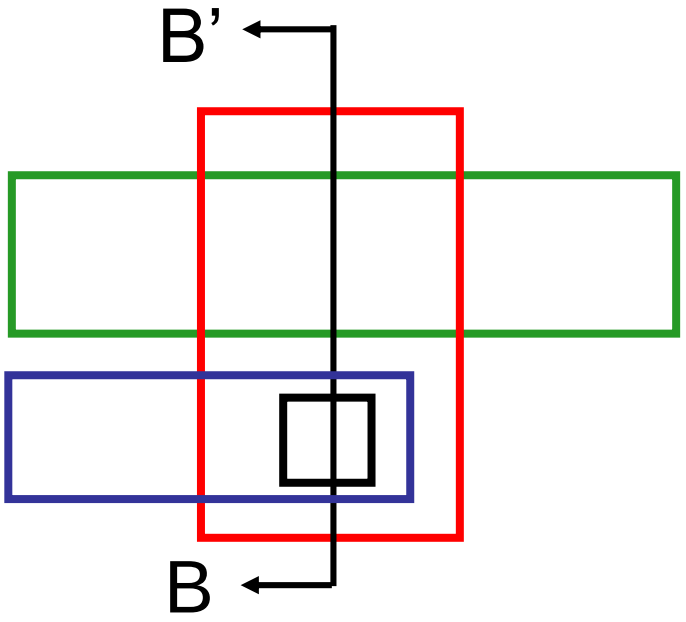

Acceptable Contact

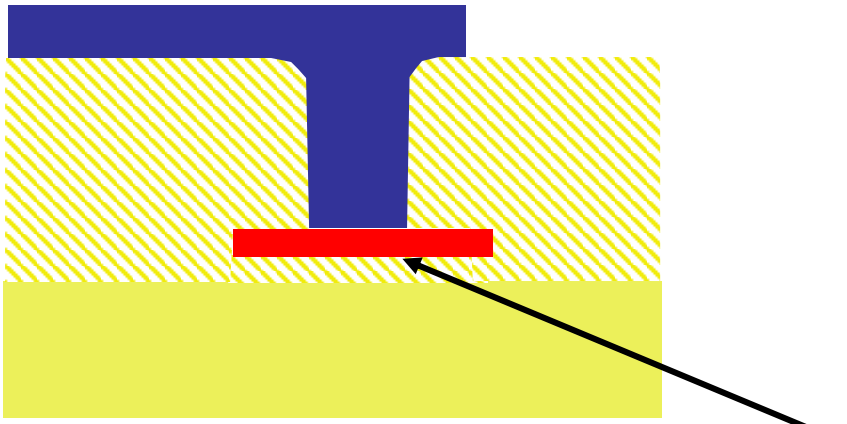

Unacceptable Contact

Vulnerable to pin holes
(usually all contacts are same size)

Contacts

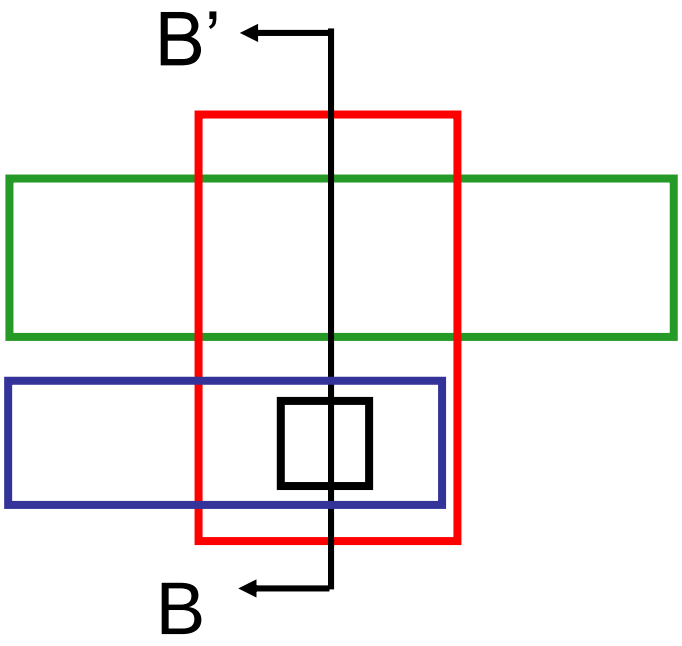

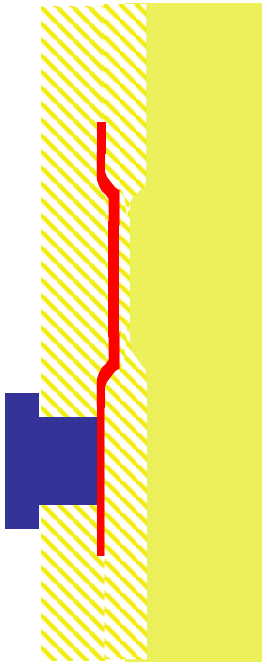

Acceptable Contact

Contacts

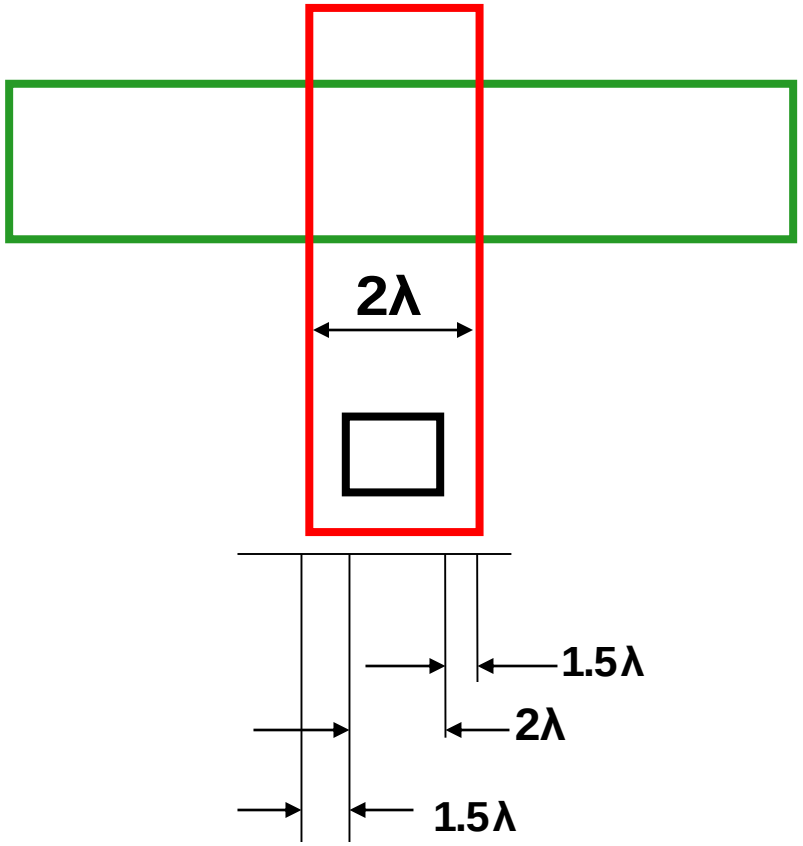

Design Rule Violation

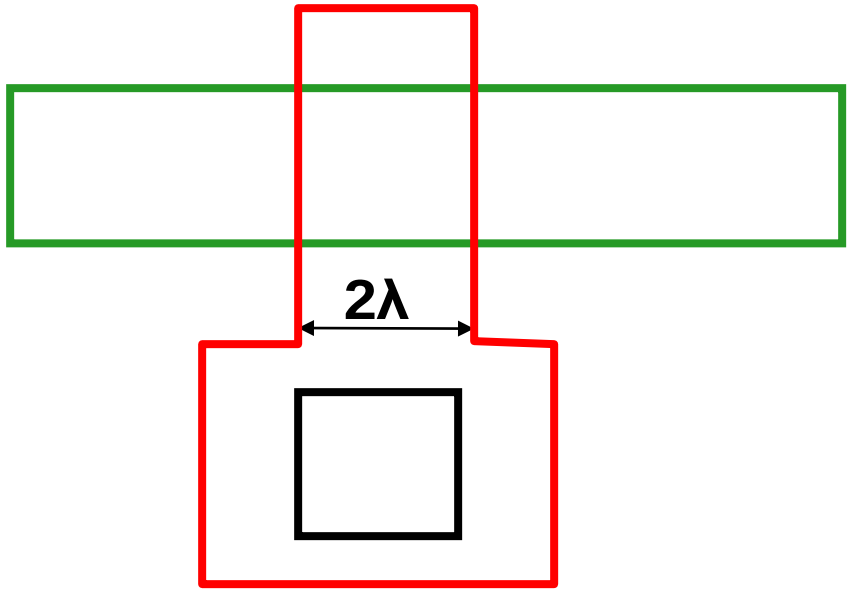

“Dog Bone” Contact

Contacts

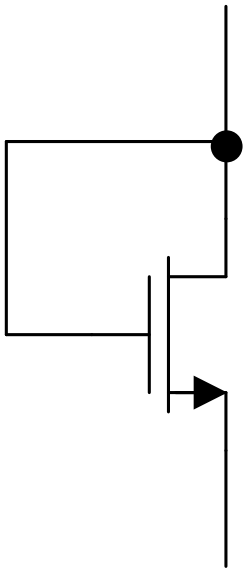

Common
Circuit
Connection

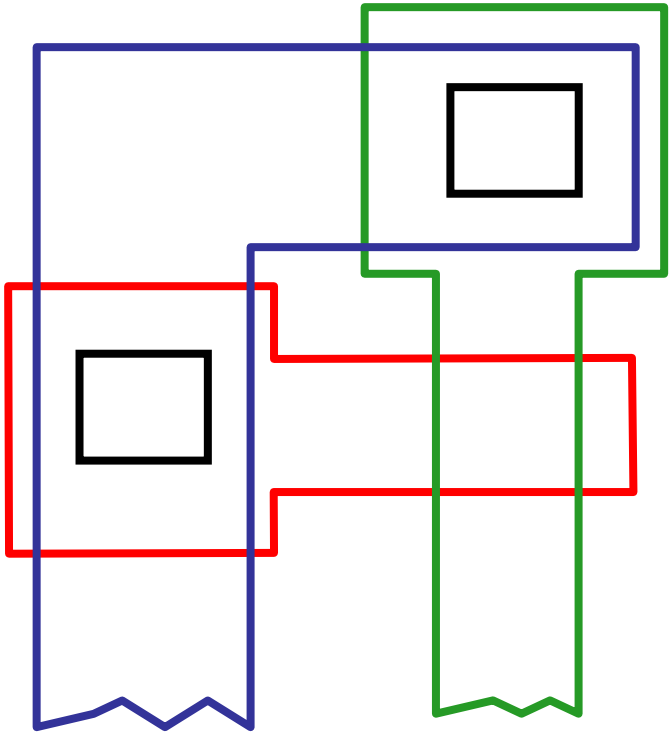

Standard Interconnection

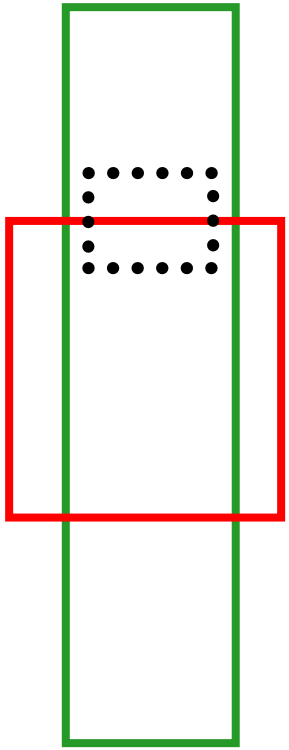

Buried Contact

Can save area but not
allowed in many processes

Metalization

- Aluminum widely used for interconnect
- Copper often replacing aluminum in recent processes
- Must not exceed maximum current density
  - around 1ma/u for aluminum and copper
- Ohmic Drop must be managed
- Parasitic Capacitances must be managed
- Interconnects from high to low level metals require connections to each level of metal
- Stacked vias permissible in some processes

Metalization

Aluminum

- Aluminum is usually deposited uniformly over entire surface and etched to remove unwanted aluminum
- Mask is used to define area in photoresist where aluminum is to be removed

Copper

- Plasma etches not effective at removing copper because of absence of volatile copper compounds
- Barrier metal layers needed to isolate silicon from migration of copper atoms
- Damascene or Dual-Damascene processes used to pattern copper

Patterning of Aluminum

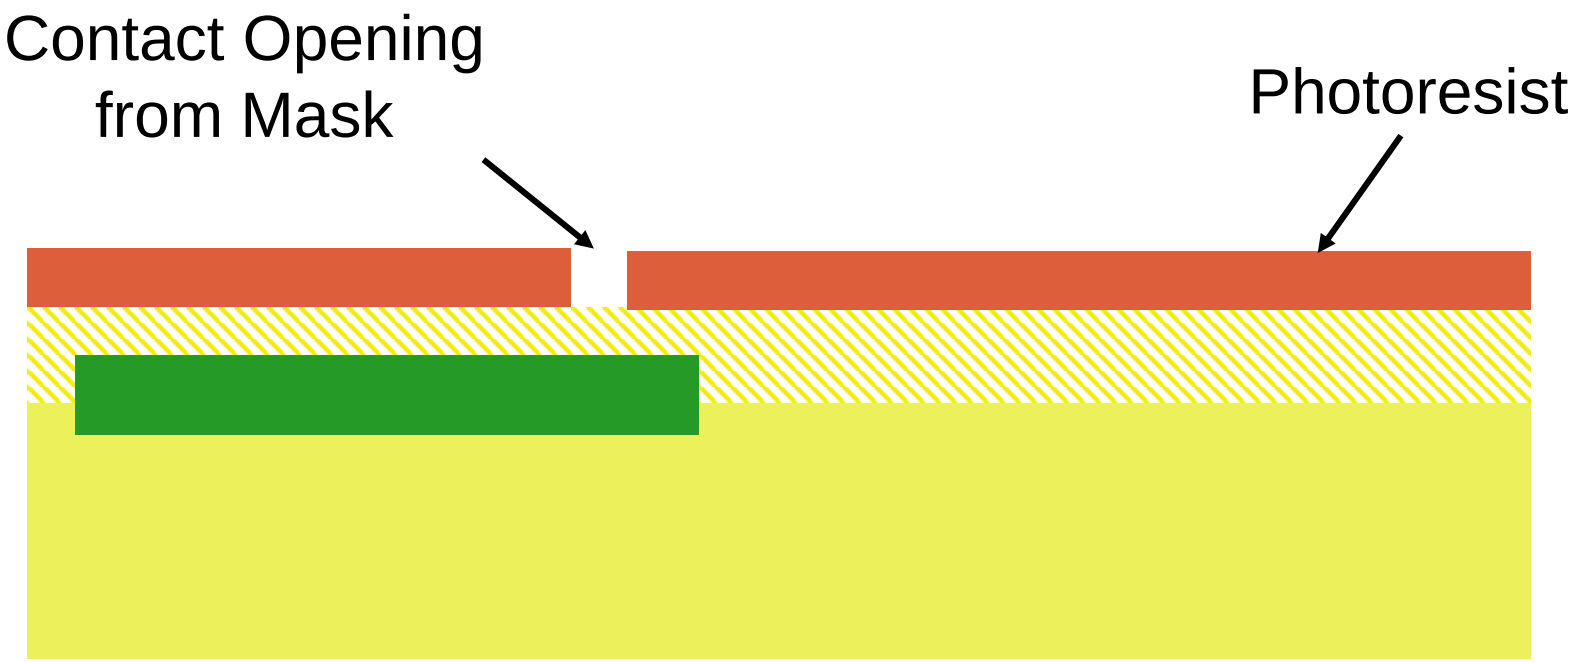

Patterning of Aluminum

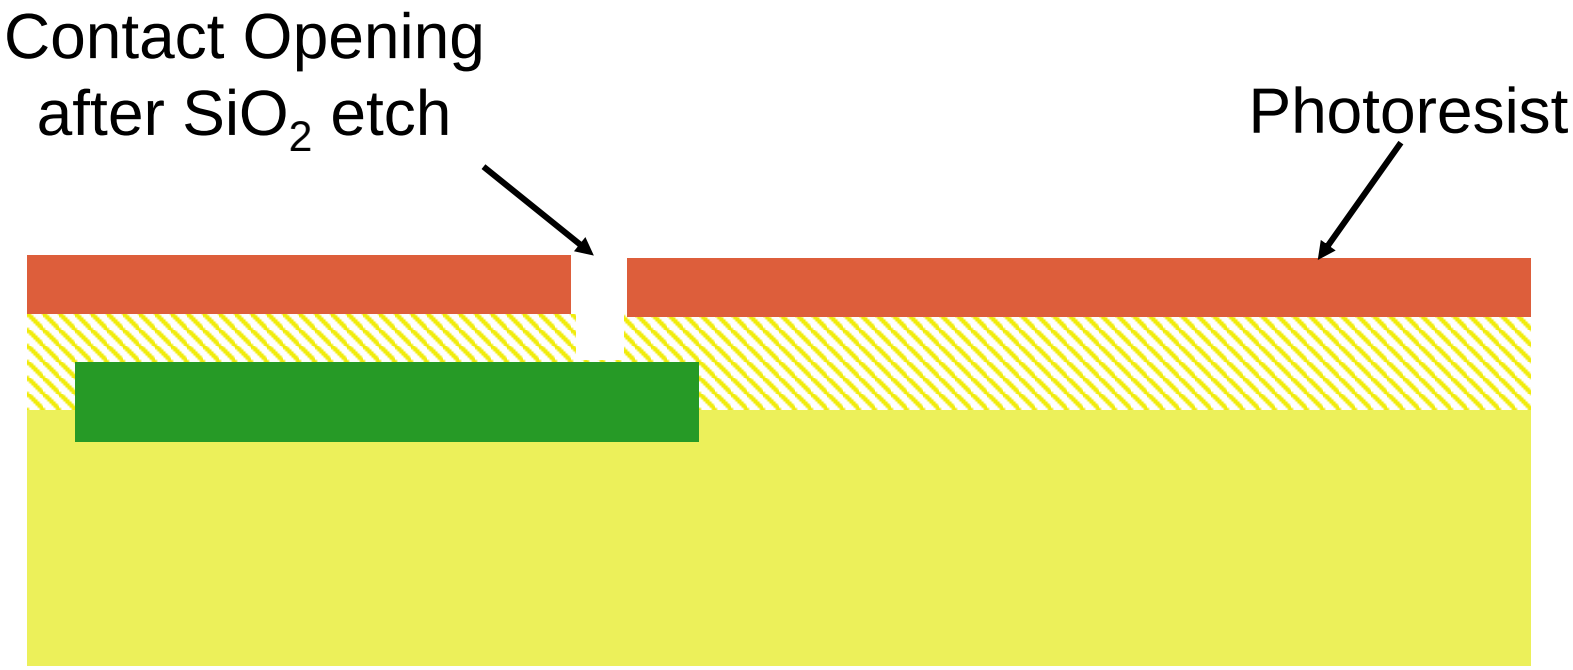

Patterning of Aluminum

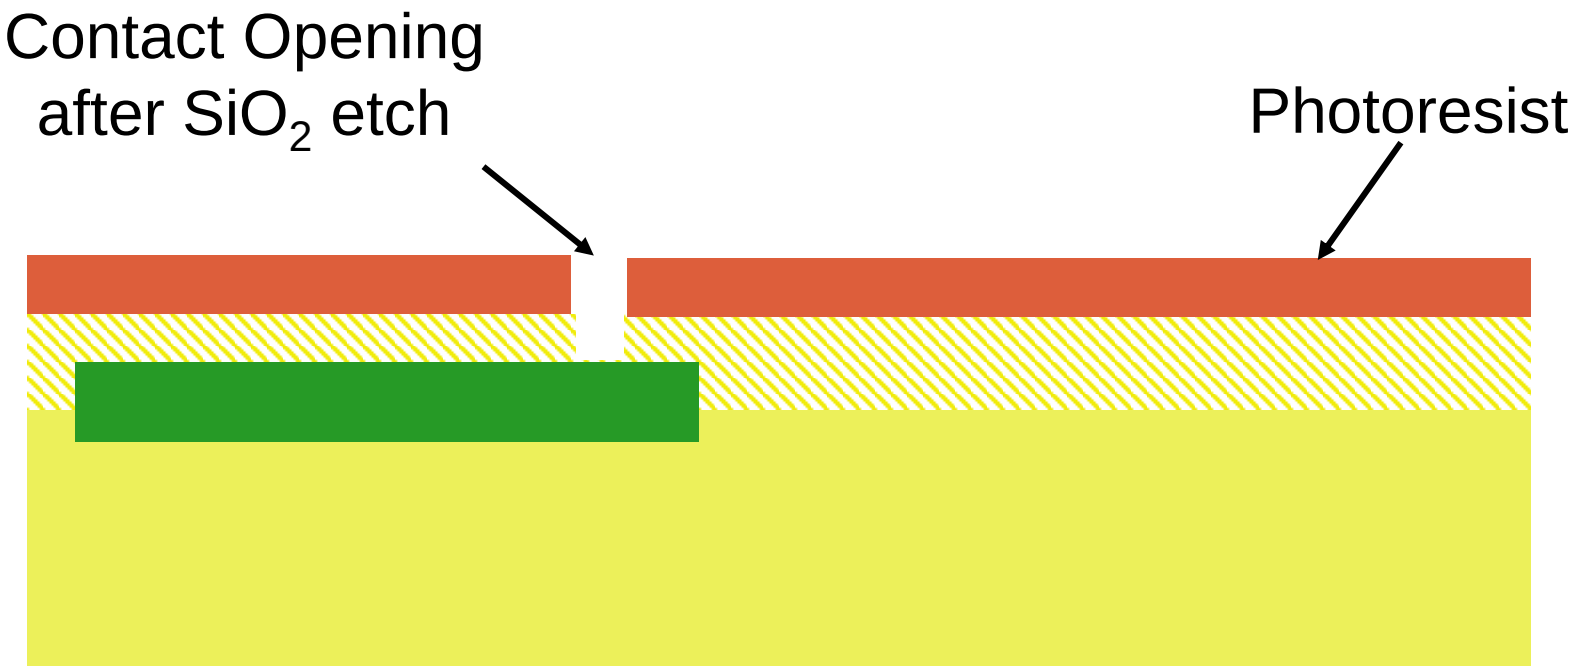

Patterning of Aluminum

Metal Applied to Entire Surface

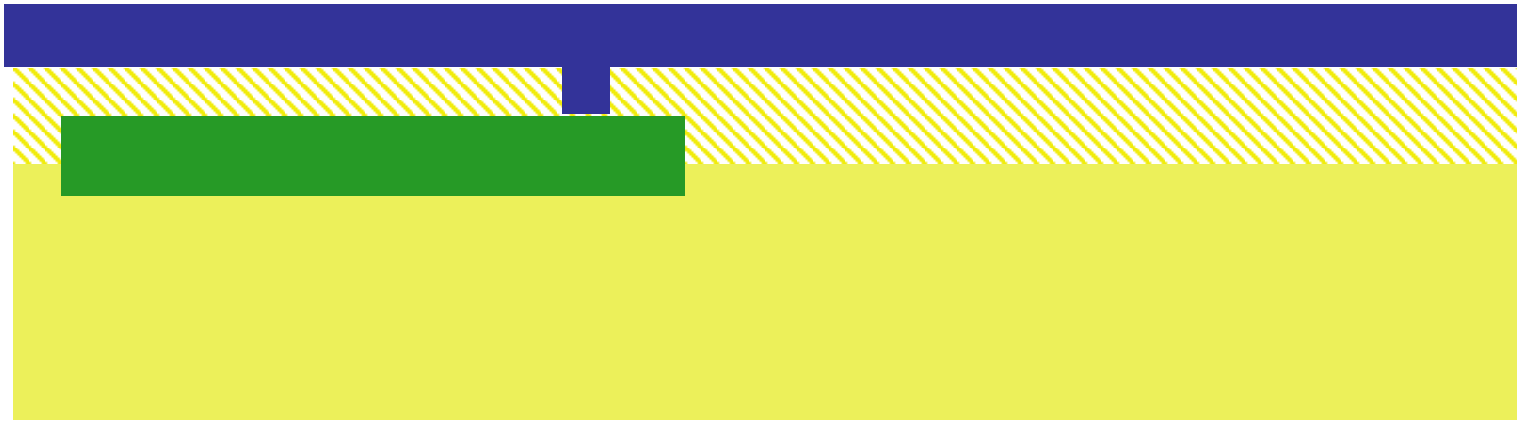

Patterning of Aluminum

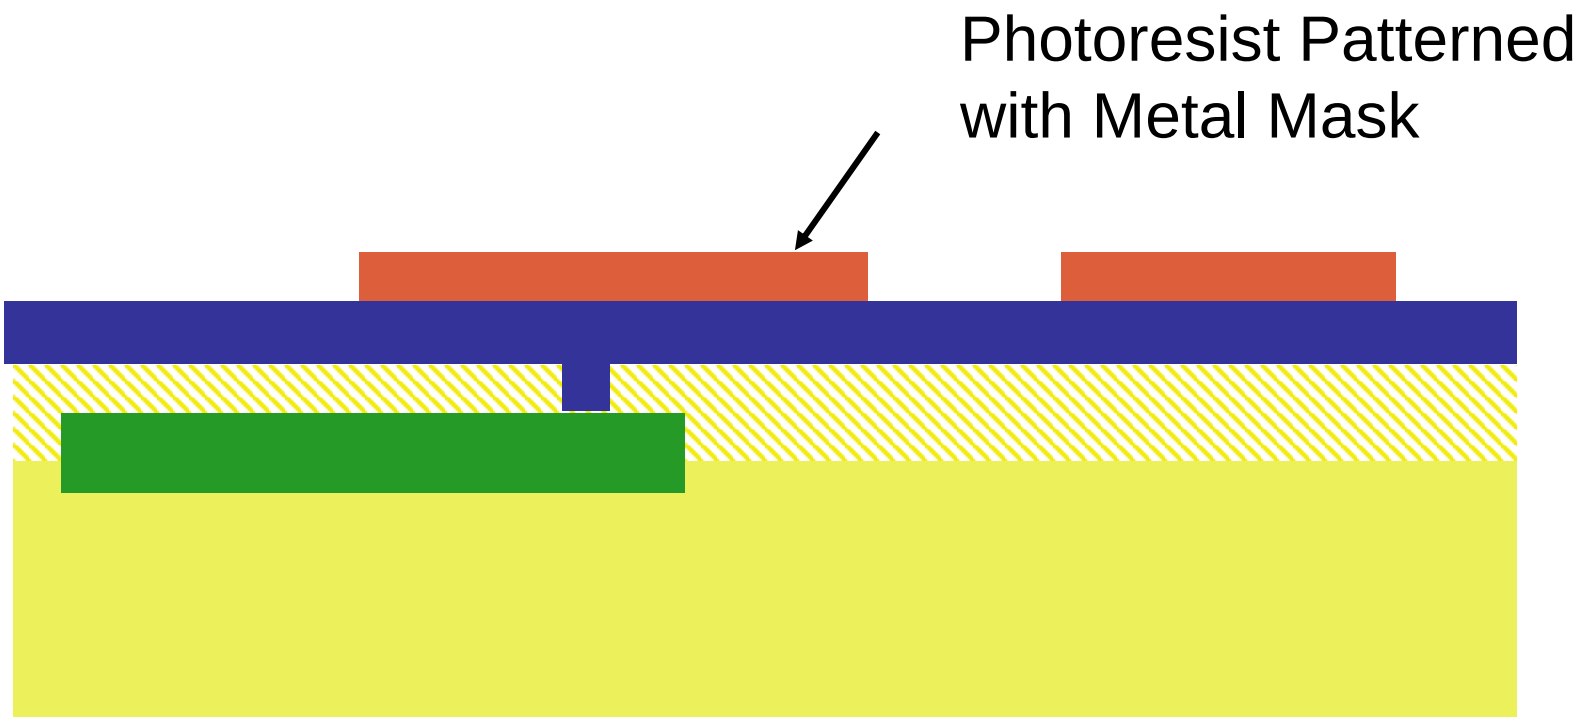

Patterning of Aluminum

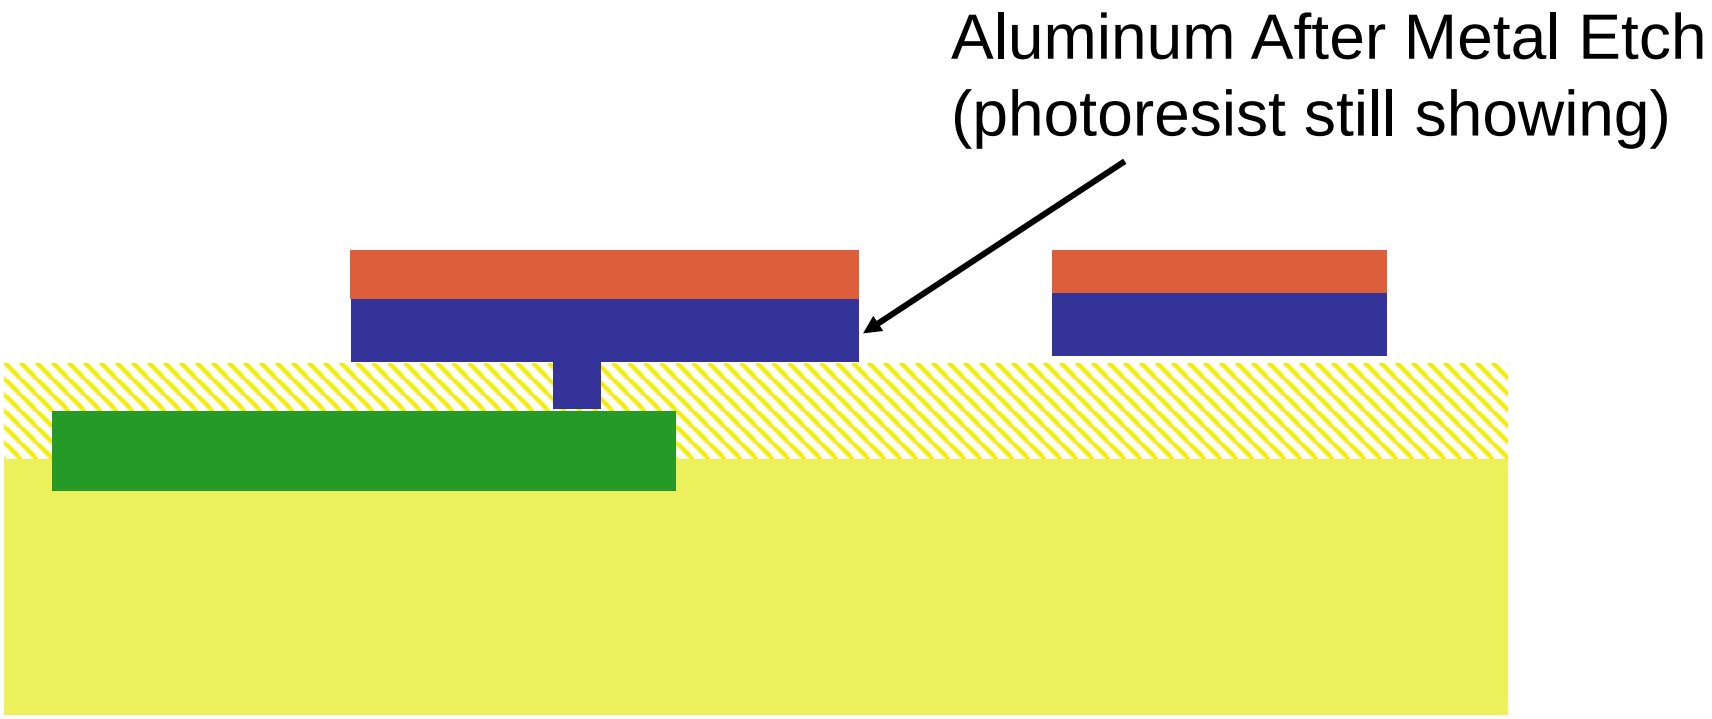

Copper Interconnects

Limitations of Aluminum Interconnects

- Electromigration
- Conductivity not real high

Relevant Key Properties of Copper

- Reduced electromigration problems at given current level
- Better conductivity

Challenges of Copper Interconnects

- Absence of volatile copper compounds (does not etch)
- Copper diffuses into surrounding materials (barrier metal required)

Material	ρ (Ω·m) at 20 °C	σ (S/m) at 20 °C	Temperat coefficient[(K^{-1})
Carbon (graphene)	1.00×10^{-8}	1.00×10^{8}	−0.0002
Silver	1.59×10^{-8}	6.30×10^{7}	0.0038
Copper	1.68×10^{-8}	5.96×10^{7}	0.003862
Annealed copper[note 2]	1.72×10^{-8}	5.80×10^{7}	0.00393
Gold[note 3]	2.44×10^{-8}	4.10×10^{7}	0.0034
Aluminium[note 4]	2.82×10^{-8}	3.50×10^{7}	0.0039
Calcium	3.36×10^{-8}	2.98×10^{7}	0.0041
Tungsten	5.60×10^{-8}	1.79×10^{7}	0.0045
Zinc	5.90×10^{-8}	1.69×10^{7}	0.0037
Nickel	6.99×10^{-8}	1.43×10^{7}	0.006
Lithium	9.28×10^{-8}	1.08×10^{7}	0.006
Iron	9.71×10^{-8}	1.00×10^{7}	0.005
Platinum	1.06×10^{-7}	9.43×10^{6}	0.00392
Tin	1.09×10^{-7}	9.17×10^{6}	0.0045
Carbon steel (1010)	1.43×10^{-7}	6.99×10^{6}	

Source:
Sept 13, 2017

Lead	2.20×10^{-7}	4.55×10^{6}	0.0039
Titanium	4.20×10^{-7}	2.38×10^{6}	0.0038
Grain oriented electrical steel	4.60×10^{-7}	2.17×10^{6}	
Manganin	4.82×10^{-7}	2.07×10^{6}	0.000002
Constantan	4.90×10^{-7}	2.04×10^{6}	0.000008
Stainless steel[note 5]	6.90×10^{-7}	1.45×10^{6}	0.00094
Mercury	9.80×10^{-7}	1.02×10^{6}	0.0009
Nichrome[note 6]	1.10×10^{-6}	6.7×10^{5}	0.0004
GaAs	1.00×10^{-3} to 1.00×10^{8}	1.00×10^{-8} to 10^{3}	
Carbon (amorphous)	5.00×10^{-4} to 8.00×10^{-4}	1.25×10^{3} to 2×10^{3}	−0.0005
Carbon (graphite)[note 7]	2.50×10^{-6} to 5.00×10^{-6} ∥basal plane 3.00×10^{-3} ⊥basal plane	2.00×10^{5} to 3.00×10^{5} ∥basal plane 3.30×10^{2} ⊥basal plane	
PEDOT:PSS	2×10^{-6} to 1×10^{-1}	1×10^{1} to 4.6×10^{5}	?
Germanium[note 8]	4.60×10^{-1}	2.17	−0.048
Sea water[note 9]	2.00×10^{-1}	4.80	
Swimming pool water[note 10]	3.33×10^{-1} to 4.00×10^{-1}	0.25 to 0.30	

Silicon[note 8]	6.40×10^{2}	1.56×10^{-3}	−0.075
Wood (damp)	1.00×10^{3} to 1.00×10^{4}	10^{-4} to 10^{-3}	
Deionized water[note 12]	1.80×10^{5}	5.50×10^{-6}	
Glass	1.00×10^{11} to 1.00×10^{15}	10^{-15} to 10^{-11}	?
Hard rubber	1.00×10^{13}	10^{-14}	?
Wood (oven dry)	1.00×10^{14} to 1.00×10^{16}	10^{-16} to 10^{-14}	
Sulfur	1.00×10^{15}	10^{-16}	?
Air	1.30×10^{14} to 3.30×10^{14}	3×10^{-15} to 8×10^{-15}	
Carbon (diamond)	1.00×10^{12}	$\sim 10^{-13}$	
Fused quartz	7.50×10^{17}	1.30×10^{-18}	?
PET	1.00×10^{21}	10^{-21}	?
Teflon	1.00×10^{23} to 1.00×10^{25}	10^{-25} to 10^{-23}	?

Copper Interconnects

Practical methods of realizing copper interconnects took many years to develop

Copper interconnects widely used in some processes today

Patterning of Copper

Damascene Process

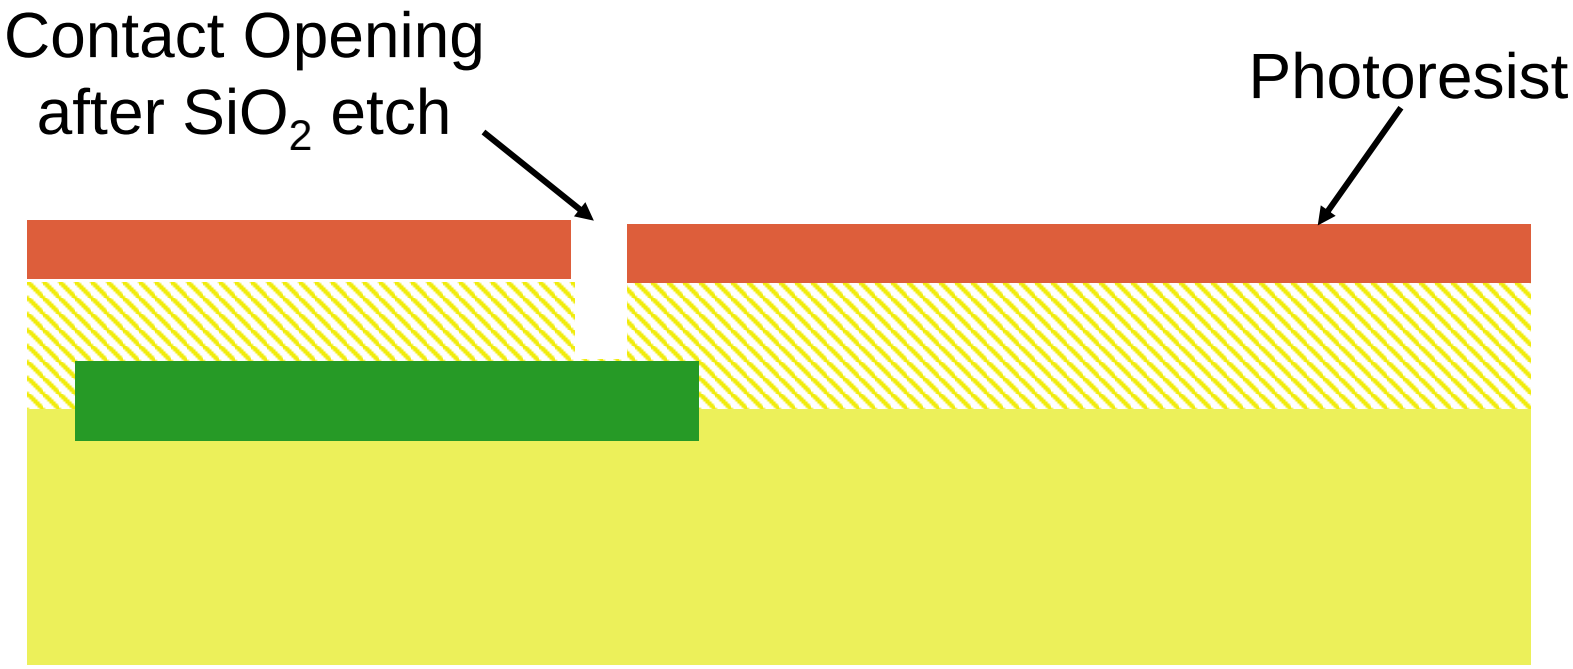

Patterning of Copper

Damascene Process

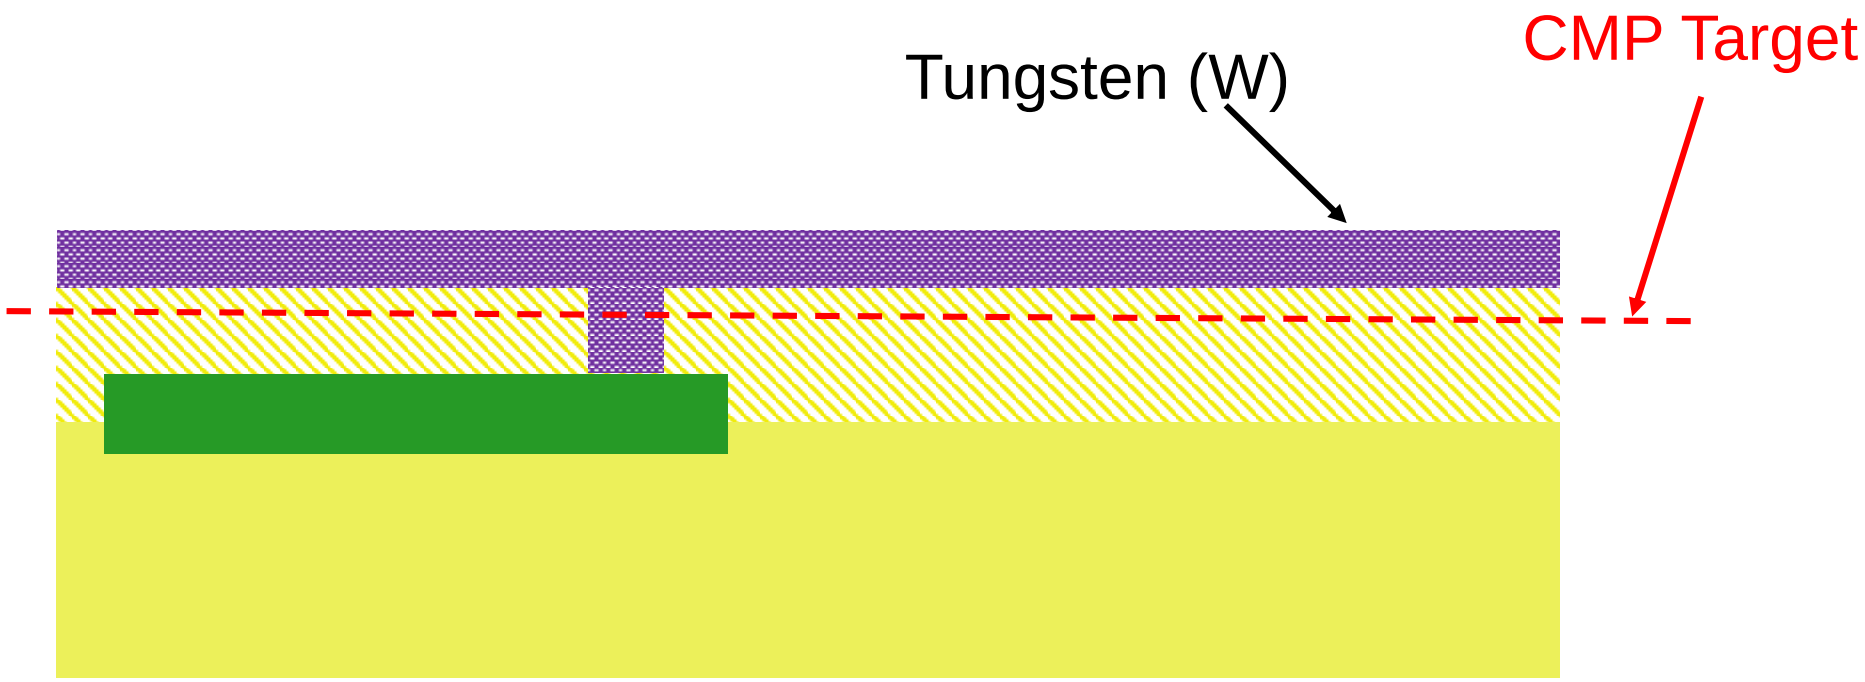

W has excellent conformality when formed from WF_6

Applied with CVD $WF_6+3H_2 \rightarrow W+6HF$

Chemical-Mechanical Planarization (CMP)

- Polishing Pad and Wafer Rotate in non-concentric pattern to thin, polish, and planarize surface
- Abrasive/Chemical polishing
- Depth and planarity are critical

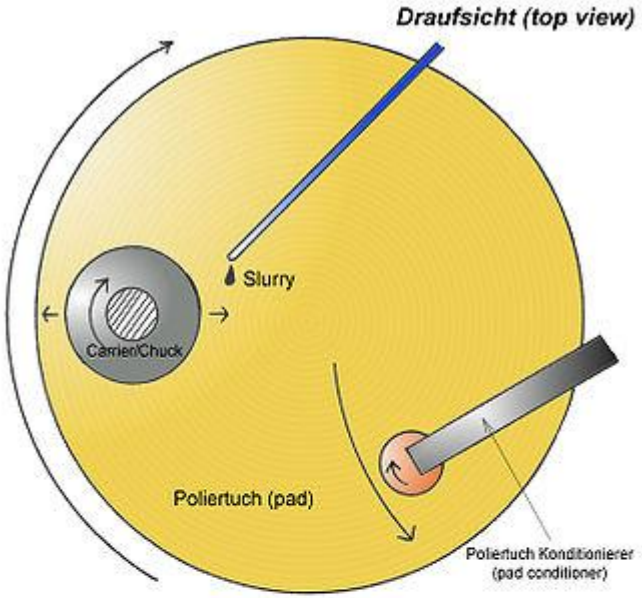

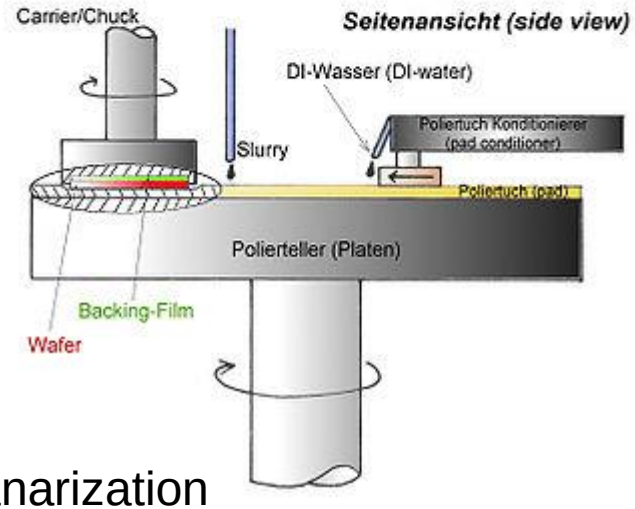

Acknowledgement:
http://en.wikipedia.org/wiki/Chemical-mechanical_planarization

Patterning of Copper

Damascene Process

After first CMP Step

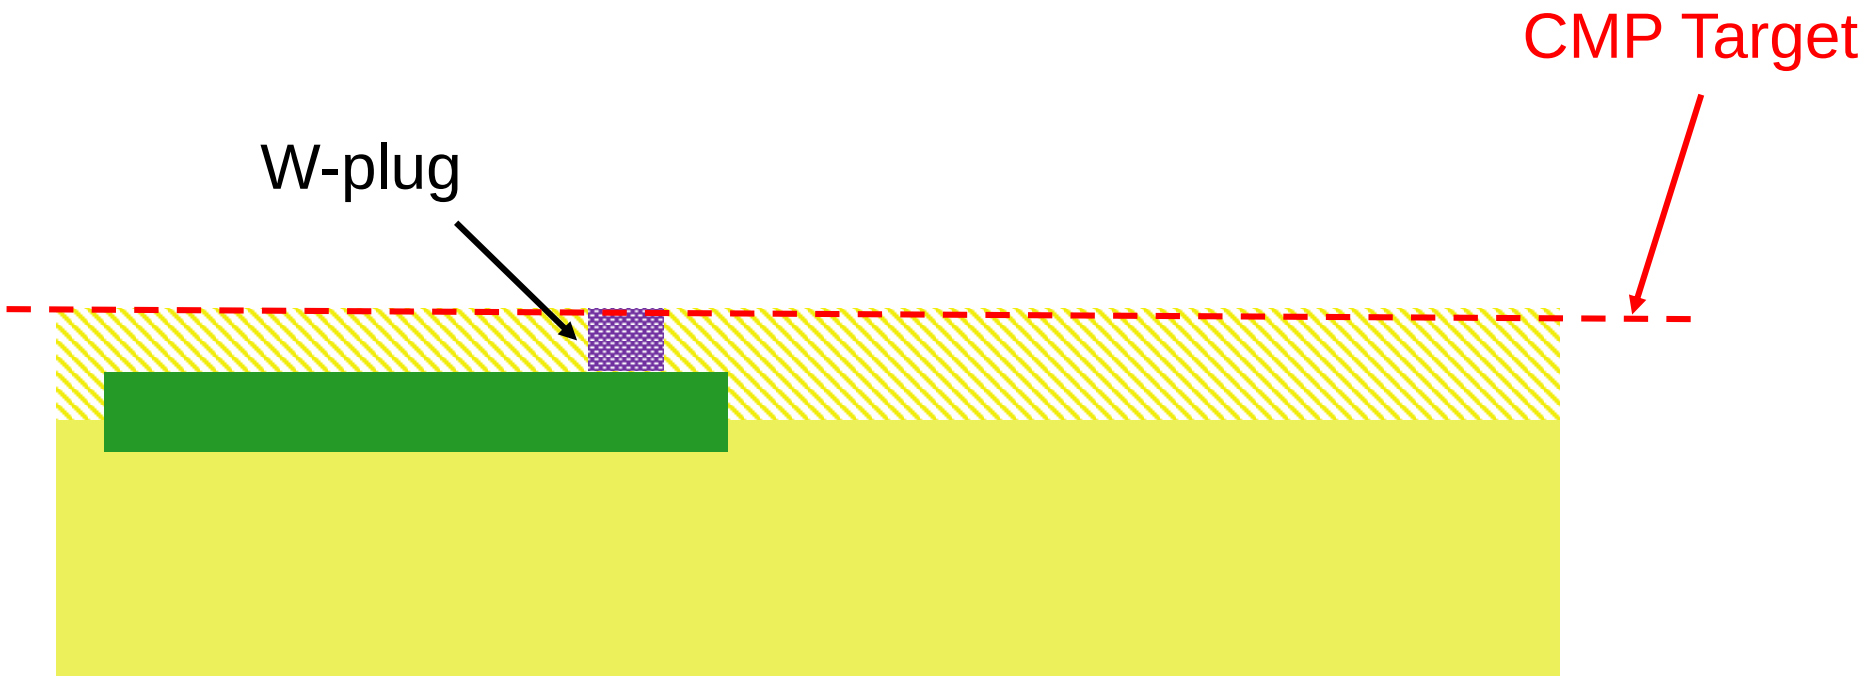

Patterning of Copper

Damascene Process

After first CMP Step

Oxidation

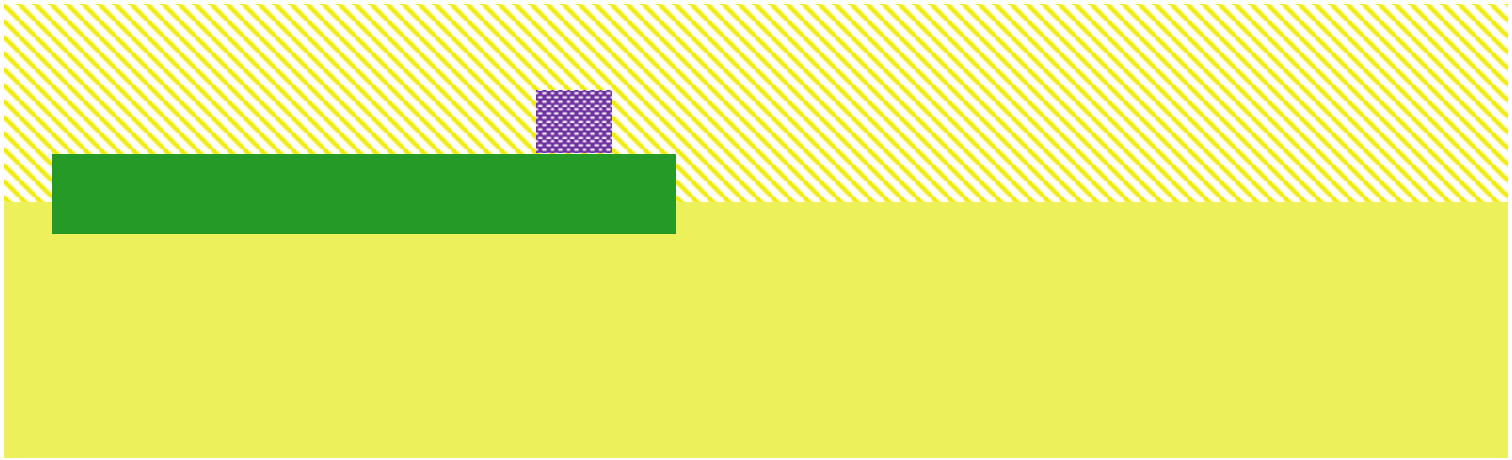

Patterning of Copper

Damascene Process

Photoresist Patterned with
Metal Mask Defines Trench

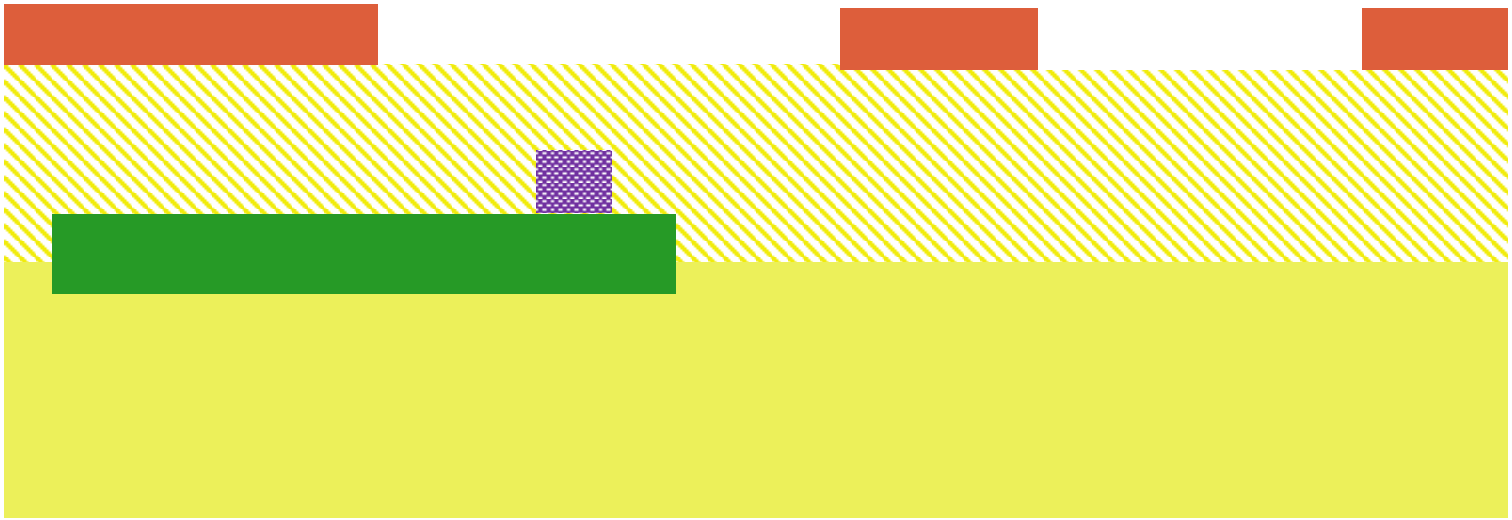

Patterning of Copper

Damascene Process

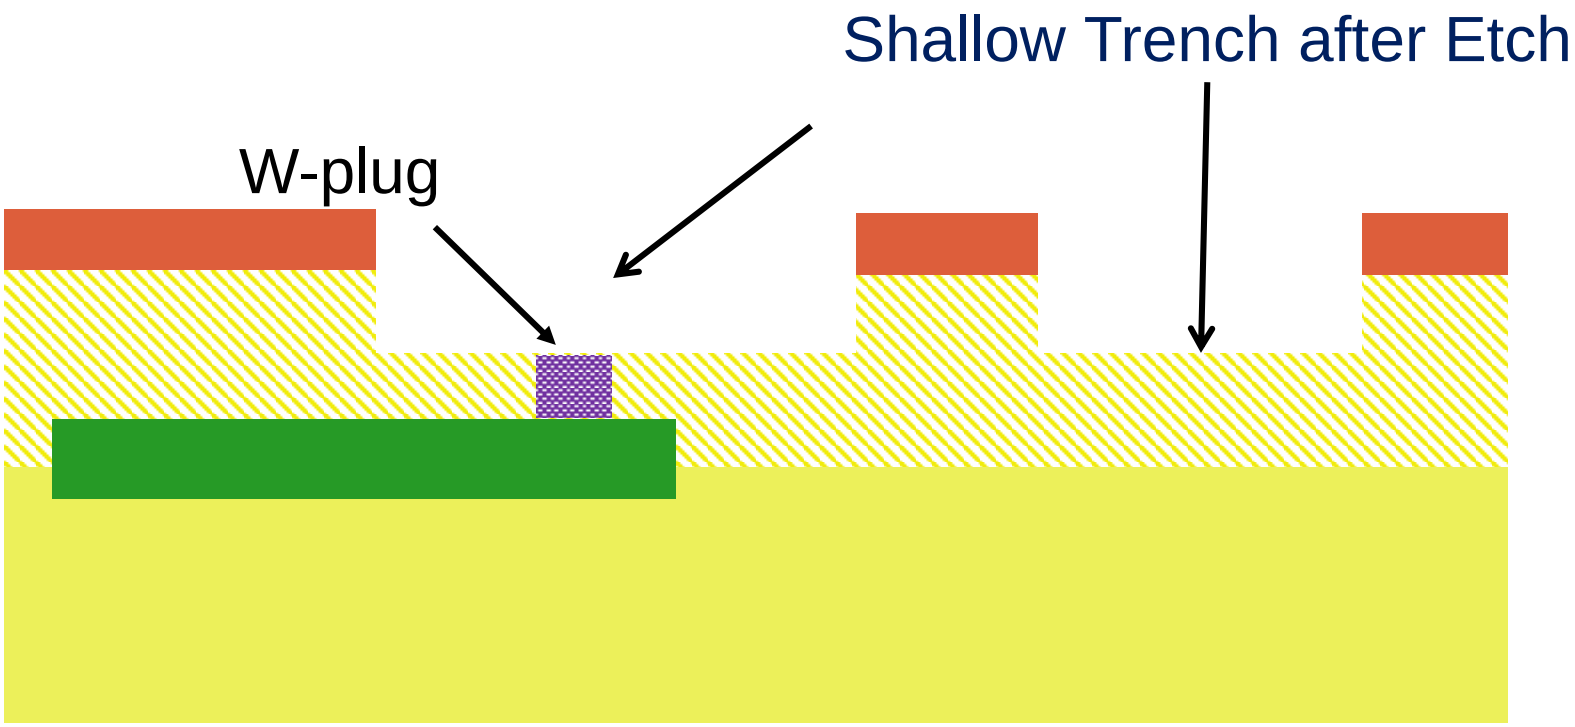

Patterning of Copper

Damascene Process

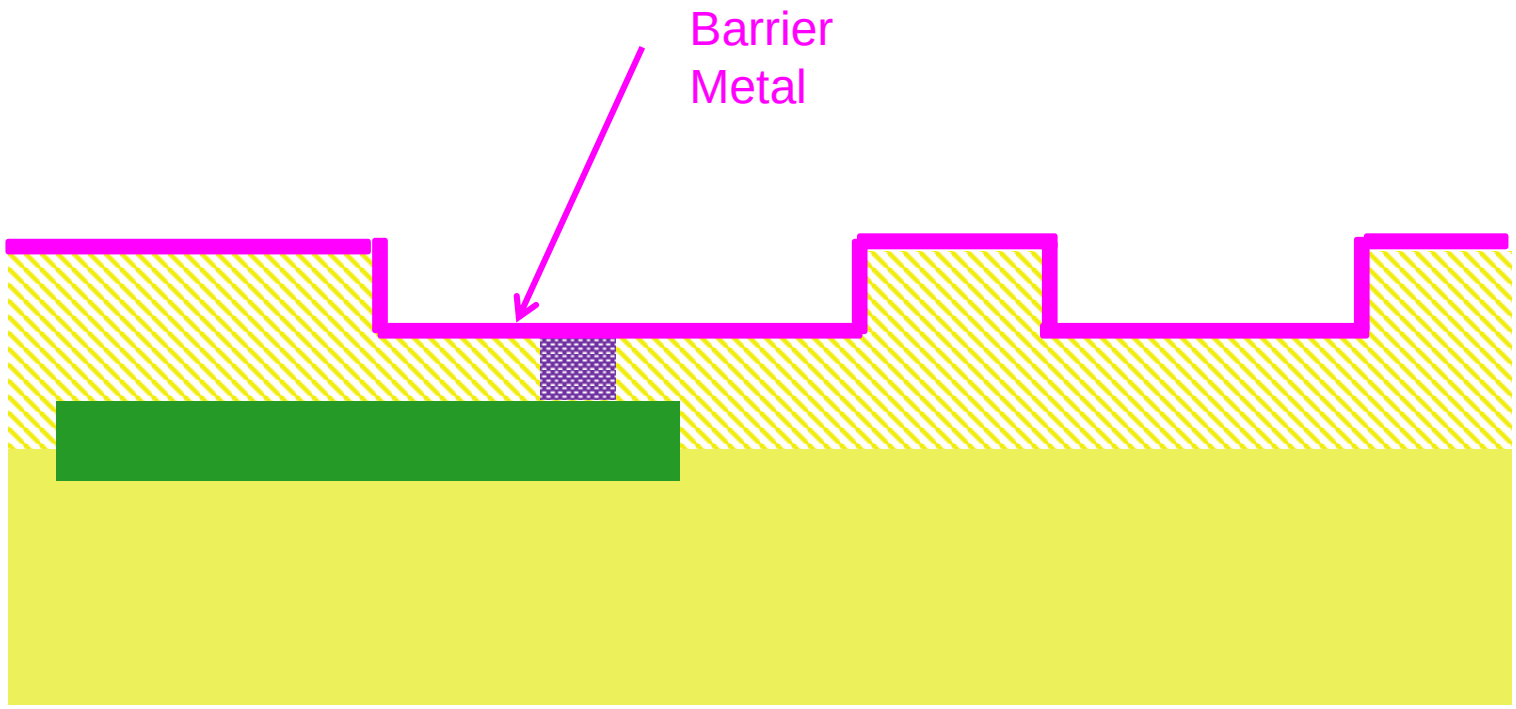

(Barrier metal added before copper to contain the copper atoms)

Patterning of Copper

Damascene Process

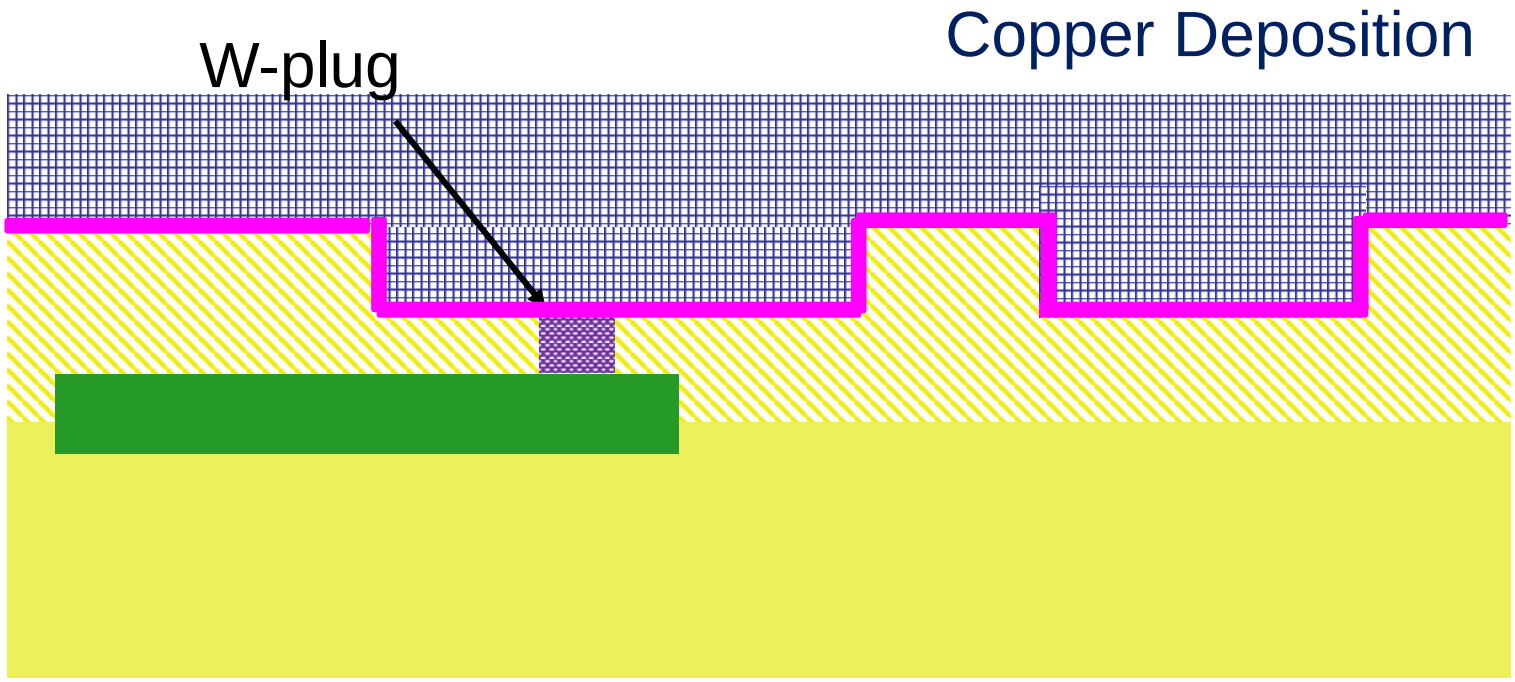

Patterning of Copper

Damascene Process

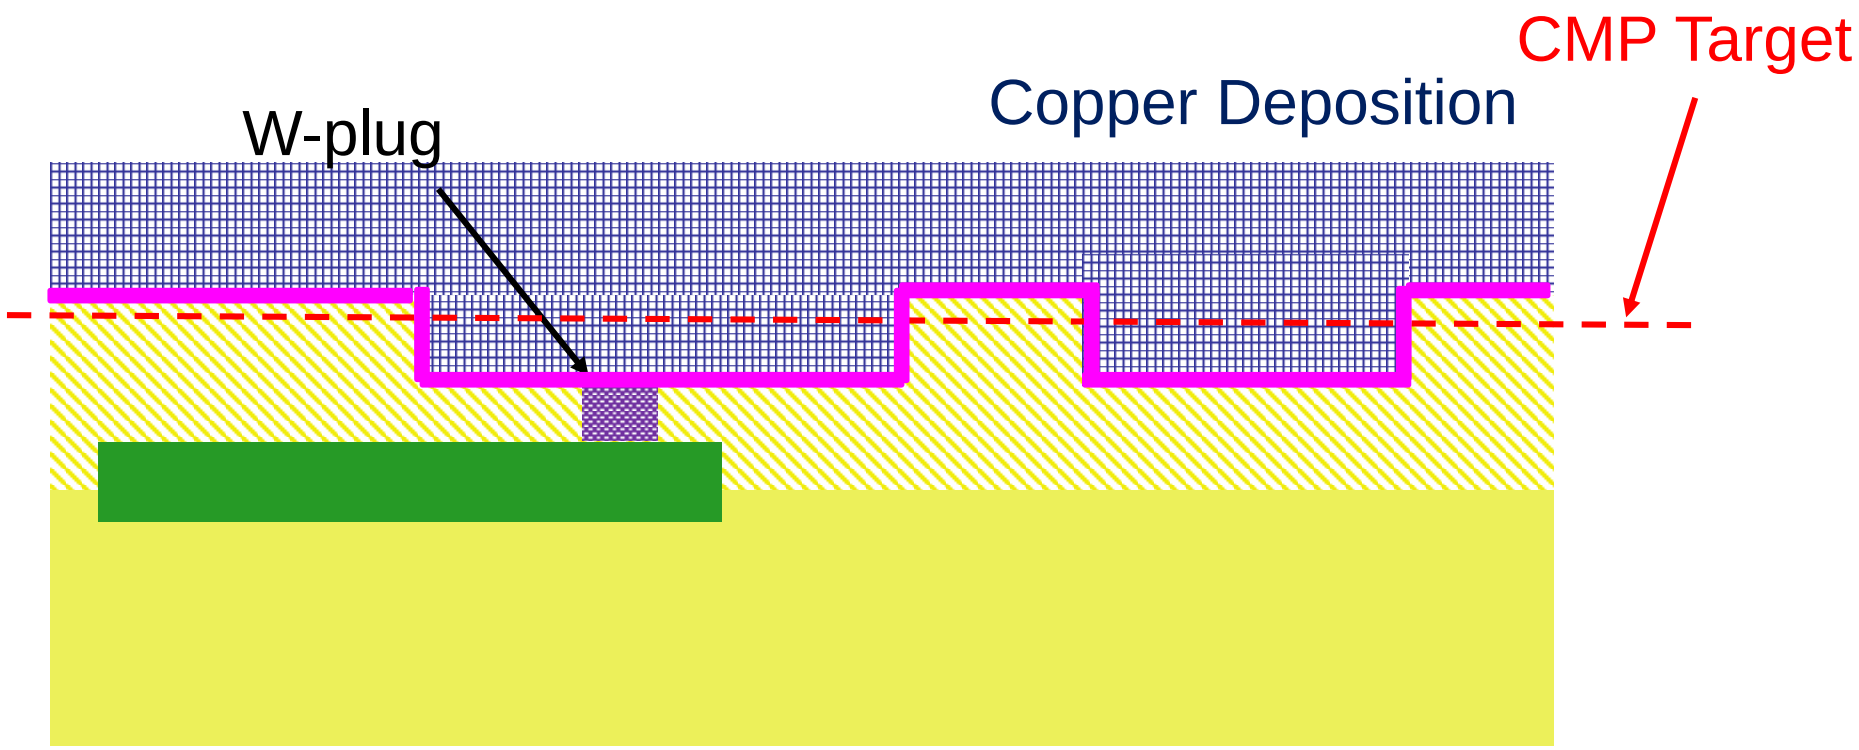

Copper is deposited or electroplated (Barrier Metal Used for Electroplating Seed)

Patterning of Copper

Damascene Process

After Second CMP Step

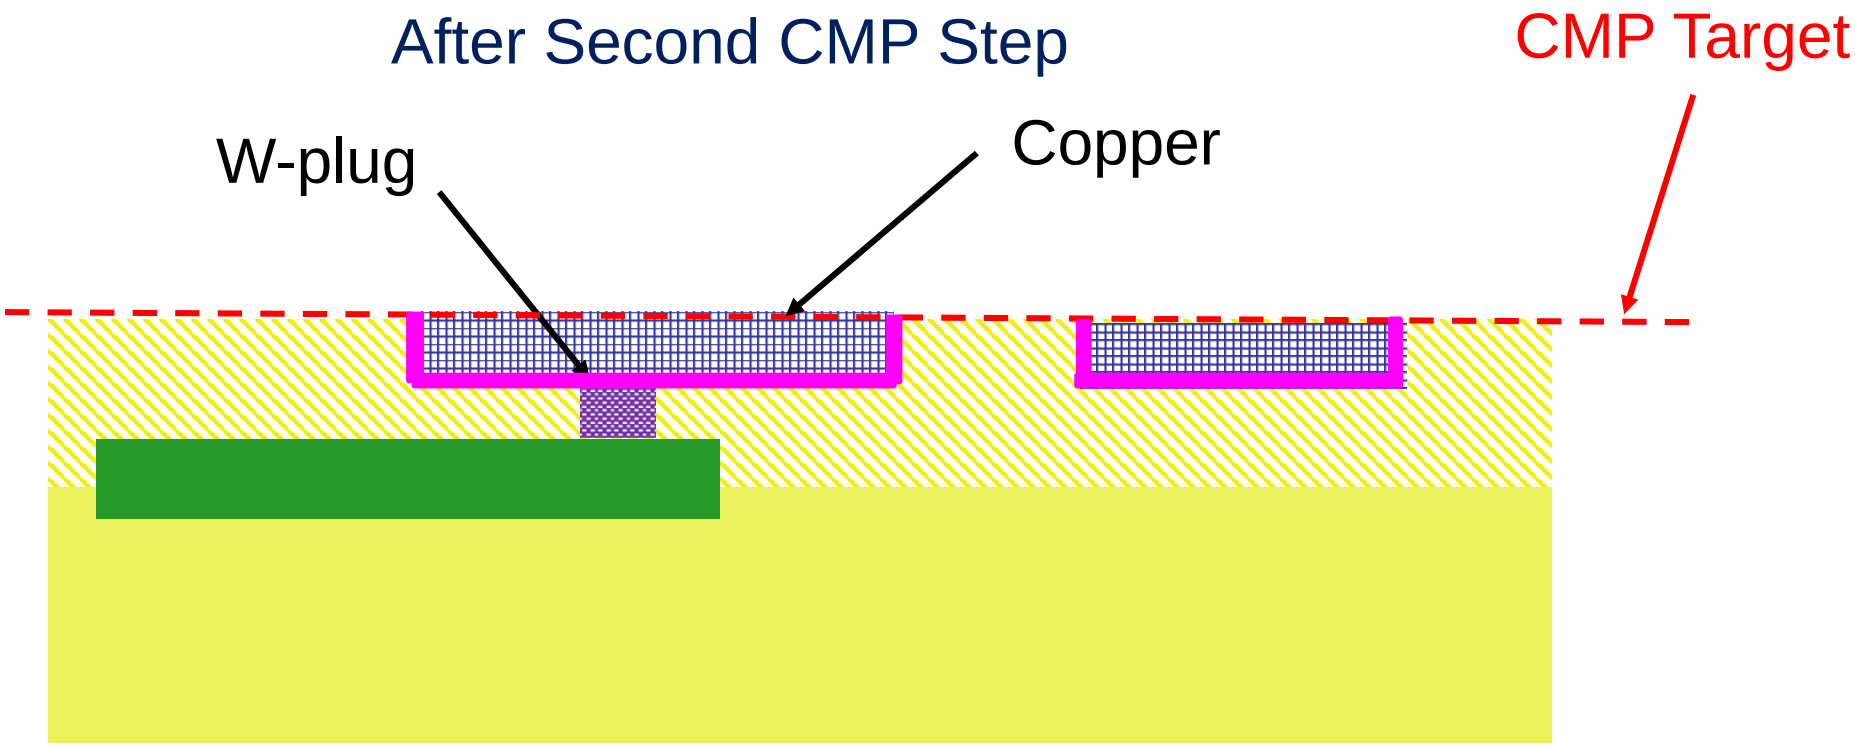

Patterning of Copper

Dual-Damascene Process

Shallow Trench Defined in PR with Metal Mask

Photoresist

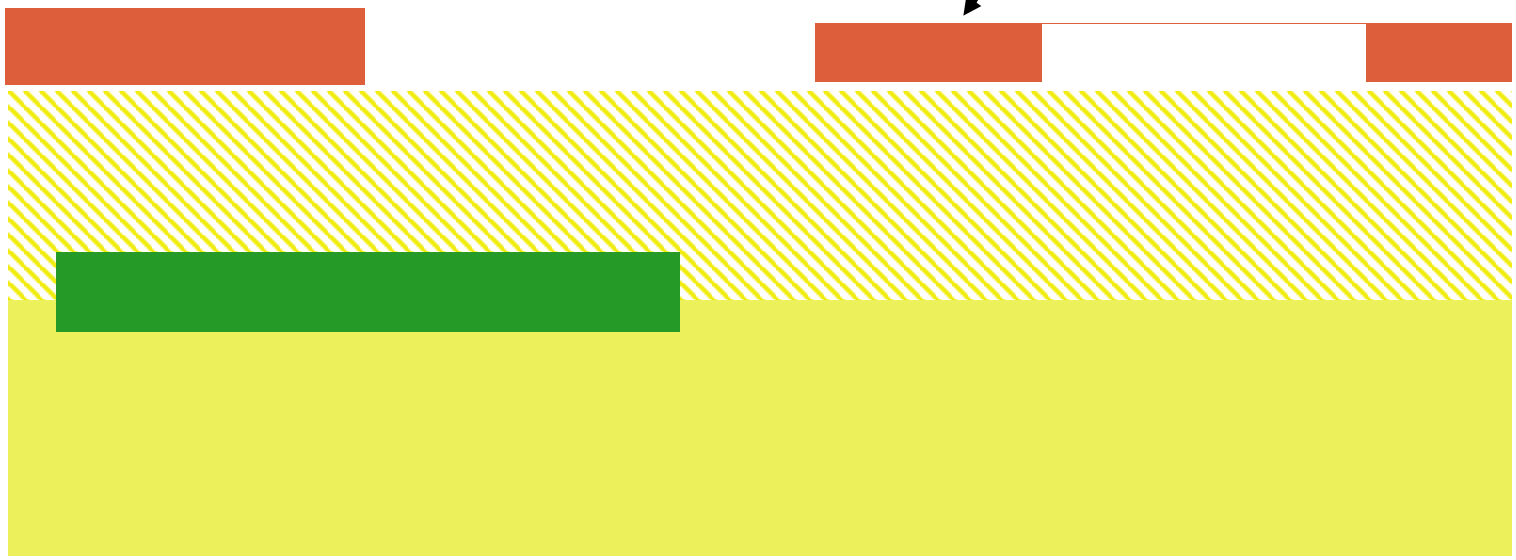

Patterning of Copper

Dual-Damascene Process

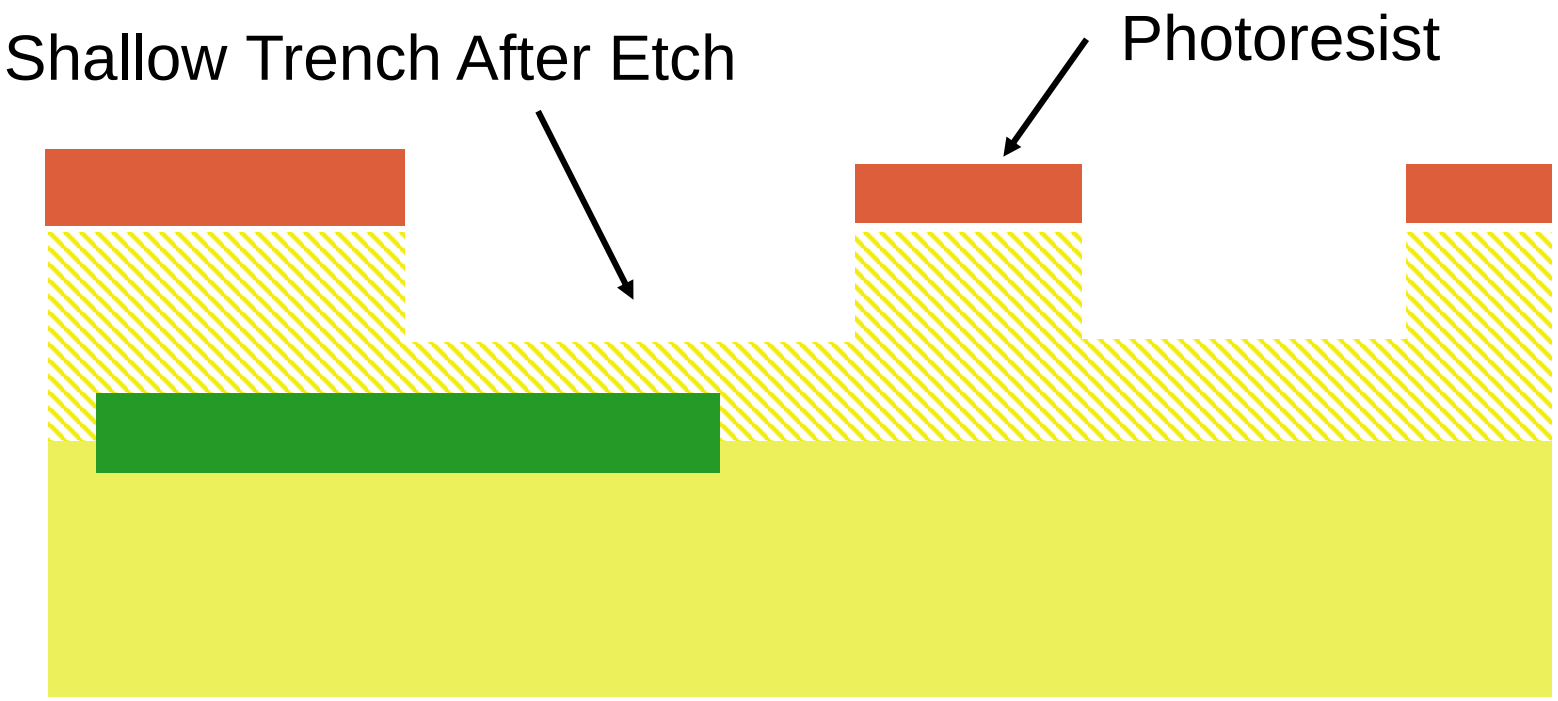

Patterning of Copper

Dual-Damascene Process

Via Defined in PR
with Via Mask

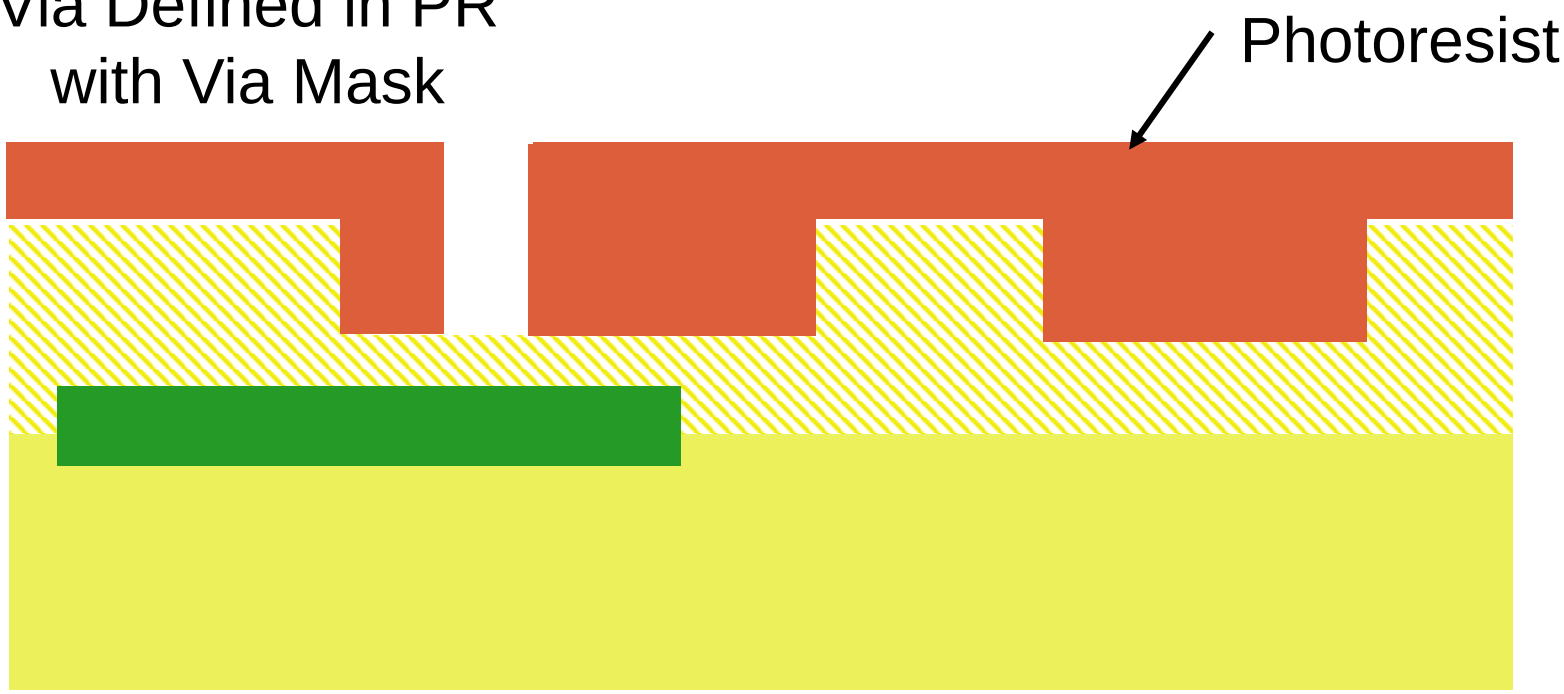

Patterning of Copper

Dual-Damascene Process

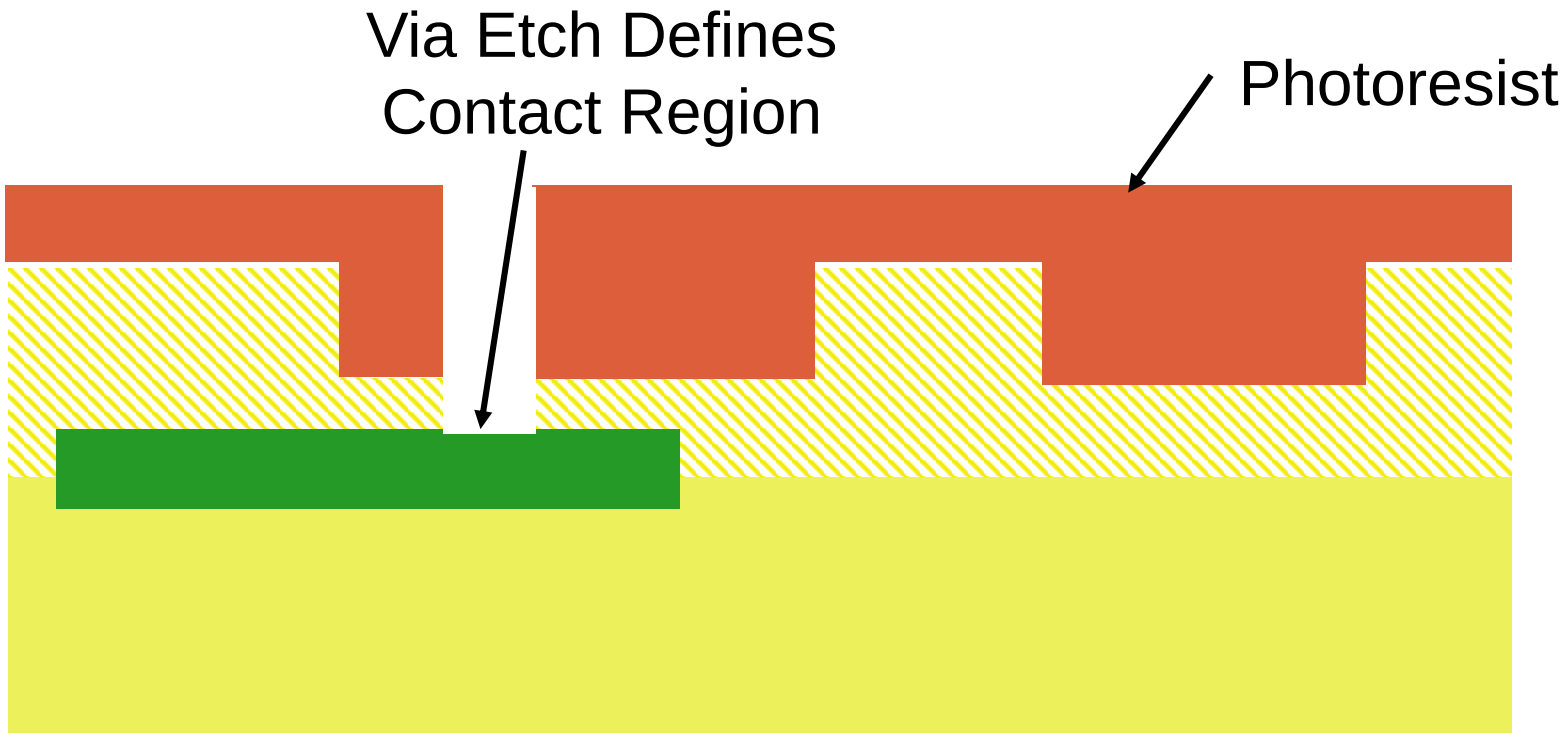

(Barrier Metal added before copper but not shown)

Patterning of Copper

Dual-Damascene Process

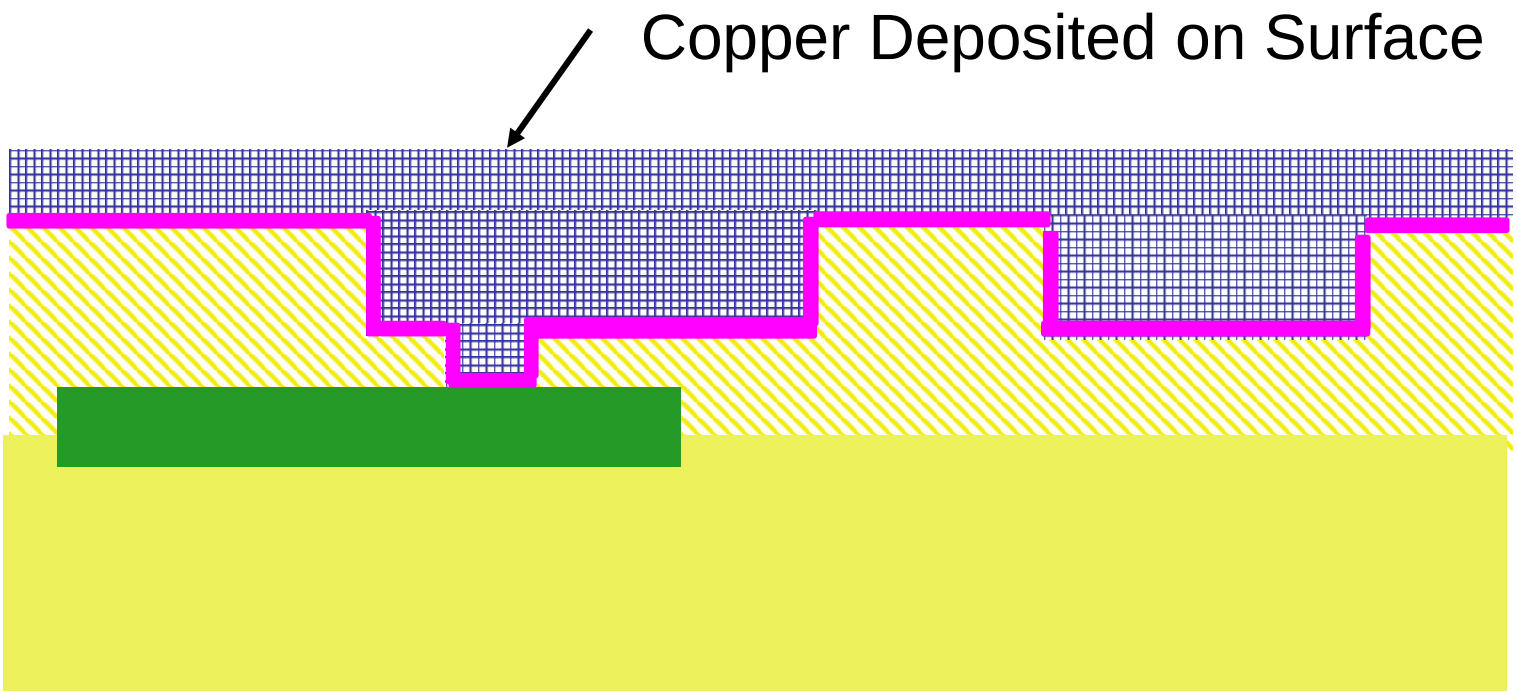

Copper is deposited or electroplated (Barrier Metal Used for Electroplating Seed)

Patterning of Copper

Dual-Damascene Process

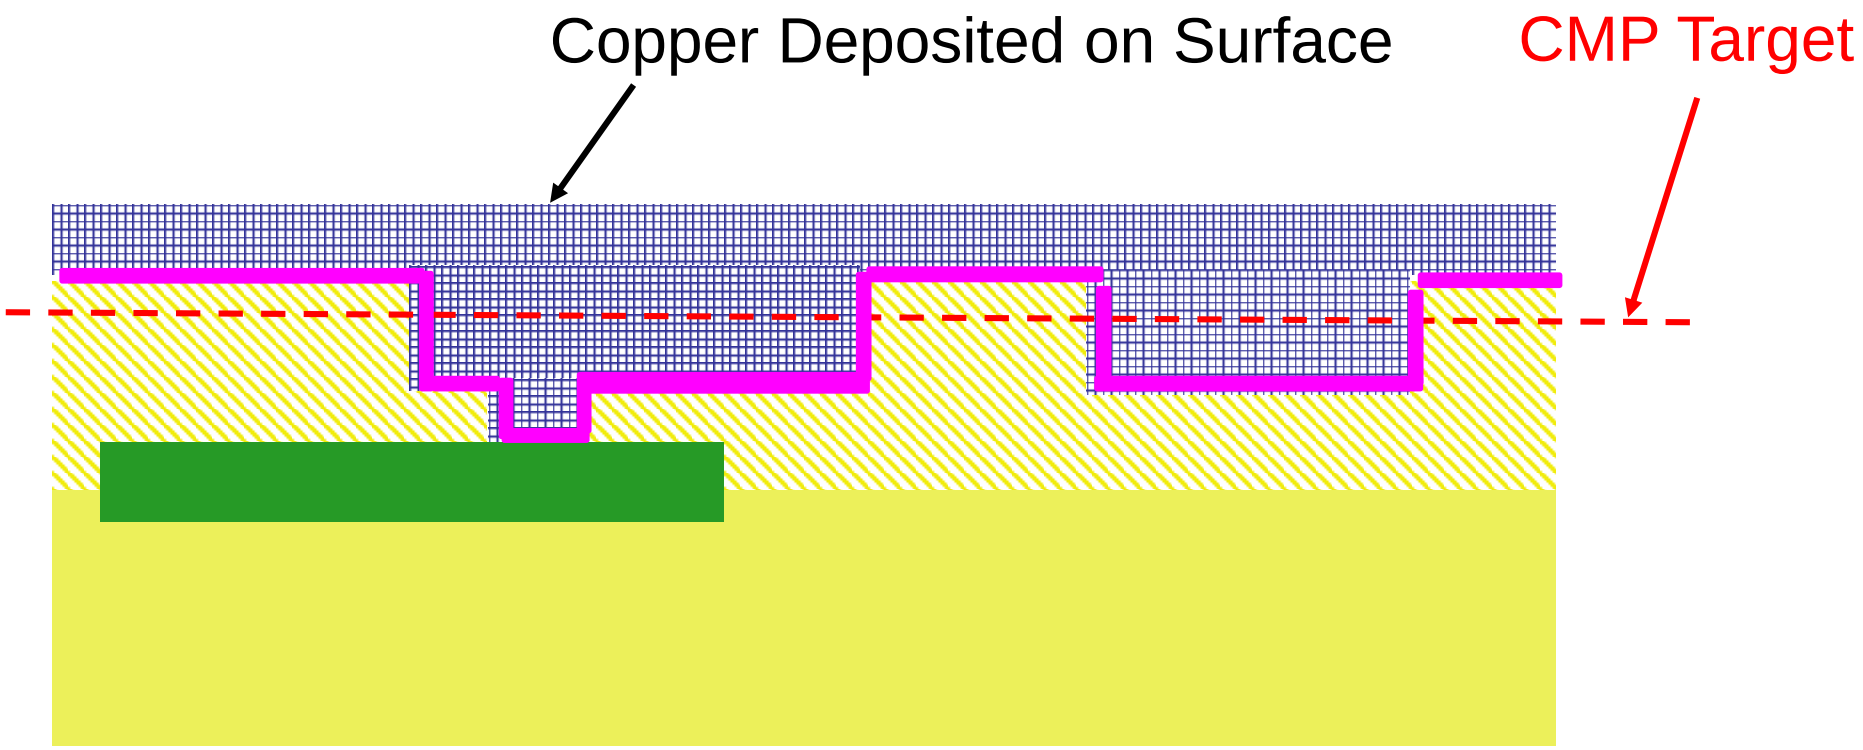

Patterning of Copper

Dual-Damascene Process

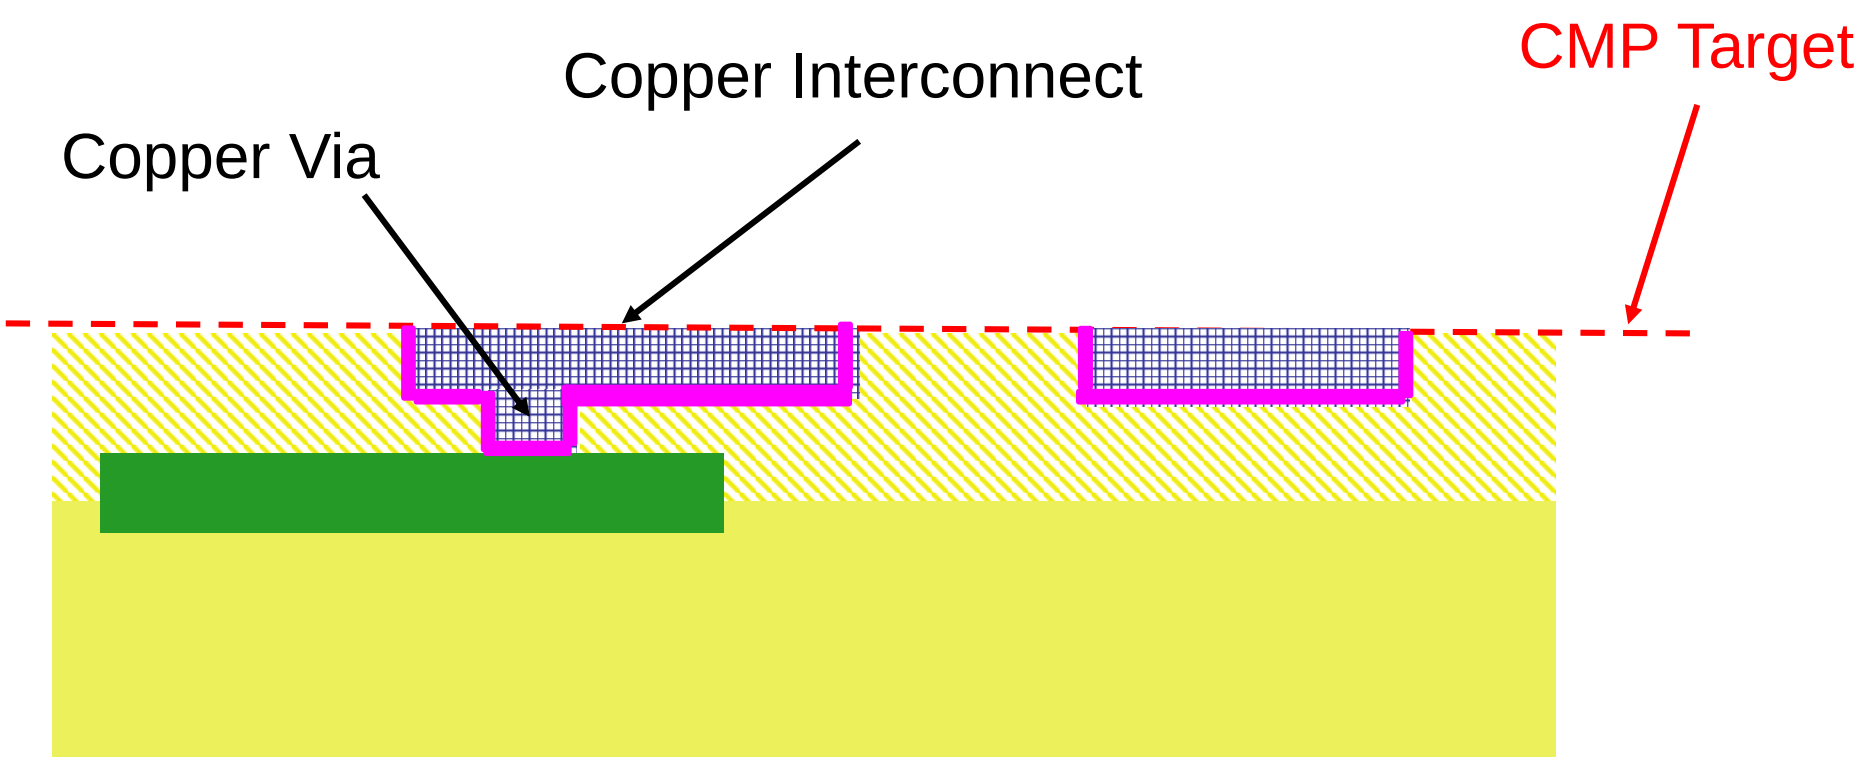

Patterning of Copper

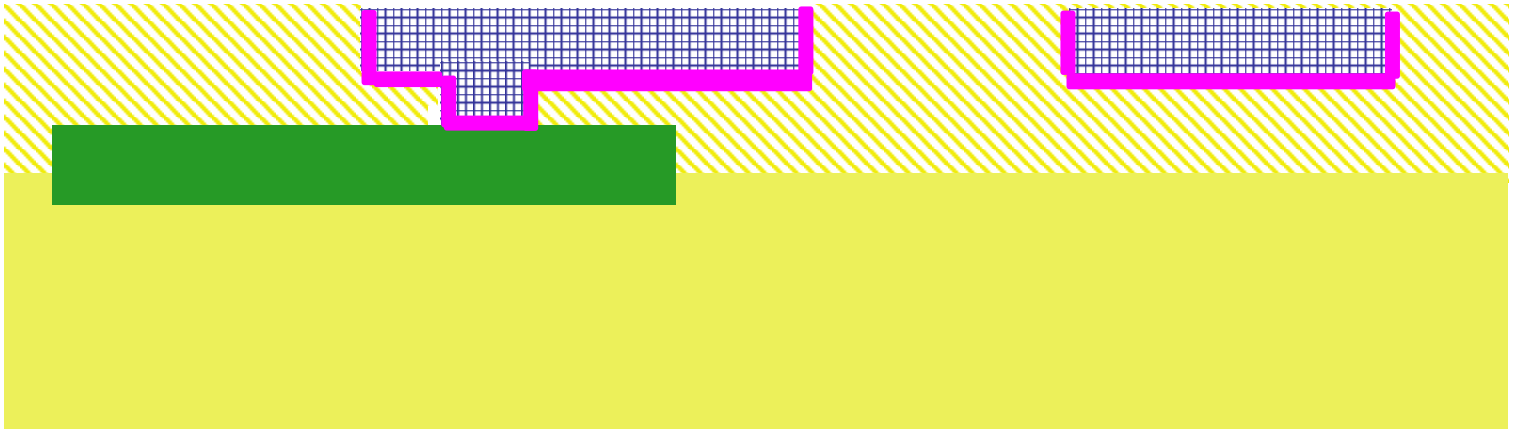

Both Damascene Processes Realize Same Structure

Damascene Process

Two Dielectric Deposition Steps
Two CMP Steps
Two Metal Deposition Steps
Two Dielectric Etches
W-Plug

Dual-Damascene Process

One Dielectric Deposition Steps
One CMP Steps
One Metal Deposition Steps
Two Dielectric Etches
Via formed with metal step

Multiple Level Interconnects

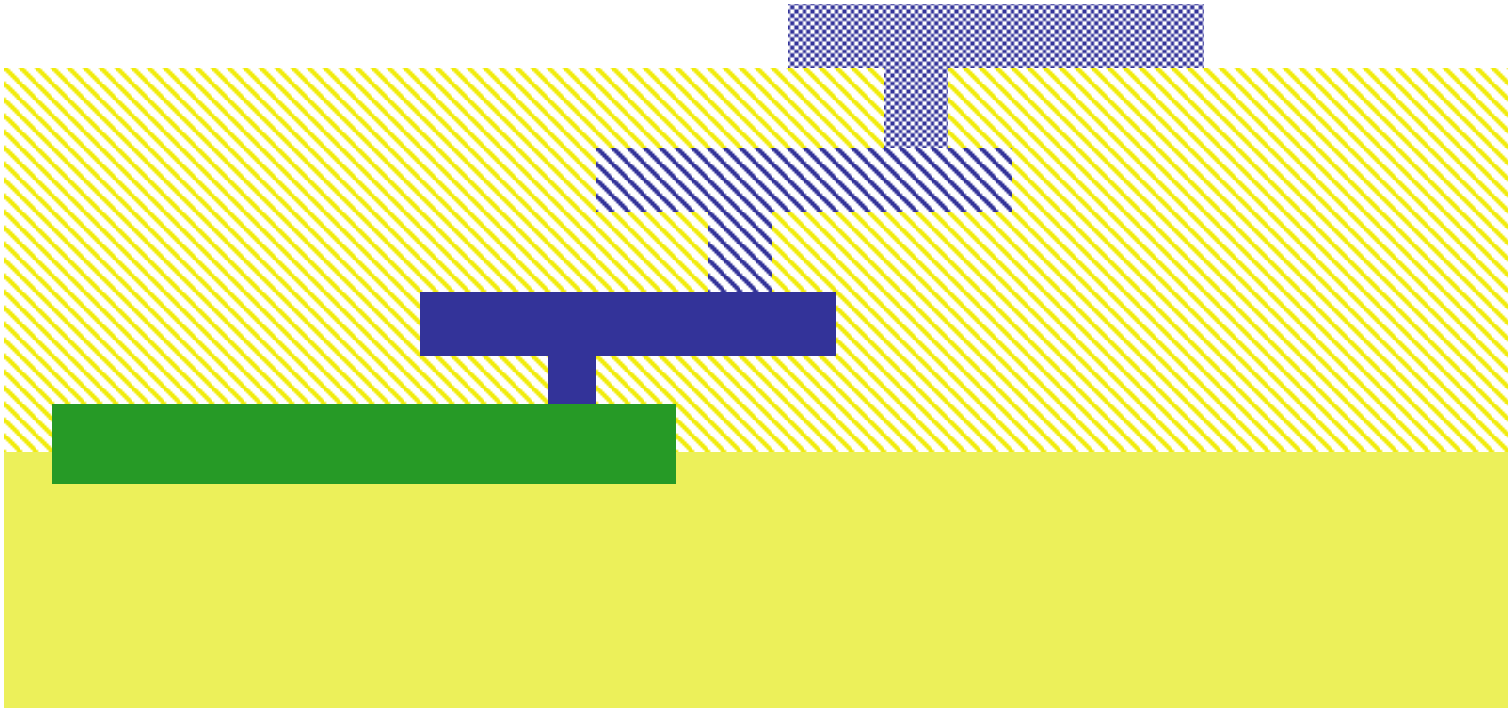

3-rd level metal connection to n-active without stacked vias

Multiple Level Interconnects

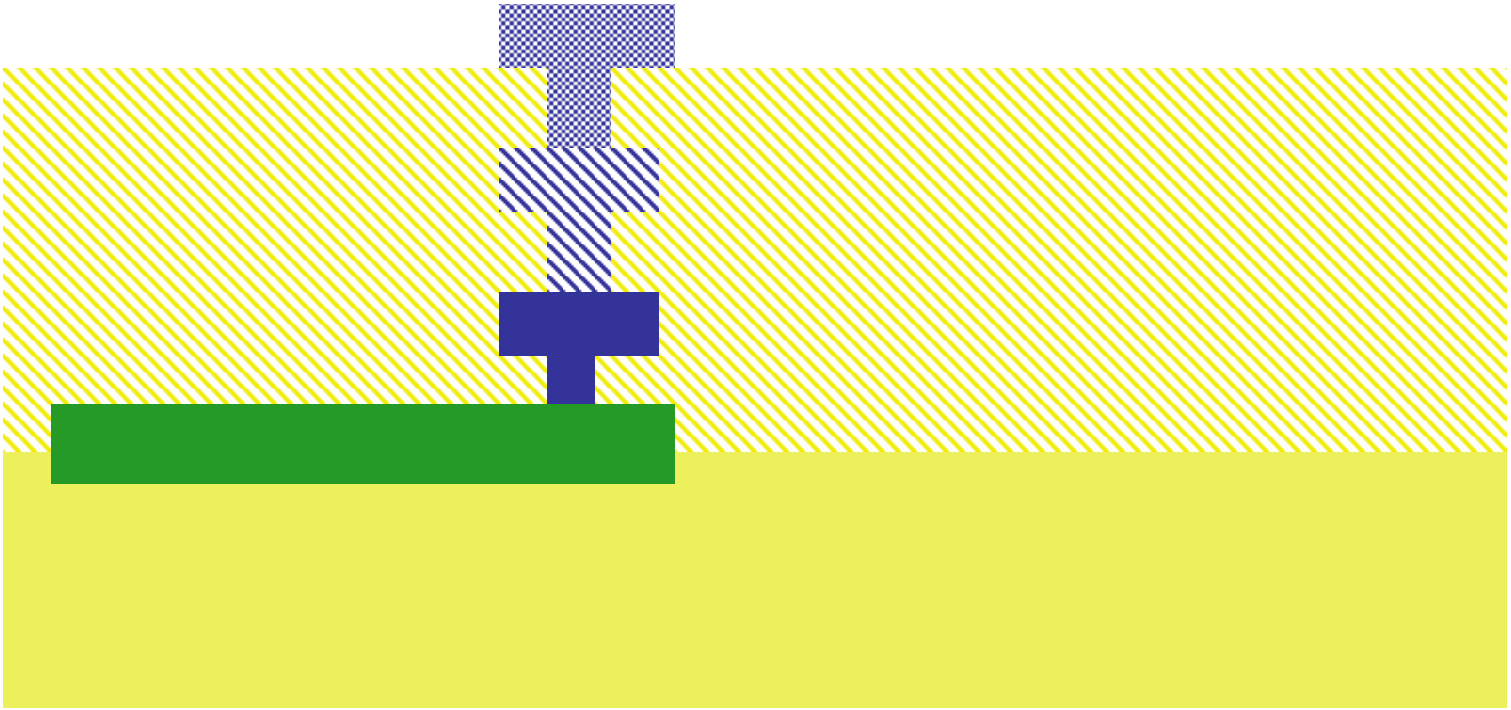

3-rd level metal connection to n-active with stacked vias

Interconnect Layers May Vary in Thickness or Be Mostly Uniform

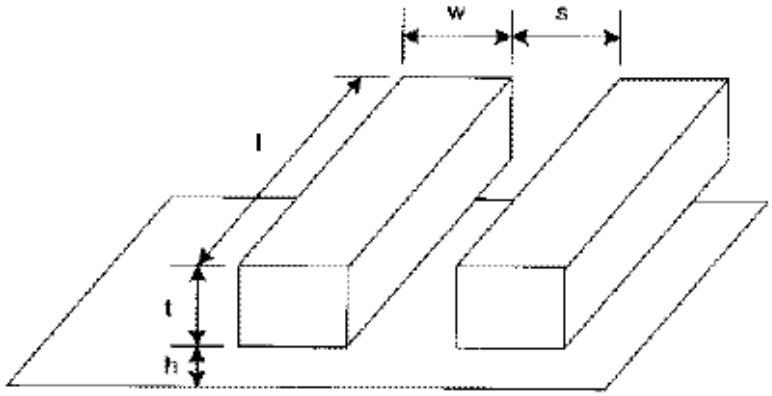

FIG 4.30 Interconnect geometry

Layer	t (nm)	w (nm)	s (nm)	AR
6	1720 1000	860	860	2.0
5	1600 1000	800	800	2.0
4	1080 700	540	540	2.0
3	700 700	320	320	2.2
2	700 700	320	320	2.2
1	480 800	250	250	1.9

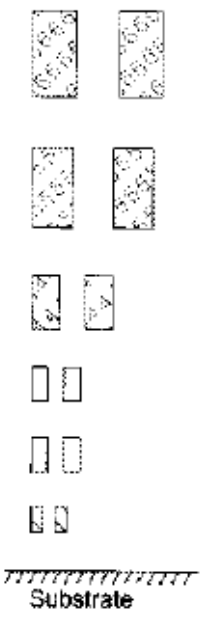

12.5µ

FIG 4.31 Layer stack for 6-metal Intel 180 nm process

Interconnects

- Metal is preferred interconnect
  - Because conductivity is high
- Parasitic capacitances and resistances of concern in all interconnects
- Polysilicon used for short interconnects
  - Silicided to reduce resistance
  - Unsilicided when used as resistors
- Diffusion used for short interconnects
  - Parasitic capacitances are high

Interconnects

- Metal is preferred interconnect
  - Because conductivity is high
- Parasitic capacitances and resistances of concern in all interconnects
- Polysilicon used for short interconnects
  - Silicided to reduce resistance
  - Unsilicided when used as resistors
- Diffusion used for short interconnects
  - Parasitic capacitances are high

Resistance in Interconnects

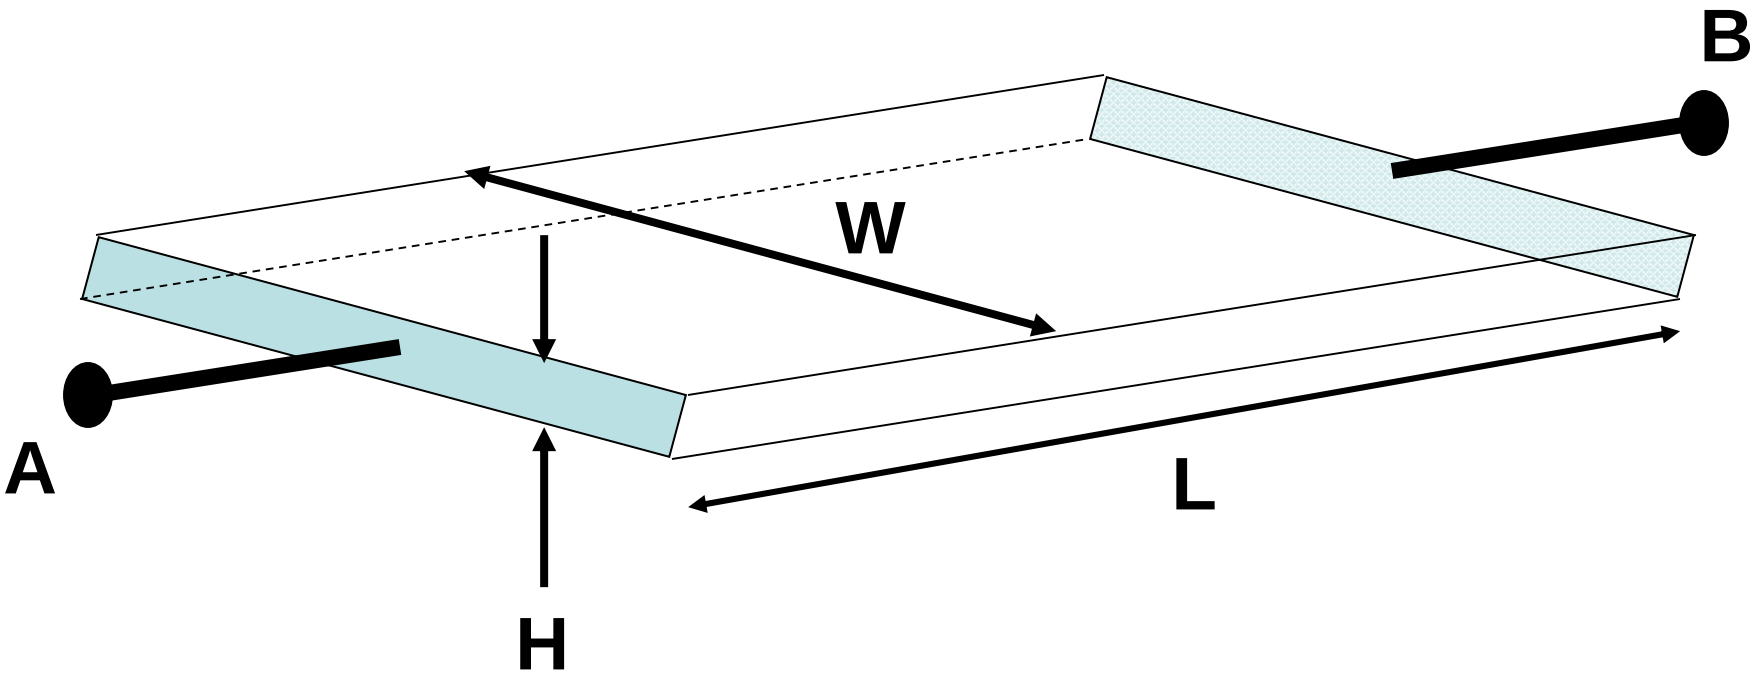

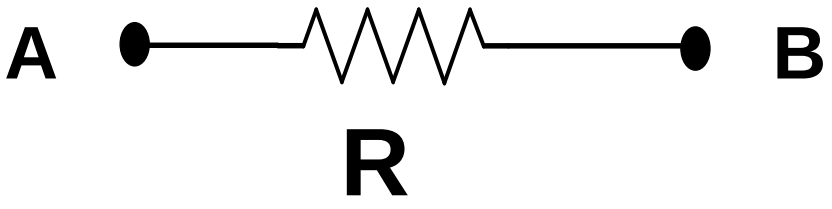

Resistance in Interconnects

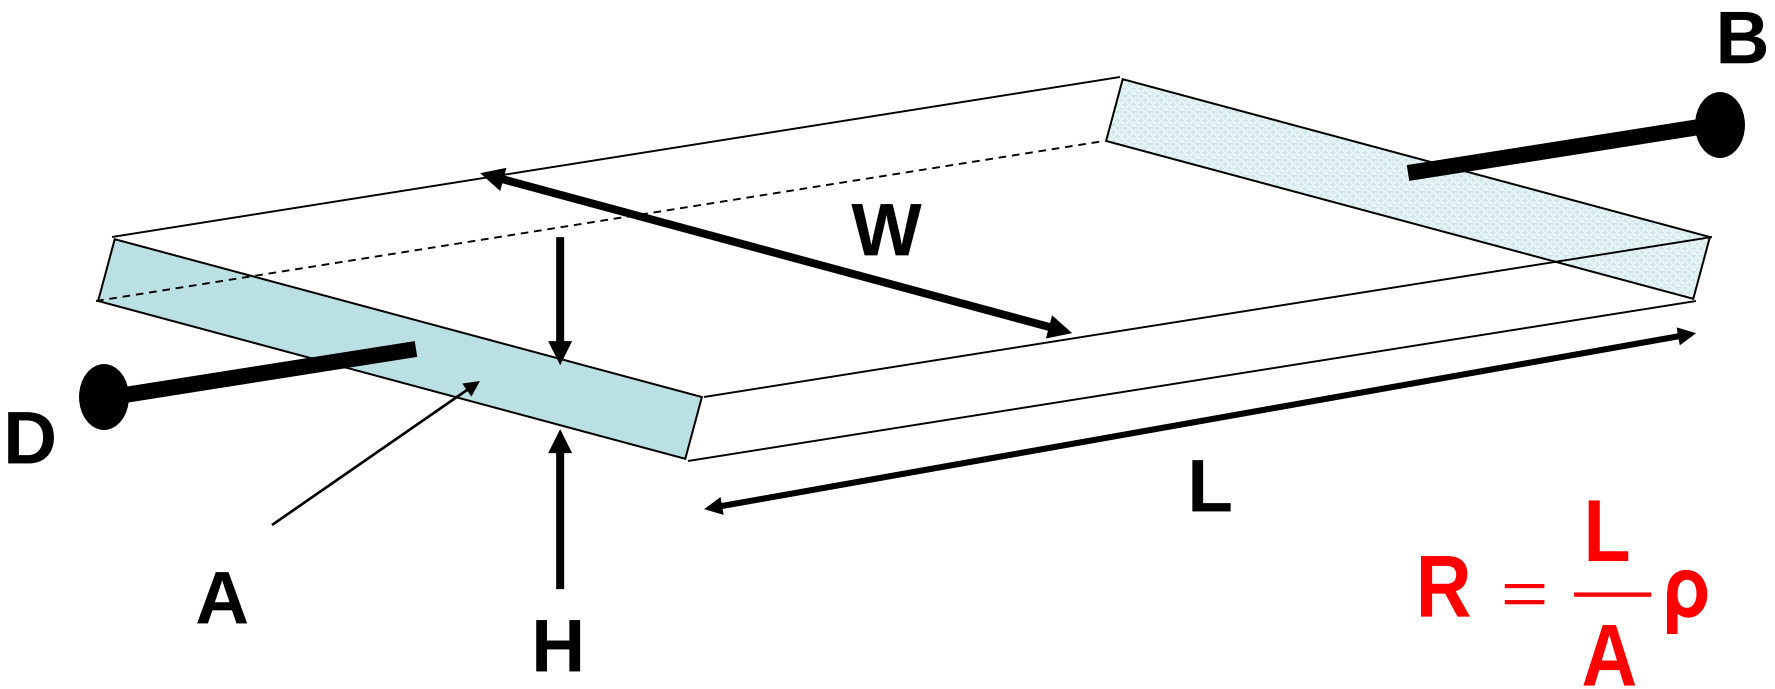

$$R = \frac{L}{A}\rho$$

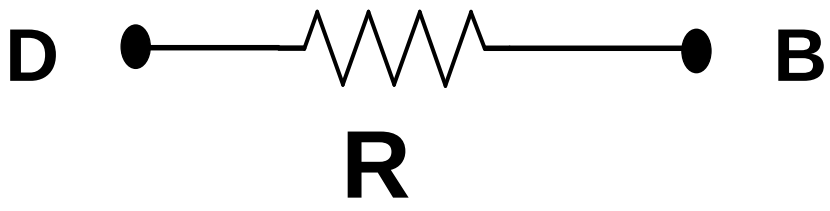

A=HW

ρ independent of geometry and characteristic of the process

Resistance in Interconnects

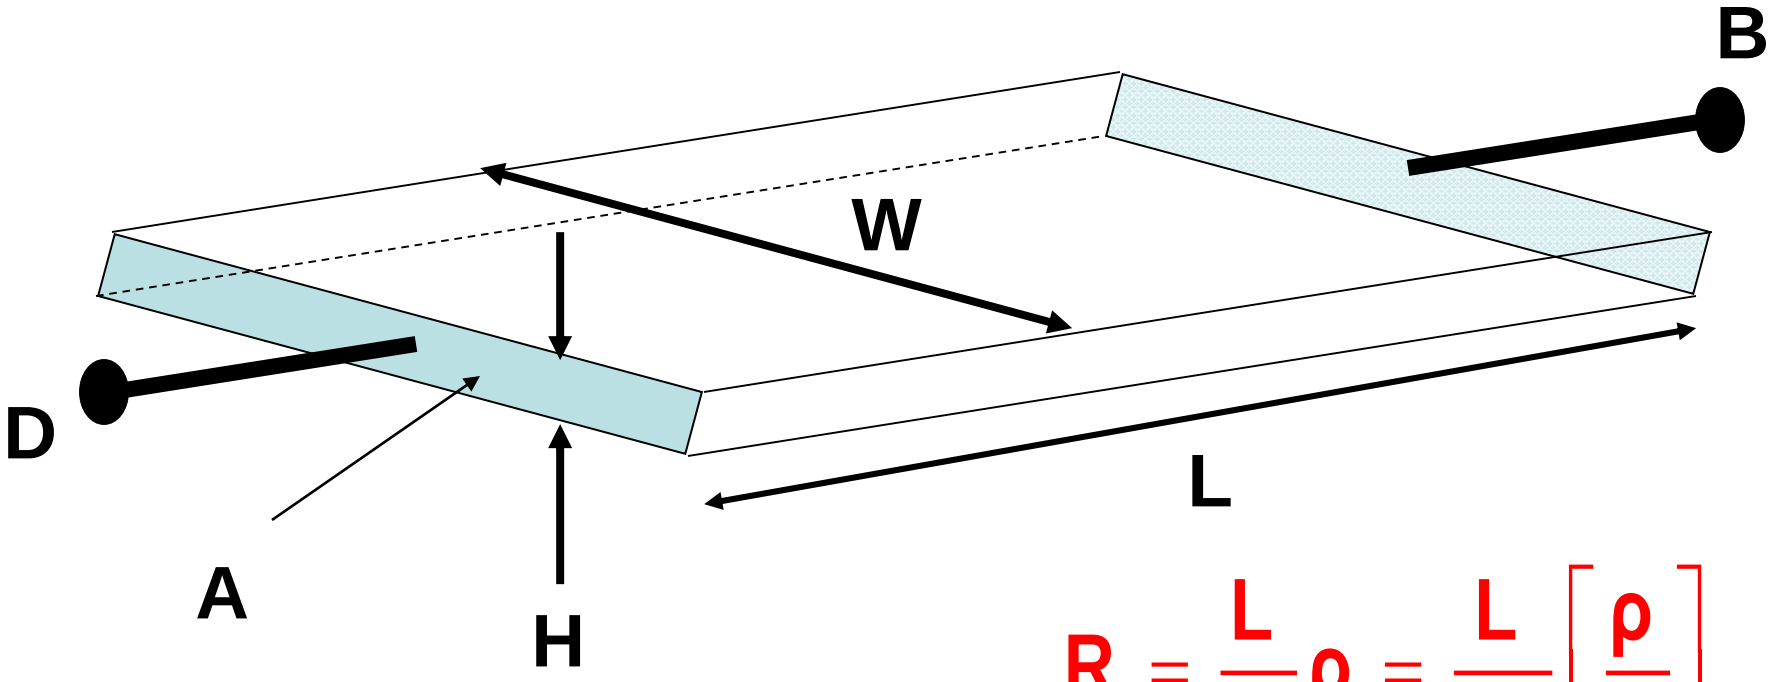

$$R = \frac{L}{A}\rho = \frac{L}{W}\left[\frac{\rho}{H}\right]$$

H << W and H << L in most processes
Interconnect behaves as a “thin” film
Sheet resistance often used instead of conductivity to characterize film

$R_{\square}=\rho/H$ $R=R_{\square}[L / W]$

Resistance in Interconnects

$$R = R_{\square}[L / W]$$

The “Number of Squares” approach to resistance determination in thin films

$N_S = 21$

$L / W = 21$

$$R = R_{\square} N_S$$

Resistance in Interconnects

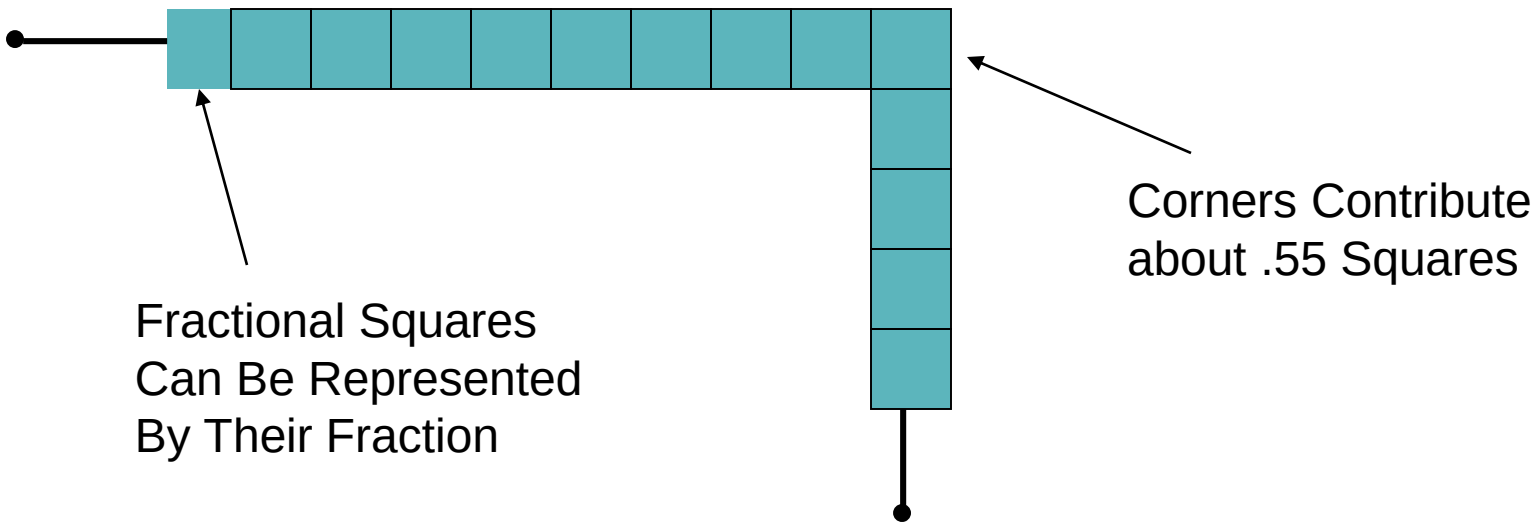

The “squares” approach is not exact but is good enough for calculating resistance in almost all applications

In this example:

$$N_S = 12 + .55 + .7 = 13.25$$

$$\mathbf{R = R_{\square} 13.25}$$

Example:

The layout of a film resistor with electrodes A and B is shown. If the sheet resistance of the film is 40 Ω/□, determine the resistance between nodes A and B.

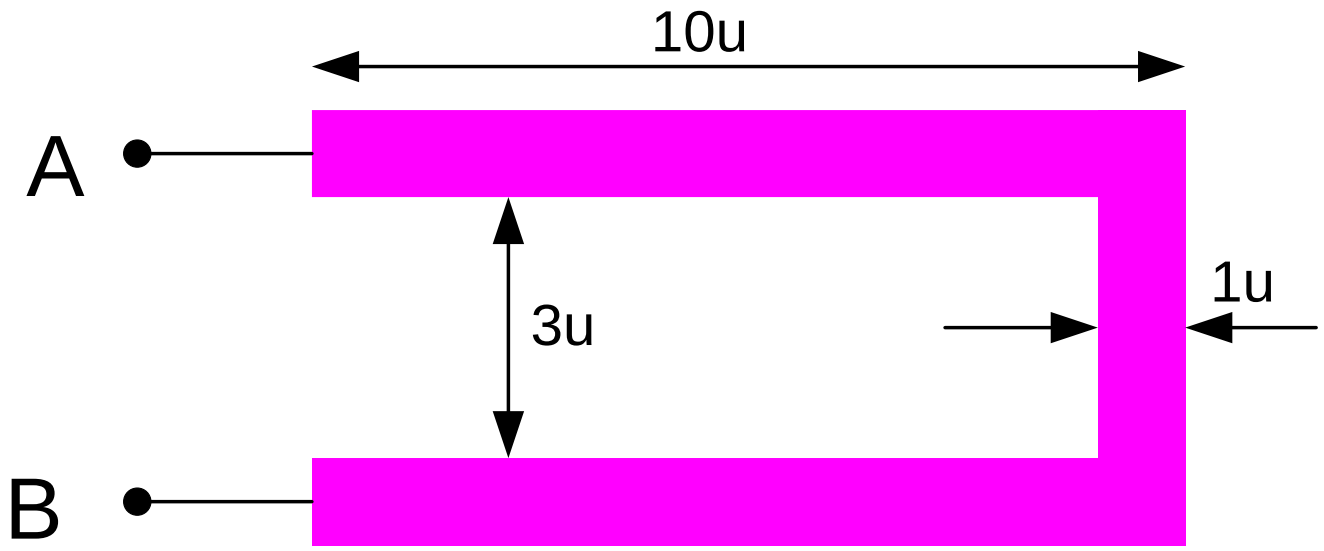

Solution

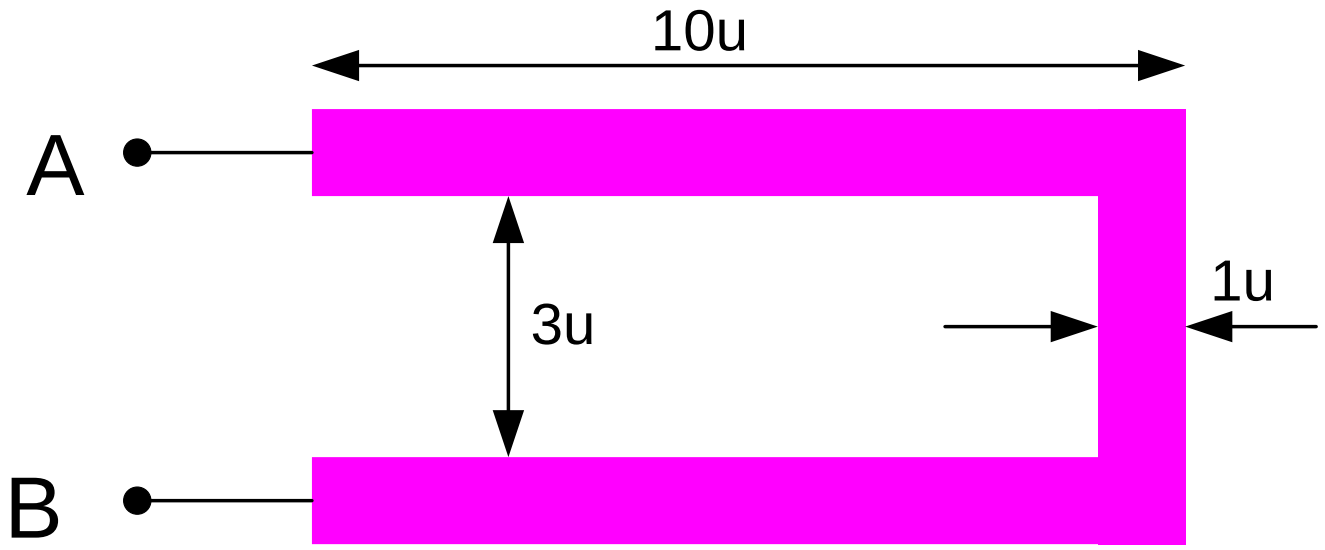

$N_S = 9+9+3+2(.55)=22.1$

$R_{AB}=R_{\square}N_S=40x22.1=884\Omega$

Resistance in Interconnects
(can be used to build resistors!)

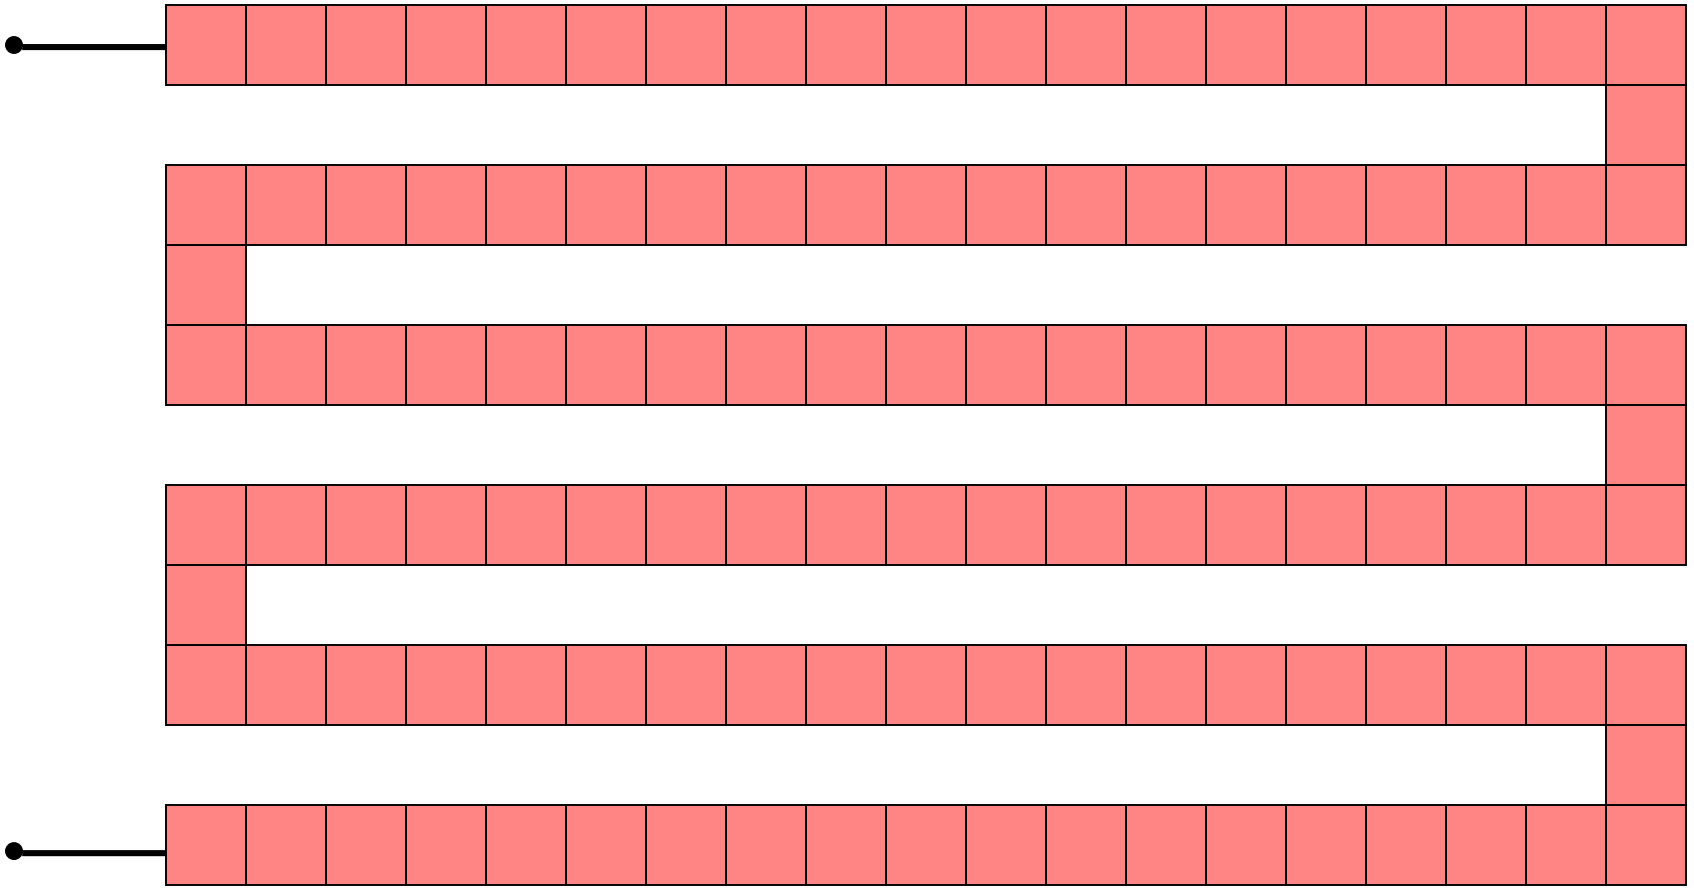

- Serpentine often used when large resistance required
- Polysilicon or diffusion often used for resistor creation
- Effective at managing the aspect ratio of large resistors
- May include hundreds or even thousands of squares

Resistance in Interconnects

(can be used to build resistors!)

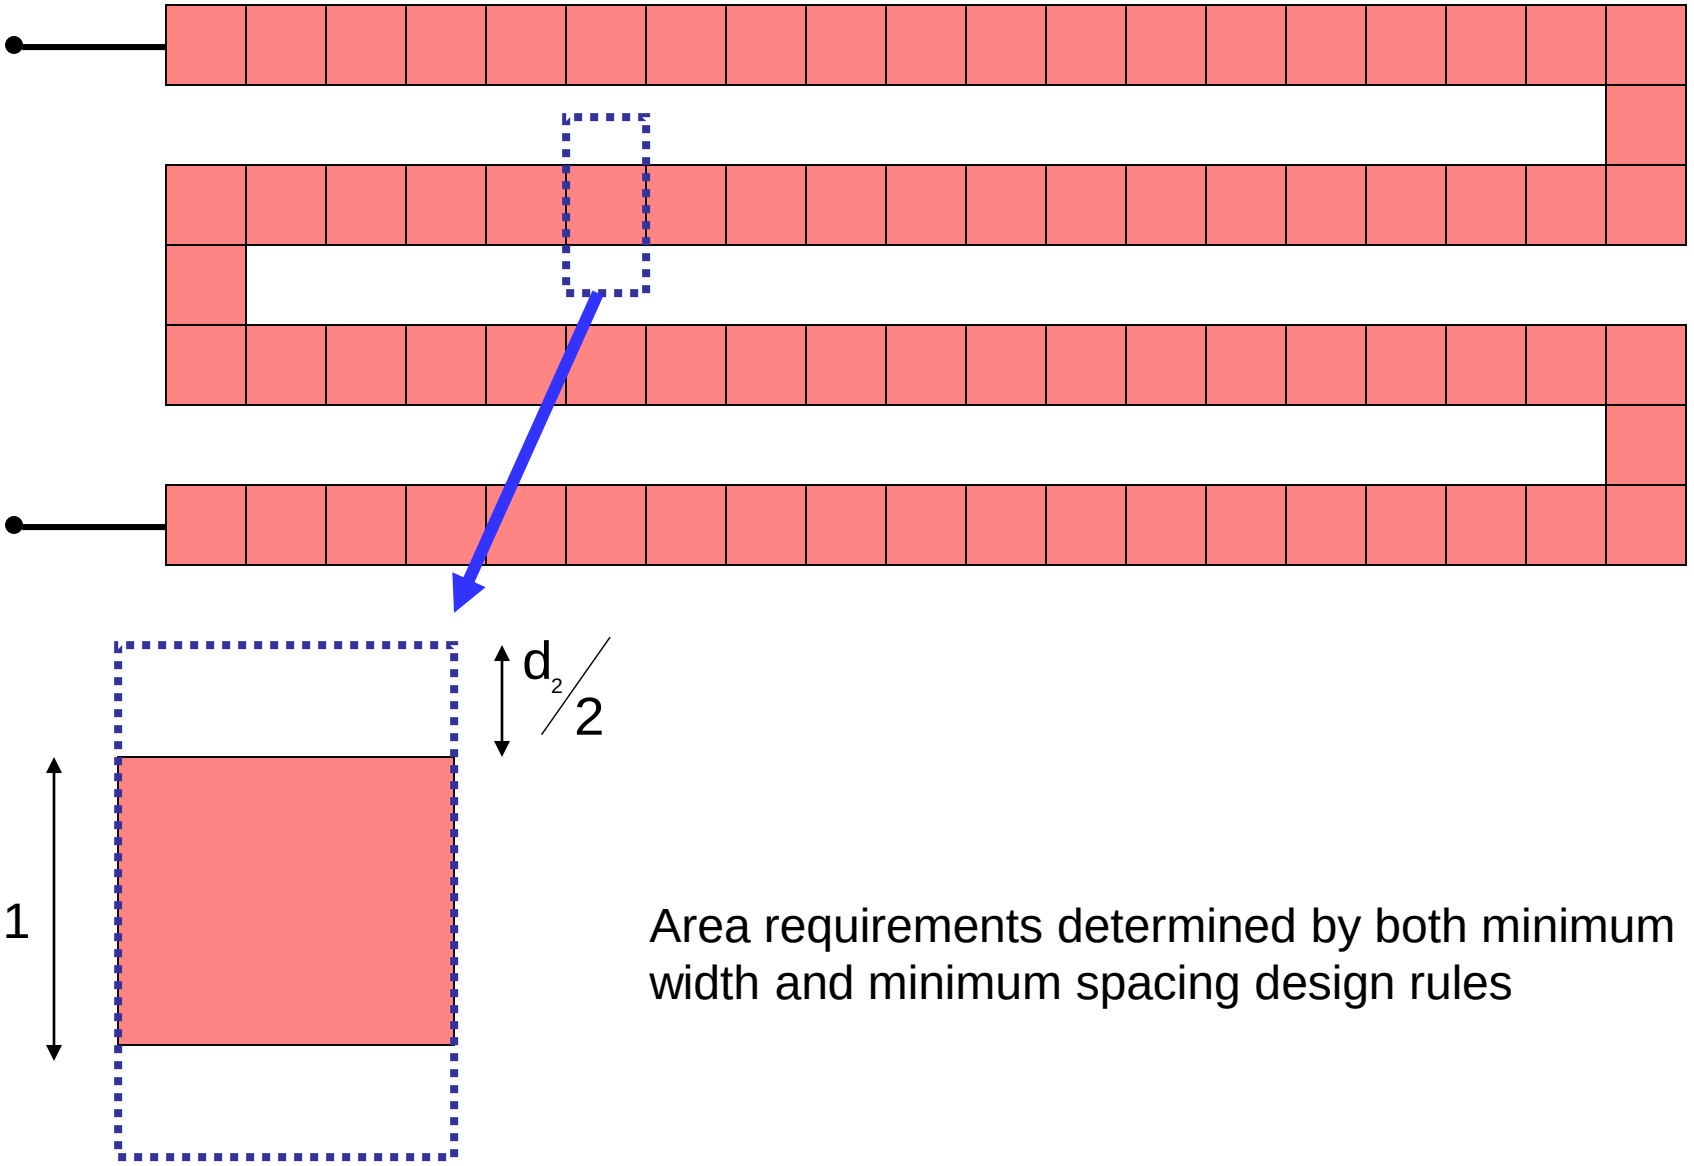

Area requirements determined by both minimum width and minimum spacing design rules

End of Lecture 10