

1. 天然胶, 硬度: 68 ± 3 shore A, 参照标准RENAULT 30-00-118; ⑤
Nature rubber with 68 ± 3 shore A, according to the spec. RENAULT 30-00-118.

3. 粘接准备事项 Bush status before for gluing on stab bar:

3.1 内表面需保持清洁,索格菲粘接前无需处理措施

3.2 衬套出模后6个月可粘接;

3.3 采用脱模剂必须与索格菲粘接工艺兼容:

3.1 The internal surface of the bush must be clean and can receive the Sogefi glue without surface preparation.

3.2 The gluing operation can be made 6 months maximum after moulding.

3.3 The release agent used for bushes must be compatible with the Sogefi glue.

4. 特殊特性参照标准 I-02-P-01-01: Special characteristics as I-02-P-01-01:

关键特性标识Critical: 

重要特性标识Important: 

橡胶尺寸公差参照 NF/T47-001 M3级执行; General tolerances on rubber M3 as norm NF/T47.001.

5. 追溯性标识: 字高2.5mm, 字深0.2mm;

Traceability:characters height 2.5mm,characters deep 0.2mm.

6. 刚度采用卡箍和夹具完成 (见附表): Stiffness are checked with serial brackets and rigid blocks to meet the specification(see table).

7. 索格菲试验项目 (Sogefi test);

7.1 噪音实验:在80℃*4周和120℃*24h环境下对3根老化前后产品分别做噪音实验,测试角度:9.4° & 18.8°, 5种温度(-30℃, -20℃, -10℃, 0℃, +10℃, +20℃), 5次循环,不可察觉的噪音为合格;

7.2 拔脱实验:80%的粘接效果为合格(新件);70%的粘接效果为合格(疲劳件);

7.3 环境试验:在110℃环境下,扭转9.4°,持续100小时,z&x向静刚度损失<10%,且粘接面积>70%为合格;

7.1 Noisy test:control before and after aging test on 3bars for 4 weeks at 80° c and 24h at 120° c, test angle(9.4° &18.8°),5 temperatures(-30℃,-20℃,-10℃,0℃,+10℃,+20℃),evaluation on 5 cycles,not noticeable noise=0K;

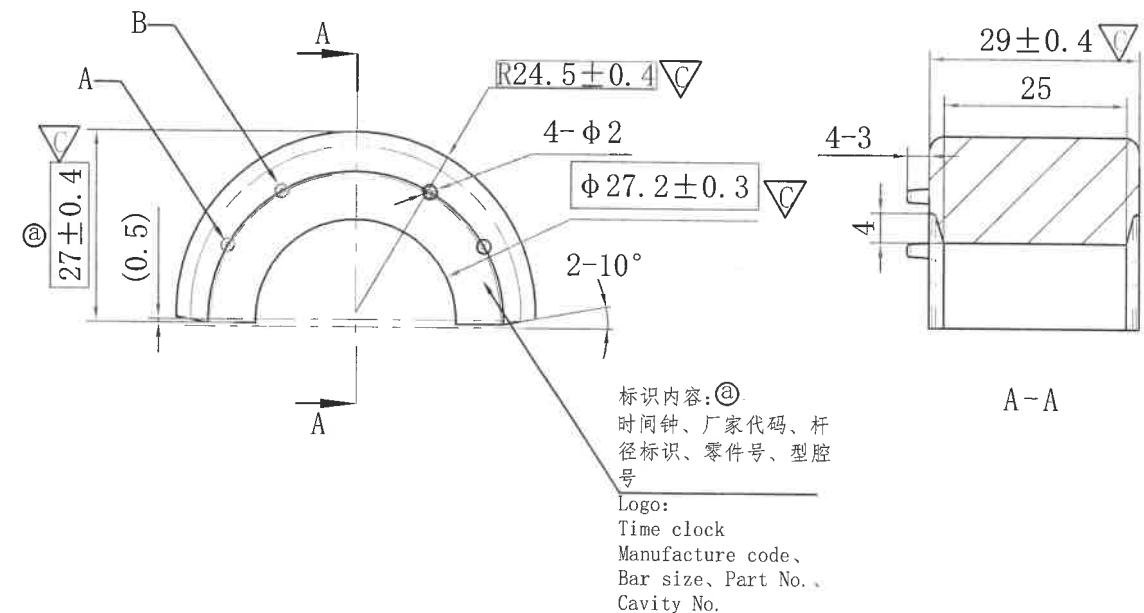
7.2 Destructive tests: 80% rubber adhesion for new bush; 70% rubber adhesion after fatigue;

7.3 Ambient test: Preload bars as 9.4° angle for 100h at 110°C, the test is ok if the stiffness loss in z&x < 10% between before and after and peeling ok > 70%.



8. □为工序、出厂检验尺寸。

☐ is marked for inspection dimensions.

No.	客户版本号 (CUSTOMER VERSION)	No.	变更标记 (MARK CHANGE)	更改内容 (CHANGE CONTENT)	中鼎版本号 (ZD version)	日期 (DATE)	责任人 (RESPONSIBLE)
				Initial Release (初始版本)	A	20240925	马传德
			a/7	产品更新为上半个衬套，高度尺寸增加1mm，更新产品名称，更新厂家代码，更新胶料，更新图号，增加刻字。	B	20250903	马传德
	SJ-255840		b/2	胶料由R6934-64改为R6934-H68	C	20250924	马传德



DIN ISO 3302-1 Class M3										
	≤4	≤6.3	≤10	≤16	≤25	≤40	≤63	≤100	≤160	> 160
F	±0.25	±0.25	±0.30	±0.40	±0.50	±0.60	±0.80	±1.00	±1.30	±0.8%
C	±0.40	±0.40	±0.50	±0.60	±0.80	±1.00	±1.30	±1.60	±2.0	±1.3%

第一角画法 (FIRST ANGLE PROJECTION)				比例 (SCALE) 1:1		重量 (WEIGHT) TBDg		材料 (MATERIAL) NR+BR (R6934-H68)④⑤		产品号 (PRODUCT NO.) C114244-CPSJ	
热处理·表面处理 (HEAT TREATMENT, SURFACE TREATMENT)								名称 (NAME) 前上稳定杆衬套④ (前稳定杆衬套)			
批准 (APPROVAL)		标准化 (STD.)		审核 (AUDITOR)		校对 (CHECKER)		设计 (DESIGNER)		项目组 PROJECT TEAM	
						马传德 20250928		Stabilizer System 稳定杆系统		图号 (PART NO.) Z6012801④ (WYDL30)④	
SIGN (标记)		S		PAGES (共 1 张)		OF (第 1 张)		 ZHONGDING SEALING PARTS CO., LTD 中鼎密封件股份有限公司		A3	