



来历	客户版本号	变更标记	区域	变更事项	中鼎版本号	年 月 日	变更者
	04			首次下发图纸	A	2024.12.31	蒋子杰
SJ-250915	05	ⓐ/2		变更产品图号	B	2025.3.19	蒋子杰


Variant	ZD SAP No.	Mubea proto. SAP No. ⓐ	Mubea serial SAP No. without coating	Mubea serial SAP No. with coating	Mubea part No.	Rubber compound	Hardness (shore A)	Stab diameter (mm) ØA	Bushing diameter (mm) ØE	Insert outer radius (mm) RAR	Insert inner radius (mm) RIR	Insert thickness (mm) B	Rubber thickness (mm) T1A	Rubber thickness (mm) T1B	Inner rubber thickness (mm) T2	Total weight (g)	Rubber volume 3 (cm)	Mubea part No. part 1	Material part 1	Material part 2
A	C114284	91991220			TE-05-03-23-01-A	R5621	55±3	30.4-30.0	29.2	21.35	18.85	2.5	14.4	11.4	4.75	53	30.8	TE-05-03-23-02	GB/T 5754-H22	NR-BR, GS 93010 31 110-NR-55
B	C114285	91991221			TE-05-03-23-01-B	R5621-H60	60±3	28.8	27.8				15.1	12.1	5.45	54	31.9			NR-BR, GS 93010 31 110-NR-60

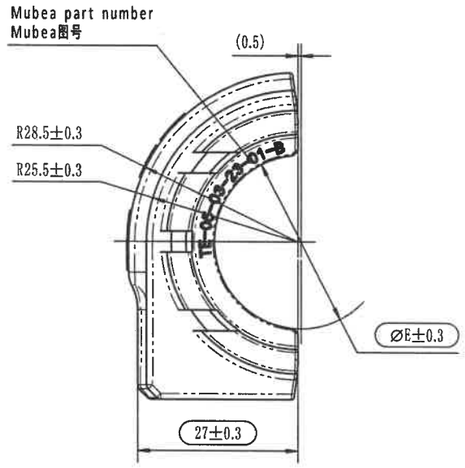

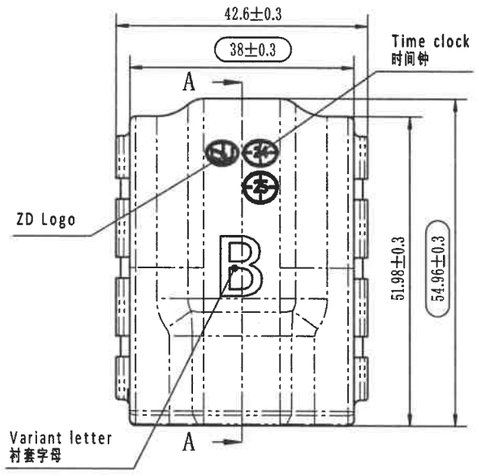


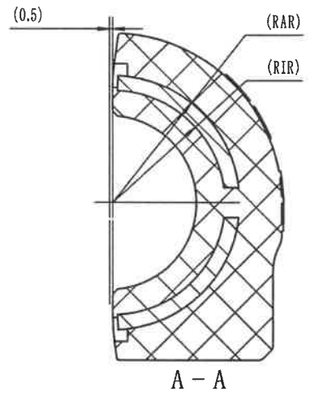

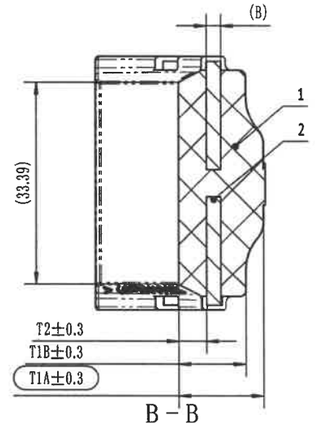

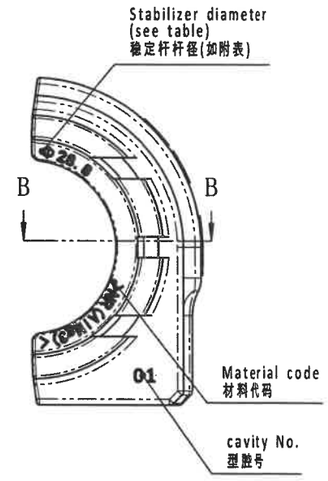

Specification技术要求:
1.Nature rubber refer to the spec GS 93010 .
天然胶参照标准GS 93010 ;
2.No release agent containing Silicone material to be used.
不使用含硅材料的脱模剂;
3.General tolerance on rubber M2 as norm ISO 3302.1 .
橡胶尺寸公差参照ISO 3302.1 M2级 ;
4.The position and the present of the insert (rate plate) has to be 100% automatically controlled.
100%自动控制骨架的位置和存在 ;
5.The bonding between the rubber and the inserts needs to be stronger than >95% rubber break.
骨架与橡胶粘接面积应>95% ;
6.Emission reduced acc. To akt. GADSL and EU-directive 2000/53/EG.
节能减排需参考akt. GADSL和EU-directive 2000/53/EG;
7.Mould misalignment max. 0.5 mm permissible.
模具偏差最大允许0.5毫米;
8.General parting line max. 0.5 mm thick and 1 mm long permissible. No parting line on the bonding surface to the stabilizer.
通常飞边要求≦0.5mm厚,≦1mm长,与稳定杆粘接面上不得有分型线;
9.◯ is marked for inspection dimensions.
◯为出厂检验尺寸。

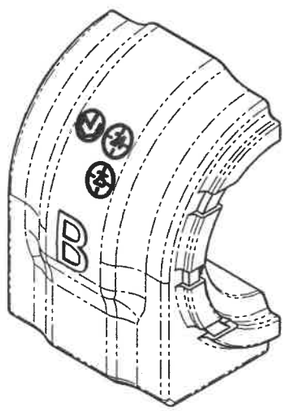

DIN ISO 3302-1 M2 class			
>	≦	F(±)	C±
0	4	0.10	0.15
4	6.3	0.15	0.20
6.3	10	0.20	0.25
10	16	0.20	0.25
16	25	0.25	0.35
25	40	0.35	0.40
40	63	0.40	0.50
63	100	0.50	0.70
100	160	0.70	0.80
160	-	0.5%	0.7%

Reference参考:
ISO 8015
DIN 1451
DIN 16742
DIN EN 1396
ISO 1817
ISO 3302
ISO 2768
VDA 260
GS 91002
GS 93008
GS 93010
GS 93016
QV 31075
WN 730007
ASTM D2000
BMW PR 945:21/07/2021

2	TE-05-03-23-02	铝骨架Al inlay	5754-H22	1	C114284/01-01
1	/	橡胶Rubber	R5621-H60	1	
序号	图号	名称	材料	数量	备注

投影法	比例	质量(g)	材质	产品号
第一画法	1:1	见表格	组件	C114285-CPSJ

热处理·表面处理

名称: 稳定杆衬套 (后稳定杆衬套)

批准	标准化	审批	校对	设计	项目组
				蒋子杰 2025.3.19	稳定杆系统

图号: 91991221 ⓐ (WJK37)

图样标记	S			共 1 张 第 1 张	安徽中鼎密封件股份有限公司	A3