


| 未历 From | 客户版本号 Customer Version | 变更标记 Marking | 区域 Position | 变更事项 Modification | 中鼎版本号 ZD Version | 日期 Date | 责任人 Resp. |
|---|---|---|---|---|---|---|---|
| | | | | 首次下发产品图纸 | A | 2024.12.27 | 蒋子杰 |


| Variant | ZD SAP No. | Mubea proto. SAP No. | Mubea serial SAP No. | | Mubea part No. | Hardness (shore A) | Stab diameter (mm) | Bushing diameter (mm) | Insert outer radius (mm) | Insert inner radius (mm) | Insert thickness (mm) | Rubber thickness (mm) | Inner rubber thickness (mm) | Total weight (g) | Rubber volume 3 (cm ) | Mubea part No. part 1 | Material part 1 | Material part 2 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | without coating | with coating | | | ØA | ØE | RAR | RIR | B | T1 | T2 | | | | | |
| A | C114295 | 91993227 | | | TE-09-02-24-02-A | 55±3 | 30.0 | 29.2 | 22 | 19.5 | 2.5 | 15.60 | 5.65 | 75 | 51.9 | TE-09-02-24-03 | GB/T 5754-H22 | ASTM D2000 M4AA 614 A13 B13 F17 |
| B | C114297 | 91993229 | | | TE-09-02-24-02-B | 55±3 | 29.5 | 28.8 | | | | 15.70 | 5.85 | 75 | 52.3 | | | |
| C | C114266 | 91993148 | | | TE-09-02-24-02-C | 55±3 | 29.0 | 28.2 | | | | 16.30 | 6.15 | 73 | 52.8 | | | |
| E | C114299 | 91993231 | | | TE-09-02-24-02-E | 55±3 | 28.5 | 27.7 | | | | 16.35 | 6.40 | 77 | 53.3 | | | |
| H | C114301 | 91993233 | | | TE-09-02-24-02-H | 55±3 | 27.6 | 26.8 | | 18.5 | 3.5 | 16.80 | 5.85 | 70 | 51.9 | TE-09-02-24-04 | PA66+GF30 | |
| J | C114303 | 91993235 | | | TE-09-02-24-02-J | 60±3 | 26.7-27.0 | 25.9 | | | | 17.35 | 6.30 | 71 | 52.7 | | | |

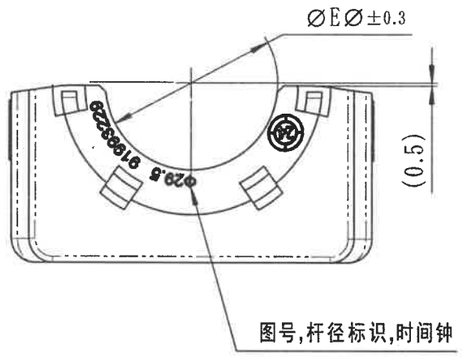

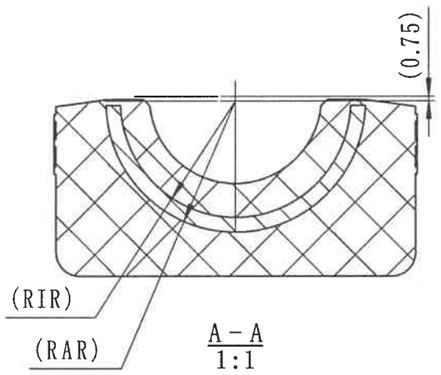



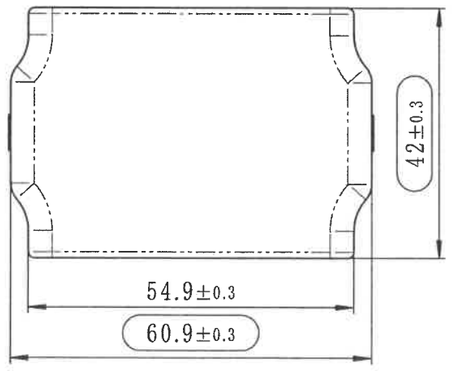



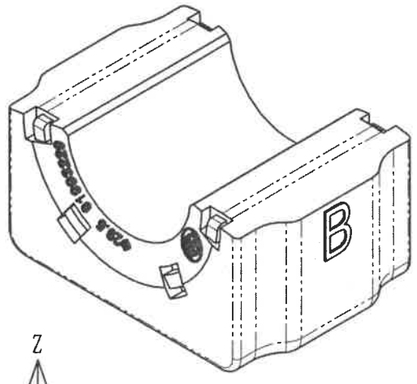

A－A
1:1

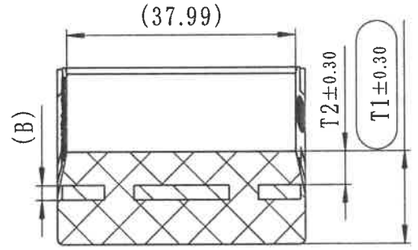



B－B
1:1

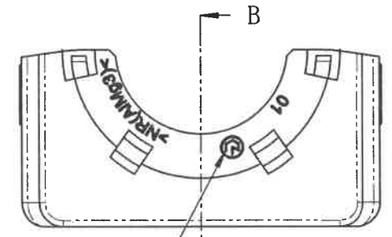


| DIN ISO 3302-1 M2 class | | | |
|---|---|---|---|
| > | ≤ | F(±) | C± |
| 0 | 4 | 0.10 | 0.15 |
| 4 | 6.3 | 0.15 | 0.20 |
| 6.3 | 10 | 0.20 | 0.25 |
| 10 | 16 | 0.20 | 0.25 |
| 16 | 25 | 0.25 | 0.35 |
| 25 | 40 | 0.35 | 0.40 |
| 40 | 63 | 0.40 | 0.50 |
| 63 | 100 | 0.50 | 0.70 |
| 100 | 160 | 0.70 | 0.80 |
| 160 | - | 0.5% | 0.7% |

Specification技术要求:
1.Nature rubber refer to the spec ASTM D2000 .
天然胶参照标准ASTM D2000 ;
2.No release agent containing Silicone material to be used.
不使用含硅材料的脱模剂;
3.General tolerance on rubber M2 as norm ISO 3302.1 .
橡胶尺寸公差参照ISO 3302.1 M2级 ;
4.The bonding between the rubber and the inserts needs to be stronger than >95% rubber break.
骨架与橡胶粘接面积应>95% ;
5.Emission reduced acc. To akt. GADSL and EU-directive 2000/53/EG.
节能减排需参考akt. GADSL和EU-directive 2000/53/EG;
6.Mould misalignment max. 0.5 mm permissible.
模具偏差最大允许0.5毫米;
7.General parting line max. 0.5 mm thick and 1 mm long permissible.
No parting line on the bonding surface to the stabilizer.
通常飞边要求≦0.5mm厚,≦1mm长,与稳定杆粘接面上不得有分型线;
8.◯ is marked for inspection dimensions.
◯为出厂检验尺寸。

Reference参考:
ISO 8015
DIN 1451
DIN EN 1396
ISO 1817
ISO 3302
ISO 2768
VDA 260
GADSL
Note-DPR-34184774

| 序号 | 图号 | 名称 | 材料 | 数量 | 备注 |
|---|---|---|---|---|---|
| 2 | | 橡胶 | R5621 | 1 | |
| 1 | TE-09-02-24-03 | 铝骨架 | 5754 H22 | 1 | C114265/01-01 |

| 投影法 Projection method | 比例Scale | 质量Weight(g) | 材质Material | 产品号ZD production code |
|---|---|---|---|---|
| 第一画法First angle projection | 1:1 | | 组件 | C114297-CPSJ |

热处理·表面处理Heat Treatment·Surface Treatment

名称Part name: 稳定杆衬套 (前稳定杆衬套)

图号Drawing No: 91993229 (WDG06)

| 批准 Approval | 标准化 Standards | 审批 Review | 校对 Check | 设计 Design | 项目组 Team |
|---|---|---|---|---|---|
| | | | | 蒋子杰 2024.12.26 | 稳定杆系统 |

| 标记SIGN | S | | | 共 1 张 第 1 张 | 安徽中鼎密封件股份有限公司 | A3 |
|---|---|---|---|---|---|---|