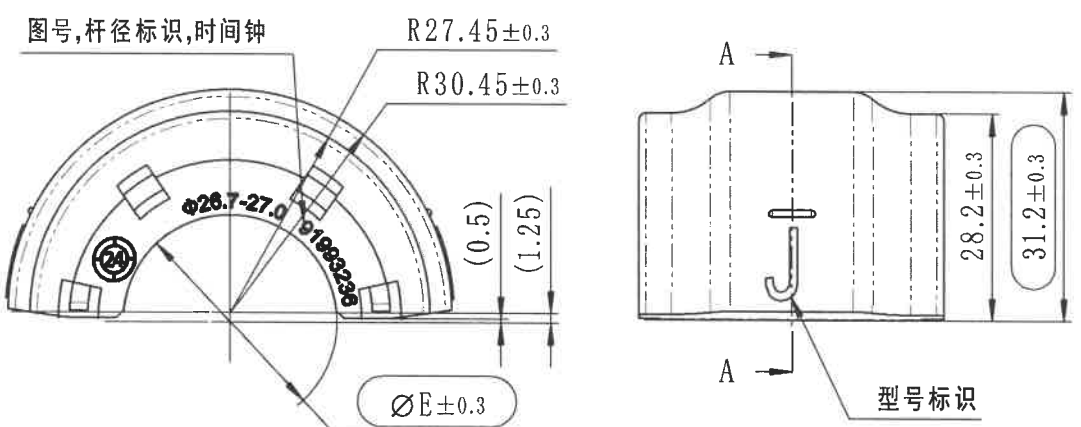
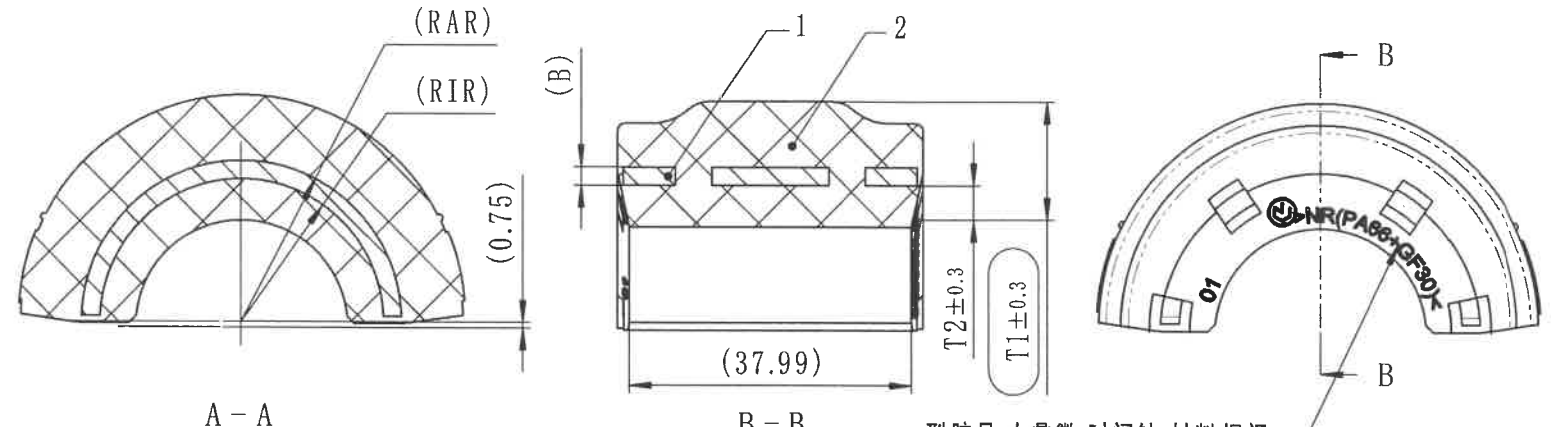
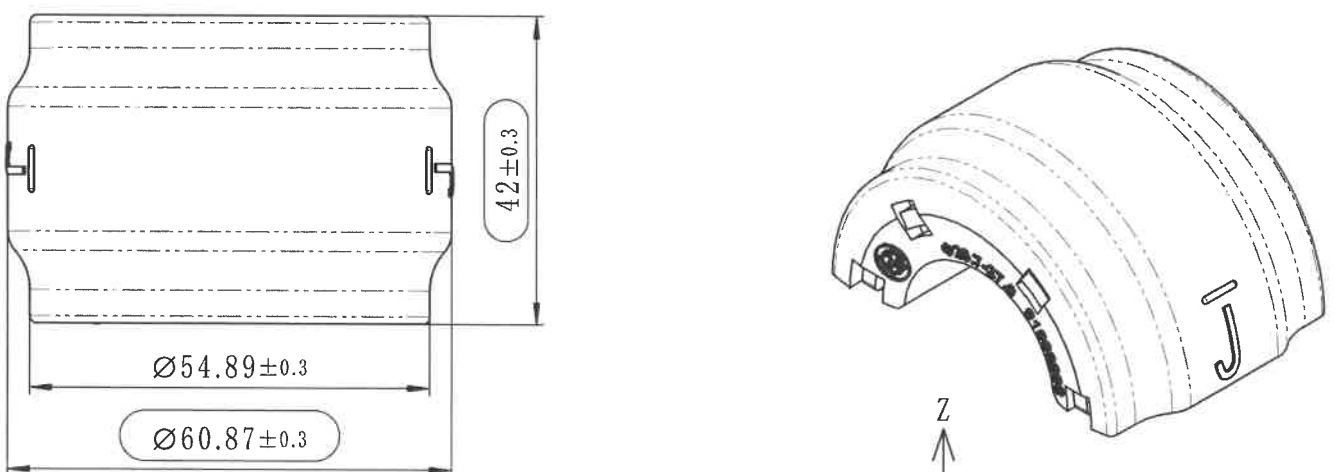


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																																																																		
A											来历	客户版本号	变更标记	区域	变更事项	中鼎版本号	年 月 日	变更者	A																																																															
															首次下发产品图纸	A	2024.12.27	蒋子杰																																																																
											SJ-251140		@/2		更新质量及材料标准	B	2025.4.25	蒋子杰																																																																
B	Variant	ZD SAP No.	Mubea proto. SAP No.	Mubea serial SAP No.		Mubea part No.	Hardness (shore A)	Stab diameter (mm)	Bushing diameter (mm)	Insert outer radius (mm)	Insert inner radius (mm)	Insert thickness (mm)	Rubber thickness (mm)	Inner rubber thickness (mm)	Total weight (g)	Rubber volume 3 (cm)	Mubea part No. part 1	Material part 1	Material part 2		B																																																													
				without coating	with coating			ØA	ØE	RAR	RIR	B	T1	T2	@				@																																																															
C	A	C114294	91993228			TE-09-02-24-01-A	55±3	30.0	29.2	22	19.5	2.5	17.10	5.65	55.1	37.5	TE-09-02-24-03	GB/T 5754-H22	ASTM D2000 M4AA 514 A13 B13 F17																																																															
	B	C114296	91993230			TE-09-02-24-01-B	55±3	29.5	28.8				17.30	5.85	55.1	37.9																																																																		
	C	C114265	91993149			TE-09-02-24-01-C	55±3	29.0	28.2				17.60	6.15	56.1	38.4																																																																		
	E	C114298	91993232			TE-09-02-24-01-E	55±3	28.5	27.7				17.85	6.40	56.2	38.9																																																																		
	H	C114300	91993234			TE-09-02-24-01-H	55±3	27.6	26.8				18.30	5.85	50.1	37.5																																																																		
	J	C114302	91993236			TE-09-02-24-01-J	60±3	26.7-27.0	25.9				18.5	3.5	18.75	6.30						51.2	38.4	TE-09-02-24-04	PA66+GF30	ASTM D2000 M4AA 614 A13 B13 F17																																																								
D																						D																																																												
E																						E																																																												
F																						F																																																												
G																						G																																																												
H	Specification技术要求: 1.Nature rubber refer to the spec ASTM D2000 . 天然胶参照标准ASTM D2000 ; 2.No release agent containing Silicone material to be used. 不使用含硅材料的脱模剂; 3.General tolerance on rubber M2 as norm ISO 3302.1 . 橡胶尺寸公差参照ISO 3302.1 M2级 ; 4.The bonding between the rubber and the inserts needs to be stronger than >95% rubber break. 骨架与橡胶粘接面积应>95% ; 5.Emission reduced acc. To akt. GADSL and EU-directive 2000/53/EG. 节能减排需参考akt. GADSL和EU-directive 2000/53/EG; 6.Mould misalignment max. 0.5 mm permissible. 模具偏差最大允许0.5毫米; 7.General parting line max. 0.5 mm thick and 1 mm long permissible. No parting line on the bonding surface to the stabilizer. 通常飞边要求≤0.5mm厚,≤1mm长,与稳定杆粘接面上不得有分型线; 8.⊙ is marked for inspection dimensions. ⊙为出厂检验尺寸。																					H																																																												
I																						I																																																												
J	<table><tr><td>2</td><td></td><td>橡胶</td><td>R5621</td><td>1</td><td></td></tr><tr><td>1</td><td>TE-09-02-24-04</td><td>铝骨架</td><td>PA66+GF30</td><td>1</td><td>C114300/01-01</td></tr><tr><td>序号</td><td>图号</td><td>名称</td><td>材料</td><td>数量</td><td>备注</td></tr><tr><td colspan="3">投影法Projection method</td><td>比例Scale</td><td>质量Weight(g)</td><td>材质Material</td></tr><tr><td colspan="3">第一画法First angle projection</td><td>1:1</td><td></td><td>组件</td></tr><tr><td colspan="3">热处理·表面处理Heat Treatment·Surface Treatment</td><td colspan="3">名称Part name</td></tr><tr><td colspan="3"></td><td colspan="3">稳定杆衬套 (前稳定杆衬套)</td></tr><tr><td colspan="3"></td><td colspan="3">图号Drawing No</td></tr><tr><td colspan="3"></td><td colspan="3">91993236 (WDG06)</td></tr><tr><td colspan="3"></td><td colspan="3" rowspan="2">安徽中鼎密封件股份有限公司</td></tr></table>																					2		橡胶	R5621	1		1	TE-09-02-24-04	铝骨架	PA66+GF30	1	C114300/01-01	序号	图号	名称	材料	数量	备注	投影法Projection method			比例Scale	质量Weight(g)	材质Material	第一画法First angle projection			1:1		组件	热处理·表面处理Heat Treatment·Surface Treatment			名称Part name						稳定杆衬套 (前稳定杆衬套)						图号Drawing No						91993236 (WDG06)						安徽中鼎密封件股份有限公司			J
2		橡胶	R5621	1																																																																														
1	TE-09-02-24-04	铝骨架	PA66+GF30	1	C114300/01-01																																																																													
序号	图号	名称	材料	数量	备注																																																																													
投影法Projection method			比例Scale	质量Weight(g)	材质Material																																																																													
第一画法First angle projection			1:1		组件																																																																													
热处理·表面处理Heat Treatment·Surface Treatment			名称Part name																																																																															
			稳定杆衬套 (前稳定杆衬套)																																																																															
			图号Drawing No																																																																															
			91993236 (WDG06)																																																																															
			安徽中鼎密封件股份有限公司																																																																															
K	<table><tr><th colspan="4">DIN ISO 3302-1 M2 class</th></tr><tr><td>></td><td>≤</td><td>F(±)</td><td>C±</td></tr><tr><td>0</td><td>4</td><td>0.10</td><td>0.15</td></tr><tr><td>4</td><td>6.3</td><td>0.15</td><td>0.20</td></tr><tr><td>6.3</td><td>10</td><td>0.20</td><td>0.25</td></tr><tr><td>10</td><td>16</td><td>0.20</td><td>0.25</td></tr><tr><td>16</td><td>25</td><td>0.25</td><td>0.35</td></tr><tr><td>25</td><td>40</td><td>0.35</td><td>0.40</td></tr><tr><td>40</td><td>63</td><td>0.40</td><td>0.50</td></tr><tr><td>63</td><td>100</td><td>0.50</td><td>0.70</td></tr><tr><td>100</td><td>160</td><td>0.70</td><td>0.80</td></tr><tr><td>160</td><td>-</td><td>0.5%</td><td>0.7%</td></tr></table>																					DIN ISO 3302-1 M2 class				>	≤	F(±)	C±	0	4	0.10	0.15	4	6.3	0.15	0.20	6.3	10	0.20	0.25	10	16	0.20	0.25	16	25	0.25	0.35	25	40	0.35	0.40	40	63	0.40	0.50	63	100	0.50	0.70	100	160	0.70	0.80	160	-	0.5%	0.7%	K												
DIN ISO 3302-1 M2 class																																																																																		
>	≤	F(±)	C±																																																																															
0	4	0.10	0.15																																																																															
4	6.3	0.15	0.20																																																																															
6.3	10	0.20	0.25																																																																															
10	16	0.20	0.25																																																																															
16	25	0.25	0.35																																																																															
25	40	0.35	0.40																																																																															
40	63	0.40	0.50																																																																															
63	100	0.50	0.70																																																																															
100	160	0.70	0.80																																																																															
160	-	0.5%	0.7%																																																																															
L	Reference参考: ISO 8015 DIN 1451 DIN EN 1396 ISO 1817 ISO 3302 ISO 2768 VDA 260 GADSL Note-DPR-34184774																					L																																																												
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																																																																		
											标记SIGN	S		共 1 张 第 1 张		安徽中鼎密封件股份有限公司		A3																																																																