来历	客户版本号	变更标记	区域	变更事项	中鼎版本号	年 月 日	变更者
				首次下发产品图纸	A	2024.12.27	蒋子杰
SJ-251140		ⓐ/2		更新质量及材料标准	B	2025.4.25	蒋子杰

Variant	ZD SAP No.	Mubea proto. SAP No.	Mubea serial SAP No.		Mubea part No.	Hardness (shore A)	Stab diameter (mm)	Bushing diameter (mm)	Insert outer radius (mm)	Insert inner radius (mm)	Insert thickness (mm)	Rubber thickness (mm)	Inner rubber thickness (mm)	Total weight (g) ⓐ	Rubber volume 3 (cm)	Mubea part No. part 1	Material part 1	Material part 2 ⓐ	Mubea part No.part 3	Material part 3
			without coating	with coating			ØA	ØE	RAR	RIR	B	T1	T2							
B	C114305	91993245			TE-01-03-24-02-B	55±3	23.6	22.8	17.7	16.2	1.5	5.30	15.60	37.4	19.0	TE-01-03-24-03	GB/T 5754-H22	ASTM D2000 M4AA 514 A13 B13 F17	TE-01-03-24-06	PA66 GF30
C	C114307	91993247			TE-01-03-24-02-C	60±3	22.5	21.7				5.85	16.15	38	19.7					
E	C114264	91991594			TE-01-03-24-02-E	60±3	21.7	20.9		15.2	2.5	5.25	16.55	32.4	18.6	TE-01-03-24-04		ASTM D2000 M4AA 614 A13 B13 F17		
H	C114309	91993249			TE-01-03-24-02-H	60±3	20.7	19.9				5.75	17.05	38.7	19.2					
J	C114311	91993252			TE-01-03-24-02-J	65±3	19.6	18.8				6.30	17.60	42.5	19.7			ASTM D2000 M4AA 614 A13 B13 F17		
K	C114313	91993254			TE-01-03-24-02-K	60±3	18.4	17.6		13.2	4.5	4.90	18.20	38.5	17.7	TE-01-03-24-05	PA66 GF30	ASTM D2000 M4AA 614 A13 B13 F17		
L	C114315	91993256			TE-01-03-24-02-L	60±3	17.2	16.4				5.50	18.80	38.5	18.2					

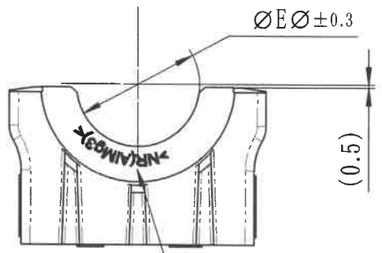



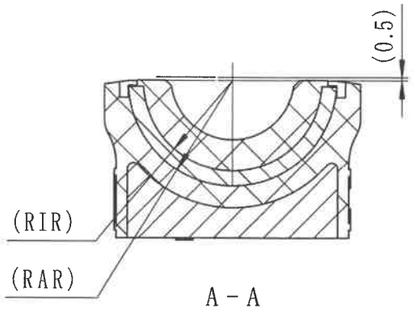

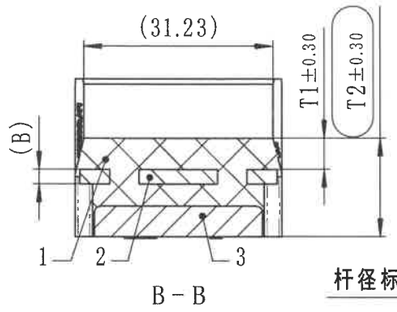



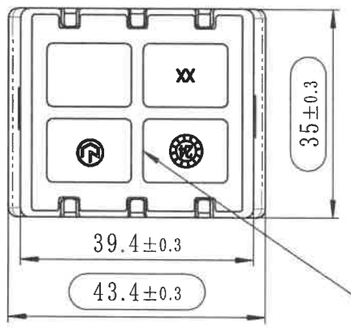





DIN ISO 3302-1 M2 class			
>	≤	F(±)	C±
0	4	0.10	0.15
4	6.3	0.15	0.20
6.3	10	0.20	0.25
10	16	0.20	0.25
16	25	0.25	0.35
25	40	0.35	0.40
40	63	0.40	0.50
63	100	0.50	0.70
100	160	0.70	0.80
160	-	0.5%	0.7%

Reference参考:
ISO 8015
DIN 1451
DIN EN 1396
ISO 1817
ISO 3302
ISO 2768
VDA 260
GADSL
Note-DPR-34184774

Specification技术要求:
1.Nature rubber refer to the spec ASTM D2000 .
天然胶参照标准ASTM D2000 ;
2.No release agent containing Silicone material to be used.
不使用含硅材料的脱模剂;
3.General tolerance on rubber M2 as norm ISO 3302.1 .
橡胶尺寸公差参照ISO 3302.1 M2级 ;
4.The bonding between the rubber and the inserts needs to be stronger than >95% rubber break.
骨架与橡胶粘接面积应>95% ;
5.Emission reduced acc. To akt. GADSL and EU-directive 2000/53/EG.
节能减排需参考akt. GADSL和EU-directive 2000/53/EG;
6.Mould misalignment max. 0.5 mm permissible.
模具偏差最大允许0.5毫米;
7.General parting line max. 0.5 mm thick and 1 mm long permissible.
No parting line on the bonding surface to the stabilizer.
通常飞边要求≦0.5mm厚,≦1mm长,与稳定杆粘接面上不得有分型线;
8.◯ is marked for inspection dimensions.
◯为出厂检验尺寸。

序号	图号	名称	材料	数量	备注
3	TE-01-03-24-06	塑料底座	PA66+GF30	1	C114264/01-01
2	TE-01-03-24-03	铝骨架	5754 H22	1	C114304/01-01
1		橡胶	R5621-H60	1	

投影法 Projection method / 第一画法First angle projection	比例Scale	质量Weight(g)	材质Material	产品号ZD production code
	1:1		组件	C114307-CPSJ

热处理·表面处理Heat Treatment·Surface Treatment

名称Part name: 稳定杆衬套 (后稳定杆衬套)

图号Drawing No: 91993247 (WDG06)

批准 Approval	标准化 Standards	审批 Review	校对 Check	设计 Design	项目组 Team
				蒋子杰 2025.4.25	稳定杆系统

标记SIGN	S			共 1 张 第 1 张	安徽中鼎密封件股份有限公司	A3