


A	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	A		
										来历	客户版本号	变更标记	区域	变更事项		中鼎版本号		年 月 日	变更者
														首次下发产品图纸		A		2025.3.7	蒋子杰

B	Variant	ZD ID	Mubea proto. ID	Mubea serial ID	Mubea serial material ID	Mubea serial ID	Mubea serial material ID	Mubea part No.	Rubber compound	Hardness (shore A)	Stab diameter (mm)	Bushing diameter (mm)	Rate plate thickness (mm)	Rate plate inner radius (mm)	Rate plate inner radius (mm)	Inner rubber thickness (mm)	Rubber thickness (mm)	Total weight (g)	Rubber volume 3 (cm)	Mubea part No. part 1	Material part 1	Material part 2	B
	without coating				with coating		ØD				ØE	B	RI	RA	T1	T2	TE-01-08-24-03	GB/T 3880.2 -5754-H22	NR or NR-BR acc. SAE J200 M4AA 617 A13 B13 C12 F17 K11				
	A	C114435	91998672								TE-01-08-24-01-A	R6949	60±3	22.1-22.5	21.3	2.5							
C	B	C114437	91998674					TE-01-08-24-01-B	R6949-H55	55±3	23.0-23.6	22.3	1.5	17.5			5.6	12.35	31	20.1	TE-01-08-24-05		
	C	C114439	91998676					TE-01-08-24-01-C			24.2-24.8	23.5				5.25	13.0	36	21.1				
	E	C114441	91998678					TE-01-08-24-01-E			26.1	25.3				5.6	12.35	31	20.1				
		H	C114443	91998680					TE-01-08-24-01-H	R6949-H50	50±3	27.0	26.2				5.15	11.9	32	21.8			

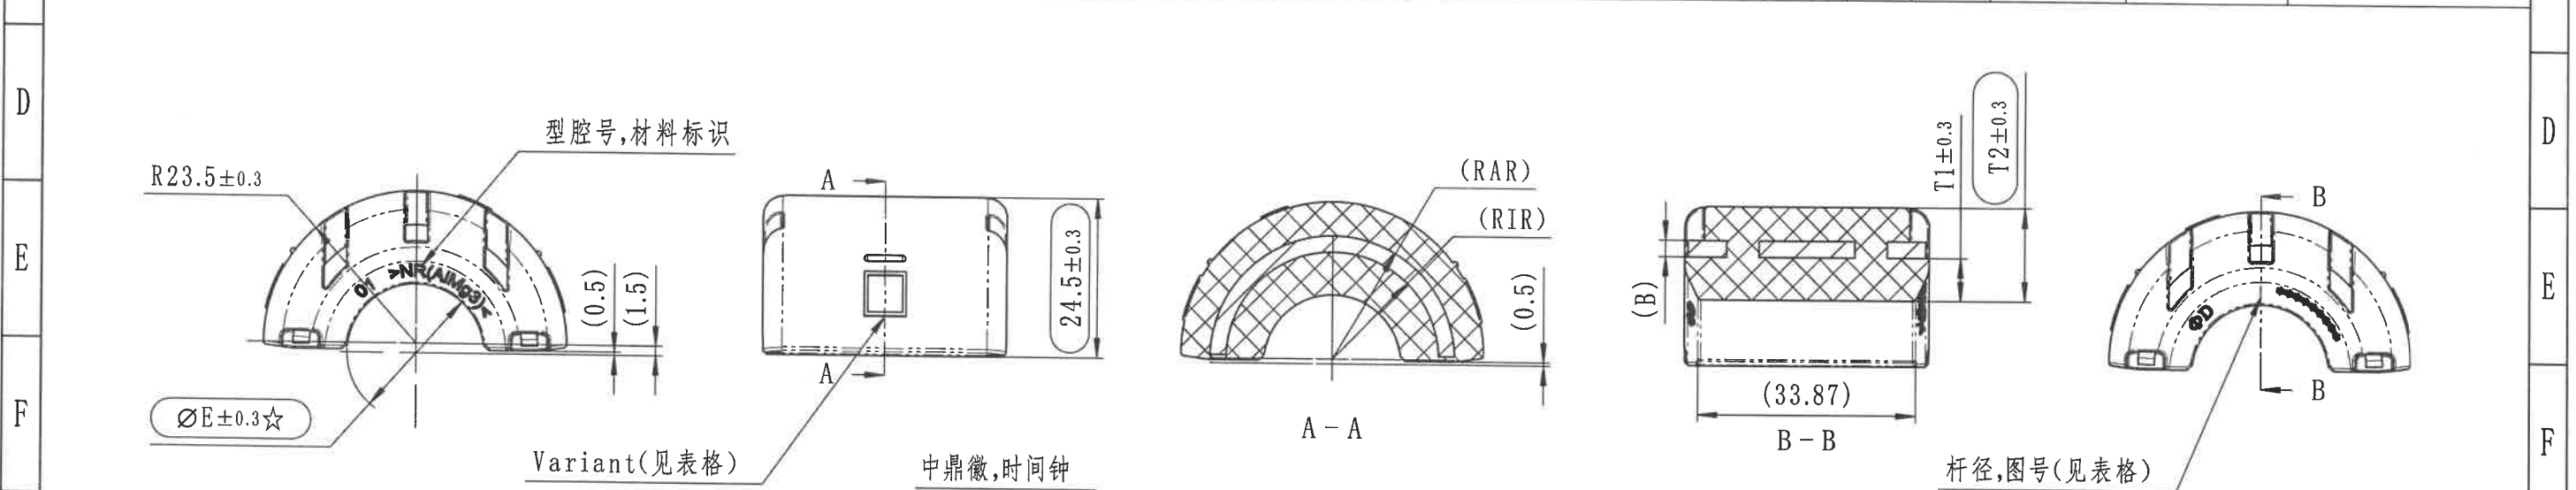

2		TE-01-08-24-03		铝骨架Al inlay		1	5754 H22	C114435/01-01
1				橡胶Rubber		1	R6949-H55	
序号		图号		名称		数量	材料	备注
投影法		第一画法		比例		质量(g)		材质
热处理-表面处理				1:1		0.00g		组件
批准		标准化		审批		校对		设计
图样标记		S		共 1 张 第 1 张		稳定杆系 统		图号
								91998674 (WMX83)
								安微中鼎密封件股份有限公司 A3