来历	客户版本号	变更标记	区域	变更事项	中鼎版本号	年 月日	变更者
				首次下发产品图纸	A	2025.3.7	蒋子杰

Variant	ZD ID	Mubea proto. ID	Mubea proto. Material ID	Mubea serial ID (without coating)	Mubea serial material ID (without coating)	Mubea serial ID (with coating)	Mubea serial material ID (with coating)	Mubea part No.	Rubber compound	Hardness (shore A)	Stab diameter (mm) ØD	Bushing diameter (mm) ØE	Rate plate thickness (mm) B	Rate plate inner radius (mm) RI	Rate plate inner radius (mm) RA	Inner rubber thickness (mm) T1	Rubber thickness (mm) T2	Total weight (g)	Rubber volume 3 (cm)	Mubea part No. part 1	Material part 1	Material part 2
A	C114436	91998673						TE-01-08-24-02-A	R6949	60±3	22.1-22.5	21.3	2.5	16.5	19.0	6.6	14.35	47	30.5	TE-01-08-24-03	GB/T 3880.2 -5754-H22	NR or NR-BR acc. SAE J200 M4AA 617 A13 B13 C12 F17 K11
B	C114438	91998675						TE-01-08-24-02-B	R6949-H55	55±3	23.0-23.6	22.3				6.1	13.85	46	29.9			
C	C114440	91998677						TE-01-08-24-02-C			24.2-24.8	23.5				5.25	13.0	45	28.8			
E	C114442	91998679						TE-01-08-24-02-E			26.1	25.3	1.5	17.5		5.6	12.35	39	27.8	TE-01-08-24-05		
H	C114444	91998681						TE-01-08-24-02-H	R6949-H50	50±3	27.0	26.2				5.15	11.9	44	31.8			

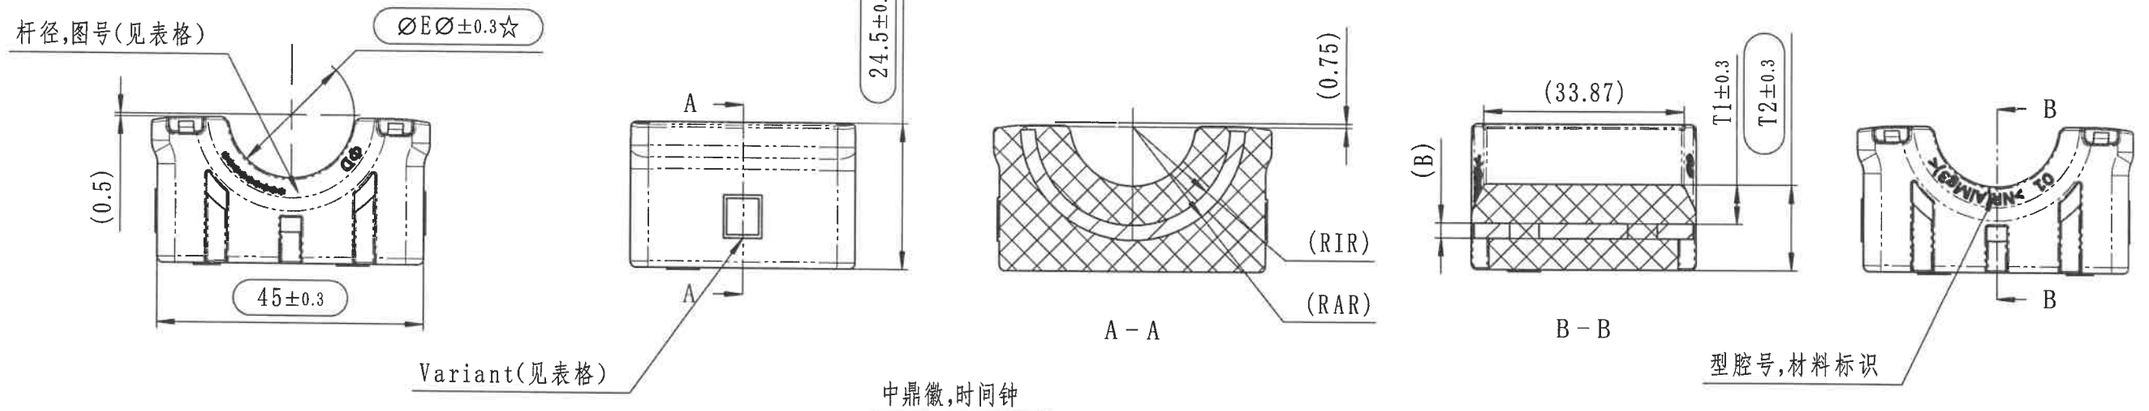

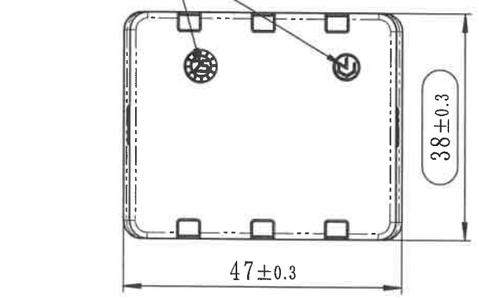



技术要求:
1.天然胶参照标准SAE J200 ;
2.不使用含硅材料的脱模剂;
3.橡胶尺寸公差参照ISO 3302.1 M2级 ;
4.工作温度:
长期工作温度:-40℃~ +80℃
短期温度可达:+120°C ;
5.100%自动控制骨架的位置和存在 ;
6骨架与橡胶粘接面积应>95% ;
7.衬套可以满足标准ESJCP1-5482-AE中对单、复模零件在两种安装条件下定义的测试;
8.所有衬套测试都需要使用MAT工艺粘接Mubea短棒和卡箍的衬套进行;
9.在汽车寿命期间各工况下,稳定杆与衬套之间以及衬套和卡箍之间不允许有噪音,且需说明测试能力;
10.节能减排需参考akt. GADSL和EU-directive 2000/53/EG;
11.模具偏差最大允许0.5毫米;
12.通常飞边要求≦0.5mm厚,≦1mm长,与稳定杆粘接面上不得有分型线;
13.☆为关键尺寸,◯为出厂检验尺寸。

DIN ISO 3302-1 M2 class			
>	≦	F(±)	C±
0	4	0.10	0.15
4	6.3	0.15	0.20
6.3	10	0.20	0.25
10	16	0.20	0.25
16	25	0.25	0.35
25	40	0.35	0.40
40	63	0.40	0.50
63	100	0.50	0.70
100	160	0.70	0.80
160	-	0.5%	0.7%

Reference参考:
ISO 8015
DIN 1451
DIN EN 1396
ISO 1817
ISO 3302
ISO 2768
VDA 260
GADSL
ESJCP1-5482-AE
SAE J200

序号	图号	名称	数量	材料	备注
2	TE-01-08-24-05	铝骨架Al inlay	1	5754 H22	C114441/01-01
1		橡胶Rubber	1	R6949-H55	

投影法	比例	质量(g)	材质	产品号
第一画法	1:2	0.00g	组件	C114442-CPSJ

热处理·表面处理

名称: 稳定杆衬套 (后稳定杆衬套)

批准	标准化	审批	校对	设计	项目组
				蒋子杰 2025.3.7	稳定杆系统

图号: 91998679 (WMX83)

图样标记 S | 共 1 张 第 1 张 | 安徽中鼎密封件股份有限公司 | A3