

12345678910111213141516

技术要求: Specifications:

- 天然胶,硬度:60±5 shore A,材料硬度可调整以满足刚度要求为主, 参照标准RENAULT 30-00-118;
Nature rubber with 60±5 shore A,rubber hardness can be adjusted to reach the stiffness requirements,according to the spec.RENAULT 30-00-118.
- 由索格菲完成粘接工序; The gluing is made by Sogefi.
- 衬套尺寸 Bush sizes : 所有的尺寸和特性由供应商设计以满足要求; All the sizes with * are defined by provider respect the specifications.
- 粘接准备事项 Bush status before gluing on stab bar:
 - 内表面需保持清洁,索格菲粘接前无需处理措施
 - 衬套出模后6个月可粘接;
 - 采用脱模剂必须与索格菲粘接工艺兼容;

4.1 The internal surface of the bush must be clean and can receive the Sogefi glue without surface preparation.

4.2 The gluing operation can be made 6 months maximum after moulding.

4.3 If a release agent is used on bushes, it must be compatible with the sogefi glue.

4.4 A test such as the control of surface tension or another test must be carried out on the inner bush diameter in order to validate the ability to receive the sogefi glue
- 特殊特性参照标准 IGR-D-2010:Special characteristics as IGR-D-2010:
关键特性标识Critical: ▽ 重要特性标识Important: ▽
橡胶尺寸公差参照 NF/T47-001或ISO 3302-1 M3级或者执行; General tolerances of rubber according to NF T 47.001 OR M3 ISO 3302-1.
- 追溯性标识:字高2.5mm,字深0.2mm;
Traceability:characters height 2.5mm,characters deep 0.2mm.
- 刚度采用卡箍和夹具完成(见附表): Stiffness are checked with serial brackets and rigid blocks to meet the specification(see table).
- 索格菲试验项目(Sogefi test);
 - 噪音实验:在80℃*4周和120℃*24h环境下对3根老化前后产品分别做噪音实验,测试角度:9.4° &18.8° ,5种温度(-30℃,-20℃,-10℃,0℃,+10℃,+20℃),5次循环,不可察觉的噪音为合格;
 - 拔脱实验:80%的粘接效果为合格(新件);70%的粘接效果为合格(疲劳件);
 - 环境试验:在110℃环境下,扭转9.4° ,持续100小时,z&x向静刚度损失<10%,且粘接面积>70%为合格;


7.1 Noisy test:control before and after aging test on 3bars for 4 weeks at 80° c and 24h at 120° c,test angle(9.4° &18.8°),5 temperatures(-30℃,-20℃,-10℃,0℃,+10℃,+20℃),evaluation on 5 cycles,not noticeable noise=OK;

7.2 Destructive tests:80% rubber adhesion for new bush; 70% rubber adhesion after fatigue;

7.3 Ambient test: Preload bars as 9.4° angle for 100h at 110℃,the test is ok if the stiffness loss in z&x < 10% between before and after and peeling ok > 70%.
- 为工序、出厂检验尺寸。
○ is marked for inspection dimensions.

CHARACTERTISTICS TABLE				REQUEST	STATIC STIFFNESS			
PART NUMBER	ARA REFERENCE	STAB BAR DIAMETER ØD	INTERNAL BUSHING DIAMETER Ød*	DIRECTION	RADIAL Z	TORSION Y	RADIAL X	AXIAL Y
				LOAD SPEED	10mm/min	60° /min	10mm/min	20mm/min
				LOAD	±1mm	±16°	±1mm	±2mm
				CHECK SPEED	10mm/min	60° /min	10mm/min	10mm/min
				CHECK	±0.6mm	±9.6°	±0.6mm	±1.2mm
19126-OR	19126-OR	mm	mm	UNITS	N/mm	N. m/°	N/mm	N/mm
		19	18.5	ARA RIGID BLOCK	TBD	TBD	TBD	TBD
				SERIAL BRACKET	2500±20%	1.5 MAX	TBD	TBD

NO.	客户版本号 (CUSTOMER VERS)	NO. (N)	变更标记 (MARK CHANGE)	变更事项 (CHANGE CONTENT)	中鼎版本号 (ZD VERSION)	日期 (DATE)	责任人 (RESPONSIBLE)
		1		Initial Release(初始版本)	A	2025.03.11	Matt

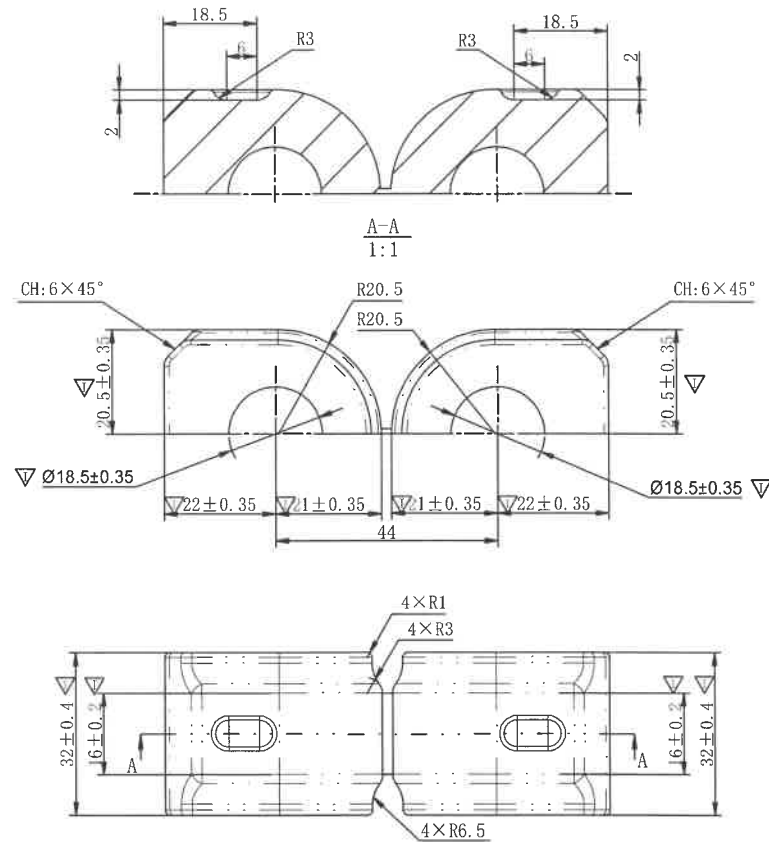

NF/T 47-001 CLASS M3								
	≤6.3	≤10	≤16	≤25	≤40	≤63	≤100	≤160
F	±0.20	±0.20	±0.20	±0.35	±0.40	±0.50	±0.70	±0.80
C	±0.25	±0.35	±0.40	±0.50	±0.70	±0.80	±1.00	±1.30

第一角画法(FIRST ANGLE PROJECTION)		比例(SCALE)	质量 (WEIGHT)	材质 (MATERIAL)	产品号 (PRODUCTION NO.)
		1:1		R5604-H60	C114472-CPSJ
热处理・表面处理 (HEAT TREATMENT・SURFACE TREATMENT)				名称 (NAME)	
				后稳定杆衬套 (前稳定杆衬套)	
批准 (APPROVAL)	标准化 (STD.)	审核 (AUDITOR)	校对 (CHECKER)	设计 (DESIGNER)	项目组 (PROJECT TEAM)
				马传德	Stabilized bar system 稳定杆系统
(SIGN) 标记		S	A	图号 (PART NO.) drw-SAR-00000102 (WYDL30)	
		PAGES (共 1 张) OF (第 1 张)		⑤ 安徽中鼎密封件股份有限公司	

12345678910111213141516