

技术要求: Specifications:

1. 天然胶,硬度:55±5 shore A,参照标准RENAULT 30-00-118;
 Nature rubber with 55±5 shore A,according to the spec.RENAULT 30-00-118.
2. 由索格菲完成粘接工序; The gluing is made by Sogefi.
3. 粘接准备事项 Bush status before for gluing on stab bar:
 3.1 衬套内表面需保持清洁并进行活化,索格菲粘接前无需额外的表面处理;
 3.2 衬套出模后6个月可粘接;
 3.3 采用脱模剂必须与索格菲粘接工艺兼容;
 3.1 The internal surface of the bush must be clean and chemically activated, and can receive the Sogefi glue without additional surface preparation.
 3.2 The gluing operation can be made 6 months maximum after moulding.
 3.3 The release agent used for bushes must be compatible with the Sogefi glue.
4. 特殊特性参照标准 I-02-P-01-01:Special characteristics as I-02-P-01-01:
 关键特性标识Critical:▽C
 重要特性标识Important:▽I
 橡胶尺寸公差参照 DIN ISO 3302-1 Class M3级执行; General tolerances on rubber DIN ISO 3302-1 Class M3.
5. 追溯性标识:字高2.5mm,字深0.2mm;
 Traceability:characters height 2.5mm,characters deep 0.2mm.
6. 刚度采用卡箍和夹具完成(见附表): Stiffness are checked with serial brackets and rigid blocks to meet the specification(see table).
7. 试验项目: 所有产品试验参照技术标准文件RNDS-C-00105
 Test item:For all tests refer to the technical specification RNDS-C-00105
8. □为工序、出厂检验尺寸。
 □is marked for inspection dimensions.

No.	变更来源 (Source of change)	No.	变更标记 (MARK CHANGE)	更改内容(CHANGE CONTENT)	中鼎版本号 (ZD version)	日期(DATE)	责任人 (RESPONSIBLE)
				Initial Release(初始版本)	A	20250701	马传德
	SJ-253323		ⓐ/1	胶料由R7770-H55改为R6934-H55	B	20250627	马传德
	SJ-255840		ⓑ/5	更新图号为76470-260, 增加刻字内容, 增加防错凸台	C	20250929	马传德

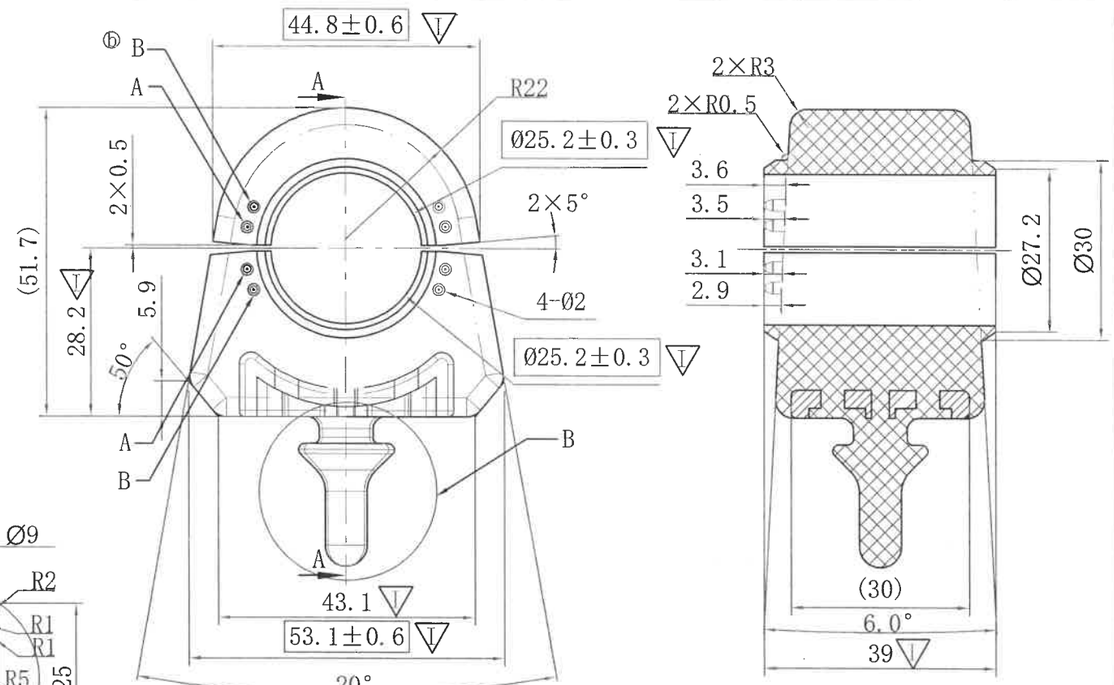


A-A
1:1

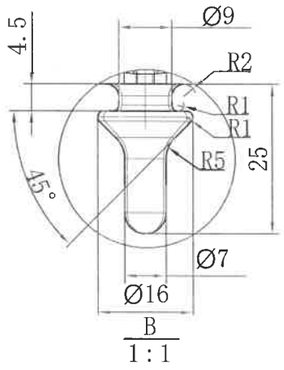

B
1:1

ⓑ标识内容:
杆径标识、时间钟
厂家代码、材料标识
零件号、型腔号
Logo:
Bar size、Time clock
Manufacture code、
Material、Part No.、
Cavity No.



DIN ISO 3302-1 Class M3										
	≤4	≤6.3	≤10	≤16	≤25	≤40	≤63	≤100	≤160	>160
F	±0.25	±0.25	±0.30	±0.40	±0.50	±0.60	±0.80	±1.00	±1.30	±0.8%
C	±0.40	±0.40	±0.50	±0.60	±0.80	±1.00	±1.30	±1.60	±2.0	±1.3%

CHARACTERTISTICS TABLE				REQUEST	STATIC STIFFNESS			
PART NUMBER	STAB BAR DIAMETER ∅D	INTERNAL BUSHING DIAMETER ∅d*	CODIFICATION	DIRECTION	RADIAL Z ▽I	TORSION Y ▽I	RADIAL X	AXIAL Y
				LOAD SPEED	10mm/min	60° /min	10mm/min	10mm/min
				LOAD	±1mm	±16°	±1mm	±2mm
				CHECK SPEED	10mm/min	60° /min	10mm/min	10mm/min
				CHECK	±0.6mm	±9.6°	±0.6mm	±1.2mm
	mm	mm		UNITS	N/mm	N.m/°	N/mm	N/mm
76470-260 ⓑ	26	25.2	A	ARA RIGID BLOCK	TBD	TBD	TBD	TBD
				SERIAL BRACKET	5000	2	3000	500

No.	PN/代号	Composition/组成	Quantity/数量	Material/材料	Note/备注
2	76470-260/01-01 ⓑ	Plastic bottom/塑料底座	1	PA66+GF30	C114505/01-01
1		Rubber/橡胶		R6934-H55 ⓐ	

第一角画法 (FIRST ANGLE PROJECTION)	比例(SCALE) 1:1	重量(WEIGHT) 48.1g	材料(MATERIAL) 组件	产品号(PRODUCT NO.) C114505-CPSJ

热处理·表面处理(HEAT TREATMENT. SURFACE TREATMENT)

名称(NAME) 稳定杆衬套/XFK CMF1 FT (前稳定杆衬套)

批准 (APPROVAL)	标准化 (STD.)	审核 (AUDITOR)	校对 (CHECKER)	设计 (DESIGNER)	项目组 PROJECT TEAM
				马传德 20250929	Stabilizer System 稳定杆系统

图号(PART NO.) 76470-260 ⓑ (WYDL30)

SIGN(标记) S | PAGES(共 1 张) OF(第 1 张) | ZHONGDING SEALING PARTS CO.,LTD 中鼎密封件股份有限公司 | A3