产品信息					
项目代号	名称	杆径	孔径	样块硬度	产品表面硬度
戴姆勒 ARC167	左(右)衬套	∅30	∅29	52±5SHA	52±5SHA

来历	客户版本号	变更标记	区域	变更事项	中鼎版本号	年 月 日	变更者
				首次下发图纸	A	2025.7.1	蒋子杰

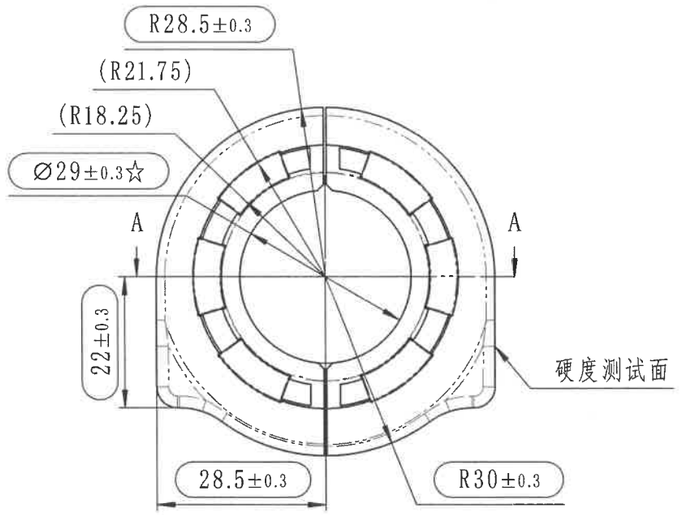

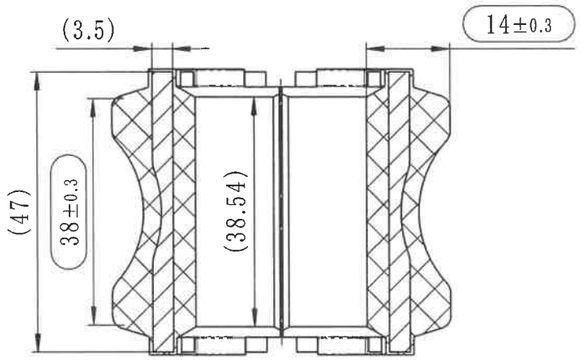

A－A

Specification技术要求:
1.Nature rubber refer to the spec DBL 5558.45 .
天然胶参照标准DBL 5558.45 ;
2.No release agent containing Silicone material to be used.
不使用含硅材料的脱模剂;
3.General tolerance on rubber M2 as norm ISO 3302.1 .
橡胶尺寸公差参照ISO 3302.1 M2级 ;
4.Operating temperature工作温度:
Long term operation temperature: -40°C up to +80°C
Short term temperature up to +120°C
长期工作温度:-40℃~ +80℃
短期温度可达:+120°C ;
5.The position and the present of the insert (rate plate) has to be 100% automatically controlled.
100%自动控制骨架的位置和存在 ;
6.The bonding between the rubber and the inserts needs to be stronger than >95% rubber break.
骨架与橡胶粘接面积应>95% ;
7.All bushing tests need to be performed with bushings which are bonded by MAT process to bar equivalent tube pieces and cold formed steel clamps from Mubea.
所有衬套测试都需要使用MAT工艺粘接Mubea短棒和卡箍的衬套进行;
8.No noise between stabilizer and bushing as well as bushing and clamp allowed at all conditions which occur during car life. Test capability shall be also explained.
在汽车寿命期间各工况下,稳定杆与衬套之间以及衬套和卡箍之间不允许有噪音,且需说明测试能力;
9.Emission reduced acc. To akt. GADSL and EU-directive 2000/53/EG.
节能减排需参考akt. GADSL和EU-directive 2000/53/EG;
10.Mould misalignment max. 0.5 mm permissible.
模具偏差最大允许0.5毫米;
11.General parting line max. 0.5 mm thick and 1 mm long permissible. No parting line on the bonding surface to the stabilizer.
通常飞边要求≤0.5mm厚,≤1mm长,与稳定杆粘接面上不得有分型线;
12.◯ is marked for inspection dimensions.
◯为出厂检验尺寸。

DIN ISO 3302-1 M2 class			
>	≦	F(±)	C±
0	4	0.10	0.15
4	6.3	0.15	0.20
6.3	10	0.20	0.25
10	16	0.20	0.25
16	25	0.25	0.35
25	40	0.35	0.40
40	63	0.40	0.50
63	100	0.50	0.70
100	160	0.70	0.80
160	-	0.5%	0.7%



序号	图号	名称	数量	材料	备注
2	HW-DML后/01-01	塑料骨架	2	PA66+GF35	C114617/01-01
1		橡胶	1	R6949-H52	

投影法	比例	质量(g)	材质	产品号
第一画法	2:3	0.00g	组件	C114617-CPSJ

热处理·表面处理

名称: 戴姆勒后稳定杆衬套 (后稳定杆衬套)

批准	标准化	审批	校对	设计	项目组
				蒋子杰 2025.7.1	稳定杆系统

图号: HW-DML后 (ZJ1327)

图样标记				共 1 张 第 1 张	安徽中鼎密封件股份有限公司	A3
	S					