来历	客户版本号	变更标记	区域	变更事项	中鼎版本号	年 月 日	变更者
				首次下发产品图纸	A	2025.7.7	蒋子杰

Variant	ZD SAP No.	Mubea proto. SAP No.	Mubea serial SAP No.		Mubea part No.	Hardness (shore A)	Stab diameter (mm)	Bushing diameter (mm)	Mubea part No. part 1	Material part 1	Material part 2	Mubea part No.part 3	Material part 3
			without coating	with coating			⌀A	⌀E					
N	C114641	92410230			TE-01-03-24-01-N	50±3	25.5	24.7	TE-01-03-24-07	Steel DC01	Compound acc. ASTM D2000 M4AA 514 A13 B13 F17	TE-01-03-24-06	PA66 GF30
		92410231			TE-01-03-24-02-N								

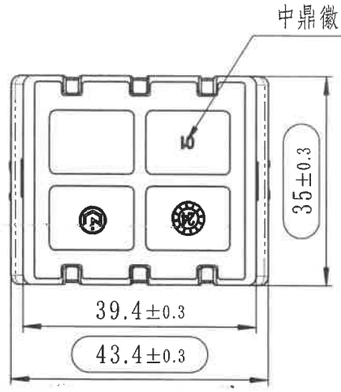

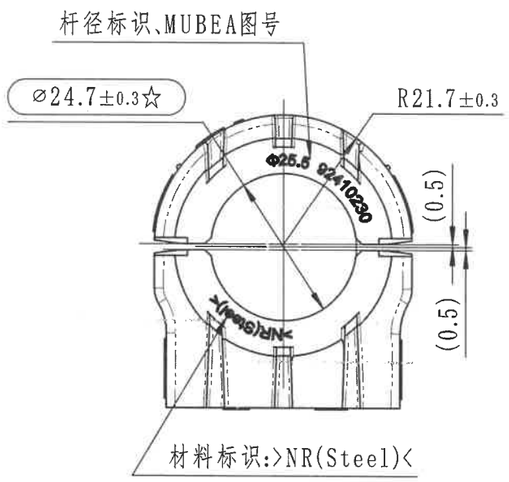

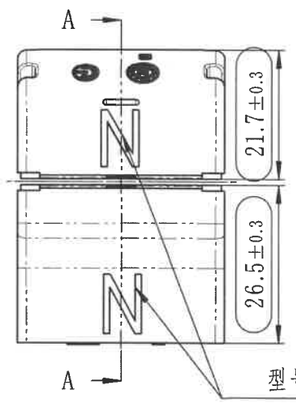

A－A

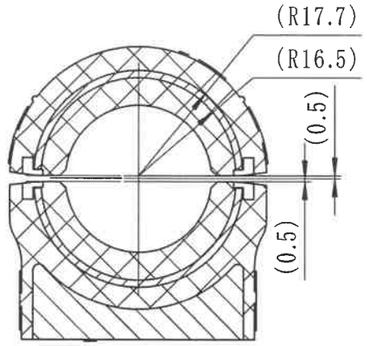

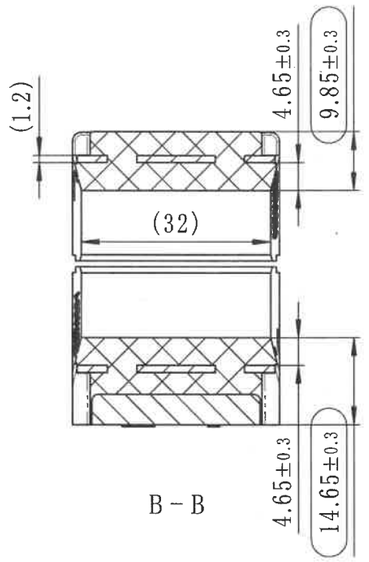

B－B

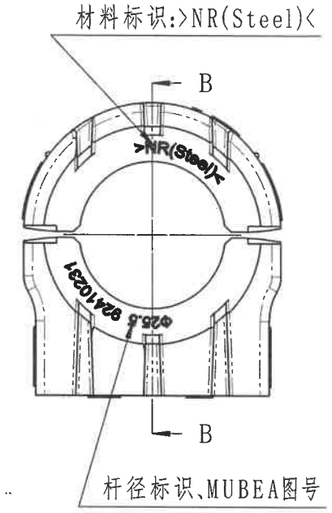



Specification技术要求:
1.Nature rubber refer to the spec ASTM D2000 .
天然胶参照标准ASTM D2000 ;
2.No release agent containing Silicone material to be used.
不使用含硅材料的脱模剂;
3.General tolerance on rubber M2 as norm ISO 3302.1 .
橡胶尺寸公差参照ISO 3302.1 M2级 ;
4.The bonding between the rubber and the inserts needs to be stronger than >95% rubber break.
骨架与橡胶粘接面积应>95% ;
5.Emission reduced acc. To akt. GADSL and EU-directive 2000/53/EG.
节能减排需参考akt. GADSL和EU-directive 2000/53/EG;
6.Mould misalignment max. 0.5 mm permissible.
模具偏差最大允许0.5毫米;
7.General parting line max. 0.5 mm thick and 1 mm long permissible.
No parting line on the bonding surface to the stabilizer.
通常飞边要求≤0.5mm厚,≤1mm长,与稳定杆粘接面上不得有分型线;
8.◯ is marked for inspection dimensions.
◯为出厂检验尺寸。

DIN ISO 3302-1 M2 class			
>	≤	F(±)	C±
0	4	0.10	0.15
4	6.3	0.15	0.20
6.3	10	0.20	0.25
10	16	0.20	0.25
16	25	0.25	0.35
25	40	0.35	0.40
40	63	0.40	0.50
63	100	0.50	0.70
100	160	0.70	0.80
160	-	0.5%	0.7%

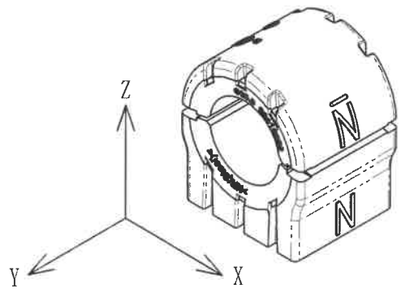

Reference参考:
ISO 8015
DIN 1451
DIN EN 1396
ISO 1817
ISO 3302
ISO 2768
VDA 260
GADSL
Note-DPR-34184774

序号	图号	名称	材料	数量	备注
3	TE-01-03-24-06	塑料底座	PA66+GF30	1	C114264/01-01
2	TE-01-03-24-07	铁骨架	DC01	2	C114641/01-01
1		橡胶	30R5621-H50	1	

投影法	比例	质量(g)	材质	产品号
第一画法	1:1	0.00g	组件	C114641-CPSJ

热处理·表面处理

批准	标准化	审批	校对	设计	项目组
				蒋子杰 2025.7.7	稳定杆系统

名称: 稳定杆衬套 (后稳定杆衬套)

图号: 92410230/92410231 (WDG06)

图样标记	S			共 1 张 第 1 张	安徽中鼎密封件股份有限公司	A3