

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		
A									No.	客户版本号 Customer Version	变更标记 Mark Change	区域 Position	变更事项 Modification		中鼎版本号 ZD Version	日期 Date	变更者 Editor	A
B													初始图纸Initial drawing		A	2025.01.09	范康祺	B
C																		C
D																		D
E																		E
F																		F
G																		G
H																		H
I																		I
J																		J
K																		K
L																		L

技术要求:

Specification:

▽ 1.天然胶:参照标准FIAT 55276/04-无蜡;
Nature rubber, according to spec FIAT 55276/04-No wax.

2.特殊特性参照标准IGR-D-20/0:
Special characteristics as IGR-D-20/0:
关键特性标识Critical: ▽
重要特性标识Important: ▽
橡胶尺寸公差参照NF/T 47-001 M3级执行;
General tolerances on rubber M3 as norm NF/T 47-001.

▽ 3.金属骨架与橡胶的粘接性参照标准
ASTM-D429: 80%Rubber mini,10%Rubber top coat,10%Metal maxi;
Gluing metallic inserts as norm ASTM429 as this criteria: 80%Rubber mini, 10%Rubber top coat,10%Metal maxi.

▽ 禁止硫化时漏装骨架;
Insert presence at 100% after moulding.


4.参照图1 加载7N max 打开衬套且没有塑性变形和骨架变形;
Load 7N maxi to open the bush without and plastic deformation and metallic insert.

5.可追溯性标识 字高2mm;
Traceability:characters height 2mm.
刻字内容: 型号、材料标识NR、时间、中鼎徽、图号、参考信息、杆径等;
Content:Cavity NO.,material,date of production,manufacture code,part NO., reference,bar diameters,etc.

▽ 6.刚度测试Stiffness tests:
Z向静刚度:加载±2500N,循环3次,计算±2500N时的刚度;
扭转刚度:加载±12°,循环3次,计算±12°时的刚度;
测试速度为 1 min/循环;
Kz:Load ±2500N for 3 cycles,check at ±2500N.
Ry:Load ±12°for 3 cycles,check at ±12°.
Stiffness speed is one minute per cycle.
刚度要求(卡箍)Stiffness requirement(assembling with serial brackets)
Kz=TBD ±15%N/mm
Ry=TBD ±15%Nm/°

▽ 7.其他试验参照索格菲试验计划;
The rest tests refer to Sogefi test plan.

8.  为工序、出厂检验尺寸。
 is marked for inspection dimensions.

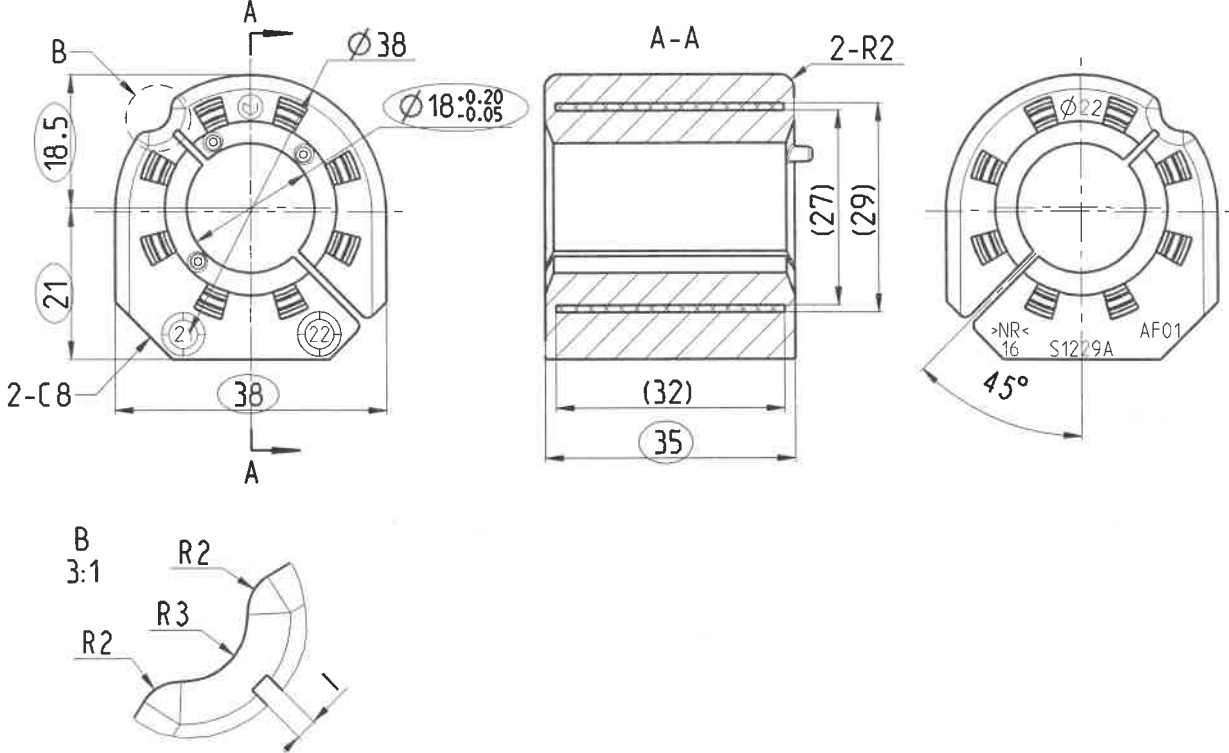

产品代号		代用产品图号		代用产品编号		代用厂家代码		备注	
		S1229A		C804815		WMX67		/	
2	借用 S1229A/01-01	钢骨架Insert		2	DC04	借用 C804815/01-01			
1		橡胶Rubber		1	NR+BR				
序号 No	图号 Part No	名称 Part name		数量 Quantity	材料 Material	备注 Remarks			
投影法 第一画法		比例 1:1		质量(g) 56.5g	材质 R6935	产品号 C80481551-CPSJ			
热处理、表面处理					名称 稳定杆衬套 (后稳定杆衬套)				
批准	标准化	审批	校对	设计	项目组	图号 S1229A (WBX50)			
图样标记		A B	共 1 张	第 1 张	安徽中鼎密封件股份有限公司				

NF/T 47-001 CLASS M3								
	≤6.3	≤10	≤16	≤25	≤40	≤63	≤100	≤160
F	±0.20	±0.20	±0.20	±0.35	±0.40	±0.50	±0.70	±0.80
C	±0.25	±0.35	±0.40	±0.50	±0.70	±0.80	±1.00	±1.30