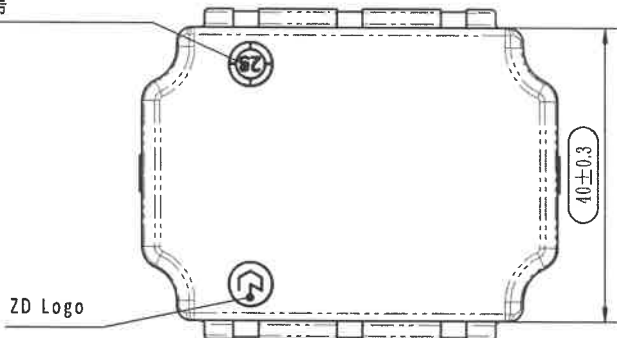
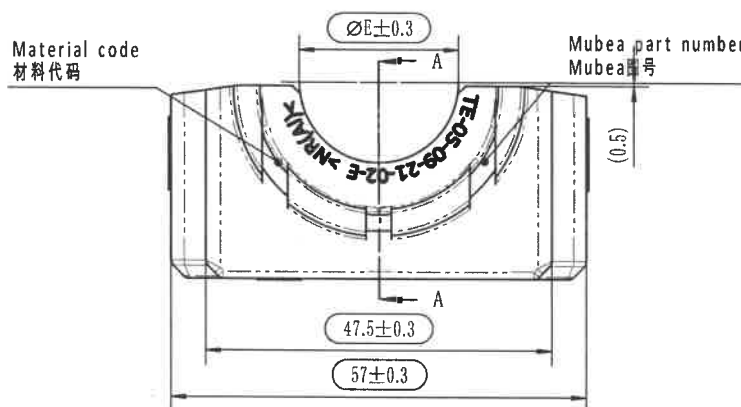

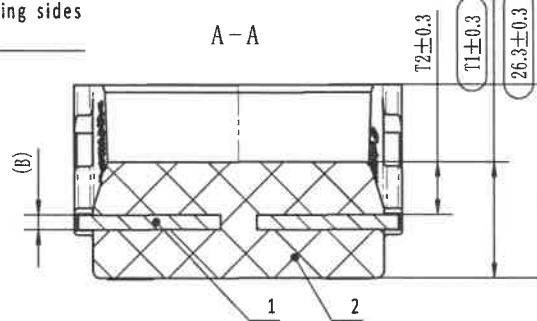
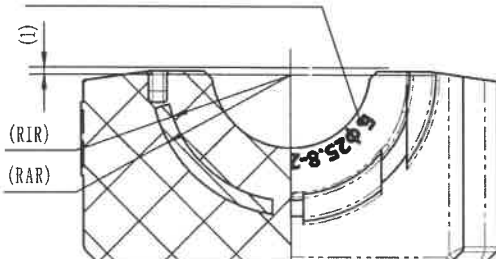


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16							
A	Durability test						来历 客户版本号 变更标记 区域 变更事项 首次下发产品图纸 中鼎版本号 年 月 日 变更者						A										
	Test 6.4 A			Test 6.4 B													B						
	Amplitude Fz			±7500N									±500N							C			
B	Frequency			2 Hz																D			
	Angle amplitude			β_OL		±6°		β_max		±20.7°						E							
	Load cycles			100000			min.100000; after until break			Stiffness targets for all variants		Measurement range		Evaluation range		Precycles							
	Pass requirement			Max.20% stiffness loss. No cracks until 100000 load cycles for block A and B			Radial Z stiffness		±8000N/mm		±5000N		±2500N		2								
C	T[°C]			23			Axial		<500N/mm		±1200N		±500N		2								
	Radial and torsional load need to be applied in phase. Both tests need to be done on the same bushing.						Torsional		<2.5Nm/°		±20°		+5°~+10°		2								
D	Variant	ZD SAP No.	Mubea proto. SAP No.	Mubea serial SAP No.		Mubea part No.	Hardness (shore A)	Stab diameter (mm)	Bushing diameter (mm)	Insert outer radius (mm)	Insert inner radius (mm)	Insert thickness (mm)	Rubber thickness (mm)	Inner rubber thickness (mm)	Total weight (g)	Rubber volume 3 (cm)	Mubea part No. part 1	Material part 1	Material part 2				
	E	C904648	91949566	91971782	91971784	TE-05-09-21-02-E	55±3	25.8-26.2	25.1	19.2	17.2	2	14.25	5.65	60	42.3	TE-05-09-21-03	GB/T 5754-H16	GS 93010 31 110-NR-55				
E	Time clock and cavity No. 时间钟和型腔号						Specification技术要求: 1.Nature rubber refer to the spec GS 93010 . 天然胶参照标准GS 93010 ; 2.No release agent containing Silicone material to be used. 不使用含硅材料的脱模剂; 3.General tolerance on rubber M2 as norm ISO 3302.1 . 橡胶尺寸公差参照ISO 3302.1 M2级 ; 4.The bonding between the rubber and the inserts needs to be stronger than >95% rubber break. 骨架与橡胶粘接面积应>95% ; 5.Emission reduced acc. To akt. GADSL and EU-directive 2000/53/EG. 节能减排需参考akt. GADSL和EU-directive 2000/53/EG; 6.Mould misalignment max. 0.5 mm permissible. 模具偏差最大允许0.5毫米; 7.General parting line max. 0.5 mm thick and 1 mm long permissible. No parting line on the bonding surface to the stabilizer. 通常飞边要求≤0.5mm厚,≤1mm长,与稳定杆粘接面上不得有分型线; 8.○ is marked for inspection dimensions. ○为出厂检验尺寸.																
F																							
G																							
H																							
I																							
J																							
K	DIN ISO 3302-1 M2 class												本产品完全代用捷克慕贝尔(WJK37)产品,图号:91971782/产品号:C904648										
	>	≤	F(±)	C±								2 橡胶 R6778-H55 1											
	0	4	0.10	0.15								1 TE-05-09-21-03 铝骨架 5754 H16 1 C904640/01-01											
	4	6.3	0.15	0.20								序号 图号 名称 材料 数量 备注											
	6.3	10	0.20	0.25								投影法 第一画法 比例 1:1 质量(g) 见表格 材质 NR+5754 H16 产品号 C90464851-CPSJ											
	10	16	0.20	0.25								热处理-表面处理 名称 稳定杆衬套 (前稳定杆衬套)											
	16	25	0.25	0.35								批准 标准化 审批 校对 设计 项目组											
	25	40	0.35	0.40								图号 91971782 (WZG332)											
	40	63	0.40	0.50								蒋子杰 2025.4.1 稳定杆系统											
	63	100	0.50	0.70								图样标记 S 共 1 张 第 1 张 安徽中鼎密封件股份有限公司 A3											
	100	160	0.70	0.80																			
	160	-	0.5%	0.7%																			
L	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16							