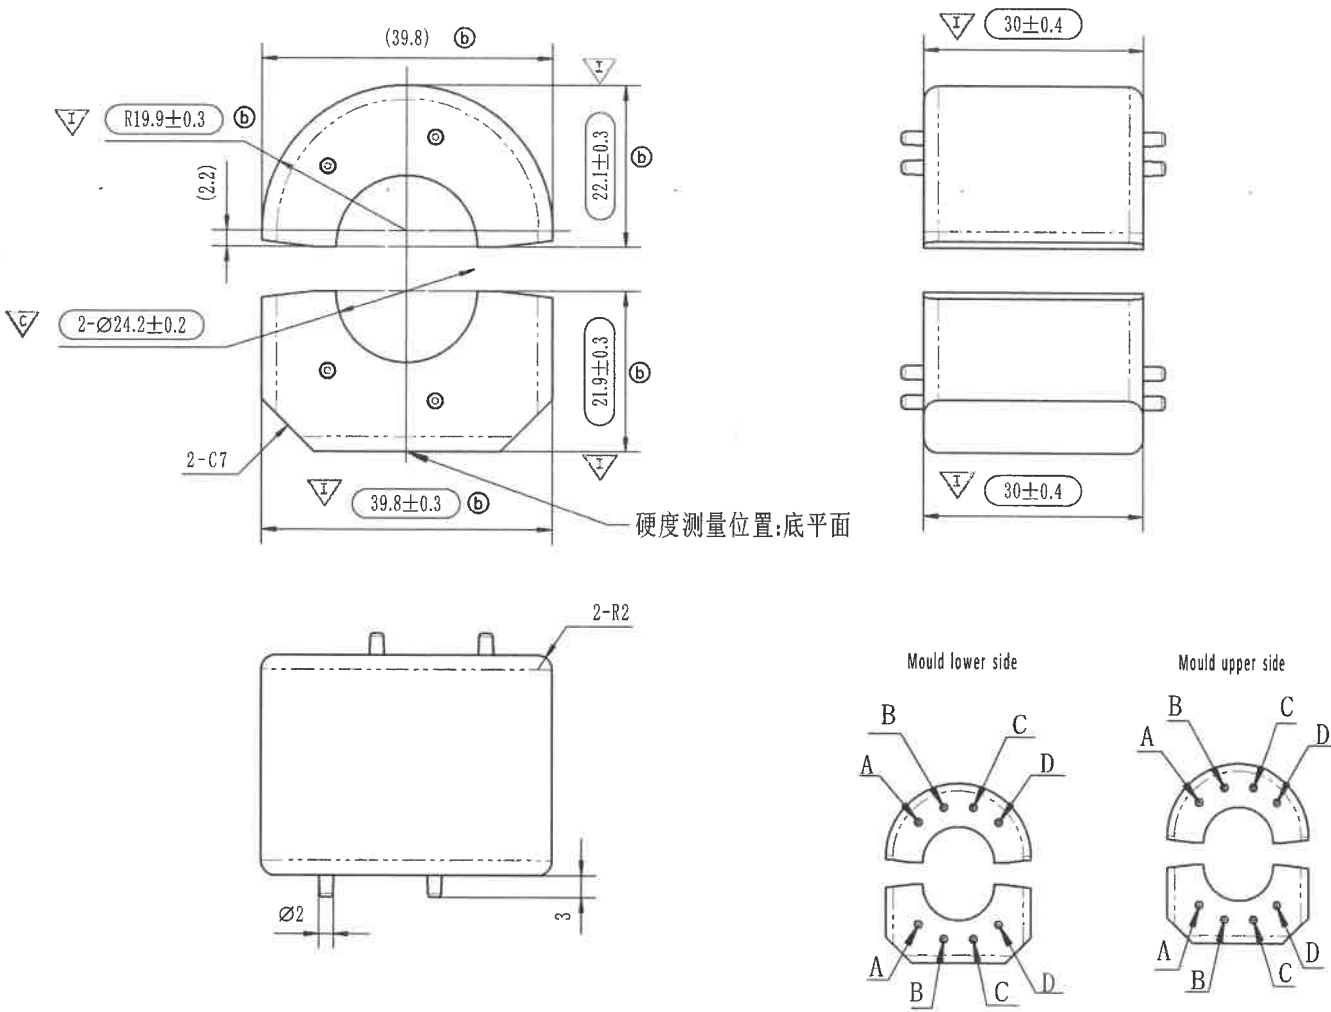
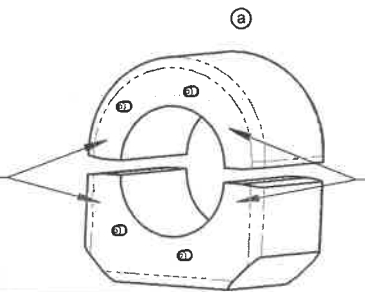


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16									
A	技术要求: Specifications: 1.天然胶,硬度:55±3 shore A,参照标准DBL 5558-45; Nature rubber with 55±3 shore A,according to the spec.DBL 5558-45. 2.由索格菲完成粘接工序; The gluing is made by Sogefi. 3.粘接准备事项 Bush status before for gluing on stab bar: 3.1 内表面需保持清洁,索格菲粘接前无需处理措施 3.2 衬套出模后6个月可粘接; 3.3 采用脱模剂必须与索格菲粘接工艺兼容; 3.1 The internal surface of the bush must be clean and can receive the Sogefi glue without surface preparation. 3.2 The gluing operation can be made 6 months maximum after moulding. 3.3 The release agent used for bushes must be compatible with the Sogefi glue. 4.特殊特性参照标准 I-O2-P-01-01:Special characteristics as I-O2-P-01-01: 关键特性标识Critical: 重要特性标识Important: 橡胶尺寸公差参照 NF/T47-001 M3级执行; General tolerances on rubber M3 as norm NF/T47.001. 5.追溯性标识:字高2.5mm,字深0.2mm; Traceability:characters height 2.5mm,characters deep 0.2mm. 6.刚度采用卡箍和夹具完成(见附表): Stiffness are checked with serial brackets and rigid blocks to meet the specification(see table). 6.1.z&x向静刚度:加载±1mm,速度:10mm/min,循环4次,计算±0.5mm时的刚度; 6.2.扭转刚度:加载±20°,速度:60°/min,循环4次,计算±5°时的刚度; 6.1.Radial static stiffness Kz&x:Load ±1mm for 4 cycles, speed:10mm/min, check at ±0.5mm. 6.2.Torsional stiffness Kty:Load ±20° for 4 cycles,speed:60°/min,check at ±5°. 7.索格菲试验项目(Sogefi test); 7.1 噪音实验:在80℃*4周和120℃*24h环境下对3根老化前后产品分别做噪音实验,测试角度:9.4°&±23.5°,5种温度(-30℃,-20℃,-10℃,0℃,+10℃,+20℃),5次循环,不可察觉的噪音为合格; 7.2 拔脱实验:80%的粘接效果为合格(新件);70%的粘接效果为合格(疲劳件); 7.3 环境试验:在110℃环境下,扭转9.4°,持续100小时,z&x向静刚度损失<10%,且粘接面积>70%为合格; 7.1 Noisy test:control before and after aging test on 3bars for 4 weeks at 80℃ and 24h at 120℃,test angle(9.4°&±23.5°),5 temperatures(-30℃,-20℃,-10℃,0℃,+10℃,+20℃),evaluation on 5 cycles,not noticeable noise=OK; 7.2 Destructive tests:80% rubber adhesion for new bush; 70% rubber adhesion after fatigue; 7.3 Ambient test: Preload bars as 9.4° angle for 100h at 110℃,the test is ok if the stiffness loss in z&x < 10% between before and after and peeling ok > 70%. 8.○为工序、出厂检验尺寸。 ○is marked for inspection dimensions.									来历 From	客户版本号 Customer Version	变更标记 Marking	区域 Position	变更事项 Modification	中鼎版本号 ZD Version	日期 Date	责任人 Resp.								
B											19388-E			初始图纸Initial drawing	A	20240929	范康祺								
										SJ-246346	19388-E	@/2		增加产品刻字示意图;增加产品打点标识位置;更新噪音试验条件	B	20241227	范康祺								
										SJ-256872	19388-E	@/7		更新图纸及尺寸公差,增加胶种信息;根据实测结果更新刚度标准	C	20260105	马传德								
C																			硬度测量位置:底平面						
D																									
E																									
F																									
G																									
H	标识内容: 零件号:19388-247 时间钟:24-25 材料标识:>NR+BR< 厂家代码:D200501 型腔号:01-32  打点标识:绿色									NF/T 47-001 CLASS M3															
I																									
J																									
K																									
L																									
	Upper bracket	19387			Stiffness requirement ⑥																				
	Lower bracket	19385																							
	Bar dia.	Bush dia	Identification	Color dot	Gauge	Ks-Z(N/mm)	Ks-X(N/mm)	Ks-Y(N/mm)	Ty(Nm/°)																
	Ø24.7	Ø24.2	AC	Green	Bracket	3350±15%	2960±15%	390±15%	1.51±15%																
					Block (glued)	4560±15%	3350±15%	450±15%	1.66±15%																
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16									

NF/T 47-001 CLASS M3								
	≤6.3	≤10	≤16	≤25	≤40	≤63	≤100	≤160
F	±0.20	±0.20	±0.25	±0.35	±0.40	±0.50	±0.70	±0.80
C	±0.25	±0.35	±0.40	±0.50	±0.70	±0.80	±1.00	±1.30

代用信息		C904879/C114343		Z6012512/Z6012514		WFG58		R6938-H55		模具代用					
		代用品产品号		代用品图号		代用品厂家		代用品胶料		备注					
投影法 Projection method				比例 Scale		质量 Weight(g)		材质 Material		产品号 ZD production code					
第一画法 First angle projection				1:1		33.1g		>NR+BR<(R6938-H55) ⑥		C90487951-CPSJ					
热处理·表面处理 Heat Treatment·Surface Treatment								名称 Part name 稳定杆衬套 (后稳定杆衬套) (Rear stab bar bushing)							
批准 Approval		标准化 Standards		审批 Review		校对 Check						设计 Design		项目组 Team	
图号 Drawing No		19388-247		马传德		稳定杆系统 Stab Bar system									
标记 SIGN		S A		共 1 张 第 1 张		安徽中鼎密封件股份有限公司						A3			