
AASHTO T342: Standard Method of Test for Determining Dynamic Modulus of Hot Mix Asphalt (HMA)

Project Name:	**Institution:**
Mix Type:	**Date Tested:**
	Technician:

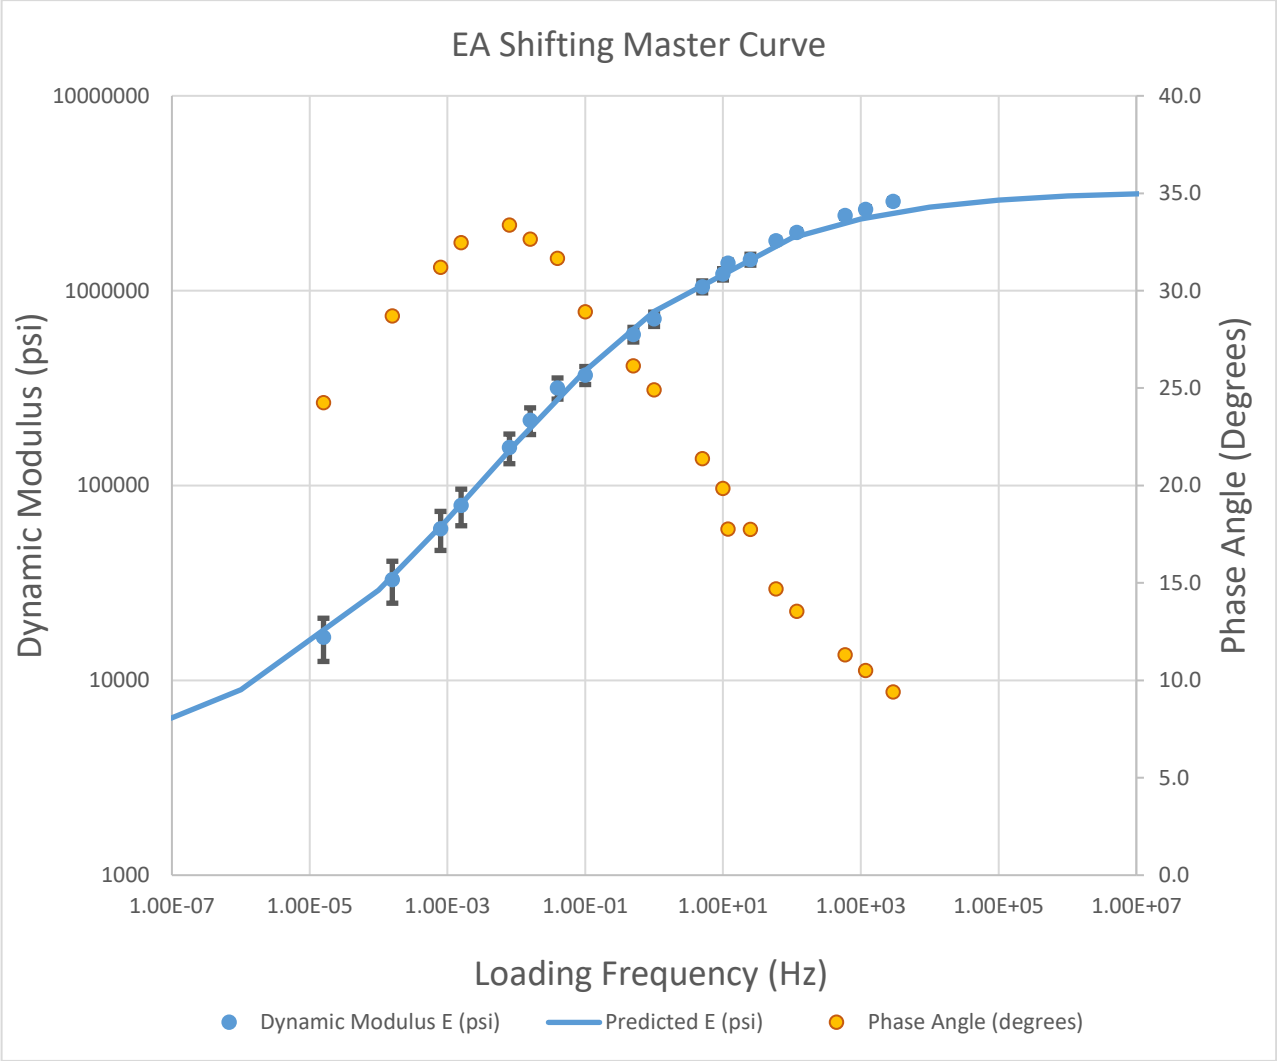

AASHTO T342: Standard Method of Test for Determining Dynamic Modulus of Hot Mix Asphalt (HMA)

Project Name:	**Institution:**
Mix Type:	**Date Tested:**
	Technician:

Loading Frequency (Hz)	Dynamic Modulus E (psi)	Standard Deviation (psi)	Phase Angle (degrees)
1.59E-05	16667	4163	24.3
1.59E-04	32867	7988	28.7
7.93E-04	60033	13614	31.2
1.59E-03	78967	16801	32.5
7.93E-03	156534	27150	33.4
1.59E-02	216467	33830	32.7
3.96E-02	317001	39345	31.7
1.00E-01	368901	39056	28.9
5.00E-01	596668	51551	26.1
1.00E+00	715602	60216	24.9
5.00E+00	1048402	73951	21.4
1.00E+01	1215336	81095	19.8
2.50E+01	1445003	93054	17.8
1.18E+01	1386670	47427	17.8
5.90E+01	1801337	57518	14.7
1.18E+02	1993004	62024	13.5
5.90E+02	2430672	76840	11.3
1.18E+03	2617672	80407	10.5
2.95E+03	2874006	90006	9.4

Reduced Frequency (Hz)	Predicted E (psi)
1.00E-10	4198
1.00E-09	4543
1.00E-08	5180
1.00E-07	6408
1.00E-06	8946
1.00E-04	28978
1.00E-03	66981
1.00E-02	165777
1.00E-01	388508
1.00E+00	783139
1.00E+02	1864317
1.00E+03	2334399
1.00E+04	2682479
1.00E+05	2917442
1.00E+06	3067104
1.00E+08	3214506
1.00E+09	3247429
1.00E+10	3266855