Computer Networking Lab Assignment – Cisco Packet Tracer

Experiment 1: Design and Configure a Star Topology Network using Cisco Packet Tracer

Introduction: In a star topology every device is connected to one central device, usually a switch. This makes the network easy to manage and troubleshoot, because a fault on one cable only affects one PC. In this experiment I built a small star network in Cisco Packet Tracer with one switch and four PCs, gave each PC an IP address and checked the connection with ping.

Implementation:

1. Network Design

- Topology type: Star
- Devices used: 1 × Cisco 2960 switch (central device), 4 × PCs (PC0 to PC3), copper straight-through cables

2. Logical Addressing

Device	Switch Port	IP Address	Subnet Mask
PC0	FastEthernet0/1	192.168.1.10	255.255.255.0
PC1	FastEthernet0/2	192.168.1.11	255.255.255.0
PC2	FastEthernet0/3	192.168.1.12	255.255.255.0
PC3	FastEthernet0/4	192.168.1.13	255.255.255.0

3. Steps Performed in Cisco Packet Tracer


1. I opened Cisco Packet Tracer and started a new blank workspace.
2. I dragged one 2960 switch into the workspace and placed four PCs around it.
3. Using the copper straight-through cable, I connected PC0 to Fa0/1, PC1 to Fa0/2, PC2 to Fa0/3 and PC3 to Fa0/4 on the switch.
4. I clicked each PC, went to Desktop → IP Configuration and entered the IP address and subnet mask from the table.
5. I labeled the devices and saved the file as "Star_Topology.pkt".


4. Testing / Results


On PC0 I opened Desktop → Command Prompt and pinged the other three PCs:

```
ping 192.168.1.11
ping 192.168.1.12
ping 192.168.1.13
```

I got replies from all three, so every PC can reach the others through the switch.

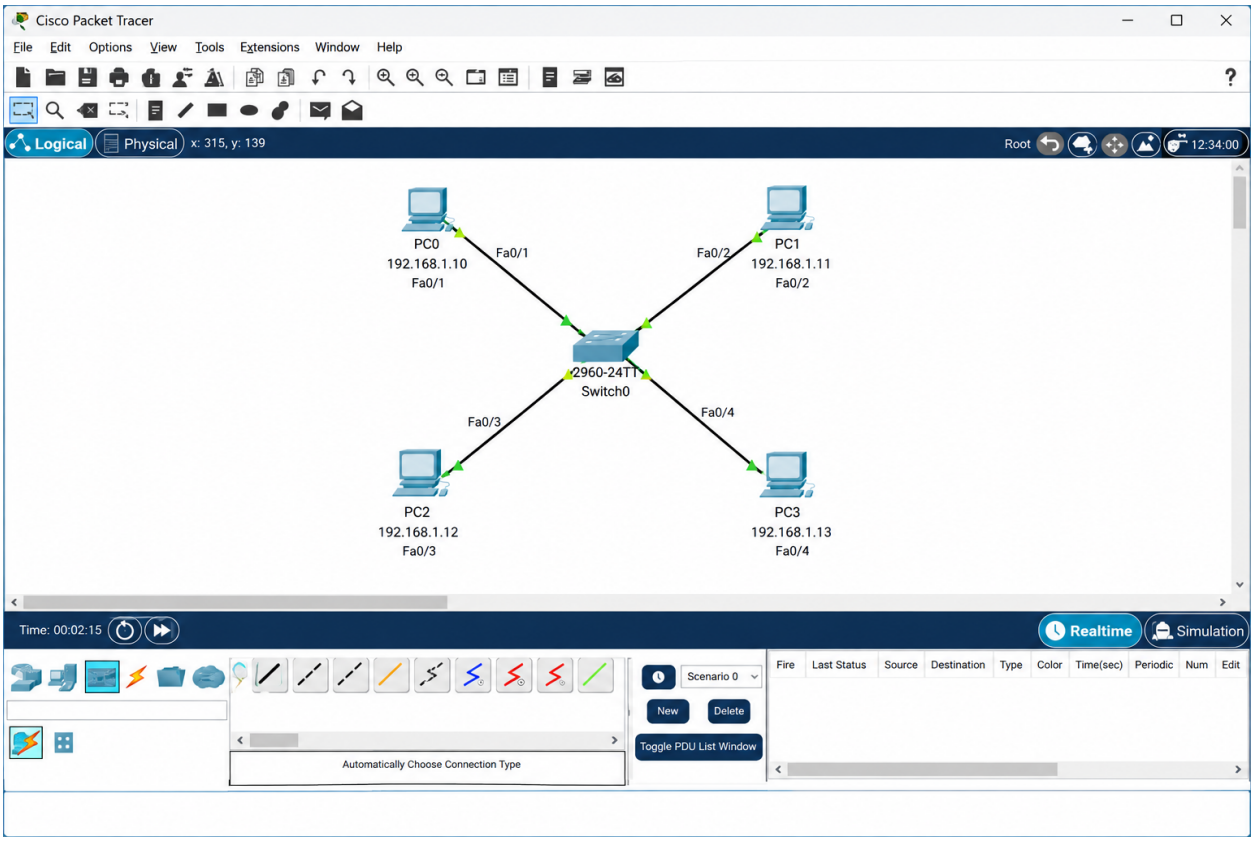
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 315, y: 139
Root 12:34:00
PC0
192.168.1.10
Fa0/1
Fa0/1
Fa0/2
PC1
192.168.1.11
Fa0/2
2960-24TT
Switch0
Fa0/3
Fa0/4
PC2
192.168.1.12
Fa0/3
PC3
192.168.1.13
Fa0/4
Time: 00:02:15
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Automatically Choose Connection Type

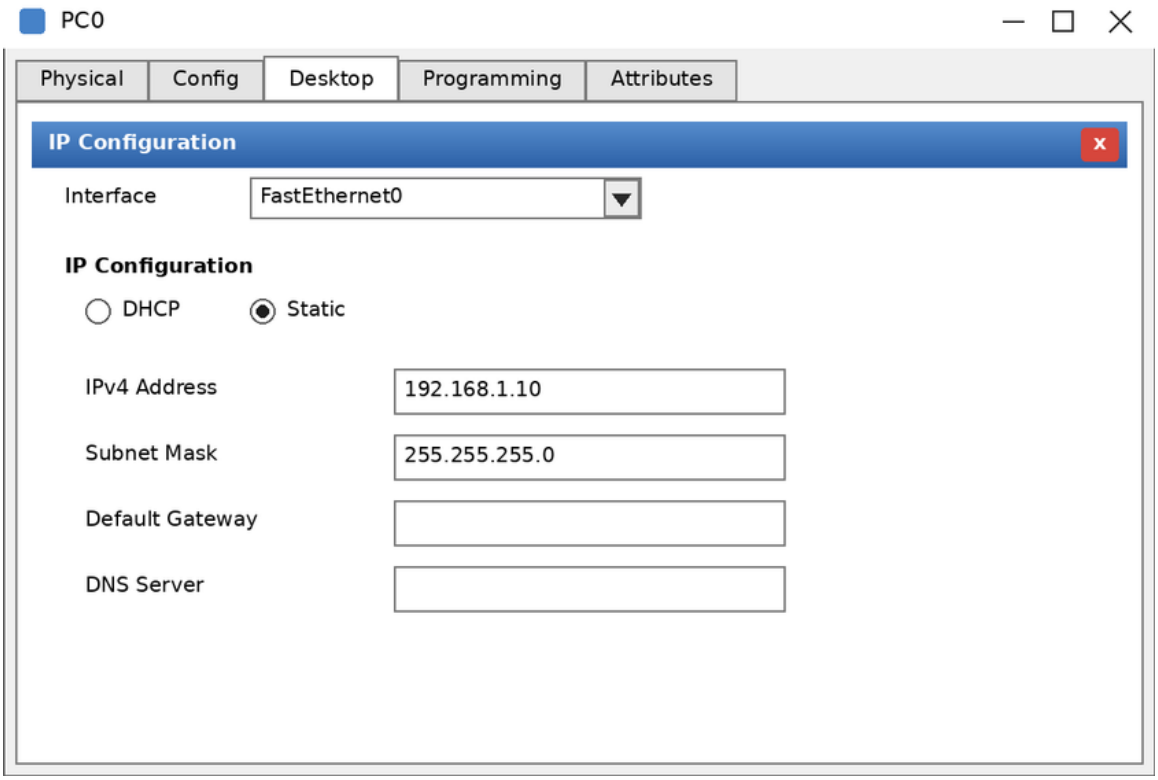
PC0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.10
Subnet Mask
255.255.255.0
Default Gateway
DNS Server

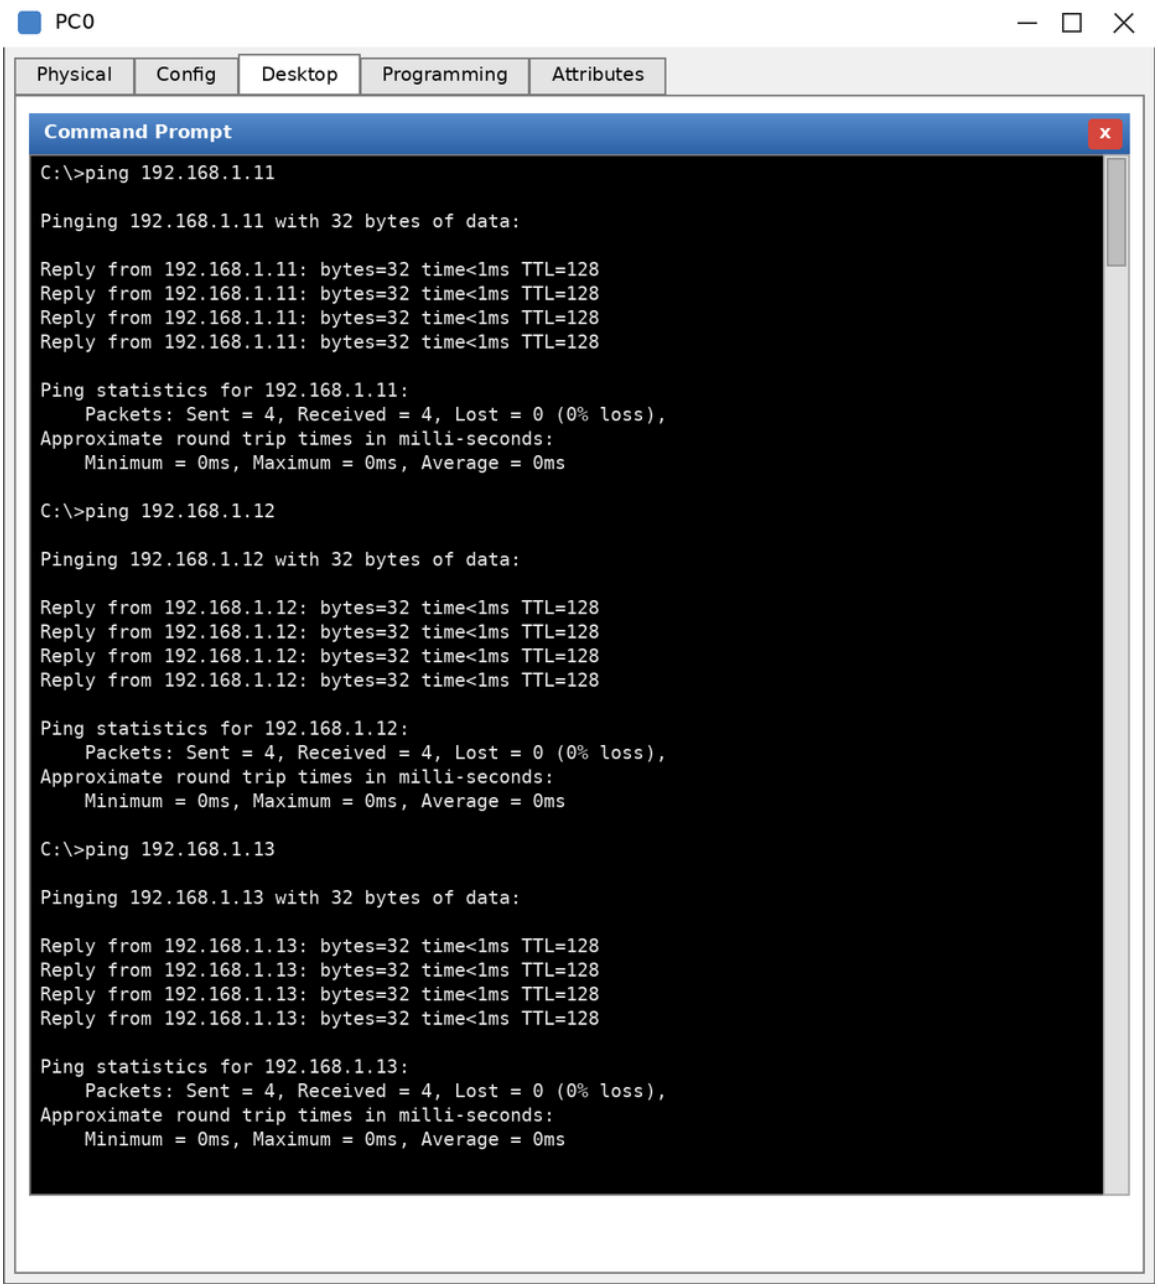

Conclusion: I successfully built a star topology in Cisco Packet Tracer. All PCs were connected to one switch and used addresses from the same subnet, and the ping tests showed they can talk to each other. The star topology is simple to set up and easy to troubleshoot, so it suits small LANs.

Experiment 2: Design Two Separate Networks (CSE and ECE), Connect Them with a Cisco Router and Configure DHCP for the CSE Network

Introduction: CSE and ECE each need their own LAN, so I put them in separate subnets and joined them with a Cisco router. The router also works as a DHCP server for the CSE network, which means the CSE PCs get their IP settings automatically. The ECE PCs use static IP addresses.

Implementation:

1. Network Design

- Devices used: 1 × Cisco 2911 router (R1), 2 × Cisco 2960 switches (CSE-SW, ECE-SW), 3 PCs in each network, copper straight-through cables
- CSE network: 192.168.10.0/24 (DHCP). ECE network: 192.168.20.0/24 (static)

2. Logical Addressing

Device	Connected To	IP Address	Subnet Mask	Default Gateway
R1 Gi0/0	CSE-SW Fa0/24	192.168.10.1	255.255.255.0	N/A
R1 Gi0/1	ECE-SW Fa0/24	192.168.20.1	255.255.255.0	N/A
CSE-PC1	CSE-SW Fa0/1	DHCP (192.168.10.10)	255.255.255.0	192.168.10.1
CSE-PC2	CSE-SW Fa0/2	DHCP (192.168.10.11)	255.255.255.0	192.168.10.1
CSE-PC3	CSE-SW Fa0/3	DHCP (192.168.10.12)	255.255.255.0	192.168.10.1
ECE-PC1	ECE-SW Fa0/1	192.168.20.10	255.255.255.0	192.168.20.1
ECE-PC2	ECE-SW Fa0/2	192.168.20.11	255.255.255.0	192.168.20.1
ECE-PC3	ECE-SW Fa0/3	192.168.20.12	255.255.255.0	192.168.20.1

3. Steps Performed in Cisco Packet Tracer

1. I opened Cisco Packet Tracer and placed one 2911 router, two 2960 switches and six PCs in a new workspace.
2. I connected the three CSE PCs to CSE-SW (Fa0/1 to Fa0/3) and the three ECE PCs to ECE-SW (Fa0/1 to Fa0/3). Then I connected CSE-SW Fa0/24 to R1 Gi0/0 and ECE-SW Fa0/24 to R1 Gi0/1.
3. I opened R1 → CLI and configured the two interfaces and the DHCP pool
4. On each CSE PC I went to Desktop → IP Configuration and selected DHCP. Each PC got its address automatically.
5. On each ECE PC I selected Static and typed the IP address, subnet mask and gateway from the table.
6. I saved the file as "CSE_ECE_DHCP.pkt".


4. Testing / Results


On CSE-PC1 the IP Configuration window showed 192.168.10.10 with gateway 192.168.10.1, so DHCP is working. On R1, `show ip dhcp binding` listed the addresses given to the CSE PCs.


Then I opened the Command Prompt on CSE-PC1 and pinged two ECE PCs:

```
ping 192.168.20.10
ping 192.168.20.11
```

The first ping timed out once while the router was resolving ARP, and the rest got replies. So the router passes traffic between the CSE and ECE networks.

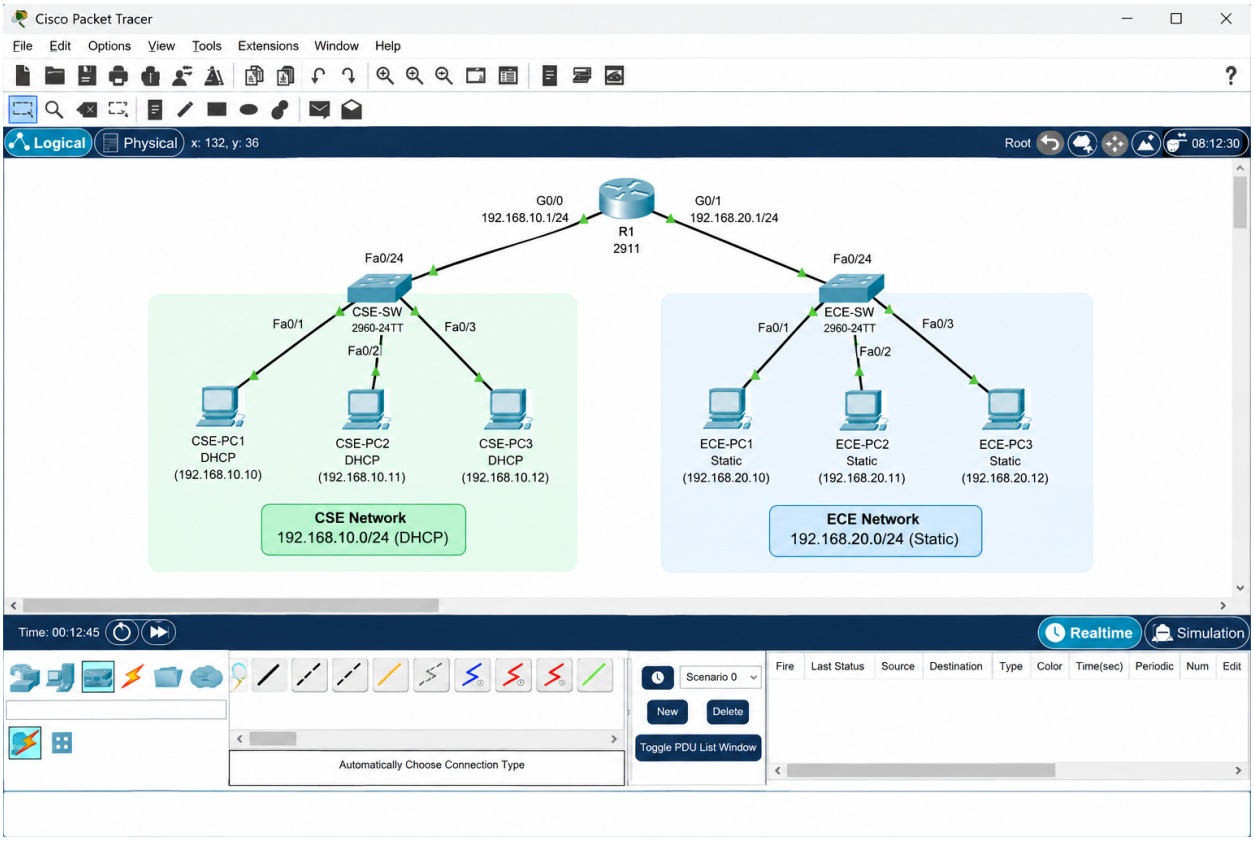

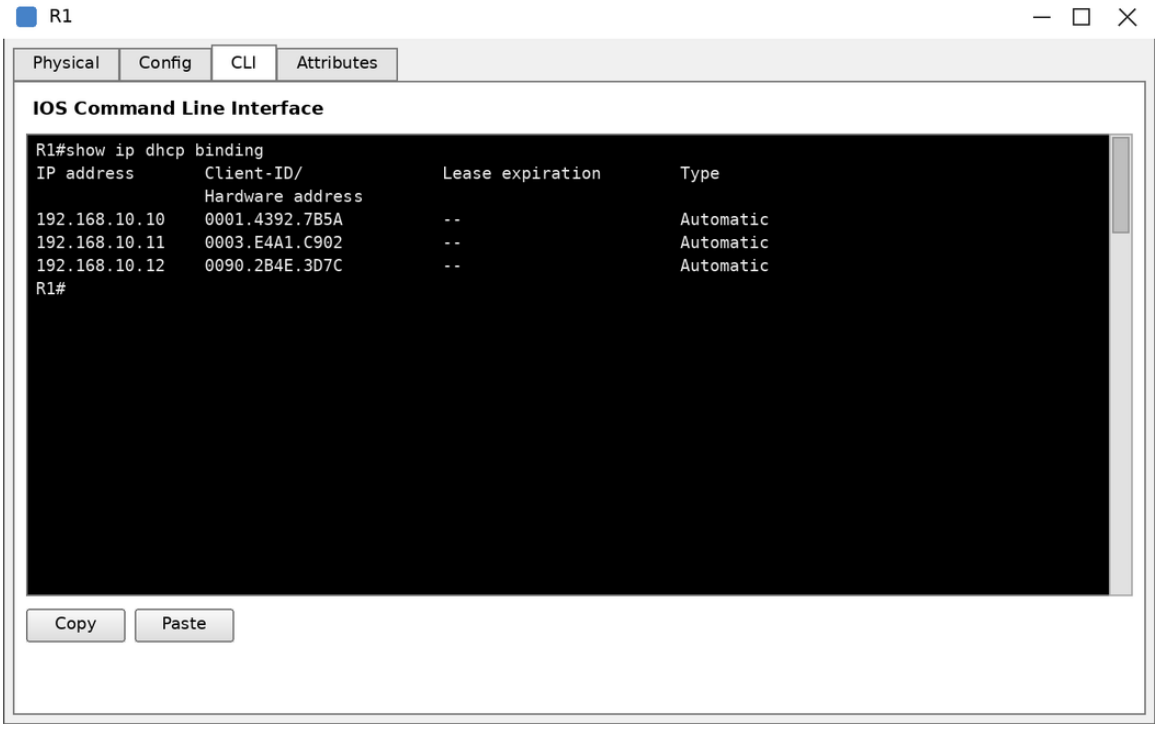

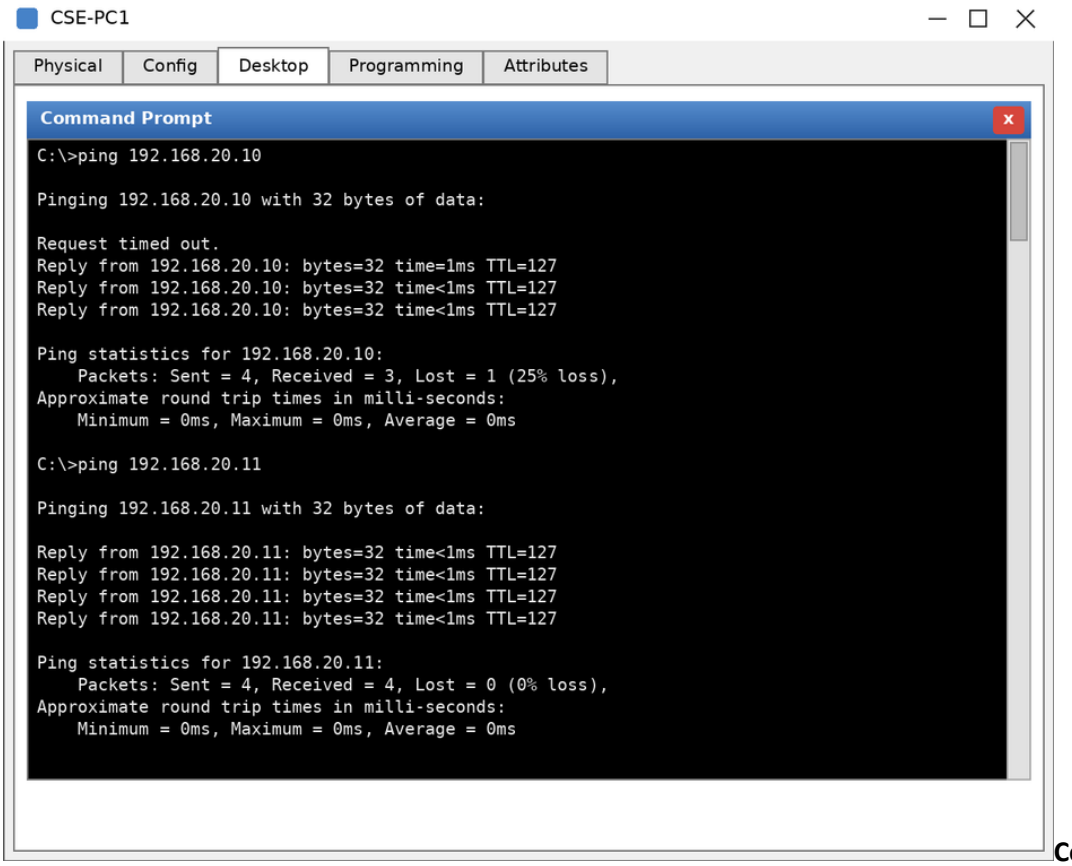

Conclusion: I connected the CSE and ECE networks with a Cisco router and set up DHCP for the CSE network. The CSE PCs got their IP settings from the router, and the pings between the two networks worked. This showed that a router can connect separate subnets and also act as a DHCP server.

Experiment 3: Connect 4 Networks using Two Routers with the RIPv2 Dynamic Routing Protocol

Introduction: RIP is a distance-vector routing protocol that chooses routes by hop count. RIPv2 improves on RIPv1 by sending the subnet mask in its updates, so it works with different subnet sizes. In this experiment I connected four LANs through two routers and turned on RIPv2, so each router learns the networks behind the other router by itself.

Implementation:

1. Network Design

- Topology: four LANs joined by two routers (R1 and R2) over a point-to-point link
- Devices used: 2 × Cisco 2911 routers, 4 × Cisco 2960 switches (SW1 to SW4), 4 × PCs (PC1 to PC4), copper straight-through cables, and one copper cross-over cable between the routers
- Routing protocol: RIP version 2

2. Logical Addressing

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	Gi0/0 (to SW1, LAN1)	192.168.1.1	255.255.255.0	N/A
R1	Gi0/1 (to SW2, LAN2)	192.168.2.1	255.255.255.0	N/A
R1	Gi0/2 (to R2)	10.0.0.1	255.255.255.252	N/A
R2	Gi0/2 (to R1)	10.0.0.2	255.255.255.252	N/A
R2	Gi0/0 (to SW3, LAN3)	192.168.3.1	255.255.255.0	N/A
R2	Gi0/1 (to SW4, LAN4)	192.168.4.1	255.255.255.0	N/A
PC1	Fa0 (SW1)	192.168.1.10	255.255.255.0	192.168.1.1
PC2	Fa0 (SW2)	192.168.2.10	255.255.255.0	192.168.2.1
PC3	Fa0 (SW3)	192.168.3.10	255.255.255.0	192.168.3.1
PC4	Fa0 (SW4)	192.168.4.10	255.255.255.0	192.168.4.1

3. Steps Performed in Cisco Packet Tracer

1. I opened Cisco Packet Tracer and placed two 2911 routers, four 2960 switches and four PCs in a new workspace.
2. I connected each PC to its switch (Fa0/1) with straight-through cables. Then I connected SW1 to R1 Gi0/0, SW2 to R1 Gi0/1, SW3 to R2 Gi0/0 and SW4 to R2 Gi0/1. Finally I linked R1 Gi0/2 to R2 Gi0/2 with a cross-over cable.
3. I entered the IP address, subnet mask and default gateway on each PC (Desktop → IP Configuration).
4. I configured R1 from its CLI tab:
5. I configured R2 in the same way.

6. I saved the file as "RIPv2_Routing.pkt".


4. Testing / Results


On R1, `show ip route` listed 192.168.3.0/24 and 192.168.4.0/24 with the code **R**, which means they were learned through RIP. R2 showed 192.168.1.0/24 and 192.168.2.0/24 the same way. `show ip protocols` confirmed that RIP version 2 is running.


From PC1 I pinged PC3 and used tracert to PC4:

```
ping 192.168.3.10
tracert 192.168.4.10
```

The pings got replies (the first one may time out while ARP resolves), and tracert showed the path through R1 (192.168.1.1) and R2 (10.0.0.2) before reaching PC4. So all four networks can reach each other.

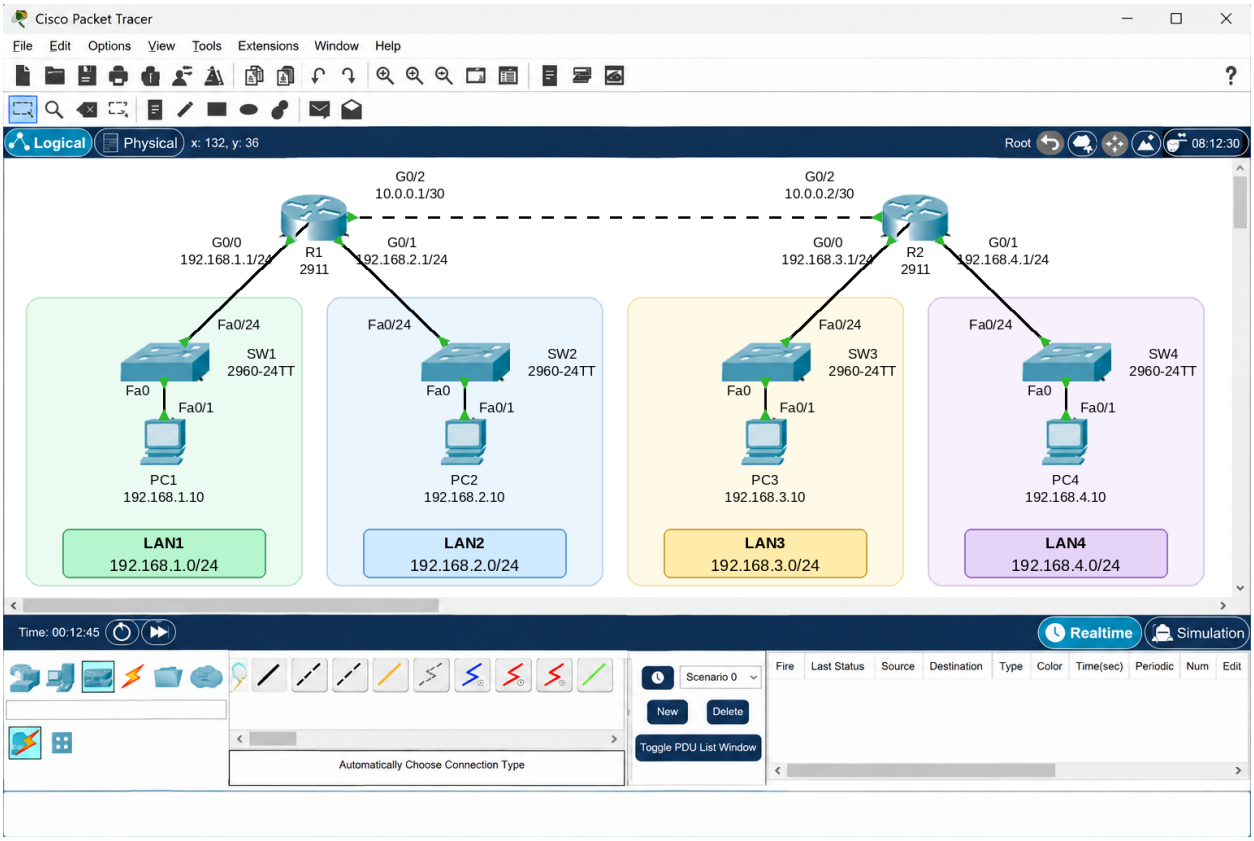

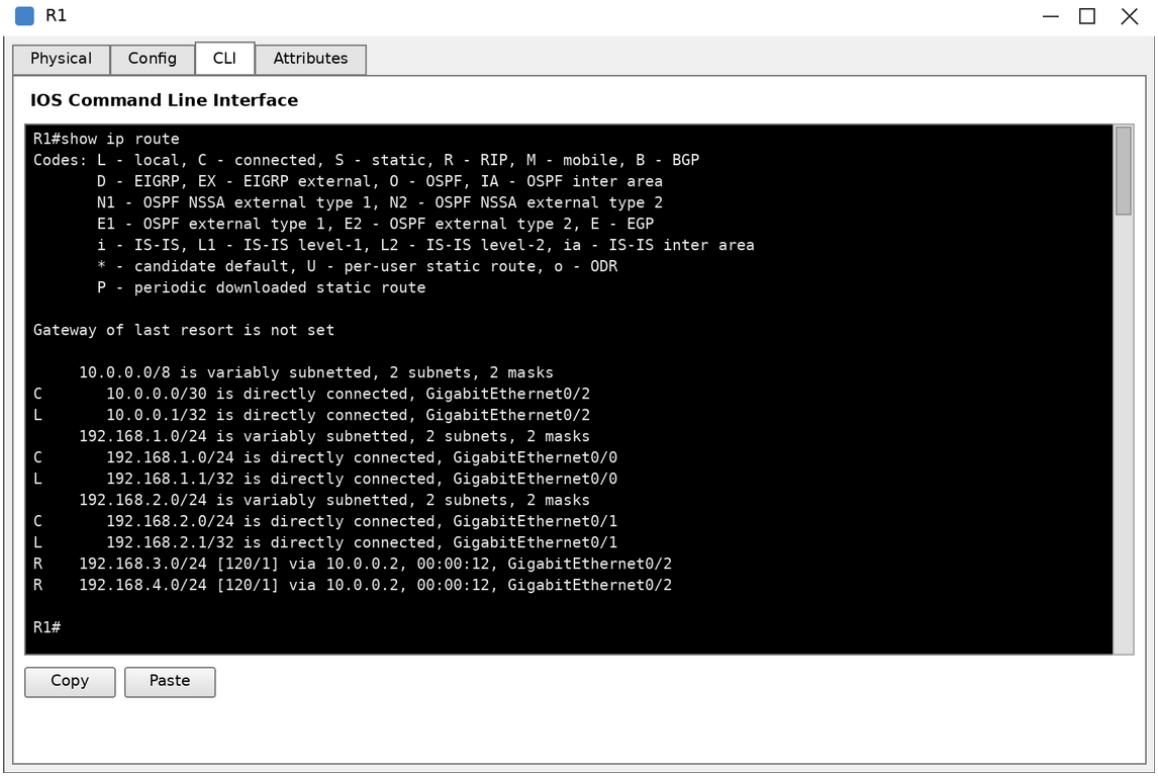

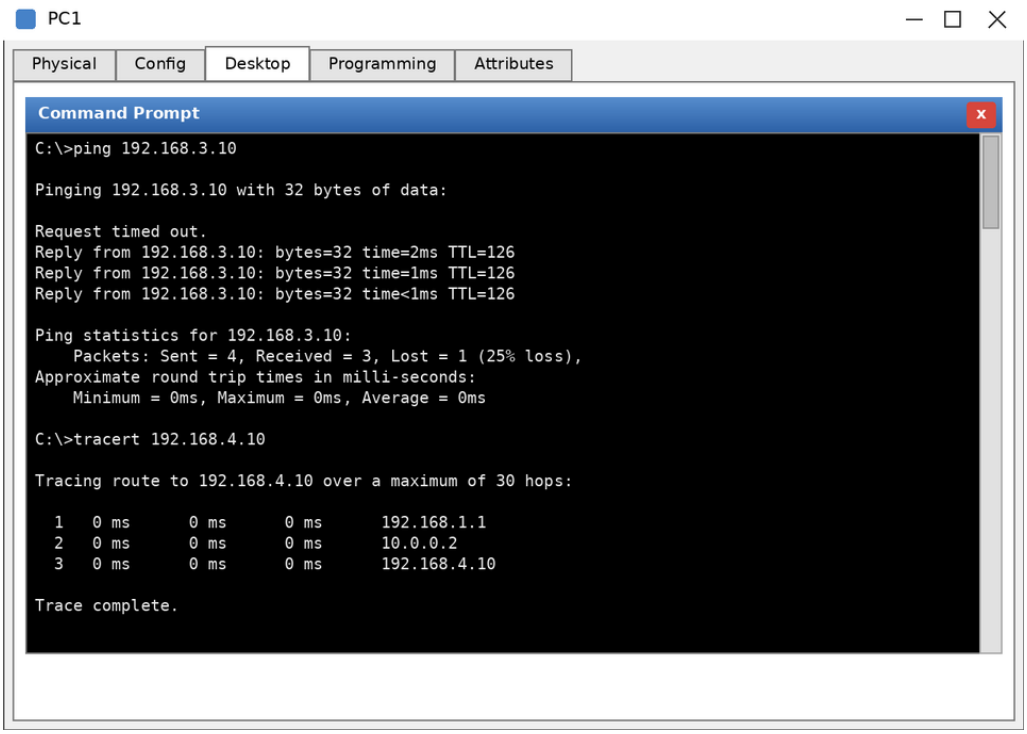

Conclusion: I connected four LANs using two routers and configured RIPv2 on both. The routers learned the remote networks on their own, without any static routes, and disabling auto-summary let RIPv2 advertise the exact subnets. The successful pings between the PCs confirmed that the dynamic routing works.

Experiment 4: Design and Configure VLANs using a Cisco Router (Router-on-a-Stick)

Introduction: A VLAN splits one physical switch into separate logical networks. PCs in different VLANs cannot talk to each other, even on the same switch, which cuts broadcast traffic and adds some security. To let the VLANs communicate, a router is needed. In the router-on-a-stick method, one router port is connected to a trunk port on the switch and is divided into sub-interfaces, one per VLAN, each acting as that VLAN's gateway. In this experiment I created VLAN 10 (CSE) and VLAN 20 (ECE) on one switch and connected them through a Cisco router.

Implementation:

1. Network Design

- Topology type: Router-on-a-stick
- Devices used: 1 × Cisco 2911 router (R1), 1 × Cisco 2960 switch (SW1), 4 × PCs (PC0 to PC3), copper straight-through cables
- VLAN 10 (CSE): 192.168.10.0/24. VLAN 20 (ECE): 192.168.20.0/24

2. Logical Addressing

Device	Switch Port	VLAN	IP Address	Subnet Mask	Default Gateway
PC0	FastEthernet0/1	10 (CSE)	192.168.10.10	255.255.255.0	192.168.10.1
PC1	FastEthernet0/2	10 (CSE)	192.168.10.11	255.255.255.0	192.168.10.1
PC2	FastEthernet0/3	20 (ECE)	192.168.20.10	255.255.255.0	192.168.20.1
PC3	FastEthernet0/4	20 (ECE)	192.168.20.11	255.255.255.0	192.168.20.1
R1 Gi0/0.10	SW1 Fa0/24 (trunk)	10	192.168.10.1	255.255.255.0	N/A
R1 Gi0/0.20	SW1 Fa0/24 (trunk)	20	192.168.20.1	255.255.255.0	N/A

3. Steps Performed in Cisco Packet Tracer

1. I opened Cisco Packet Tracer and placed one 2911 router, one 2960 switch and four PCs in a new workspace.
2. I connected PC0 to PC3 to Fa0/1 to Fa0/4 of SW1, and SW1 Fa0/24 to R1 GigabitEthernet0/0, using straight-through cables.
3. I set the IP address, subnet mask and default gateway on each PC (Desktop → IP Configuration).
4. On SW1 I created the VLANs, assigned the access ports and made Fa0/24 a trunk:

```
I saved the file as "VLAN_Router.pkt".
```


4. Testing / Results


On SW1, `show vlan brief` showed Fa0/1 and Fa0/2 in VLAN 10 and Fa0/3 and Fa0/4 in VLAN 20, and `show interfaces trunk` showed Fa0/24 trunking VLANs 10 and 20. On R1, `show ip route` listed both VLAN subnets as directly connected.


From PC0 (VLAN 10) I opened the Command Prompt and ran:

```
ping 192.168.10.11
ping 192.168.20.10
```

The ping to PC1 (same VLAN) worked straight away. The ping to PC2 (other VLAN) timed out once and then worked, because the traffic goes through the router. Before I configured the sub-interfaces, the pings between the two VLANs failed, which shows that VLANs stay isolated until a Layer-3 device connects them.

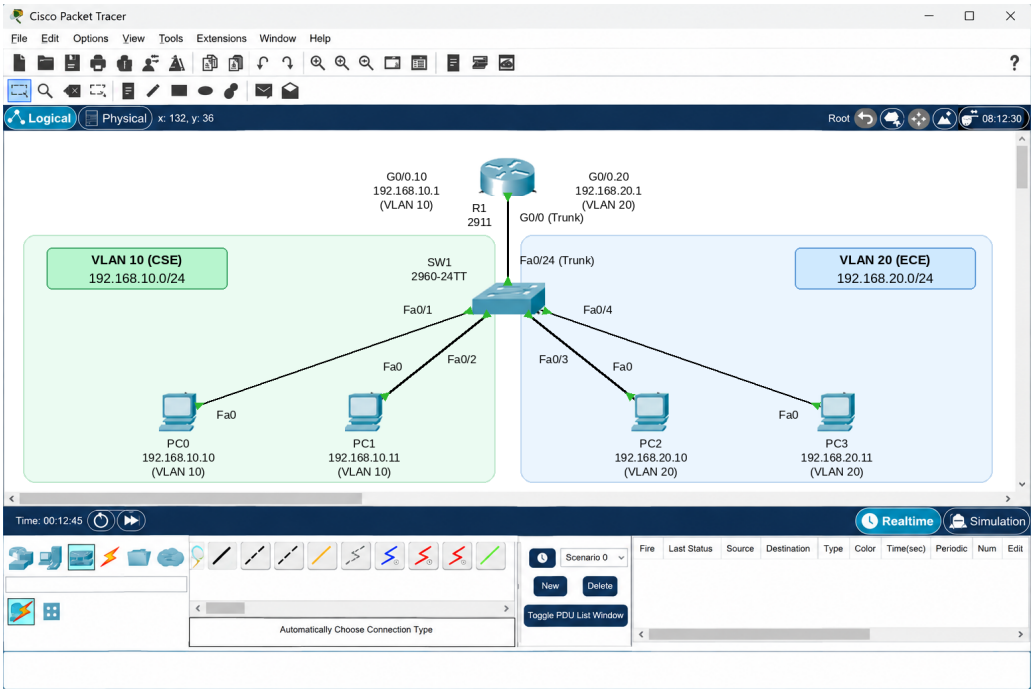

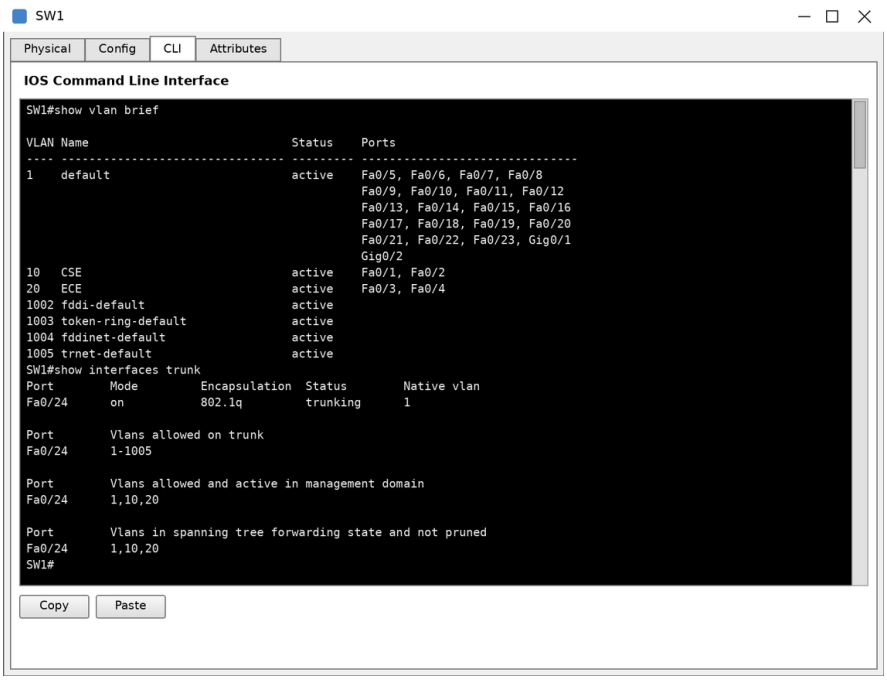

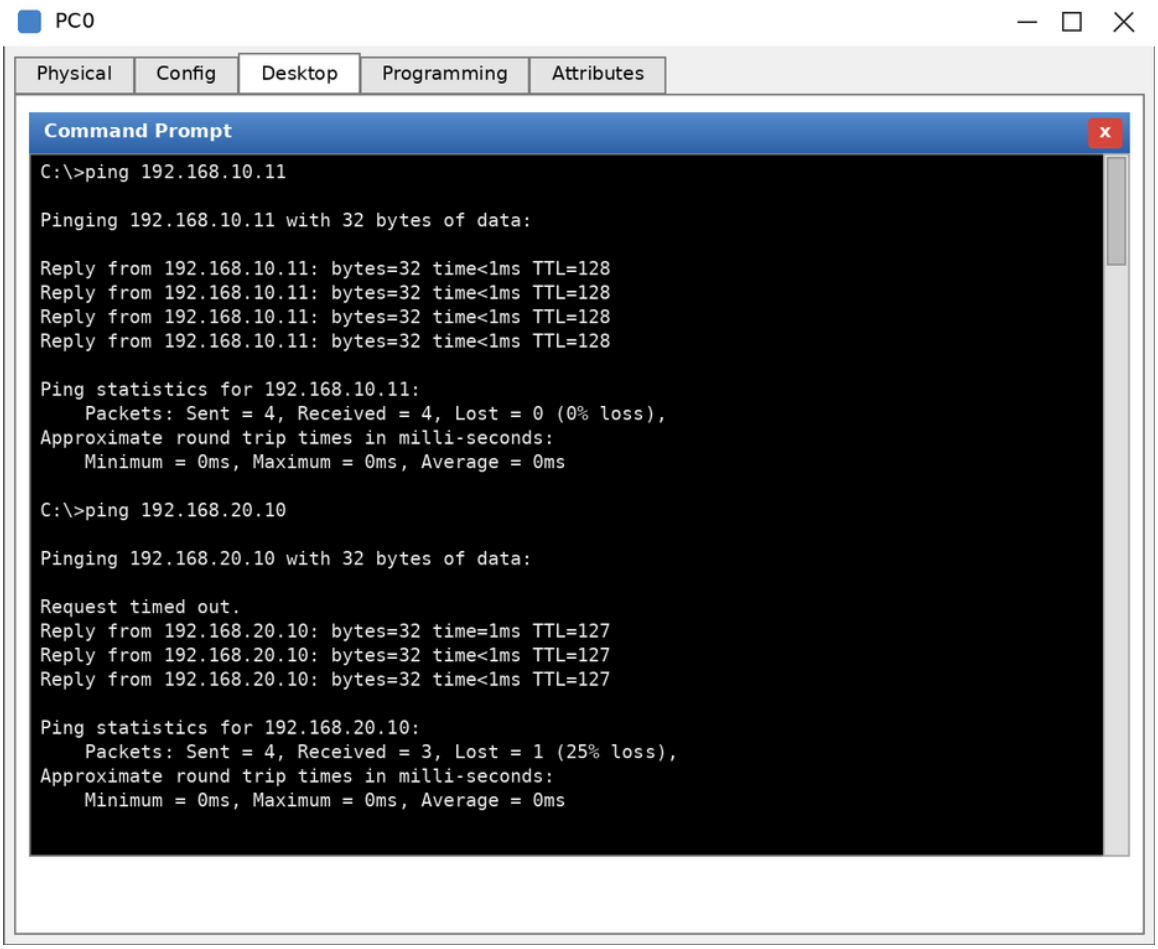

Conclusion: I created two VLANs on a Cisco switch and routed between them using 802.1Q sub-interfaces on a Cisco router. PCs in the same VLAN talked through the switch, and PCs in different VLANs talked through the router. Router-on-a-stick needs only one link between the switch and the router.

Experiment 5: Design and Configure an SMTP (Email) Server and Send a Mail from One Account to Another

Introduction: Email uses two main protocols. SMTP (port 25) sends mail from a client to the mail server and between servers. POP3 (port 110) lets a client download its mail from the server. In this experiment I set up an email server in Cisco Packet Tracer with SMTP and POP3, created two user accounts and sent a mail from one account to the other.

Implementation:

1. Network Design

- Topology type: Star
- Devices used: 1 × Cisco 2960 switch, 1 × Server-PT (Mail-Server), 2 × PCs (PC0 for Alice, PC1 for Bob), copper straight-through cables
- Email domain: mail.com

2. Logical Addressing


Device	Switch Port	IP Address	Subnet Mask	Email Account
Mail-Server	FastEthernet0/1	192.168.1.100	255.255.255.0	N/A
PC0	FastEthernet0/2	192.168.1.10	255.255.255.0	alice@mail.com
PC1	FastEthernet0/3	192.168.1.11	255.255.255.0	bob@mail.com


3. Steps Performed in Cisco Packet Tracer


1. I opened Cisco Packet Tracer, placed a switch, a server and two PCs, and connected them with straight-through cables (server to Fa0/1, PC0 to Fa0/2, PC1 to Fa0/3).
2. I gave the server and both PCs the static IP addresses from the table.
3. I clicked Mail-Server → Services → EMAIL, turned **SMTP** and **POP3** on, typed the domain name `mail.com` and clicked **Set**. Then I added two users with the **+** button: `alice` / `alice123` and `bob` / `bob123`.
4. On PC0 I opened Desktop → Email → Configure Mail and entered: name Alice, email address alice@mail.com, incoming and outgoing mail server 192.168.1.100, user name alice, password alice123. Then I clicked **Save**.
5. I did the same on PC1 for Bob (bob@mail.com, user name bob, password bob123).
6. On PC0 I clicked **Compose**, wrote to bob@mail.com with the subject "Hello Bob" and the text "This is a test mail from Alice.", and clicked **Send**.
7. On PC1 I opened Email and clicked **Receive**.
8. I saved the file as "Email_Server.pkt".


4. Testing / Results


After I clicked Send on PC0, the message "Mail Sent Successfully" appeared. After I clicked Receive on PC1, the mail "Hello Bob" from alice@mail.com showed up in the inbox and I could read it. So the SMTP service accepted and delivered the mail, and Bob picked it up through POP3.

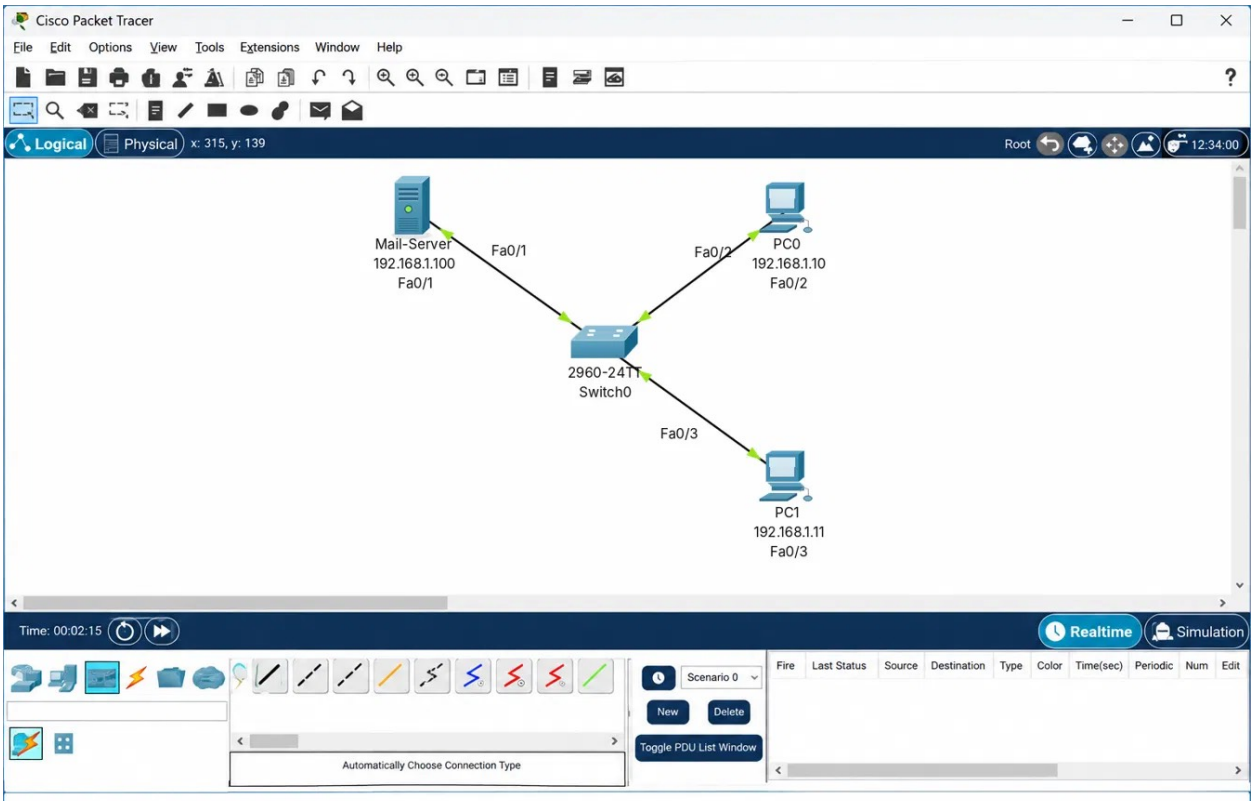

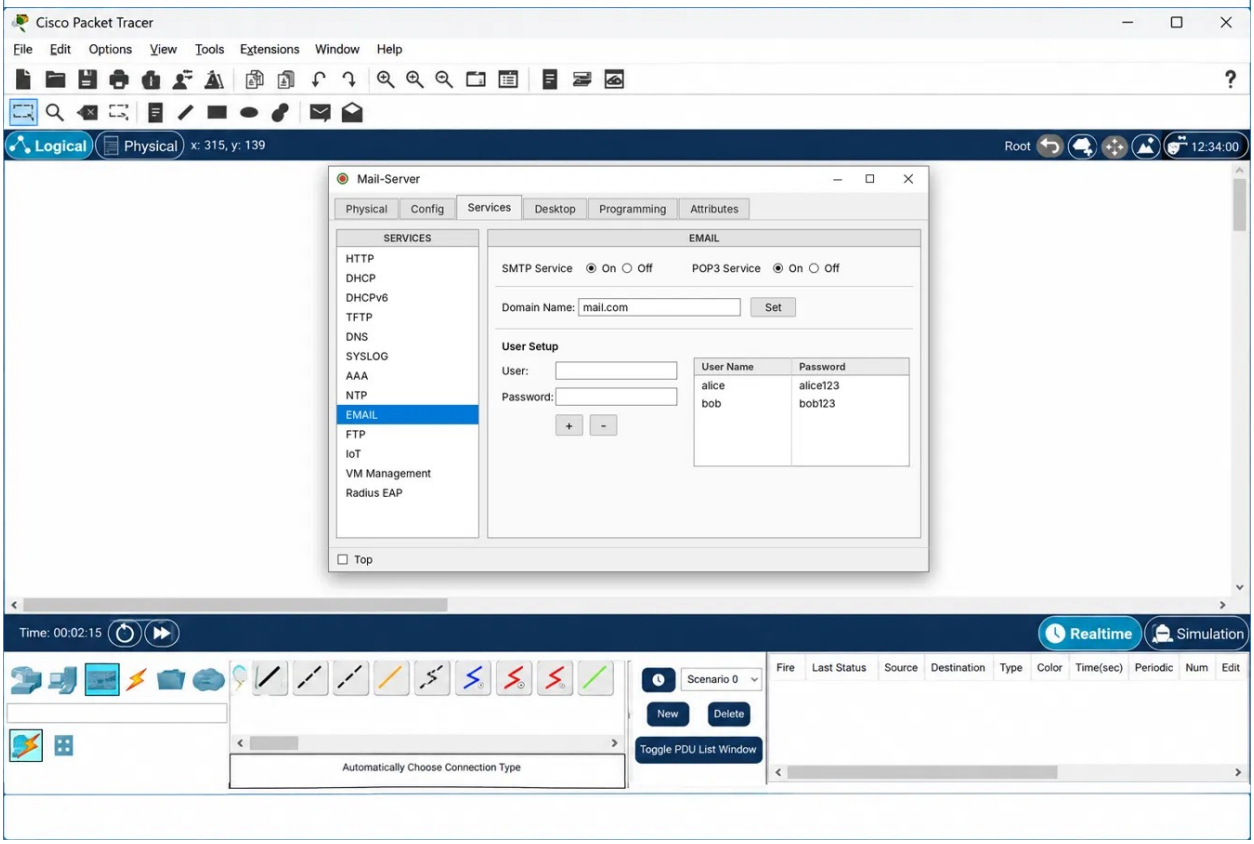

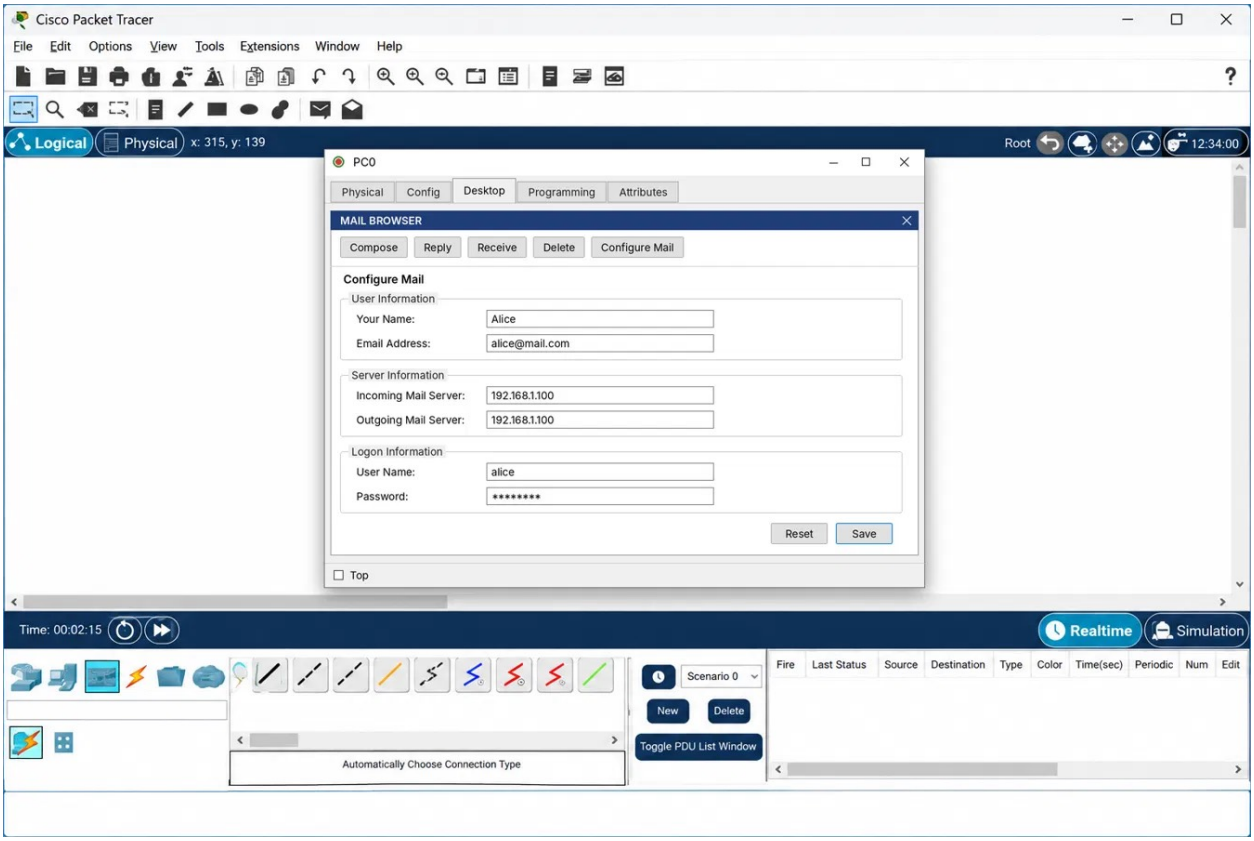
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 315, y: 139
Root 12:34:00
PC0
Physical Config Desktop Programming Attributes
MAIL BROWSER
Compose Reply Receive Delete Configure Mail
Configure Mail
User Information
Your Name: Alice
Email Address: alice@mail.com
Server Information
Incoming Mail Server: 192.168.1.100
Outgoing Mail Server: 192.168.1.100
Logon Information
User Name: alice
Password: ********
Reset Save
Top
Time: 00:02:15
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit
Scenario 0
New Delete
Toggle PDU List Window
Automatically Choose Connection Type

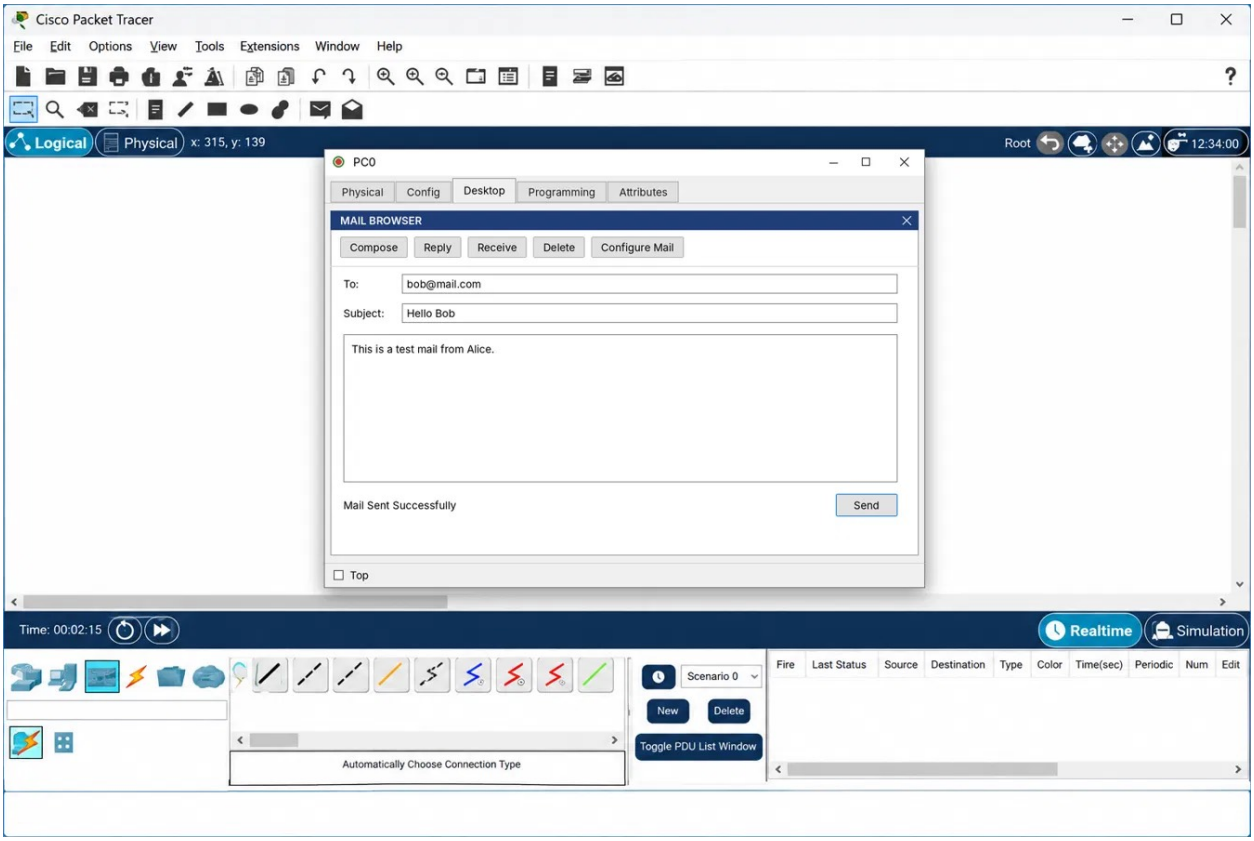
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 315, y: 139
Root 12:34:00
PC0
Physical Config Desktop Programming Attributes
MAIL BROWSER
Compose Reply Receive Delete Configure Mail
To: bob@mail.com
Subject: Hello Bob
This is a test mail from Alice.
Mail Sent Successfully
Send
Top
Time: 00:02:15
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit
Scenario 0
New Delete
Toggle PDU List Window
Automatically Choose Connection Type

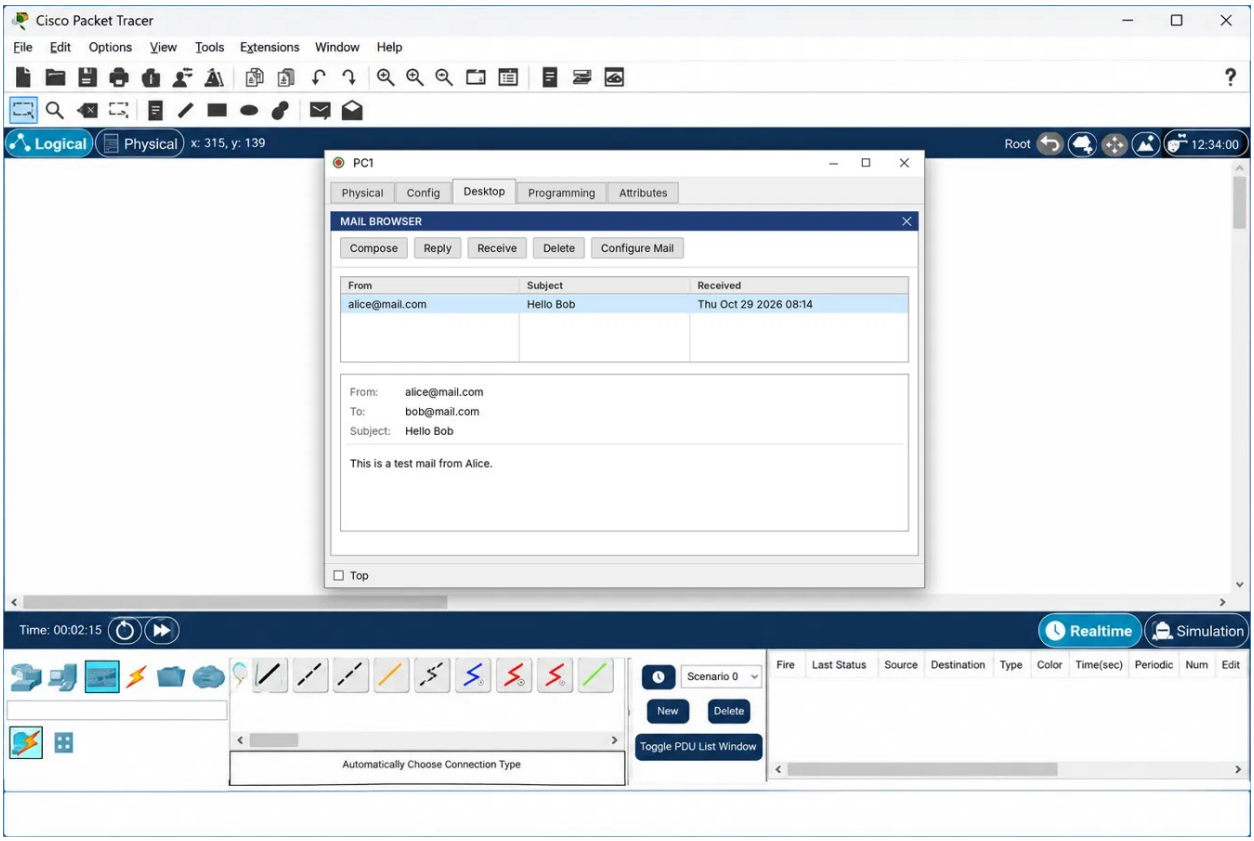

Conclusion: I set up an email server with SMTP and POP3 in Cisco Packet Tracer and created two accounts. A mail sent from alice@mail.com reached bob@mail.com. This shows how SMTP sends mail to the server and how POP3 lets the receiver collect it.

Experiment 6: Design and Configure an FTP Server

Introduction: FTP (File Transfer Protocol) is used to upload files to a server and download files from it. It works over TCP port 21 and asks for a username and password before letting anyone in. In this experiment I set up an FTP server in Cisco Packet Tracer, created a user with full permissions, and used a PC to log in, list the files, upload a file and download it again.

Implementation:

1. Network Design

- Topology type: Star
- Devices used: 1 × Cisco 2960 switch, 1 × Server-PT (FTP-Server), 2 × PCs (PC0, PC1), copper straight-through cables

2. Logical Addressing

Device	Switch Port	IP Address	Subnet Mask
FTP-Server	FastEthernet0/1	192.168.1.100	255.255.255.0
PC0	FastEthernet0/2	192.168.1.10	255.255.255.0
PC1	FastEthernet0/3	192.168.1.11	255.255.255.0

3. Steps Performed in Cisco Packet Tracer

1. I opened Cisco Packet Tracer, placed a switch, a server and two PCs, and connected them with straight-through cables (server to Fa0/1, PC0 to Fa0/2, PC1 to Fa0/3).
2. I gave the server and both PCs the static IP addresses from the table.
3. I clicked FTP-Server → Services → FTP and turned the service **On**. Under User Setup I typed the user name `student` and the password `student123`, ticked all permissions (Write, Read, Delete, Rename, List) and clicked **Add**.
4. On PC0 I opened Desktop → Text Editor, typed a line of text and saved it as `sample.txt`.
5. On PC0 I opened the Command Prompt and connected to the server:

```
C:\> ftp 192.168.1.100
Username: student
Password: student123
ftp> dir
ftp> put sample.txt
ftp> dir
ftp> quit
```


6. On PC1 I connected the same way and downloaded the file:


```
C:\> ftp 192.168.1.100
Username: student
Password: student123
ftp> get sample.txt
ftp> quit
```


7. I saved the file as "FTP_Server.pkt".

4. Testing / Results

The login on PC0 worked and the server replied "Logged in". The first `dir` listed the files already on the server. After `put sample.txt` the message "Transfer complete" appeared and the second `dir` showed `sample.txt`. On PC1, `get sample.txt` also finished with "Transfer complete". When I tried a wrong password the login was refused, so the authentication works.

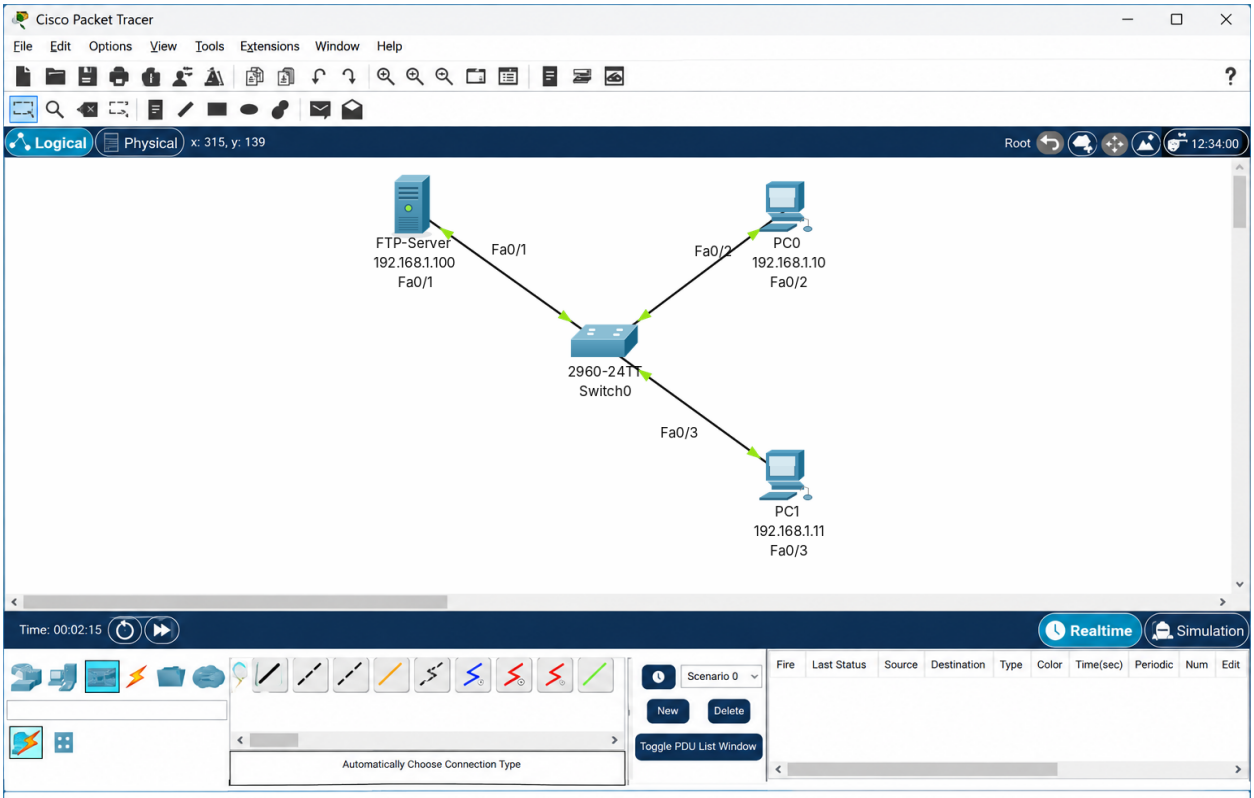

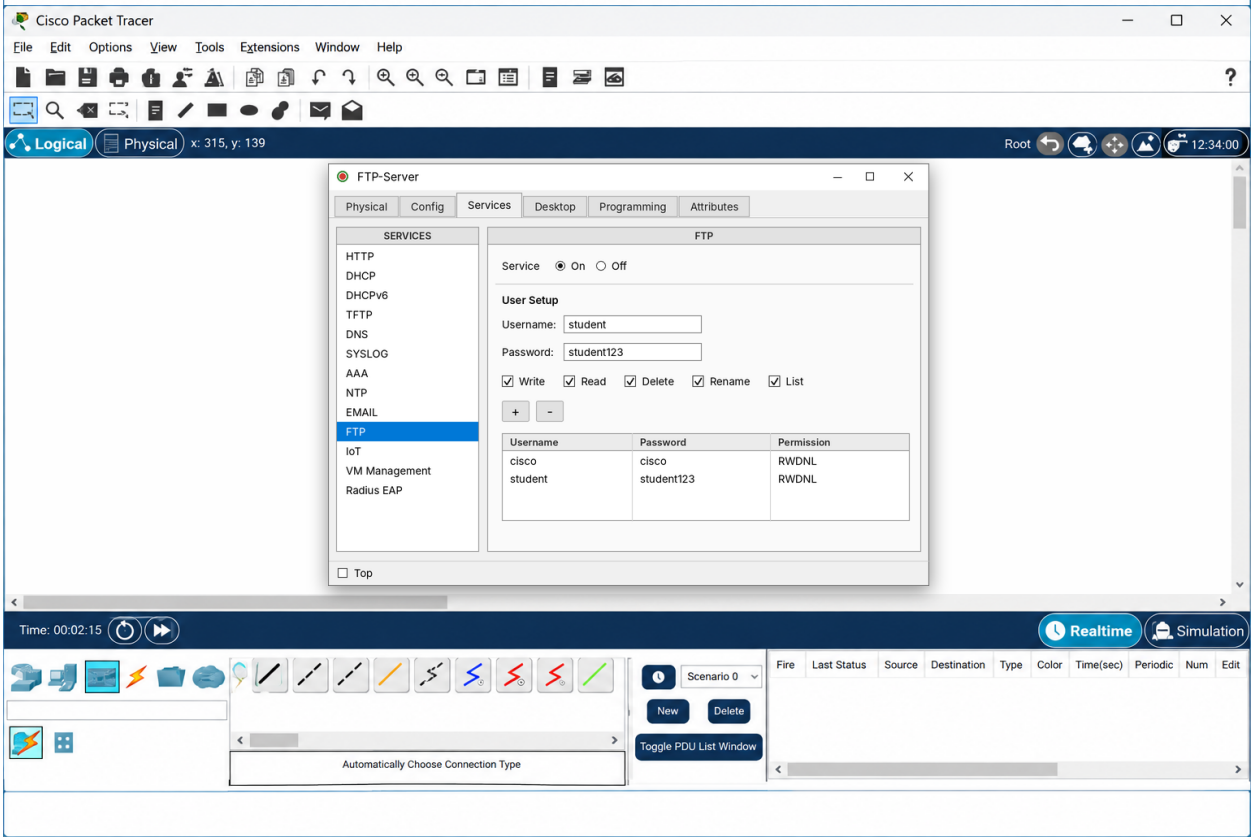

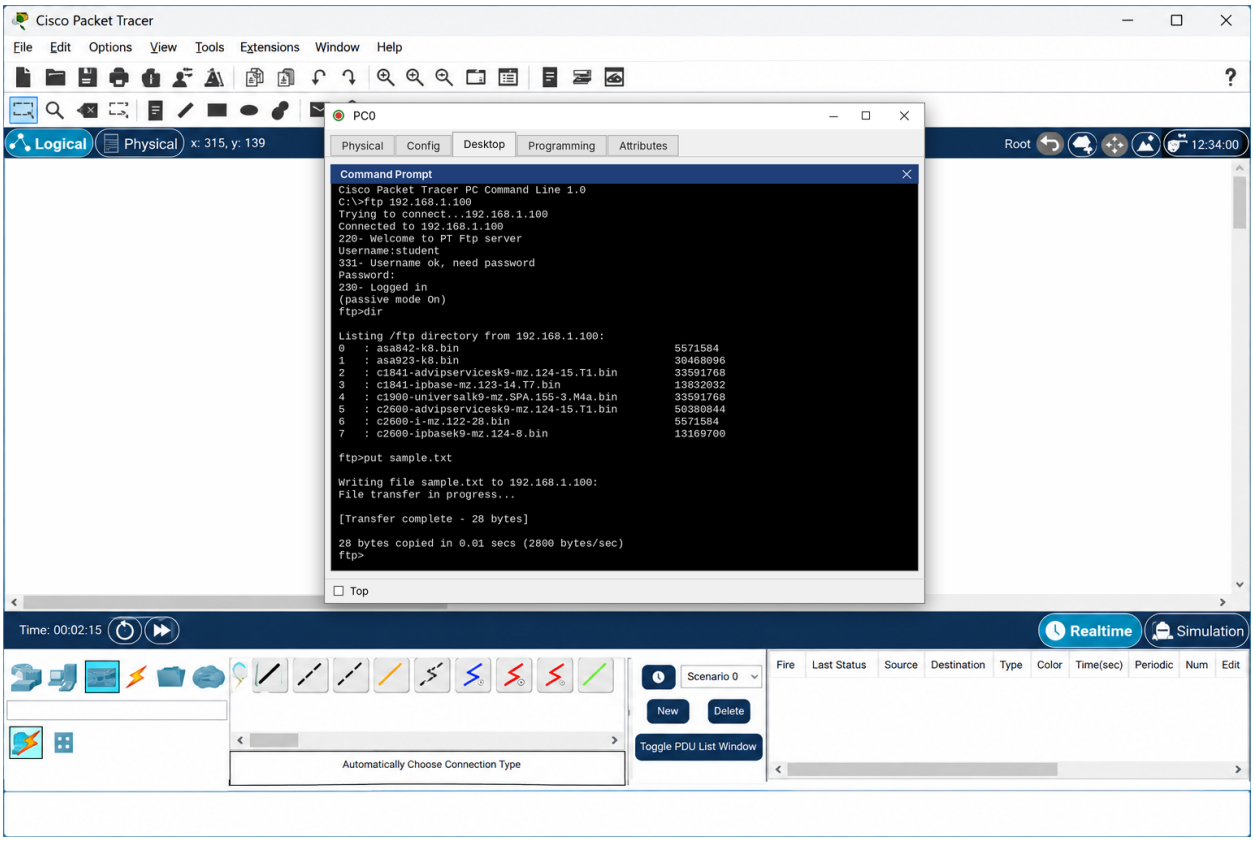

Conclusion: I configured an FTP server in Cisco Packet Tracer with a user account. One PC uploaded a file and another PC downloaded it. This shows how FTP gives password-protected file sharing between clients and a central server.

Experiment 7: Design and Configure a DNS Server

Introduction: DNS (Domain Name System) turns a domain name such as www.cse.edu into an IP address, so users do not have to remember the address of every server. A DNS server keeps resource records, and the most common one is the A record, which maps a name to an IPv4 address. Clients send their queries to the DNS server on UDP port 53. In this experiment I set up a DNS server in Cisco Packet Tracer with two A records that point to a web server, and tested them from the PCs.

Implementation:

1. Network Design

- Topology type: Star
- Devices used: 1 × Cisco 2960 switch, 2 × Server-PT (DNS-Server, Web-Server), 2 × PCs (PC0, PC1), copper straight-through cables

2. Logical Addressing

Device	Switch Port	IP Address	Subnet Mask	DNS Server
DNS-Server	FastEthernet0/1	192.168.1.100	255.255.255.0	192.168.1.100
Web-Server	FastEthernet0/2	192.168.1.101	255.255.255.0	192.168.1.100
PC0	FastEthernet0/3	192.168.1.10	255.255.255.0	192.168.1.100
PC1	FastEthernet0/4	192.168.1.11	255.255.255.0	192.168.1.100

DNS records on the DNS server:

Name	Type	Address
www.cse.edu	A Record	192.168.1.101
www.ece.edu	A Record	192.168.1.101

3. Steps Performed in Cisco Packet Tracer


1. I opened Cisco Packet Tracer, placed a switch, two servers and two PCs, and connected them with straight-through cables (DNS-Server to Fa0/1, Web-Server to Fa0/2, PC0 to Fa0/3, PC1 to Fa0/4).
2. I gave every device the static IP address from the table and typed 192.168.1.100 as the DNS server on each of them.
3. I clicked DNS-Server → Services → DNS and turned the service **On**. Then I added two records: the name `www.cse.edu` and the name `www.ece.edu`, both with type A Record and address `192.168.1.101`, clicking **Add** after each.
4. I checked on Web-Server → Services → HTTP that the HTTP service is on.
5. I saved the file as "DNS_Server.pkt".


4. Testing / Results


On PC0 I opened the Command Prompt and ran:

```
ping www.cse.edu
nslookup www.cse.edu
```

The name was resolved to 192.168.1.101 and the ping got replies. On PC1 I opened Desktop → Web Browser and typed `www.ece.edu`, and the web server's page loaded. When I turned the DNS service off, the names stopped working, but pinging 192.168.1.101 by its IP address still worked. So DNS is only needed for the name lookup.

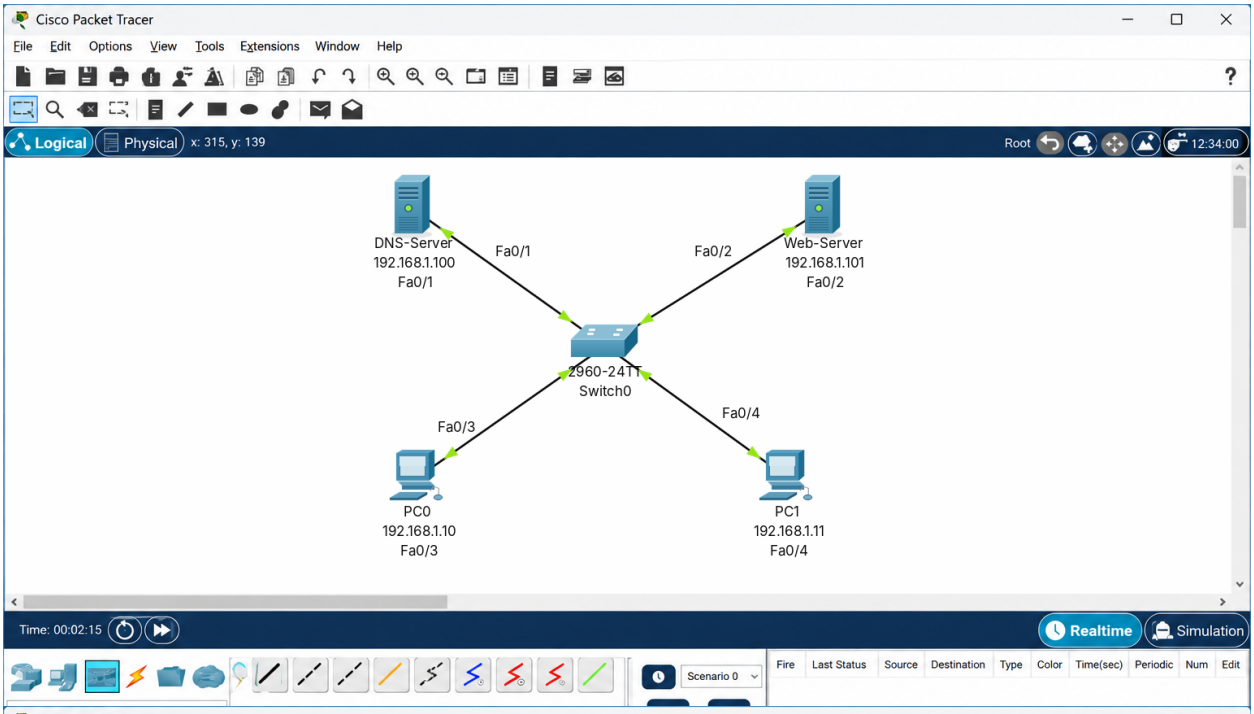

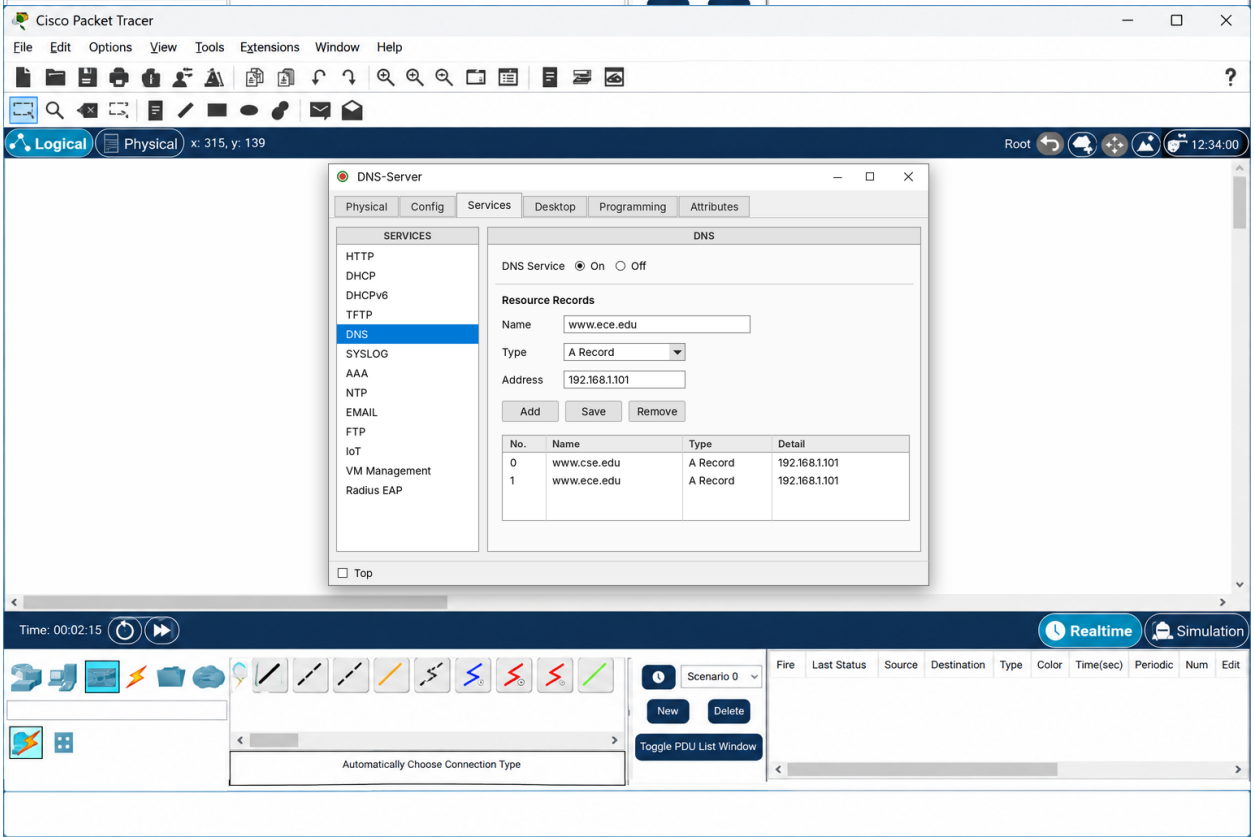

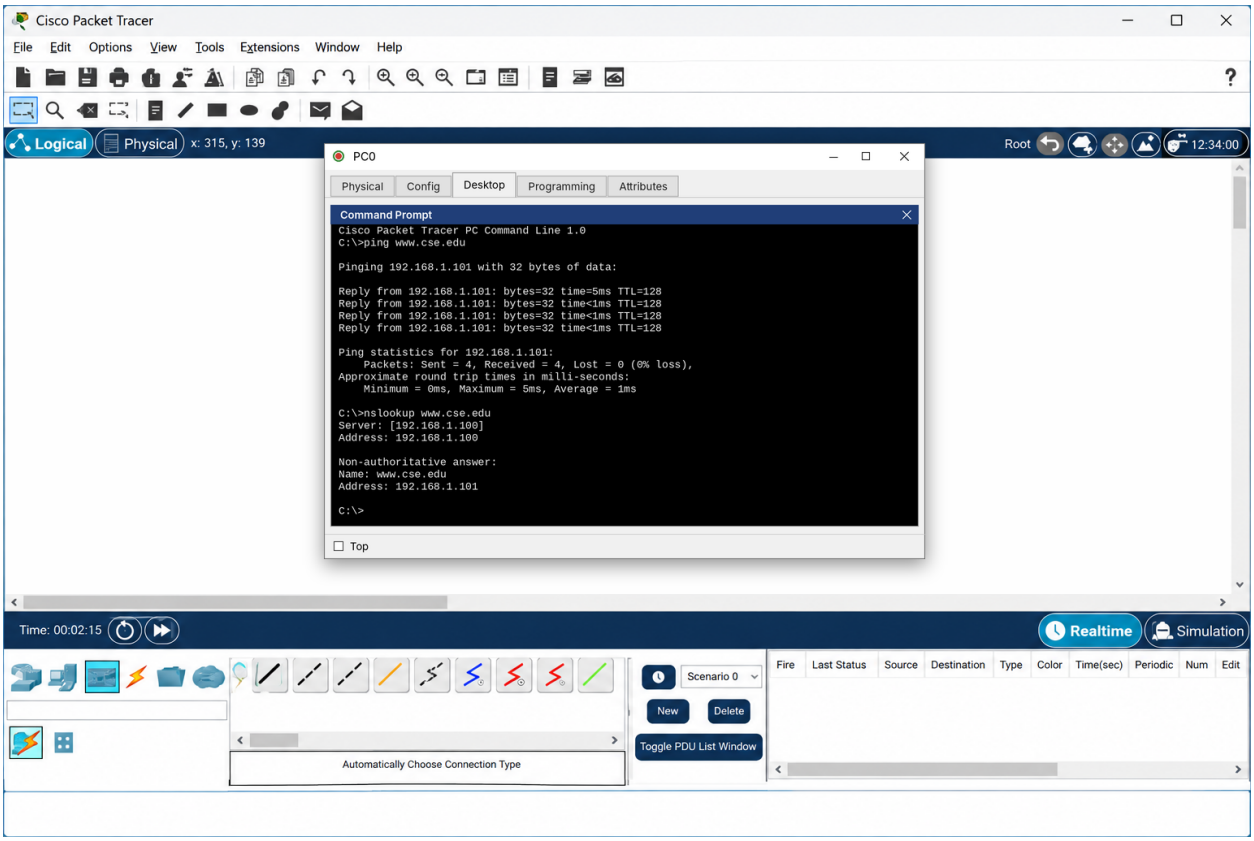

Conclusion: I configured a DNS server in Cisco Packet Tracer with A records for two domain names. The PCs resolved the names to the web server's IP address and opened it by name. This shows how DNS saves users from remembering IP addresses.

Experiment 8: Design and Configure a Web Server

Introduction: A web server stores web pages and sends them to clients that ask for them. Browsers talk to it over HTTP (port 80), or HTTPS (port 443) when the traffic is encrypted, and the page is requested with a URL that holds the server's IP address or domain name. In this experiment I set up a web server in Cisco Packet Tracer, replaced its default home page with my own HTML page, and opened it from the PCs.

Implementation:

1. Network Design

- Topology type: Star
- Devices used: 1 × Cisco 2960 switch, 1 × Server-PT (Web-Server), 2 × PCs (PC0, PC1), copper straight-through cables

2. Logical Addressing

Device	Switch Port	IP Address	Subnet Mask
Web-Server	FastEthernet0/1	192.168.1.100	255.255.255.0
PC0	FastEthernet0/2	192.168.1.10	255.255.255.0
PC1	FastEthernet0/3	192.168.1.11	255.255.255.0

3. Steps Performed in Cisco Packet Tracer


1. I opened Cisco Packet Tracer, placed a switch, a server and two PCs, and connected them with straight-through cables (server to Fa0/1, PC0 to Fa0/2, PC1 to Fa0/3).
2. I gave the server and both PCs the static IP addresses from the table.
3. I clicked Web-Server → Services → HTTP and made sure HTTP and HTTPS were **On**. Then I clicked **Edit** next to `index.html`, replaced the content with the page below and clicked **Save**:


```
<html>
<head><title>CSE Lab Web Server</title></head>
<body>
<h1>Welcome to the CSE Networking Lab</h1>
<p>This page is served by my Packet Tracer web server.</p>
</body>
</html>
```


4. On PC0 I opened Desktop → Web Browser, typed `http://192.168.1.100` in the URL bar and clicked **Go**. I repeated this on PC1.
5. I saved the file as "Web_Server.pkt".

4. Testing / Results

A ping from PC0 to 192.168.1.100 got replies from the server. The web browser on PC0 showed the page "Welcome to the CSE Networking Lab", and PC1 loaded the same page. When I turned the HTTP service off, the browser showed an error, and the page came back after I turned it on again.

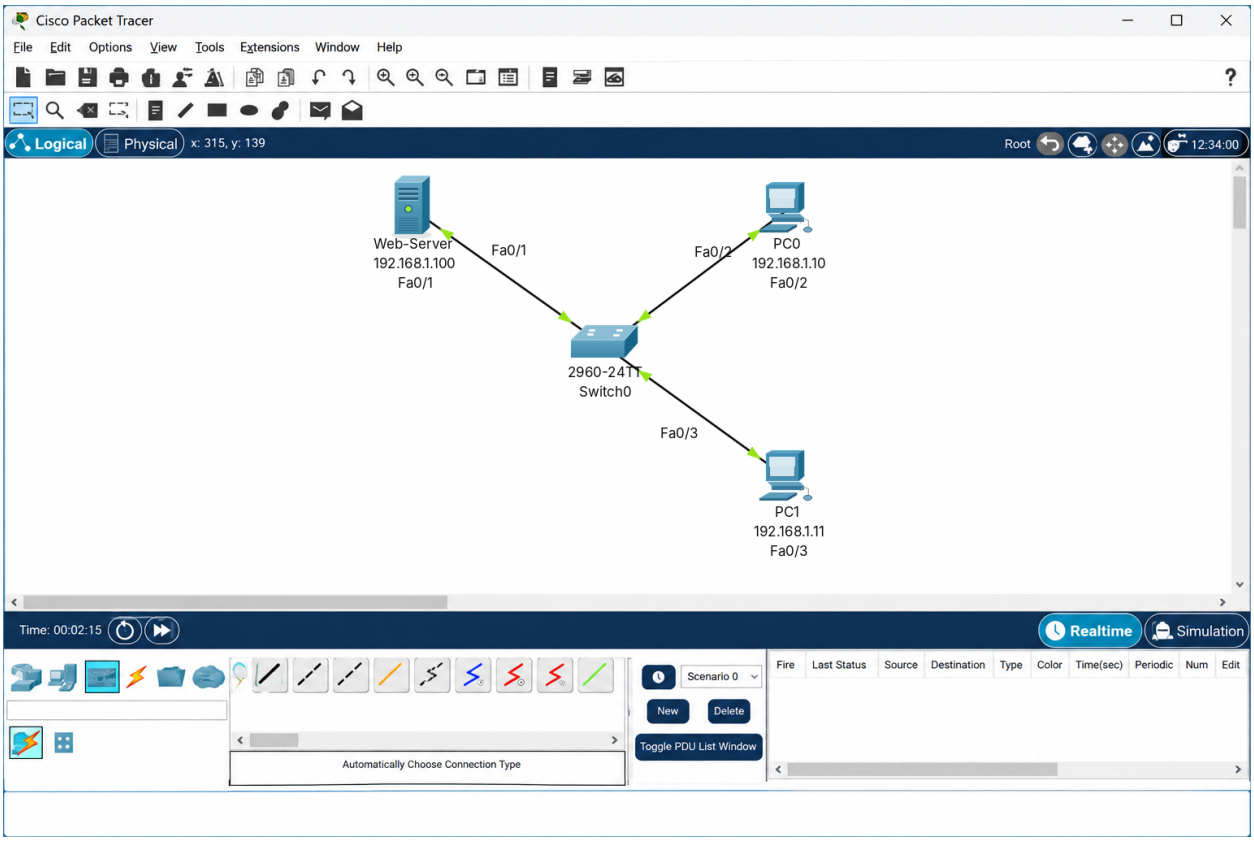
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 315, y: 139
Root 12:34:00
Web-Server
192.168.1.100
Fa0/1
Fa0/1
Fa0/2
PC0
192.168.1.10
Fa0/2
2960-24TT
Switch0
Fa0/3
PC1
192.168.1.11
Fa0/3
Time: 00:02:15
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit

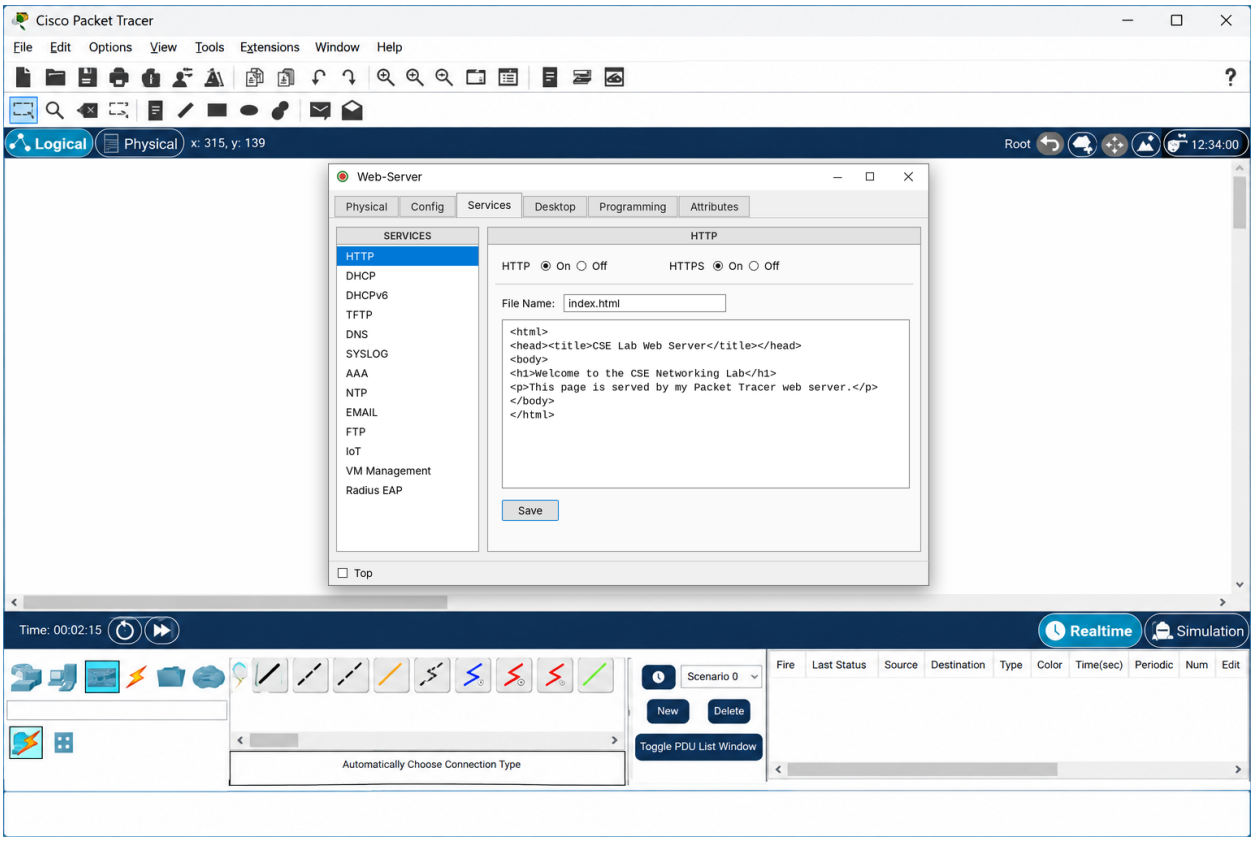
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 315, y: 139
Root 12:34:00
Web-Server
Physical
Config
Services
Desktop
Programming
Attributes
SERVICES
HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP
HTTP
HTTP On Off
HTTPS On Off
File Name: index.html
<html>
<head><title>CSE Lab Web Server</title></head>
<body>
<h1>Welcome to the CSE Networking Lab</h1>
This page is served by my Packet Tracer web server.
</body>
</html>
Save
Top
Time: 00:02:15
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit

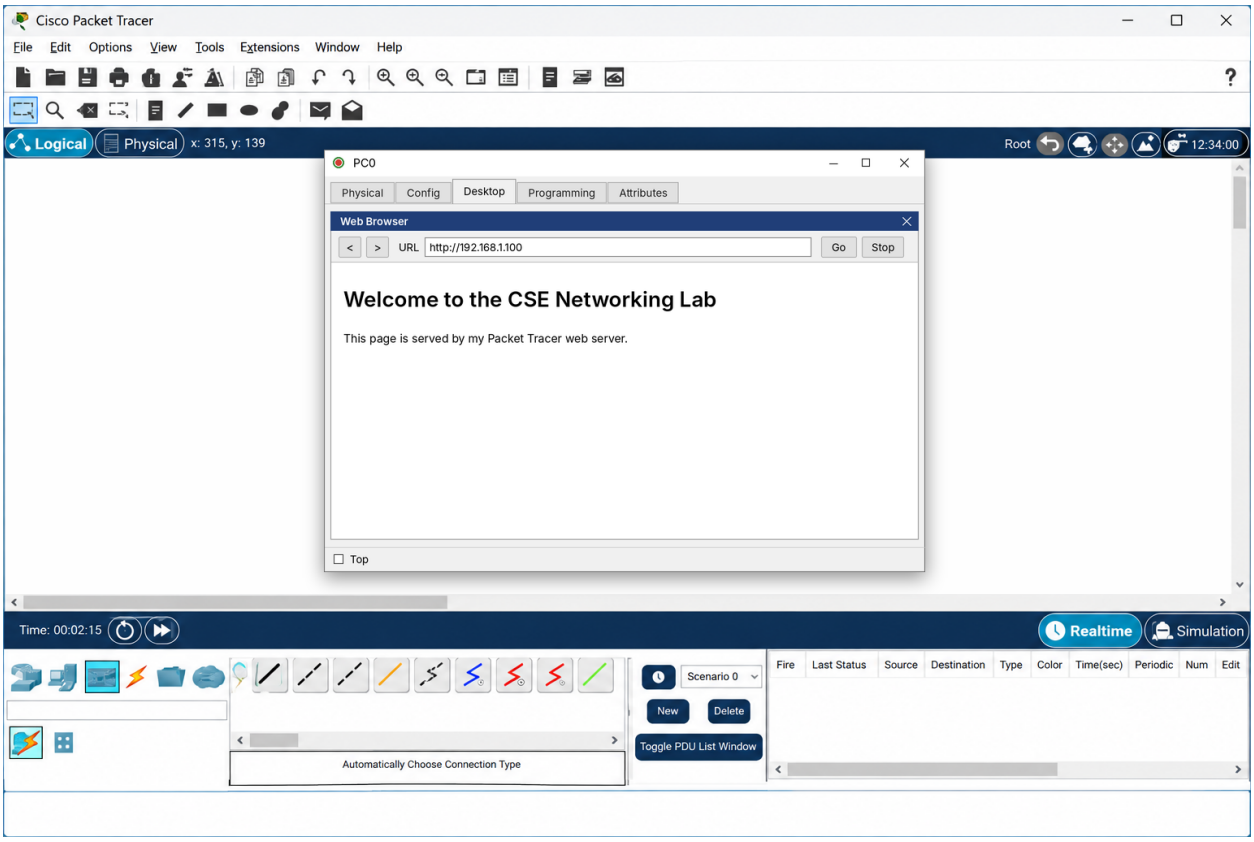

Conclusion: I set up a web server in Cisco Packet Tracer and replaced its home page with a custom HTML page. The PCs opened the page with a web browser using the server's IP address. This shows the basic client-server model of the web: the browser sends an HTTP request and the server sends back the page.